Pump ss series

BEST OPTION FOR SMALLER PLUMBING

For small sized residential and above-ground pools Optional built-in timer









- 1. 1.5 inch suction and discharge ports
- 2. Asynchronous, two-pole motor
- 3. Class insulation: 130(B)
- 4. IPX5 Waterproof standard
- 5. Built-in thermal protection
- 6. Overload protection
- 7. External heat sink
- 8. Available in 50Hz or 60Hz for 220V/110V9.
- 9. Specially designed unions compatible for both Imperial and Metric standards
- 10. 316 stainless steel shaft
- 11. 316 stainless steel mechanical seal



Pool & Spa Equipment












Technical Information:

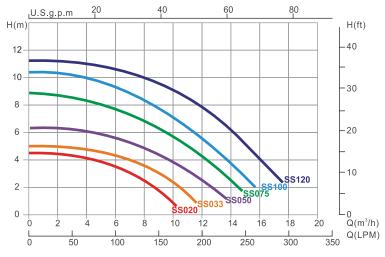

Remark: The performance curve above is for 50Hz models

Built-in timer option:

The SS Series pump offers an optional built-in timer that allows the user to quickly set up the pump's running schedule on a user-friendly control pad.

Additional features for timer option:

• No need to install an external timer for the pump.




SS050


SS050T

Product Information and Dimensions:

				Head (m)			
Model 50Hz	Input(kW)	Current(AMP)	Noise(dB)	2	4	6	8
				Flow Rate (m ³ /h)			
SS020 / SS020T	0.28	1.5	55	8.4	4		
SS033 / SS033T	0.43	2	55	10.4	7		
SS050 / SS050T	0.55	2.5	60	12.4	10	4	
SS075 / SS075T	0.75	3.5	60	14.4	12.2	9.4	5
SS100 / SS100T	0.90	4.7	65	15.2	13.8	11.4	8.4
SS120 / SS120T	0.97	5.8	65	18	16	14	12

Code 220V/50Hz	Code 110V/60Hz	Model	Connection Size	Horsepower	Weight (kg)	Capacitance 220V	Capacitance 110V	A mm
88022401	88022601	SS020	1.5" / 50mm	0.2hp	6.20	5µF	20µF	507
88022402	88022602	SS033	1.5" / 50mm	0.33hp	6.50	6µF	24µF	507
88022403	88022603	SS050	1.5" / 50mm	0.5hp	8.03	8µF	30µF	552
88022404	88022604	SS075	1.5" / 50mm	0.75hp	9.01	14µF	40µF	552
88022405	88022605	SS100	1.5" / 50mm	1.0hp	9.09	20µF	60µF	552
88022406	88022606	SS120	1.5" / 50mm	1.2hp	11.00	20µF	60µF	552
9020329	1	SS020T	1.5" / 50mm	0.2hp	6.20	5µF	1	507
9020330	/	SS033T	1.5" / 50mm	0.33hp	6.50	6µF	/	507
9020331	1	SS050T	1.5" / 50mm	0.5hp	8.03	8µF	/	552
9020332	/	SS075T	1.5" / 50mm	0.75hp	9.01	14µF	/	552
9020333	1	SS100T	1.5" / 50mm	1.0hp	9.09	20µF	/	552
9020334	1	SS120T	1.5" / 50mm	1.2hp	11.00	20μF	/	552





EMAUX WATER TECHNOLOGY CO., LTD

ADDRESS: Flat A-D, 20/F., Kai Bo 22, 22 Wing Kin Road,

Kwai Chung, Hong Kong PHONE +852 2832 9880 www.emauxgroup.com

Pool & Spa Equipment

Available from: