TOP VIEW - PEDESTAL SIDE

LOOKING -Z - SCALE 2:1

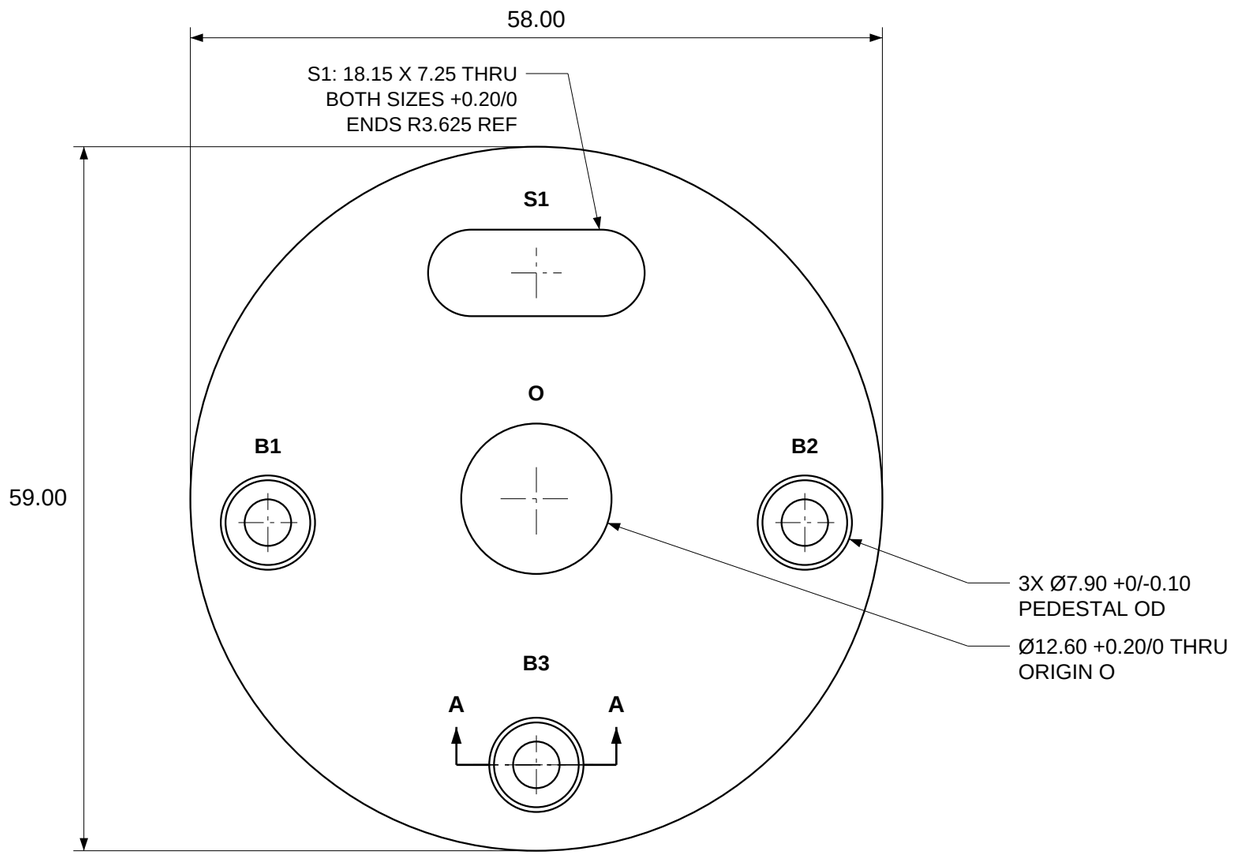

TRUE ELLIPSE; CENTER O. HIDDEN DETAIL OMITTED.

FRONT VIEW

LOOKING +Y - SCALE 2:1 - HIDDEN DETAIL OMITTED



SECTION A-A

LOCAL AT B3 - TYPICAL 3 PLACES - SCALE 5:1

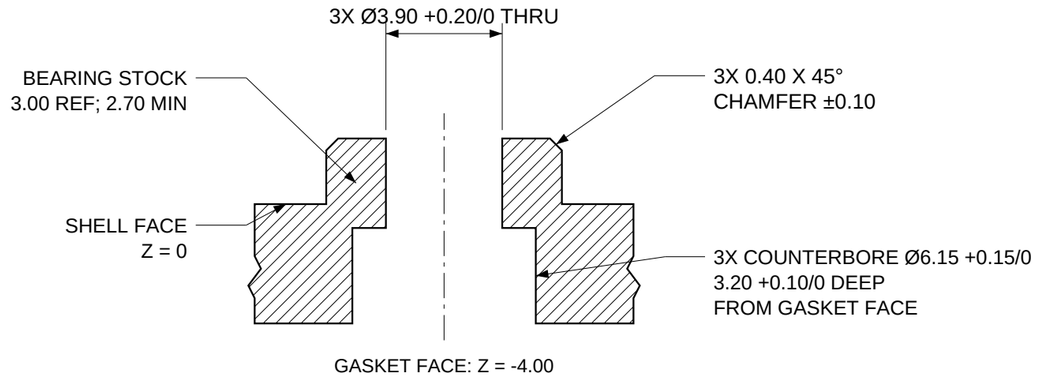

FEATURE CENTER LOCATIONS

FEATURE	X	Y	DESCRIPTION
B1	-22.500	-2.000	PEDESTAL / SCREW AXIS
B2	22.500	-2.000	PEDESTAL / SCREW AXIS
B3	0.000	-22.300	PEDESTAL / SCREW AXIS
S1	0.000	18.925	REAR SLOT CENTER

X AND Y COORDINATES: ±0.10. FEATURE AXES PARALLEL TO Z.

ORIGIN O: SHANK AXIS / ELLIPSE CENTER. +X RIGHT; +Y UP.

Z = 0 AT SHELL FACE; +Z TOWARD PEDESTALS.

FABRICATION AND FINISH

1. FDM PRINT IN PET-GF15, GASKET FACE DOWN. USE THE SHARED PET-GF PROCESS: 0.20 FIRST LAYER, 0.24 NOMINAL LAYERS; SOLID MATERIAL THROUGH ALL THREE SCREW SEATS.

2. REMOVE ALL THREE COUNTERBORE SUPPORTS, STRINGING AND LOOSE FIBERS. CLEAR THE HOLES AND REAR SLOT; PRESERVE FLAT SCREW SEATS AND LOCATING PEDESTALS.

3. FINISH FEATURES TO THE STATED SIZES. REMOVE SHARP FLASH. GASKET FACE FREE-STATE GAP: 0.20 MAX UNDER OWN WEIGHT ON A FLAT INSPECTION SURFACE.

4. REAR SLOT S1 CARRIES THE FLAVOR/DRAIN BUNDLE AND FLAT RIBBON. SCREWS, SHELL INSERTS AND GASKET BELONG TO THE FAUCET ASSEMBLY.

HSM-0092

UNLESS OTHERWISE SPECIFIED

LINEAR ±0.20 mm ANGULAR ±1°

REF = REFERENCE. DIMENSIONS APPLY AFTER SUPPORT REMOVAL.

DO NOT SCALE. ANSI B / 17 x 11 IN. PRINT AT 100% FOR SCALE.

PART ONLY. ASSEMBLY: FAUCET-SHELL/ASSEMBLY.MD, BASE JOINT.

HOME SODA MACHINE

SCULPTED FAUCET PLATE - ABOVE COUNTER

FINISHED PART

DESIGN DEFINITION

MATERIAL	UNITS	QUANTITY
PET-GF15	**MILLIMETERS**	**1 PER SCULPTED FAUCET**

DRAWING	REV	DATE	SCALE	SHEET
FCT-PLT-02	**A**	**2026-10-26**	**AS SHOWN**	**1 OF 1**