JET EXIT FACE VIEW

SCALE 5:1

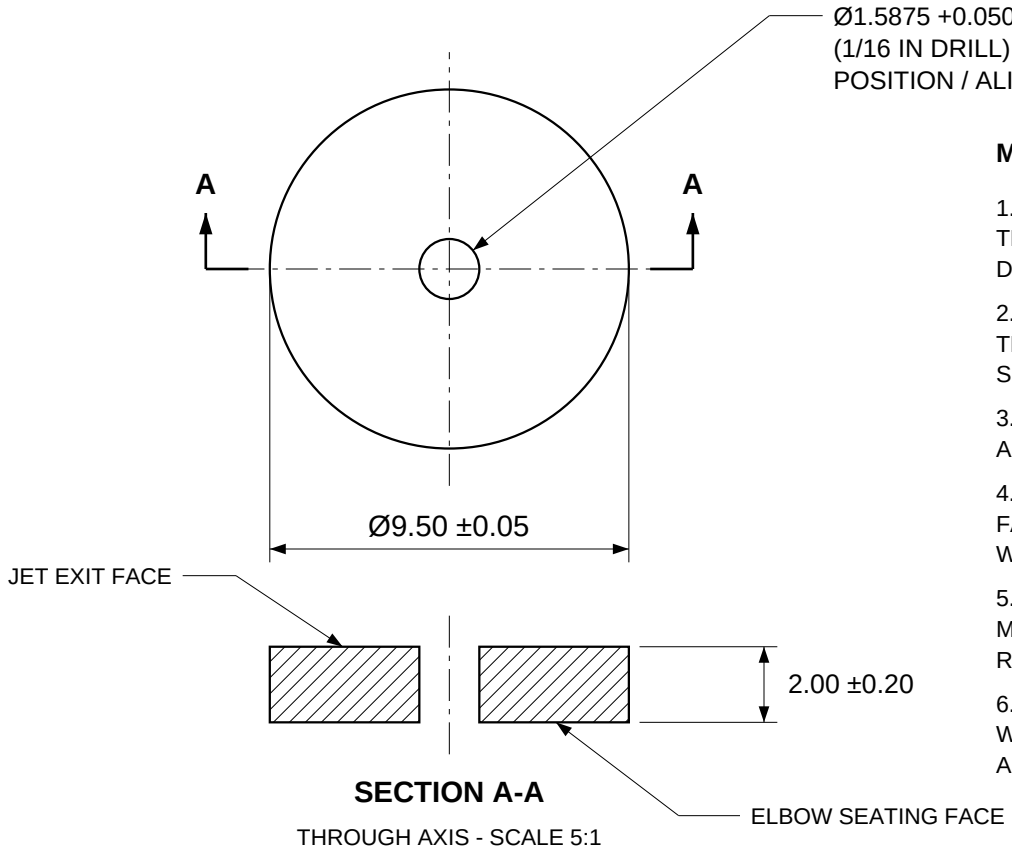

SECTION A-A

THROUGH AXIS - SCALE 5:1

MANUFACTURE AND INSPECTION

1. MATERIAL: 316 STAINLESS ROUND ROD. SELECT STOCK MEETING THE OD LIMITS. DIMENSIONS APPLY AFTER FACE FINISHING AND DEBURRING.

2. DRILL WHILE ATTACHED TO A 50-60 mm HANDLING BLANK. EXTEND THE FULL-DIAMETER BORE BEYOND THE FINAL CUT FACE; SAW THE SLICE AND FINISH TO THICKNESS.

3. CENTER THE HOLE AT BOTH FACES WITHIN 0.10 RADIAL OF THE OD AXIS. HOLE AXIS NORMAL TO ELBOW SEATING FACE WITHIN 1°.

4. THICKNESS VARIATION ACROSS CAP: 0.05 MAX. ELBOW SEATING FACE: 0.05 MAX GAP ON A FLAT INSPECTION SURFACE, UNDER OWN WEIGHT.

5. REMOVE BURRS FROM BOTH HOLE ENDS; EDGE BREAK 0.05 MAX. MAINTAIN THE CYLINDRICAL PASSAGE. OD CORNERS: BURR REMOVAL ONLY; PRESERVE THE SQUARE WELD RIM.

6. REMOVE ALL CUTTING FLUID AND LOOSE METAL. CAP-TO-ELBOW WELD, INSTALLED FIT AND POST-WELD INSPECTION: ASSEMBLY/WATER-INLET-JET.MD.

HSM-000011

mm DIMENSIONS GOVERN.

FINISHED, DEBURRED CAP.

DO NOT SCALE.

ANSI A / 11 x 8.5 IN

PRINT AT 100% FOR SCALE.

HOME SODA MACHINE

WATER-INLET JET CAP

FINISHED PART

CAP BEFORE WELD

MATERIAL	UNITS	QUANTITY
316 STAINLESS STEEL	**MILLIMETERS**	**1 PER CARBONATOR**

DRAWING	REV	DATE	SCALE	SHEET
JET-CAP-01	**A**	**2026-10-26**	**AS SHOWN**	**1 OF 1**