

Materials List for Drawing No. 434004
Intermediate or Pin Angle Pole (Double Crossarm Member)


Quantity	Description	ENATS Dwg. No. or BS Ref.	M 20 Bolts	Round Washers
1	Wood Pole	434001	4 (pole)	-
2	Kicking Block	439103 Type 2	2 (pole)	-
2	Crossarm Member Inter. & Angle/Section	439557	-	-
4	Crossarm Strut	439526	4	8
1	Insulator Bracket	439518	2	-
2	Section Strap	439525	4	8
2	Square Flat Washer	439604	-	-
6	Square Curved Washer	439605	-	-
3	11 kV Pin Insulator	439301	-	-
	20 kV Pin Insulator	439302	-	-
	33 kV Pin Insulator 33 kV Line Post Insulator	439303	-	-
3	11 kV Pin 230mm 5 kN	BS3288 Ref.28	-	-
	11 kV Pin 230mm 10 kN	BS3288 Ref.29	-	-
	33 kV Pin 305mm 5 kN	BS3288 Ref.30	-	-
	33 kV Pin 305mm 10 kN	BS3288 Ref.31	-	-
1	Safety Sign	439004	-	-

Notes:

All bolts 60 mm long with exception of pole bolts.

Pin Angle – Additional round washers and locknuts required for bonding stay to pole top bolts

+ For 33 kV applications, use 305 mm pins at all positions.

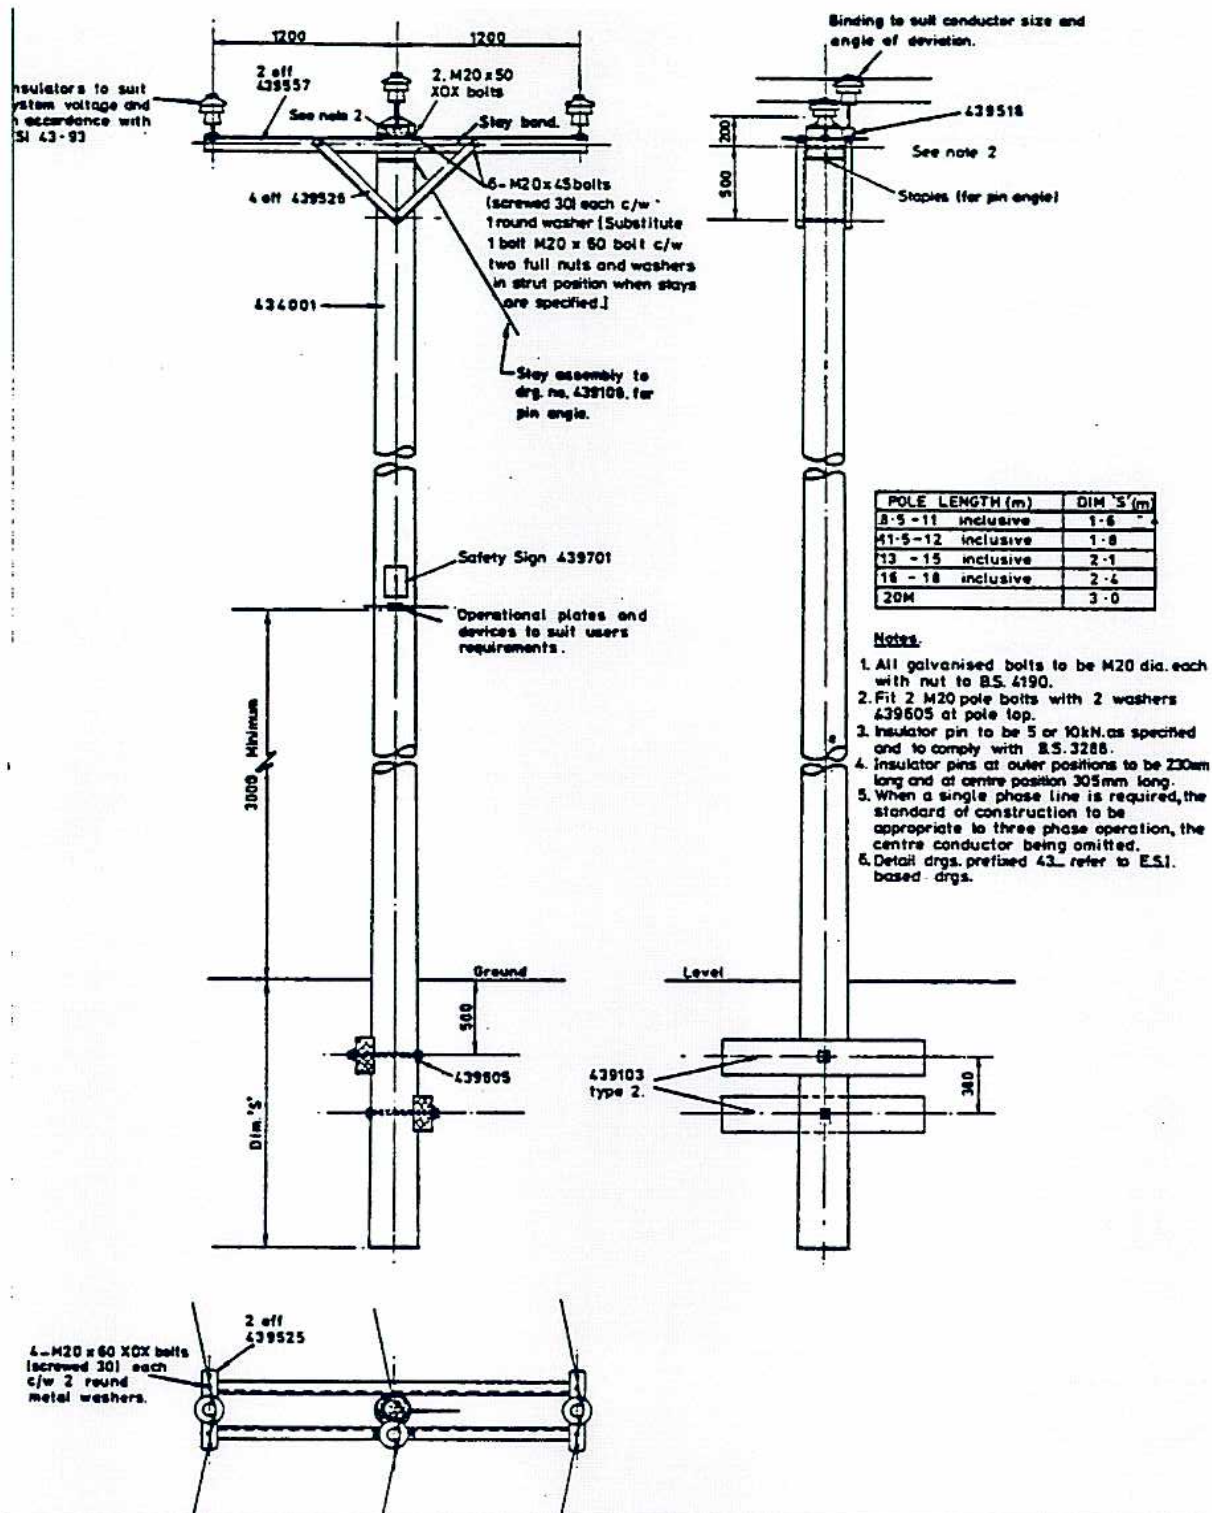

All dimensions are in millimetres unless otherwise stated

Drawing 434004 Single Pole, double crossarm, intermediate