



DESCRIPTION		FIRST ISSUE				
REV	DATE	BY	CHKD	APPD		
A	04/08/15	JDH	OC	KM		

POLE SCARFED ON
BOTH SIDES TO GIVE
50mm FLAT FACE

PARALLEL SCARFED
USING
PROPRIETARY JIG



ADDITIONAL PARALLEL SCARFING
REQUIRED WHEN POLE DIAMETER
IS GREATER THAN 265mm TO
ACHIEVE MAX. 300mm BETWEEN
FLAT FACES

< SEE
NOTE 3

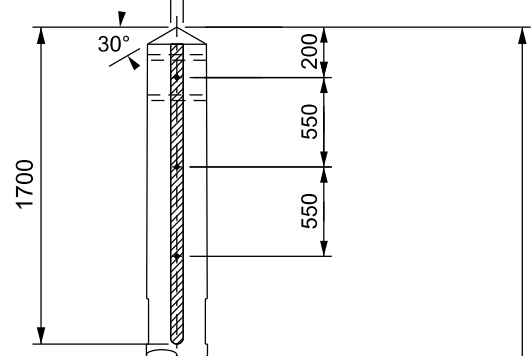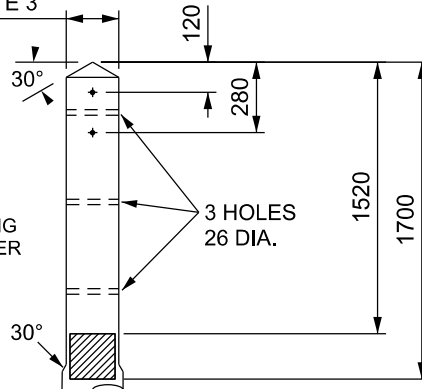

POLE SCARFED ON
BOTH SIDES TO GIVE
50mm FLAT FACE

REFERENCE (typical only)
ACTUAL POLE VALUES TO BE USED
15 - POLE LENGTH
436 - POLE DIA. 1.5m FROM BUTT
IF - IMPORTED REDFIR
75 - YEAR OF CREOSOTING
XYZ - SUPPLIERS NAME OR MARK
GOUGE MARK 6 WIDE x 6 DEEP
3m FROM POLE BUTT

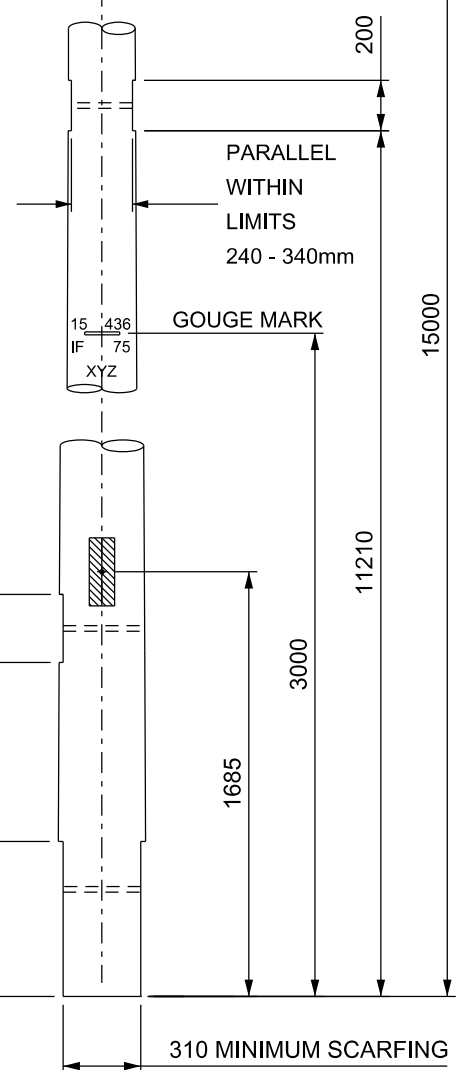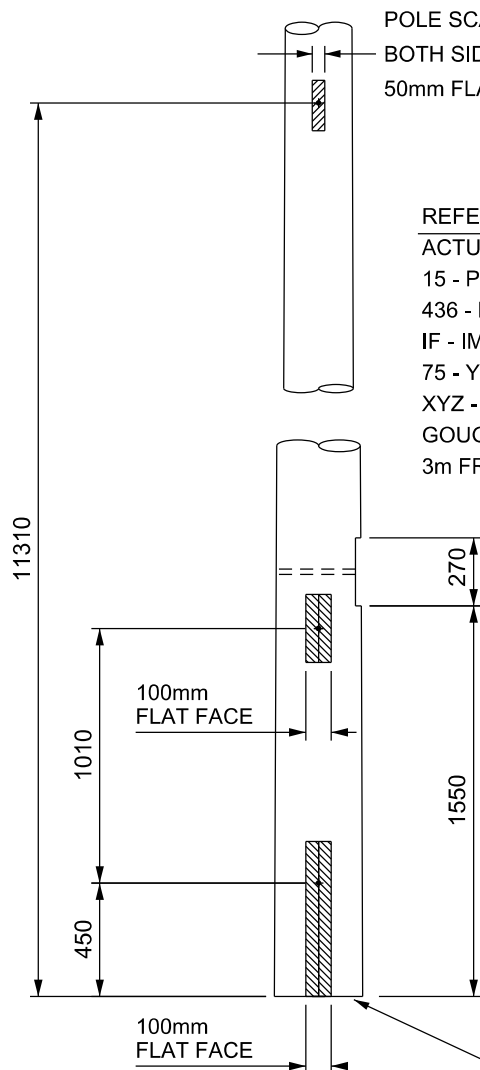

GENERAL NOTES:

1. ALL DIMENSIONS ARE IN mm, UNLESS NOTED
2. ALL DRILLINGS TO BE 24mm DIAMETER HOLES
3. LENGTH = 15m & PARALLEL WITHIN LIMITS

MINIMUM TOP DIST BETWEEN FLATS = 200mm

MAXIMUM TOP DIST BETWEEN FLATS = 265mm

MINIMUM DIAMETER 1.5m FROM BUTT = 436mm

POLE SIZE TO BE
IMPRESSED
ON THE BUTT

CLIENT
KTL
PROJECT
CUMNOCK - DERSALLOCH
ROUTE

TITLE
PART -
WOOD POLE SCARFING
4 POLE ENTRY TERMINAL
STRUCTURES
15m POLE

SCALE
N.T.S
(UNLESS OTHERWISE STATED)
DATE
04/08/2015
DRAWN
JDH
DRAWING NUMBER
18_15229_39
ORIGINAL SIZE
A4
CHECKED
OC
APPROVED
KM
REV
A

LS TRANSMISSION CONSULTANCY LIMITED
Yorkshire House
York Road
Little Driffield
East Yorkshire
YO25 5XA
01377 253617