


**NOTES:**

1. TIMBER TO BE BALTIC REDWOOD SCOTS PINE (PINUS SYLVESTRIS) OR FRENCH MARITIME PINE, GENERALLY IN ACCORDANCE WITH B.S.1990.
2. BLOCKS TO BE CUT FROM SAWN TIMBER.
3. THE LONGITUDINALLY CUT SURFACES OF BLOCKS SHALL BE STRAIGHT AND CLEAN CUT AND THE ANNULAR RINGS SHALL BE APPROX. PARALLEL TO THE WIDE FACE. PLANING IS NOT REQUIRED. WANE IS PERMISSIBLE ON ONE FACE.
4. BLOCKS SHALL BE TREATED AFTER FABRICATION WITH A
 - a) CREOSOTE TO B.S.913 (RUEPING PROCESS) OR
 - b) WATER - BORNE SALTS (TANALITH 'C') TO B.S.4072.
5. THIS DRAWING SUPERSEDES ITEM 2 OF Drg. 1.09.101.0542.

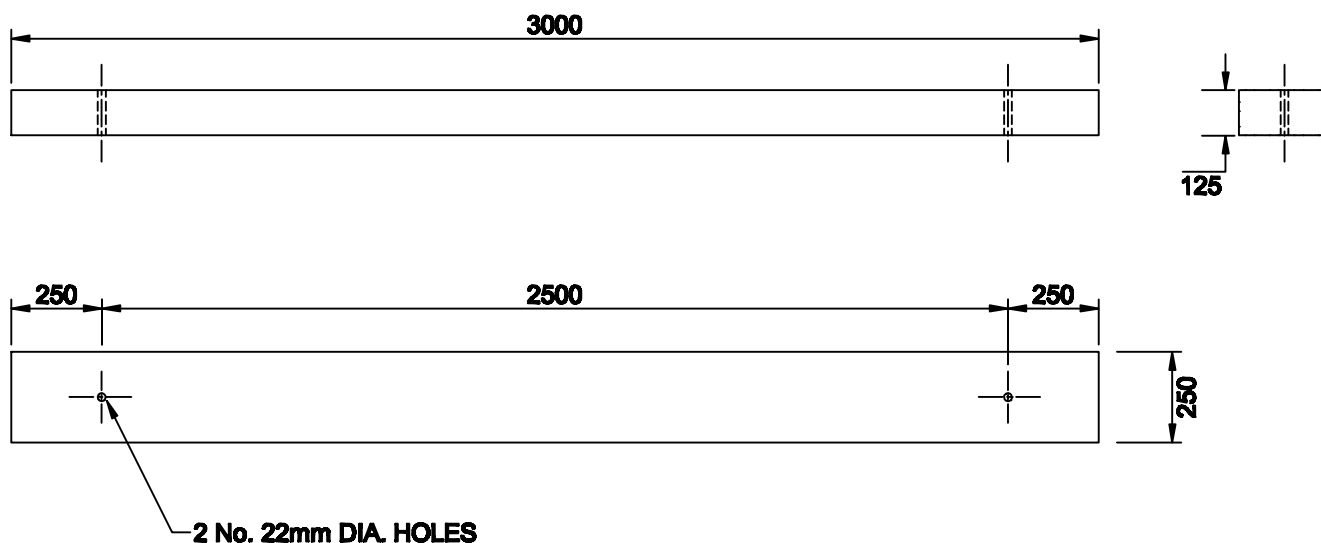

Lloyds Court, 78 Grey Street, Newcastle Upon Tyne, NE1 6AF

WOOD BRACE BLOCK (250 X 125 SECTION)
FOR 'H' POLES 2500MM CENTRES

Manufacturer Details

Sheet No.
2Scale
1:20Prepared By
Joan OakleyType
OVERHEAD

STANDARDS

Revised
13/12/13

Grid Reference

Ref No. C1029727

Historic
Drg.No.

1000439112

Date Issued
06/12/13Checked By
G HAMMEL

Revision Notes