



SCARFING TO BE CUT TO GIVE A 50mm WIDE FLAT ON BOTH FACES OF MEDIUM AND STOUT POLES. THE ENDS CHAMFERED OFF AS SHOWN.

DETAIL A  
SCALE 1:10

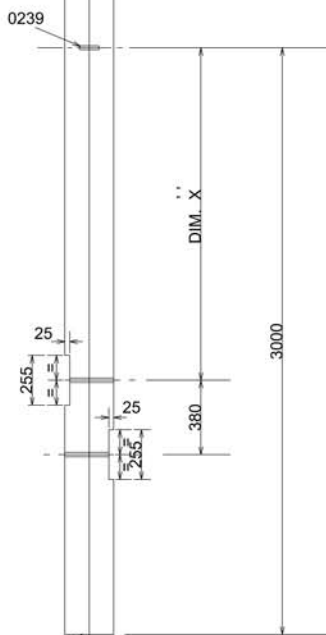

NOTES:

1. CLASS OF POLE TO BE MEDIUM, STOUT OR E/STOUT.
2. ALL HOLES TO BE 22mm DIA. DRILLED AT RIGHT ANGLES TO VERTICAL CENTRE LINE OF POLE. ALL DRILLING AND CUTTING TO BE DONE STRICTLY TO TEMPLATE PRIOR TO PRESERVATION TREATMENT.
3. POLE BUTT TO BE CUT AT RIGHT ANGLES TO AXIS OF POLE.
4. POLE TO BE NOTCHED AND DRILLED FOR DUPLICATE 250 x 125 BAULKS.

| POLE LENGTH. (m)   | DIM. X (mm) |
|--------------------|-------------|
| 9.0 - 11 INCLUSIVE | 1900        |
| 12.0               | 1700        |
| 13 - 15 INCLUSIVE. | 1400        |
| 16 - 18 INCLUSIVE. | 1100        |
| 20                 | 500         |

POLE SIZE TO BE IMPRESSED ON POLE BUTT.

|                                                                                    |                                                     |                                                                                          |                                              |
|------------------------------------------------------------------------------------|-----------------------------------------------------|------------------------------------------------------------------------------------------|----------------------------------------------|
|                                                                                    |                                                     | <b>Lloyds Court, 78 Grey Street, Newcastle Upon Tyne, NE1 6AF</b>                        |                                              |
| <b>Manufacturer Details</b>                                                        |                                                     | <b>HV OVERHEAD LINES<br/>SINGLE POLE FABRICATION FOR<br/>ARRANGEMENTS TO ESI 43 - 40</b> |                                              |
| Sheet No. 1<br>Prepared By Joon Oakley<br>Revised 24/05/10<br>Date Issued 23/02/05 | Scale 1:20<br>Grid Reference<br>Checked By G HAMMEL | Type ESI<br>Ref No. C147651<br>Revision G                                                | ESI<br>Historic Drg. No. 1000434001<br>Notes |