

A3


LIST OF ALL RELEVANT DRAWINGS OR DOCUMENTS THAT DIRECTLY RELATE TO THE CURRENT REVISION OF THE DRAWING

DOCUMENT REFERENCE:


NOTES:-

1. ALL DIMENSIONS GIVEN IN MILLIMETRES (mm) U.N.O
2. ALSO REFER TO DRAWING 200_1109_0039 SCHEMATIC STAY ARRANGEMENT DRAWING
3. SOIL GRADES TAKEN FROM ENATS 43-50 ISSUE 2. JANUARY 2012, 4.7 FOUNDATIONS:
4. PRELIMINARY SUBJECT TO LOAD AND STRENGTH STUDIES AND FINAL ROUTE ALIGNMENT, MICROSITING AND GROUND CONDITIONS.

Pole support type: Intermediate
Number of stays; None
Soil grades; 4
Brace baulk; 439112 - Type 2 - 1 No. Req'd
Top baulks; 439103 - Type 3 - 2 No. Req'd
Stay Assembly; N/A




ELEVATION




PLAN

STAY REFERENCE IHA

Pole support type: Intermediate
Number of stays; None
Soil grades; 3
Brace baulk; 439112 - Type 2 - 1 No. Req'd
Top baulks; 439103 - Type 4 - 2 No. Req'd
Stay Assembly; N/A




ELEVATION




PLAN

STAY REFERENCE IHB

Pole support type: Intermediate
Number of stays; None
Soil grades; 2
Brace baulk; 439112 - Type 2 - 1 No. Req'd
Top baulks; 439103 - Type 4 - 4 No. Req'd
Btm Baulks; 439103 - Type 1 - 2 No. Req'd
Stay Assembly; N/A



ELEVATION




PLAN


STAY REFERENCE IHC

NOTE
Terminal pole arrangements in abeyance.
Awaiting confirmation of details.

Pole support type: Terminal
Number of stays; 4 No. Req'd
Soil grades; 4
Brace baulk; 439112 - Type 2 - 1 No. Req'd
Top baulks; 439103 - Type 3 - 2 No. Req'd
Stay Assembly; To ENATS 43-91 Issue 5.
1150/7/4.0.
Type 2 stay block.
Depth to stay block 2.0m

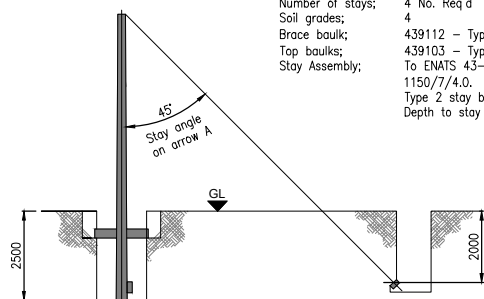


ELEVATION

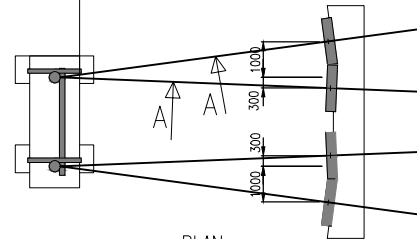


PLAN

STAY REFERENCE THA

Pole support type: Terminal
Number of stays; 4 No. Req'd
Soil grades; 3
Brace baulk; 439112 - Type 2 - 1 No. Req'd
Top baulks; 439103 - Type 4 - 2 No. Req'd
Stay Assembly; To ENATS 43-91 Issue 5.
1150/7/4.0.
Type 2 stay block.
Depth to stay block 2.0m

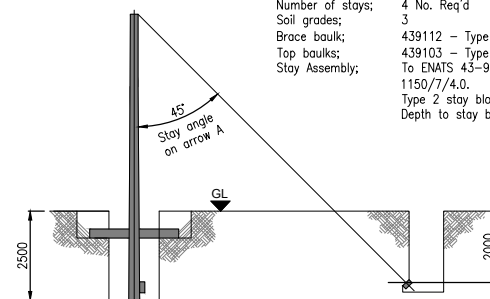


ELEVATION

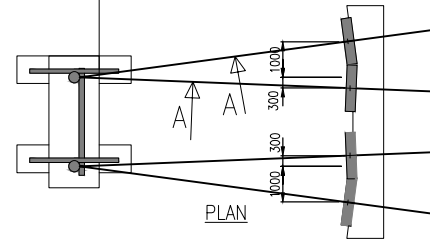


PLAN

STAY REFERENCE THB

Pole support type: Terminal
Number of stays; 4 No. Req'd
Soil grades; 2
Brace baulk; 439112 - Type 2 - 1 No. Req'd
Top baulks; 439103 - Type 4 - 4 No. Req'd
Stay Assembly; To ENATS 43-91 Issue 5.
1150/7/4.0.
Type 2 stay block.
Depth to stay block 2.0m

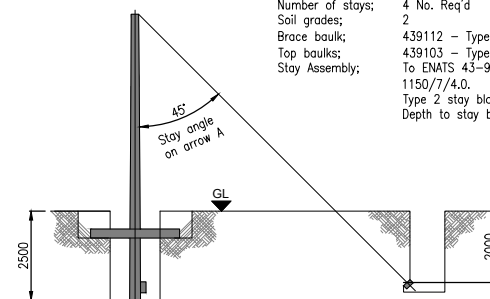

ELEVATION

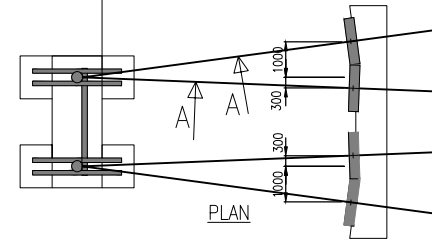

PLAN

STAY REFERENCE THC

Rev:	Drawn:	Approved:	Description:
01	PF	SA	ISSUED FOR INFORMATION
	Checked:	Date:	
	DB	22-09-20	



SSE Inverlmond House, 200 Dunkeld Road
Perth, PH1 3AQ, UK
www.sse.com

Project:
SSEN APPROACH 1 DESIGN

Project Number: VARIOUS **Location:** VARIOUS

Title:
INTERMEDIATE 'H' POLE ASSEMBLY
132kV WOOD POLE OHL

Drawing Status: For Information **Drawn:** PF

Scale: NTS **Checked:** DB

Date: 12.01.20 **Approved:** SA

Drawing Number: 200_1109_0038 **Sheet No:** 01 **Revision No:** 01

Date Plotted: 22.09.2020

File Name: David Borrie small piece 2020 07 21.dwg