

ACOUSTIC HOOD

Model: RF-15



Main features:

- Designed for use in noisy areas and harsh environments
- Extremely robust
- Good acoustic qualities and highly visible
- High visibility yellow paint finish
- **23dB noise reduction**
- Telephone mounting panel 200mm deep shelf
- Popular in noisy factories such as Newspaper print rooms.

Introduction:

For external or internal use, the RF-15 is designed to attain a high level of noise reduction up to 23dB. Manufactured using general-purpose resin material to BS476 Class 1 fire regulation, the RF-15 is extremely robust and weatherproof. Inside the hood's outer shell is a perforated

polypropylene lining that houses 50mm non-hygroscopic acoustic insulation. Fitted to the inner back wall is a stainless steel apparatus plate; beneath this plate is a detachable GRP shelf with easy cable entry.

Specifications :

Colour: Yellow Material: GRP (Glass reinforced plastic)

Dimensions: H940mm W700mm D620mm

Weight –Approx 23Kg

Outer Shell & Shelf –General Purpose Resin continuous filament mat

–Fire Resistance

to BS476 Part 7 Class 1 Surface Spread of Flame

Acoustic Insulation –50mm Tissue faced non hygroscopic Rockwool

(RW3) density


60kg/m³


Insulation Liner –White Perforated Polypropylene 3mm thickness

Boxed Dimensions –975 x 650 x 400cm

Boxed Weight –Approx 40kg (if ship by air or by carrier: 50kg)

Telephone layout:

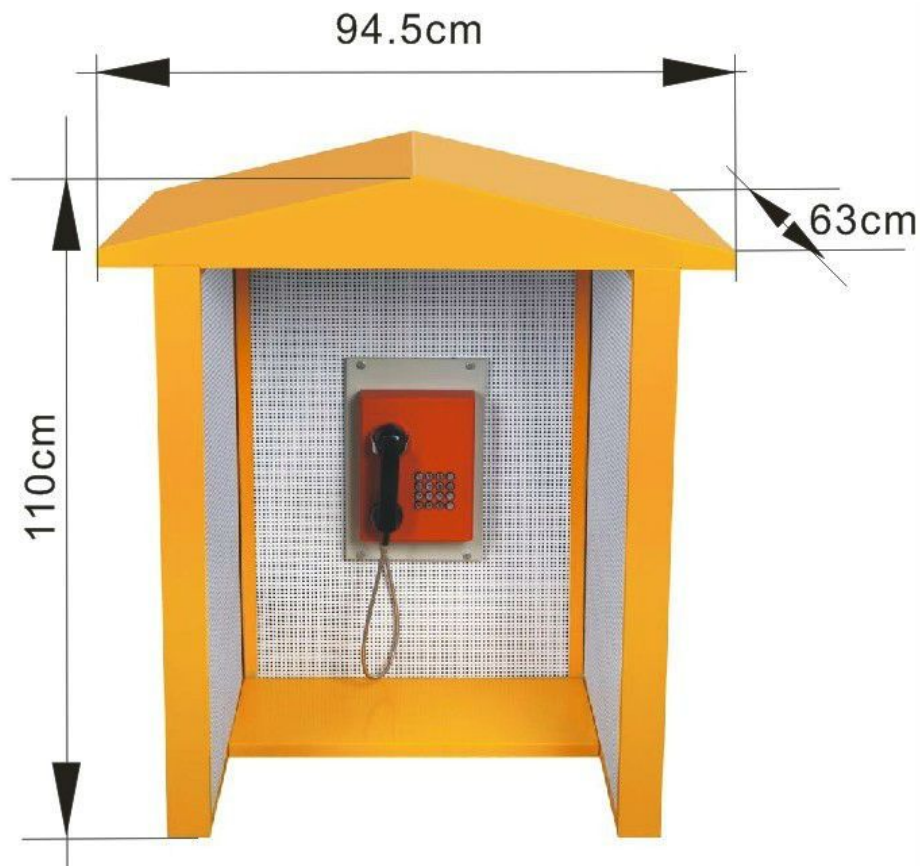

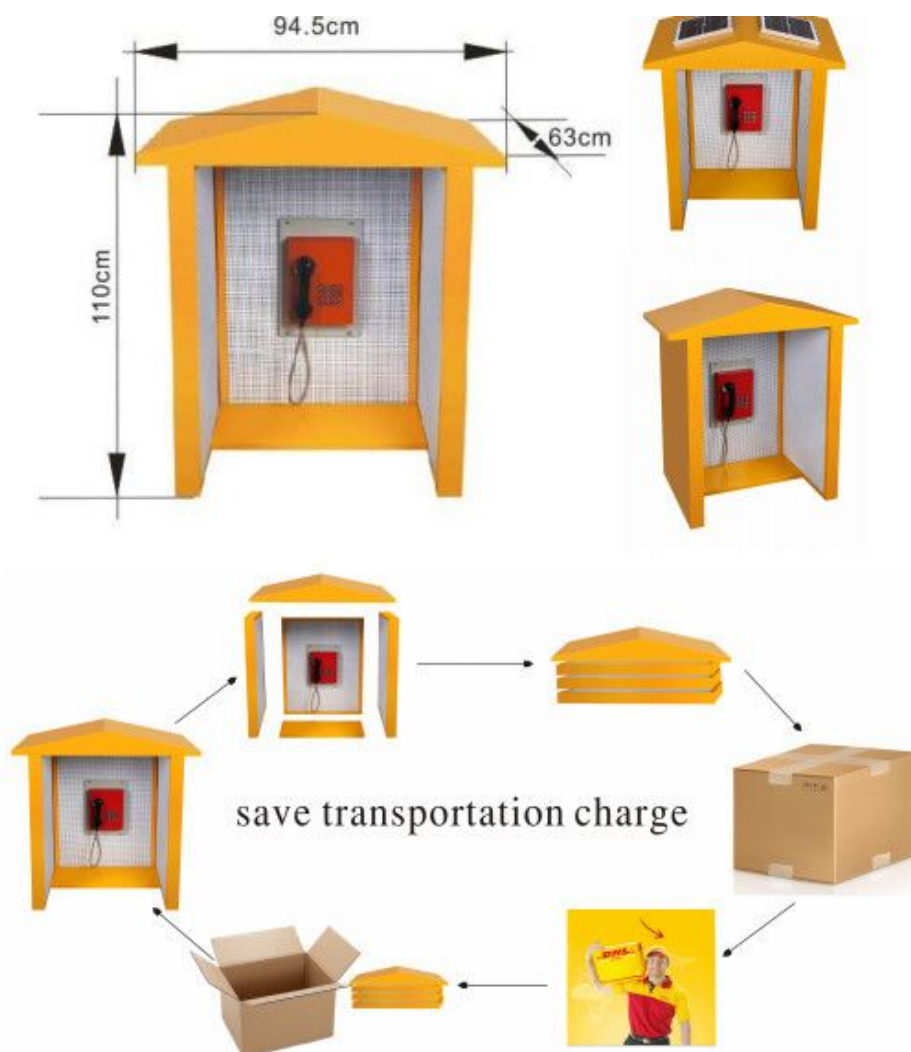

Certification:



Reference Photo:



Factory photo:

