```
cd /etc
cp hostname hostname.orig
diff hostname hostname.orig
1c1
< pi4-37
> raspberrypi
cp dphys-swapfile dphys-swapfile.orig
diff dphys-swapfile dphys-swapfile.orig
16c16
< CONF_SWAPSIZE=1000
> CONF_SWAPSIZE=100
fetch pkg installers
scp -r pi4-27:~/xx/my-projects-docs/pkg*.
dpkg -l | sort > pkgs.txt
cp pkg-install-scripts/ex*.
adds first set of packages
./extra_pkgs_64bit.sh
dpkg -l | sort > pkgs-a.txt
cp pkg-install-scripts/tensorflow/ex*.
adds 2nd set of packages
./extra-1.sh
dpkg -l | sort > pkgs-b.txt
./extra-2.sh
dpkg -l | sort > pkgs-c.txt
./extra-3.sh
dpkg -l | sort > pkgs-d.txt
./extra-4.sh
dpkg -l | sort > pkgs-e.txt
```

This is the software to program the picos with SWD

sudo su

installed-openocd082722-228ede-64bit.img openocd082722-228ede-64bit.img

Bare Metal for Raspbery Pi

ultibo2.5.123-082722-64bit.img sudo unsquashfs -d ultibo ultibo2.5.123-082722-64bit.img

qemu-6.2.0-rpios-64bit.img sudo unsquashfs -d qemu-6.2.0-rpios qemu-6.2.0-rpios-64bit.img git clone https://github.com/develone/Ultibo_Projects.git cd Ultibo_Projects/jpeg2000/src/ ./compile_ultibo.sh cd ../QEMU/ ./libbuild.sh

vi ~/.local/share/applications/ultibo.desktop

[Desktop Entry]

Name=Lazarus IDE (Ultibo Edition)

Comment=A free pascal platform for bare metal development

Exec=/home/devel/ultibo/core/lazarus.sh

Icon=/home/devel/ultibo/core/images/icons/lazarus.ico

Terminal=false

Type=Application

Categories=Development;IDE;

X-Desktop-File-Install-Version=0.26

scrot -d 3 -s qemujpeg.png

scrot -d 3 -s qemujpeg-1.png

. ~/Ultibo_Projects/picoultibo.sh

/home/devel/ultibo/core:/home/devel/qemu-6.2.0-rpios/bin:/home/devel/local/openocd/bin:/home/devel/picotool/build/:/usr/local/sbin:/usr/local/bin:/usr/sbin:/usr/bin:/bin:/usr/local/games:/usr/games

./startqemu.sh

This is what is used to program pico's with SWD.

cd ~/

mkdir local

sudo unsquashfs -d local/openocd/installed-openocd082722-228ede-64bit.img

Parallel unsquashfs: Using 4 processors

800 inodes (950 blocks) to write

created 800 files created 33 directories created 0 symlinks created 0 devices created 0 fifos which openocd /home/devel/local/openocd/bin/openocd

openocd -V

Open On-Chip Debugger 0.11.0-g228ede4-dirty (2022-08-27-19:45)

Licensed under GNU GPL v2

For bug reports, read

http://openocd.org/doc/doxygen/bugs.html

openocd: invalid option -- 'V'

curl https://pyenv.run | bash

% Total % Received % Xferd Average Speed Time Time Time Current

Dload Upload Total Spent Left Speed

100 270 100 270 0 0 704 0 --:--:- 703

Cloning into '/home/devel/.pvenv'...

remote: Enumerating objects: 1007, done.

remote: Counting objects: 100% (1007/1007), done. remote: Compressing objects: 100% (436/436), done.

remote: Total 1007 (delta 581), reused 707 (delta 442), pack-reused 0 Receiving objects: 100% (1007/1007), 495.52 KiB | 3.02 MiB/s, done.

Resolving deltas: 100% (581/581), done.

Cloning into '/home/devel/.pyenv/plugins/pyenv-doctor'...

remote: Enumerating objects: 11, done.

remote: Counting objects: 100% (11/11), done. remote: Compressing objects: 100% (9/9), done.

remote: Total 11 (delta 1), reused 5 (delta 0), pack-reused 0

Receiving objects: 100% (11/11), 38.72 KiB | 777.00 KiB/s, done.

Resolving deltas: 100% (1/1), done.

Cloning into '/home/devel/.pyenv/plugins/pyenv-installer'...

remote: Enumerating objects: 16, done.

remote: Counting objects: 100% (16/16), done. remote: Compressing objects: 100% (13/13), done.

remote: Total 16 (delta 1), reused 7 (delta 0), pack-reused 0 Receiving objects: 100% (16/16), 5.88 KiB | 2.94 MiB/s, done.

Resolving deltas: 100% (1/1), done.

Cloning into '/home/devel/.pyenv/plugins/pyenv-update'...

remote: Enumerating objects: 10, done.

remote: Counting objects: 100% (10/10), done. remote: Compressing objects: 100% (6/6), done.

remote: Total 10 (delta 1), reused 6 (delta 0), pack-reused 0

Receiving objects: 100% (10/10), done. Resolving deltas: 100% (1/1), done.

Cloning into '/home/devel/.pyenv/plugins/pyenv-virtualenv'...

remote: Enumerating objects: 63, done.

remote: Counting objects: 100% (63/63), done. remote: Compressing objects: 100% (55/55), done.

remote: Total 63 (delta 11), reused 28 (delta 1), pack-reused 0 Receiving objects: 100% (63/63), 38.44 KiB | 2.75 MiB/s, done.

Resolving deltas: 100% (11/11), done.

Cloning into '/home/devel/.pyenv/plugins/pyenv-which-ext'...

remote: Enumerating objects: 10, done.

remote: Counting objects: 100% (10/10), done. remote: Compressing objects: 100% (6/6), done.

remote: Total 10 (delta 1), reused 6 (delta 0), pack-reused 0

```
Resolving deltas: 100% (1/1), done.
WARNING: seems you still have not added 'pyenv' to the load path.
# Load pyenv automatically by appending
# the following to
~/.bash_profile if it exists, otherwise ~/.profile (for login shells)
and ~/.bashrc (for interactive shells):
export PYENV_ROOT="$HOME/.pyenv"
command -v pyenv >/dev/null || export PATH="$PYENV ROOT/bin:$PATH"
eval "$(pyenv init -)"
# Restart your shell for the changes to take effect.
# Load pyenv-virtualenv automatically by adding
# the following to ~/.bashrc:
eval "$(pyenv virtualenv-init -)"
These steps save a lot of time installing a lot of python code.
tensorflow
test-1-2.8.img
sudo unsquashfs -d test-1-2.8 test-1-2.8.img
This setup virtual enviornment
cd test-1-28
devel@pi4-37:~/test-1-2.8 $ python3 -m venv env
devel@pi4-37:~/test-1-2.8 $ source env/bin/activate
(env) devel@pi4-37:~/test-1-2.8 $
devel@pi4-37:~/test-1-2.8 $ ipython3 Copy_of_train_hello_world_model.ipynb
 0x01, 0x00, 0x00, 0x00, 0x1f, 0x00, 0x00, 0x00, 0x73, 0x65, 0x72, 0x76,
 0x69, 0x6e, 0x67, 0x5f, 0x64, 0x65, 0x66, 0x61, 0x75, 0x6c, 0x74, 0x5f,
 0x64, 0x65, 0x6e, 0x73, 0x65, 0x5f, 0x32, 0x5f, 0x69, 0x6e, 0x70, 0x75,
 0x74, 0x3a, 0x30, 0x00, 0x02, 0x00, 0x00, 0x00, 0x01, 0x00, 0x00, 0x00,
 0x01, 0x00, 0x00, 0x00, 0x0c, 0x0c, 0x0c, 0x0c, 0x00, 0x00, 0x00, 0x00, 0x00,
 0x04, 0x00, 0x08, 0x00, 0x0c, 0x00, 0x00, 0x00, 0x14, 0x00, 0x00, 0x00,
 0x04, 0x00, 0x00, 0x00, 0x01, 0x00, 0x00, 0x00, 0x80, 0xff, 0xff, 0xff,
 0xff, 0xff, 0xff, 0xff, 0x01, 0x00, 0x00, 0x00, 0x5d, 0x4f, 0xc9, 0x3c,
 0x04, 0x00, 0x04, 0x00, 0x04, 0x00, 0x00, 0x00
};
unsigned int g model len = 2408;
(env) devel@pi4-37:~/test-1-2.8 $ exec $SHELL
tensorflow lite
sudo unsquashfs -d project-rpi-tflite project-rpi-tflite102222.img
add to the end of ~/.bashrc
```

Receiving objects: 100% (10/10), done.

export PICO_SDK_PATH=/home/devel/sdk/pico-sdk export PATH="\$HOME/.pyenv/bin:\$PATH" eval "\$(pyenv init --path)" eval "\$(pyenv virtualenv-init -)"

mkdir sdk

cd sdk

This is when the repo is yours. git clone git@github.com:develone/pico-sdk.git With this you can not push changes. git clone https://github.com/develone/pico-sdk.git

cd pico-sdk/

git submodule update --init

Submodule 'lib/cyw43-driver' (https://github.com/georgerobotics/cyw43-driver.git) registered for path 'lib/cyw43-driver'

Submodule 'lib/lwip' (https://github.com/lwip-tcpip/lwip.git) registered for path 'lib/lwip' Submodule 'tinyusb' (https://github.com/hathach/tinyusb.git) registered for path 'lib/tinyusb' Cloning into '/home/devel/sdk/pico-sdk/lib/cyw43-driver'...

Cloning into '/home/devel/sdk/pico-sdk/lib/lwip'...

Cloning into '/home/devel/sdk/pico-sdk/lib/tinyusb'...

Submodule path 'lib/cyw43-driver': checked out '195dfcc10bb6f379e3dea45147590db2203d3c7b' Submodule path 'lib/lwip': checked out '239918ccc173cb2c2a62f41a40fd893f57faf1d6' Submodule path 'lib/tinyusb': checked out '4bfab30c02279a0530e1a56f4a7c539f2d35a293'

cd ../../

This is when the repo is yours.

git clone git@github.com:develone/devel-pico-tflmicro.git git clone https://github.com/develone/devel-pico-tflmicro.git cd devel-pico-tflmicro

mkdir build

cd build

cmake -DPICO_BOARD=pico .. about 4 hours

Using PICO_SDK_PATH from environment ('/home/devel/sdk/pico-sdk')

PICO SDK PATH is /home/devel/sdk/pico-sdk

Defaulting PICO_PLATFORM to rp2040 since not specified.

Defaulting PICO platform compiler to pico_arm_gcc since not specified.

-- Defaulting build type to 'Release' since not specified.

PICO compiler is pico_arm_gcc

- -- The C compiler identification is GNU 8.3.1
- -- The CXX compiler identification is GNU 8.3.1
- -- The ASM compiler identification is GNU
- -- Found assembler: /usr/bin/arm-none-eabi-gcc

Build type is Release

PICO target board is pico.

Using board configuration from /home/devel/sdk/pico-sdk/src/boards/include/boards/pico.h

-- Found Python3: /usr/bin/python3.9 (found version "3.9.2") found components: Interpreter

TinyUSB available at /home/devel/sdk/pico-sdk/lib/tinyusb/src/portable/raspberrypi/rp2040; enabling build support for USB.

cyw43-driver available at /home/devel/sdk/pico-sdk/lib/cyw43-driver lwIP available at /home/devel/sdk/pico-sdk/lib/lwip

- -- Configuring done
- -- Generating done
- -- Build files have been written to: /home/devel/devel-pico-tflmicro/build make this will take about 4 hours

```
-rw-r--r-- 1 devel devel 1788264 Oct 25 22:10 libpico-tflmicro.a
-rw-r--r-- 1 devel devel 234456 Oct 25 21:46 libpico-tflmicro_test.a
```

```
./pico-sdk/src/rp2_common/boot_stage2/bs2_default.elf
./examples/micro_speech/command_responder_test.elf
./examples/micro_speech/audio_provider_mock_test.elf
./examples/micro_speech/audio_provider_test.elf
./examples/micro_speech/recognize_commands_test.elf
./examples/magic_wand/magic_wand.elf
./examples/magic_wand/gesture_output_handler_test.elf
./examples/magic_wand/gesture_predictor_test.elf
./examples/magic_wand/gesture_predictor_test.elf
./examples/hello_world/hello_world.elf
```

This is when the repo is yours. git clone git@github.com:develone/my-projects-docs.git git clone https://github.com/develone/my-projects-docs.git

This project uses cmake Important to understand cmake the source code is 1 level above build.

This is when the repo is yours. git clone https://github.com/develone/pico-examples -b dev cd pico-examples mkdir build

This is when the repo is yours. -b dev is branch dev git clone --recursive git@github.com:develone/rp2040-freertos-project.git -b dev git clone --recursive https://github.com/develone/rp2040-freertos-project.git -b dev cd rp2040-freertos-project/ mkdir build cd build

 $cmake \hbox{-}DPICO_BOARD \hbox{-}pico \dots$

Using PICO_SDK_PATH from environment ('/home/devel/sdk/pico-sdk')

PICO_SDK_PATH is /home/devel/sdk/pico-sdk

Defaulting PICO PLATFORM to rp2040 since not specified.

Defaulting PICO platform compiler to pico_arm_gcc since not specified.

-- Defaulting build type to 'Release' since not specified.

PICO compiler is pico_arm_gcc

- -- The C compiler identification is GNU 8.3.1
- -- The CXX compiler identification is GNU 8.3.1
- -- The ASM compiler identification is GNU

-- Found assembler: /usr/bin/arm-none-eabi-gcc

Build type is Release

PICO target board is pico.

Using board configuration from /home/devel/sdk/pico-sdk/src/boards/include/boards/pico.h

-- Found Python3: /home/devel/test-1-2.8/env/bin/python3.9 (found version "3.9.2") found components: Interpreter

TinyUSB available at /home/devel/sdk/pico-sdk/lib/tinyusb/src/portable/raspberrypi/rp2040; enabling build support for USB.

cyw43-driver available at /home/devel/sdk/pico-sdk/lib/cyw43-driver

lwIP available at /home/devel/sdk/pico-sdk/lib/lwip

- -- Configuring done
- -- Generating done
- -- Build files have been written to: /home/devel/rp2040-freertos-project/build make

The elf files a loaded with openocd

. ~/Ultibo/picoultibo.sh

this program a file system performs either klt or dwt lifting step,

openocd -f interface/raspberrypi-swd.cfg -f target/rp2040.cfg -c "program test-read-crc16/test-read-crc16.elf verify reset exit"

ls ../doc lots of documentation

ls ../doc/rp2040-logic-analyzer/rp2040-logic-analyzer.pdf

qpdfview ../doc/rp2040-logic-analyzer/rp2040-logic-analyzer.pdf

./first_pwm/50_pwm.elf

./pico-lifting/pico-lifting.elf

./ultibo blink/ultibo blink.elf

./rp2040-logic-analyzer/rp2040-logic-analyzer.elf

./Scheduling/Scheduling.elf

./pico-sdk/src/rp2_common/boot_stage2/bs2_default.elf

./pico-littlefs/e-rw-r--r-- 1 devel devel 1788264 Oct 25 22:10 libpico-tflmicro.a

-rw-r--r-- 1 devel devel 234456 Oct 25 21:46 libpico-tflmicro test.axample0.elf

./pico-littlefs/example2.elf

./pico-littlefs/example1.elf

./pico-ultibo/pico-ultibo.elf

./test-read/test-read.elf

./ProjectFiles/blink.elf

./kltdwt-ultibo/kltdwt-ultibo.elf

./2tasks/2tasks.elf

./2cores/multicore.elf

./pico-lifting-sf/hello_usb.elf

./test-read-crc16/test-read-crc16.elf

./Mutex/Mutex.elf

./HCSR04/HCSR04.elf

./Semaphore/Semaphore.elf

./klt-test/klt-test.elf

This needed for octave

.octaverc

graphics_toolkit("gnuplot");


```
https://github.com/develone/svd rgb.git
cd svd_rgb/src/
devel@pi4-37:~/svd rgb/src $ make
gcc -c -o obj/svd.o svd.c -I../include
gcc -c -o obj/disp_mat.o disp_mat.c -I../include
gcc -c -o obj/mul_mat.o mul_mat.c -I../include
gcc -c -o obj/pnmio.o pnmio.c -I../include
gcc -c -o obj/error.o error.c -I../include
gcc -c -o obj/mythread.o mythread.c -I../include
gcc -c -o obj/trans_mat.o trans_mat.c -I../include
gcc -c -o obj/master.o master.c -I../include
gcc -o master obj/svd.o obj/disp_mat.o obj/mul_mat.o obj/pnmio.o obj/error.o obj/mythread.o
obj/trans mat.o obj/master.o -I../include -lm -lpthread
./master
octave
In a 2nd shell
scrot -d 3 -s redpgm.png
scrot -d 3 -s rcblu.png
scrot -d 3 -s rcblu-1.png
quit
git clone https://github.com/ArduCAM/pico-tflmicro.git
Cloning into 'pico-tflmicro'...
remote: Enumerating objects: 1812, done.
remote: Counting objects: 100% (106/106), done.
remote: Compressing objects: 100% (47/47), done.
remote: Total 1812 (delta 73), reused 59 (delta 59), pack-reused 1706
Receiving objects: 100% (1812/1812), 13.92 MiB | 14.64 MiB/s, done.
Resolving deltas: 100% (950/950), done.
$30.00 at Amazon
devel@pi4-37:~/pico-tflmicro/bin
```

magic_wand_ble.uf2 person_detection_benchmark.uf2 pico4ml_ble_magic_wand.uf2


pico4ml_magic_wand.uf2

Setting up the interfaces

micro_speech.uf2 person_detection_int8.uf2

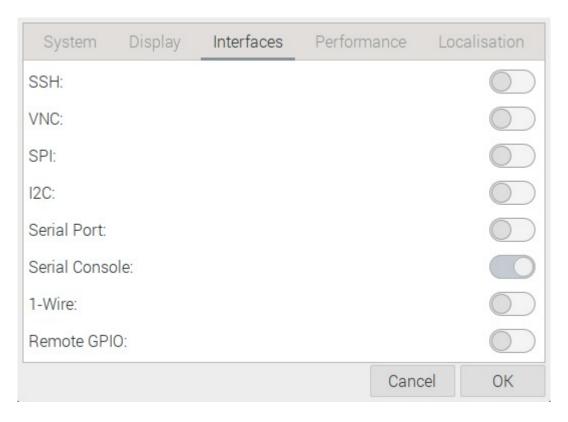

Setting up the interfaces

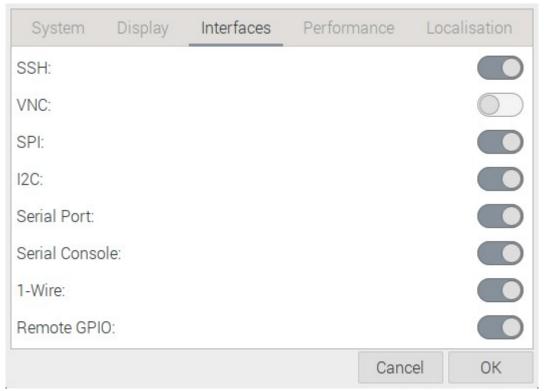

When installing

File Edit Tabs Help

Package configuration

Configuring wireshark-common

Dumpcap can be installed in a way that allows members of the "wireshark" system group to capture packets. This is recommended over the alternative of running Wireshark/Tshark directly as root, because less of the code will run with elevated privileges.

For more detailed information please see /usr/share/doc/wireshark-common/README.Debian.gz once the package is installed.


Enabling this feature may be a security risk, so it is disabled by default. If in doubt, it is suggested to leave it disabled.

Should non-superusers be able to capture packets?

<Yes>


<No>

svd_rgb

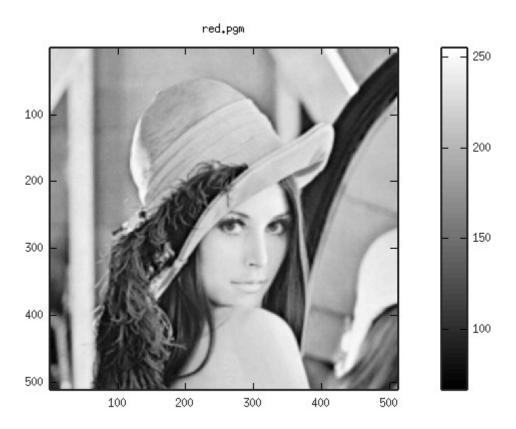


y2= 230,686

reconstruted

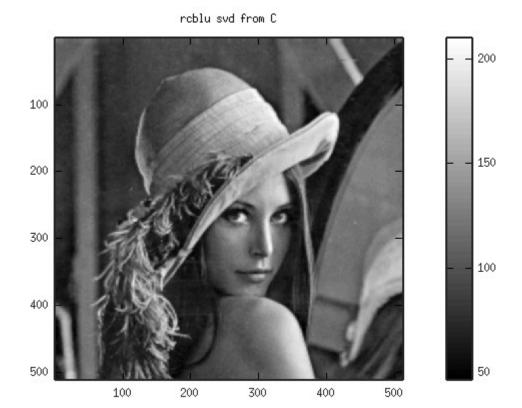



y2= 23,8538


svd

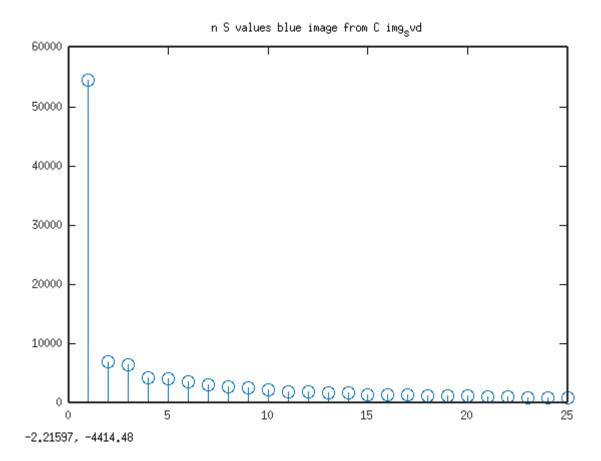


Arducam PicoML

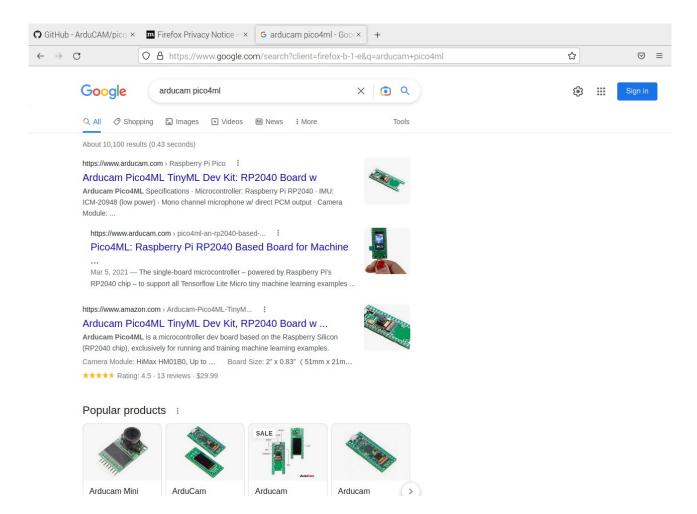

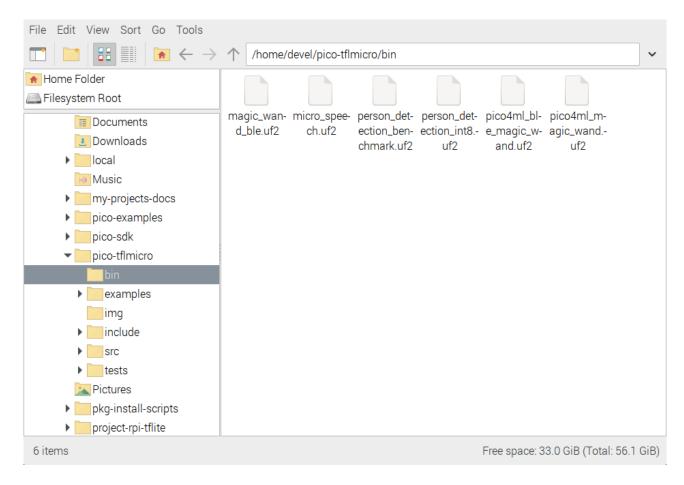

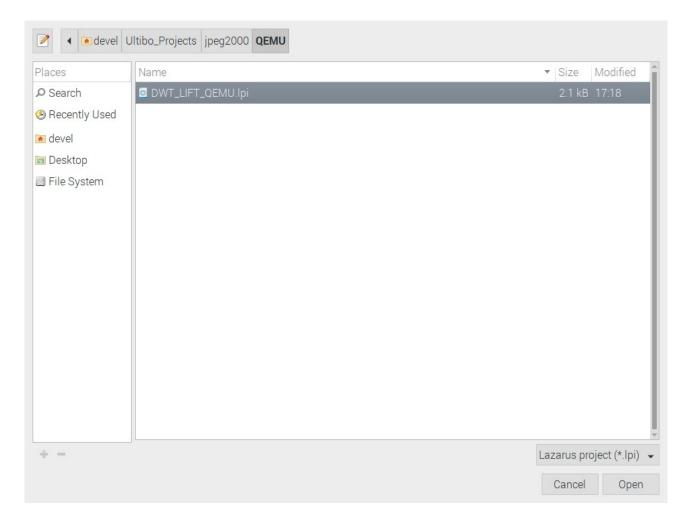

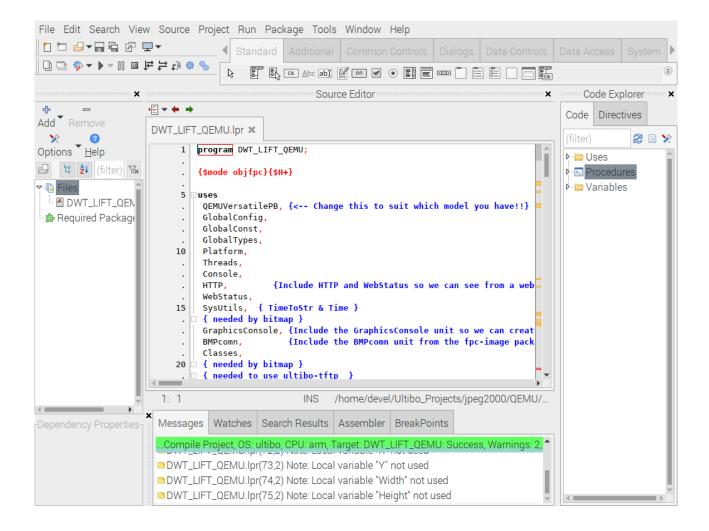

Machine View

Ultibo Core (Release: Beetroot Version: 2.5.123 Date: 23 August 2022)

xx0 0
xx0 0
yy0 0
xx1 256
yy1 256
Hello Ultibo from Cff Called by Pascal starting compress
ion: 0 seconds 0 useconds 0
in lift_config dec 6 enc 1 compression CR 25 bpp 24 flg
0 him 256 wim 256
size 196608 pointer passed 2186fc8 1542a88 width 256 hei
ght 256
l_nb_tiles 1 l_data_size 196608
0x7c 0x89 0xe2
In test_tile_encoder creating J2k
Compression time: 0 seconds 0 useconds 0 starting openjp
eg
IINFO1 tile number 1 / 1
Compression time: 2 seconds 2 useconds 0
23:32:13

TFTP Demo. writing top right handle1 Local Address 10.0.2.15 TFTP Ready.

