


BACK FACE (outer) SCALE 1.5:1

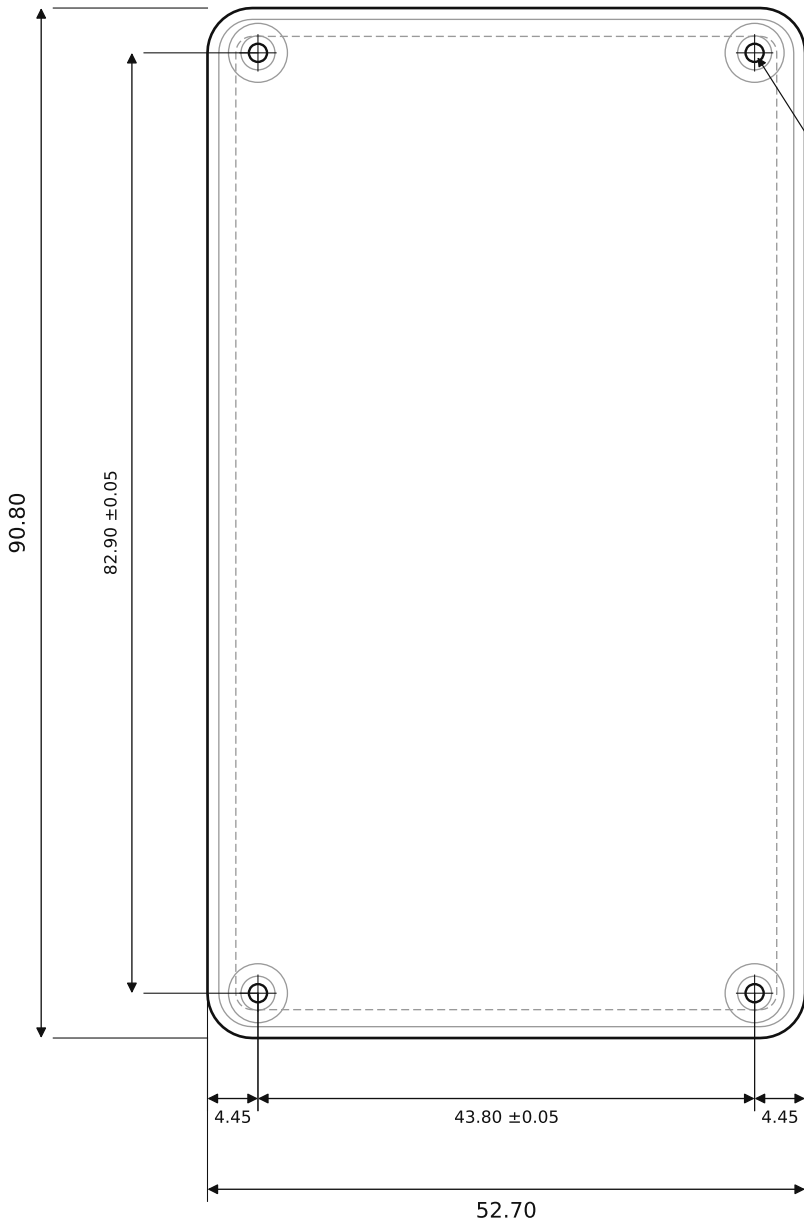

POS	Ø0.10 (M)	A	B
-----	-----------	---	---

4× M2 THREAD, THRU

Ø1.6 TAP DRILL • TAP FROM BACK FACE

Ø3.0 SPOTFACE, BACK (depth per Detail B)

C3 = hole-pattern pitch ±0.05 C4 = M2 thread


SECTION A-A → edge profile DETAIL B → corner boss

CRITICAL DIMENSIONS — C1 & C3 TOLERANCED ±0.05 (MARKED ON VIEWS); ALL OTHER FEATURES PER ISO 2768-1 (MEDIUM)

C1	Cavity depth (boss-top plane → cavity floor)	1.90 ±0.05
C2	PCB-rest plane flatness (lip + 4 bosses + 2 ribs)	FLAT 0.05
C3	4× mounting-hole pattern, pitch 43.80×82.90	±0.05 (linear)
C4	Mounting holes — tapped, thru, from back	M2 / Ø1.6 drill

NOTES


- MATERIAL: TITANIUM Gr5 (TC4) = Ti-6Al-4V GRADE 5.
- FINISH: AS-MACHINED OR BEAD-BLAST MATTE (CONFIRM). REAR ART LASER-MARKED IN RECESSED FIELD.
- GENERAL TOLERANCE PER ISO 2768-1 (MEDIUM). C1-C4 TOLERANCED AS LISTED; C1 & C3 = ±0.05. DATUMS: A = LEFT EDGE, B = BOTTOM EDGE, C = PCB-REST PLANE.
- REFLECTOR FRAME: LASER-MARK A 0.25-WIDE OUTLINE ON THE CAVITY FLOOR AT THE MONOGRAM-WINDOW OUTLINE (20.9 × 6.2, CTR OF WINDOW). MARK ONLY, DO NOT CUT - FLOOR STAYS A UNIFORM 0.55.
NON-STRUCTURAL; LOCATES THE ADHESIVE REFLECTOR STRIP. NOT MODELED IN THE STEP.
- BREAK ALL SHARP EDGES ~0.1 (Ti). OUTER TOP/BOTTOM RIM EASED 0.20×45° (MODELED).
- THIN-WALL ADVISORY: FLOOR IS A UNIFORM 0.55 (NO THINNED SECTION; REFLECTOR FRAME IS LASER-MARKED, NOT CUT), BELOW THE ~0.8/1.0 Ti MIN-WALL GUIDANCE. IF YOU CANNOT HOLD 0.55, ADVISE THE MIN Ti FLOOR YOU WILL HOLD; PART RE-ISSUED TO THAT VALUE.
- 3D STEP MODEL GOVERNS ALL GEOMETRY. STL IS NOT FOR CNC.
- PART = BACK-SHELL ONLY. PCB AND 4× M2×3 BRASS SLOTTED-CHEESE SCREWS (HEAD Ø3.8) SUPPLIED SEPARATELY.

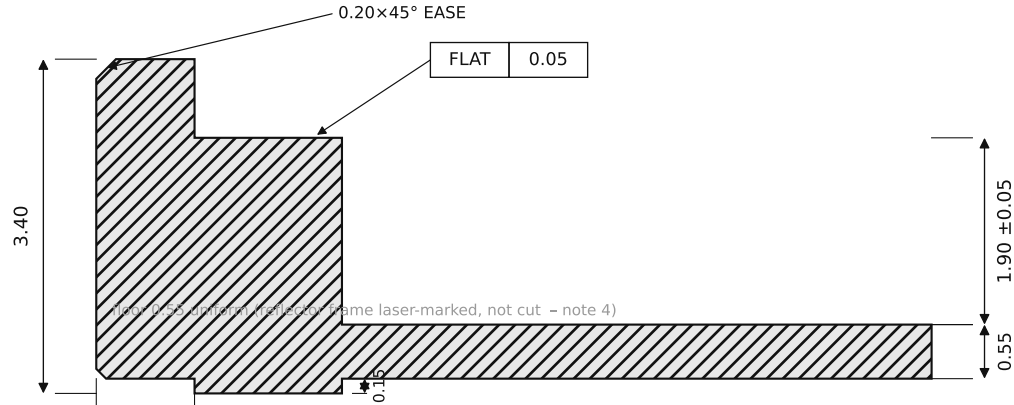

SECTION A-A (edge) SCALE 13:1

C1 = cavity depth C2 = PCB-rest-plane flatness (back face down; PCB drops in from top)

PCB + M2×3 BRASS SCREW — REF, NOT THIS PART

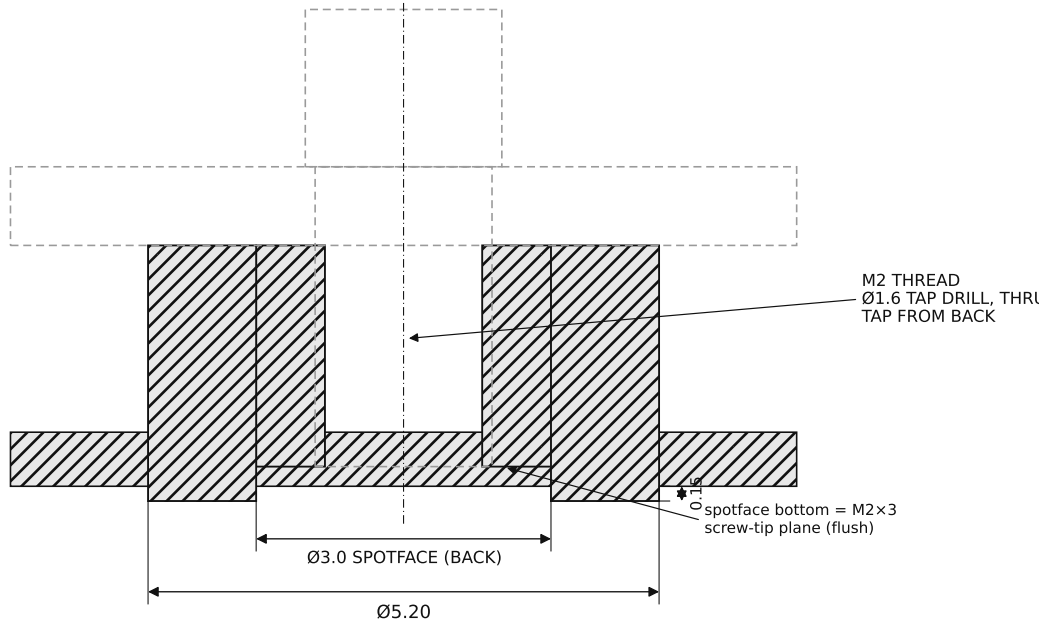

DETAIL B (corner boss, section) SCALE 13:1

GENERAL TOLERANCES (UNLESS OTHERWISE NOTED, mm)	
LINEAR & HOLE-POSITION DIMS	ISO 2768-m
CAVITY DEPTH C1 (SECTION A-A)	1.90 ±0.05
HOLE-PATTERN PITCH C3 (PLAN)	43.80 / 82.90 ±0.05
PCB-REST FLATNESS C2	FLAT 0.05

SOLAR-GLOW DRH v2.1 — TITANIUM BACK-SHELL

DWG solar-glow-drh-v2_1-backshell	REV v2.1
MATERIAL Ti Gr5 (TC4)	FINISH see note 2
UNITS mm	SCALE AS NOTED
BBOX 52.70 x 90.80 x 3.40 3rd-angle	SHEET 1/1