

Redes de Dados II

Trabalho Prático 1

2021/2022
Daniel Graça, n.º 20948
Guilherme Lourenço, n.º 23053
Grupo 9

Índice

OBJETIVOS	3
CENÁRIO A – PROTOCOLO IPv4.....	4
TOPOLOGIA DA REDE	4
TABELA DE ENDEREÇAMENTO	4
TAREFA 1: MONTAGEM DA REDE	5
PASSO 1: LIGAÇÃO DOS CABOS ENTRE EQUIPAMENTOS	5
PASSO 2: ELIMINAÇÃO DAS CONFIGURAÇÕES.....	5
TAREFA 2: CONFIGURAÇÕES BÁSICAS	6
PASSO 1: ATRIBUIÇÃO DE NOMES	6
PASSO 2: DESABILITAÇÃO DA DNS LOOKUP	6
PASSO 3: CONFIGURAÇÃO DE <i>PASSWORD</i> PARA MODO PRIVILEGIADO.....	6
PASSO 4: CONFIGURAÇÃO DO MOTD BANNER	7
PASSO 5: CONFIGURAÇÃO DE <i>PASSWORD</i> PARA LIGAÇÕES DO TIPO <i>CONSOLE</i>	7
PASSO 6: CONFIGURAÇÃO DE <i>PASSWORD</i> PARA LIGAÇÕES DO TIPO <i>VTY</i>	7
TAREFA 3: CONFIGURAÇÃO DAS <i>INTERFACES</i> DOS ROUTERS.....	8
PASSO 1: CONFIGURAÇÃO DAS <i>INTERFACES</i>	8
PASSO 2: VERIFICAÇÃO DOS ENDEREÇOS DAS <i>INTERFACES</i> DOS ROUTERS E RESPECTIVO ESTADOS	9
PASSO 3: CONFIGURAR AS <i>INTERFACES</i> DO PC	9
PASSO 4: VERIFICAÇÃO DE CONECTIVIDADE ENTRE O PC E O RESPECTIVO DEFAULT GATEWAY.....	9
PASSO 5: VERIFICAÇÃO DE CONECTIVIDADE ENTRE O PC E AS <i>INTERFACES</i> DO ROUTER B	10
PASSO 6: SOLUÇÃO PARA RESOLVER OS PROBLEMAS DE CONECTIVIDADE NO <i>PASSO 5</i>	10
CENÁRIO B – PROTOCOLO IPv6.....	11
TOPOLOGIA DA REDE.....	11
TABELA DE ENDEREÇAMENTO	11
TAREFA 1: MONTAGEM DA REDE	12
PASSO 1: LIGAÇÃO DOS CABOS ENTRE EQUIPAMENTOS	12
PASSO 2: ELIMINAÇÃO DOS ENDEREÇOS IPv4 DAS <i>INTERFACES</i> DOS ROUTERS....	12
TAREFA 2: CONFIGURAÇÃO DAS <i>INTERFACES</i> DOS ROUTERS.....	13
PASSO 1: CONFIGURAÇÃO DAS <i>INTERFACES</i> DE ACORDO COM A TABELA DE ENDEREÇAMENTO.....	13
PASSO 2: VERIFICAR AS CONFIGURAÇÕES EXECUTADAS NO <i>PASSO 1</i>	13
PASSO 3: CONFIGURAÇÃO DA <i>INTERFACE</i> GE 0/0 DO ROUTER A PARA ENVIAR MENSAGENS <i>ROUTER ADVERTISEMENT</i>	14
PASSO 4: VERIFICAÇÃO OS ESTADOS DAS <i>INTERFACES</i> DO PC	15
PASSO 5: VERIFICAÇÃO DA CONECTIVIDADE ENTRE O PC E O RESPECTIVO DEFAULT GATEWAY.....	15

PASSO 6: VERIFICAÇÃO DE CONECTIVIDADE ENTRE O PC E AS <i>INTERFACES</i> DO ROUTER B	16
PASSO 7: SOLUÇÃO PARA RESOLVER OS PROBLEMAS DE CONECTIVIDADE NO <i>PASSO 6</i>	16
TAREFA 3: <i>IPv6 NEIGHBOR DISCOVERY</i>	17
PASSO 1: LISTAGEM DA CONFIGURAÇÃO DA <i>INTERFACE</i> DO ROUTER	17
PASSO 2: REMOÇÃO DO CONTEÚDO DA <i>NEIGHBOR CACHE</i> DO ROUTER	17
PASSO 3: INICIAR UMA CAPTURA COM O <i>WIRESHARK</i>	18
PASSO 4: VERIFICAR CONECTIVIDADE ENTRE ROUTER A E PC	18
PASSO 5: EXPLICAÇÃO DE COMO SE PROCESSA, NO <i>IPv6</i> , O PROCESSO SIMILAR AO <i>ARP</i> NO <i>IPv4</i>	19
CENÁRIO C – PROTOCOLO <i>IPv6</i> EM CENÁRIOS DE TRANSIÇÃO	20
TOPOLOGIA DA REDE	20
TABELA DE ENDEREÇAMENTO	20
TAREFA 1: MONTAGEM DA REDE	21
TAREFA 2: CONFIGURAÇÃO DAS <i>INTERFACES</i> DOS ROUTERS	21
PASSO 1: CONFIGURAÇÃO DAS <i>INTERFACES</i> DE ACORDO COM A TABELA DE ENDEREÇAMENTO	21
PASSO 2: VERIFICAÇÃO DAS CONFIGURAÇÕES FEITAS NO <i>PASSO 1</i>	22
PASSO 3: CONFIGURAÇÃO DE UM TÚNEL MANUAL <i>IPv6</i> SOBRE <i>IPv4</i> DE FORMA A EXISTIR CONECTIVIDADE ENTRE AS DUAS REDES <i>IPv6</i>	22
PASSO 4: VERIFICAÇÃO DE CONECTIVIDADE ENTRE DISPOSITIVOS DAS REDES <i>IPv4</i> E <i>IPv6</i>	23
CONCLUSÃO	24
ANEXOS	25
ANEXO 1: <i>OUTPUT</i> DOS COMANDOS DO CENÁRIO A – ROUTER A	26
ANEXO 2: <i>OUTPUT</i> DOS COMANDOS DO CENÁRIO A – ROUTER B	29
ANEXO 3: <i>OUTPUT</i> DOS COMANDOS DO CENÁRIO B – ROUTER A	32
ANEXO 4: <i>OUTPUT</i> DOS COMANDOS DO CENÁRIO B - ROUTER B	35
ANEXO 5: <i>OUTPUT</i> DOS COMANDOS DO CENÁRIO C – ROUTER A	38
ANEXO 6: <i>OUTPUT</i> DOS COMANDOS DO CENÁRIO C – ROUTER B	41

Objetivos

Os objetivos pretendidos neste trabalho prático são os seguintes:

- Ligar entre si os equipamentos activos de acordo com os esquemas fornecidos.
- Configurar o equipamento activo.
- Configurar rotas estáticas.
- Conhecer o comportamento do *neighbor discovery* do IPv6.
- Configurar túneis IPv6 sobre IPv4.
- Identificar e corrigir erros e problemas de funcionamento.

Cenário A – Protocolo IPv4

Topologia da rede

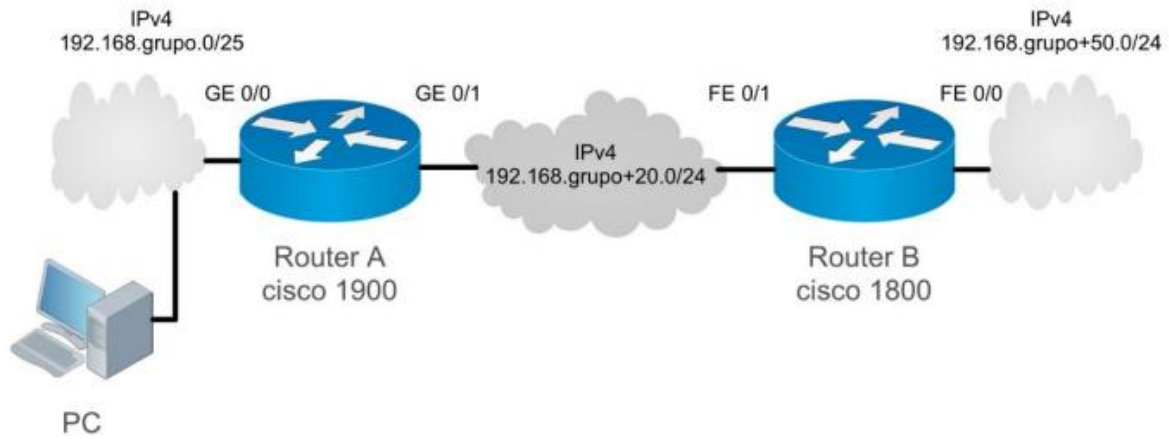


FIGURA 1 TOPOLOGIA DA REDE

Tabela de endereçamento

Dispositivo	Interface	Endereço IP	Máscara de Subrede	Default Gateway
Router A	GE 0/0	192.168.9.1	255.255.255.128	N/A
	GE 0/1	192.168.29.1	255.255.255.0	N/A
Router B	FE 0/0	192.168.59.1	255.255.255.0	N/A
	FE 0/1	192.168.29.2	255.255.255.0	N/A
PC	NIC	192.168.9.100	255.255.255.128	192.168.9.1

FIGURA 2 TABELA DE ENDEREÇAMENTO

Nota 1: A tabela de endereçamento já se encontra com as correções necessárias para ir ao enquadro do enunciado. Já se encontra com a máscara de subrede correta para /25 na rede A.

Tarefa 1: Montagem da rede

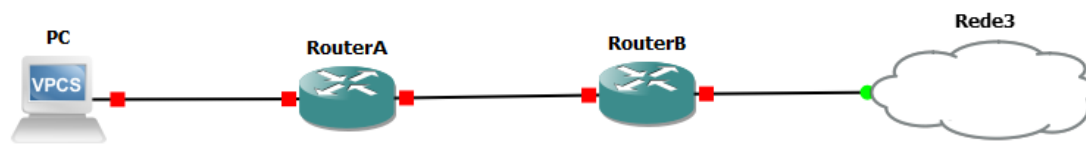


FIGURA 3 MONTAGEM DA REDE

Passo 1: Ligação dos cabos entre equipamentos

Deve-se usar cabos *crossover* para as conexões entre PC \leftrightarrow Router A e entre Router A \leftrightarrow Router B. Para a conexão entre Router B \leftrightarrow Rede 3 depende de que dispositivo seria (*crossover* no caso de outro router ou outro *end-device*; *straight-through* no caso de um switch).

Nota 2: como está descrito na tabela de endereçamento, o Router A tem interface *Gigabit Ethernet*. No entanto, limitados pelo GNS3, utilizados interfaces *Fast Ethernet*.

Passo 2: Eliminação das configurações

Para apagar as configurações dos routers deve-se fazer input dos comandos: “write erase”, seguido de “reload” (no privileged mode). No entanto, o GNS não suporta o comando “reload”, portanto em vez de usar os comandos desligamos e voltamos a ligar os routers.

Tarefa 2: Configurações básicas

Passo 1: Atribuição de nomes

Para atribuir um nome a cada router, foram executados os seguintes comandos:

```
R1(config)#hostname RouterA
```

FIGURA 4 HOSTNAME ROUTER A

```
R2(config)#hostname RouterB
```

FIGURA 5 HOSTNAME ROUTER B

Passo 2: Desabilitação da DNS lookup

Para desabilitar o DNS lookup em cada router, foram executados os seguintes comandos:

```
RouterA(config)#no ip domain-lookup
```

FIGURA 6 DESABILITAR DNS LOOKUP - ROUTER A

```
RouterB(config)#no ip domain-lookup
```

FIGURA 7 DESABILITAR DNS LOOKUP - ROUTER B

Passo 3: Configuração de *password* para modo privilegiado

Para a configuração de uma password para aceder ao modo *Exec Privileged Mode*, em que *password* é **class**, executaram-se os seguintes comandos:

```
RouterA(config)#enable secret class
```

FIGURA 8 PALAVRA-CHAVE PARA MODO EXEC PRIVILEGED MODE - ROUTER A

```
RouterB(config)#enable secret class
```

FIGURA 9 PALAVRA-CHAVE PARA MODO EXEC PRIVILEGED MODE - ROUTER B

Passo 4: Configuração do MOTD banner

Configurou-se a *message of the day banner* em cada router, da seguinte forma:

```
RouterA(config)#banner motd &AUTHORIZED ACCESS ONLY&
```

FIGURA 10 MOTD BANNER - ROUTER A

```
RouterB(config)#banner motd &AUTHORIZED ACCESS ONLY&
```

FIGURA 11 MOTD BANNER - ROUTER B

Passo 5: Configuração de *password* para ligações do tipo *console*

Configurou-se a *password class* para ligações do tipo *console*, com os seguintes comandos:

```
RouterA(config)#line console 0
RouterA(config-line)#password class
RouterA(config-line)#login
```

FIGURA 12 CONFIGURAÇÃO DA *PASSWORD* PARA LIGAÇÕES DO TIPO *CONSOLE* - ROUTER A

```
RouterB(config)#line console 0
RouterB(config-line)#password class
RouterB(config-line)#login
```

FIGURA 13 CONFIGURAÇÃO DA *PASSWORD* PARA LIGAÇÕES DO TIPO *CONSOLE* - ROUTER B

Passo 6: Configuração de *password* para ligações do tipo *VTY*

Configurou-se a *password class* para ligações do tipo *VTY*, da seguinte forma:

```
RouterA(config-line)#line vty 0 4
RouterA(config-line)#password class
RouterA(config-line)#login
```

FIGURA 14 CONFIGURAÇÃO DA *PASSWORD* PARA LIGAÇÕES DO TIPO *VTY* - ROUTER A

```
RouterB(config-line)#line vty 0 4
RouterB(config-line)#password class
RouterB(config-line)#login
```

FIGURA 15 CONFIGURAÇÃO DA *PASSWORD* PARA LIGAÇÕES DO TIPO *VTY* - ROUTER B

Tarefa 3: Configuração das interfaces dos routers

Passo 1: Configuração das interfaces

De acordo com a **tabela de endereçamento** foram configuradas as interfaces da seguinte forma:

```
RouterA(config)#interface FastEthernet 0/0
RouterA(config-if)#description PC connection
RouterA(config-if)#ip address 192.168.9.1 255.255.255.128
RouterA(config-if)#interface FastEthernet 0/1
RouterA(config-if)#ip address 192.168.29.1 255.255.255.0
RouterA(config-if)#description Router B conneciton
```

FIGURA 16 CONFIGURAÇÃO DAS INTERFACES - ROUTER A

```
RouterB(config)#interface FastEthernet 0/0
RouterB(config-if)#description Rede 3 connection
RouterB(config-if)#ip address 192.168.59.1 255.255.255.0
RouterB(config-if)#interface FastEthernet 0/1
RouterB(config-if)#description Router A connection
RouterB(config-if)#ip address 192.168.29.2 255.255.255.0
```

FIGURA 17 CONFIGURAÇÃO DAS INTERFACES - ROUTER B

Nota 3: Como já foi referido nas **notas 1 e 2**, a tabela de endereçamento sofreu uma correção em relação à máscara de subrede do router A e as interfaces do router A são *Fast Ethernet* ao invés de *Gigabit Ethernet*.

Nota 4: Não está nas **figuras 16 e 17** por lapso, mas é importante executar o comando **no shutdown** no fim, em cada interface, para estas serem ativadas.

```
RouterA(config)#interface FastEthernet 0/0
RouterA(config-if)#no shutdown
```

FIGURA 18 EXEMPLO DO COMANDO NO SHUTDOWN

Nota 5: Ao terminar de se configurar cada router, deve-se correr o comando **copy running-config startup-config** para que as alterações sejam guardadas. Caso este comando não seja executado, as configurações perdem-se e tem que se repetir os passos de novo.

```
RouterA#copy running-config startup-config
Destination filename [startup-config]?
Building configuration...
[OK]
```

FIGURA 19 EXEMPLO DE COMO GUARDAR AS CONFIGURAÇÕES NUM ROUTER

Passo 2: Verificação dos endereços das *interfaces* dos routers e respetivo estados

Para verificar se ficaram atribuídos às *interfaces* os endereços configurados, e ver os seus respetivos estados, executaram-se os seguintes comandos:

```
RouterA#show ip interface brief
Interface              IP-Address      OK? Method Status  Protoc
ol
FastEthernet0/0        192.168.9.1     YES NVRAM  up      up
FastEthernet0/1        192.168.29.1    YES NVRAM  up      up
```

FIGURA 20 ESTADO DAS *INTERFACES* - ROUTER A

```
RouterB#show ip interface brief
Interface              IP-Address      OK? Method Status  Prot
ocol
FastEthernet0/0        192.168.59.1    YES manual up      up
FastEthernet0/1        192.168.29.2    YES manual up      up
```

FIGURA 21 ESTADO DAS *INTERFACES* - ROUTER B

Passo 3: Configurar as *interfaces* do PC

Para configurar as *interfaces* do PC, executou-se o seguinte comando:

```
PC1> ip 192.168.9.100 255.255.255.128 192.168.9.1
Checking for duplicate address...
PC1 : 192.168.9.100 255.255.255.128 gateway 192.168.9.1
```

FIGURA 22 CONFIGURAÇÃO DAS *INTERFACES* DO PC

Passo 4: Verificação de conectividade entre o PC e o respetivo default gateway

Existe conectividade entre o PC e o respetivo gateway, pelo que as configurações feitas nos passos anteriores estavam corretas.

```
PC1> ping 192.168.9.1
84 bytes from 192.168.9.1 icmp_seq=1 ttl=255 time=15.230 ms
84 bytes from 192.168.9.1 icmp_seq=2 ttl=255 time=15.164 ms
84 bytes from 192.168.9.1 icmp_seq=3 ttl=255 time=15.224 ms
84 bytes from 192.168.9.1 icmp_seq=4 ttl=255 time=15.541 ms
84 bytes from 192.168.9.1 icmp_seq=5 ttl=255 time=14.919 ms
```

FIGURA 23 VERIFICAÇÃO DE CONECTIVIDADE ENTRE PC E RESPETIVO GATEWAY

Passo 5: Verificação de conectividade entre o PC e as *interfaces* do router B

Não existe conectividade entre o PC e as *interfaces* do router B. Isto acontece porque o PC encontra-se numa rede e o router B encontra-se noutra. Este problema pode e será resolvido no passo seguinte.

```
PC1> ping 192.168.29.2
192.168.29.2 icmp_seq=1 timeout
192.168.29.2 icmp_seq=2 timeout
192.168.29.2 icmp_seq=3 timeout
192.168.29.2 icmp_seq=4 timeout
192.168.29.2 icmp_seq=5 timeout
```

FIGURA 24 VERIFICAÇÃO DE CONECTIVIDADE ENTRE PC E INTERFACES DO ROUTER B

Passo 6: Solução para resolver os problemas de conectividade no *Passo 5*

Para resolver os problemas de conectividade observado no ponto anterior, basta configurar rotas estáticas em ambos os routers.

```
RouterA(config)#ip route 192.168.59.0 255.255.255.0 192.168.29.2
```

FIGURA 25 CONFIGURAÇÃO DE ROTA ESTÁTICA ENTRE ROUTER A E ROUTER B

```
RouterB(config)#ip route 192.168.9.0 255.255.255.128 192.168.29.1
```

FIGURA 26 CONFIGURAÇÃO DE ROTA ESTÁTICA ENTRE ROUTER B E ROUTER A

O comando **ip route** é composto por 3 argumentos, em que o primeiro é o endereço da rede local, seguido pela respetiva máscara de subrede e por fim o endereço destino.

Cenário B – Protocolo IPv6

Topologia da rede

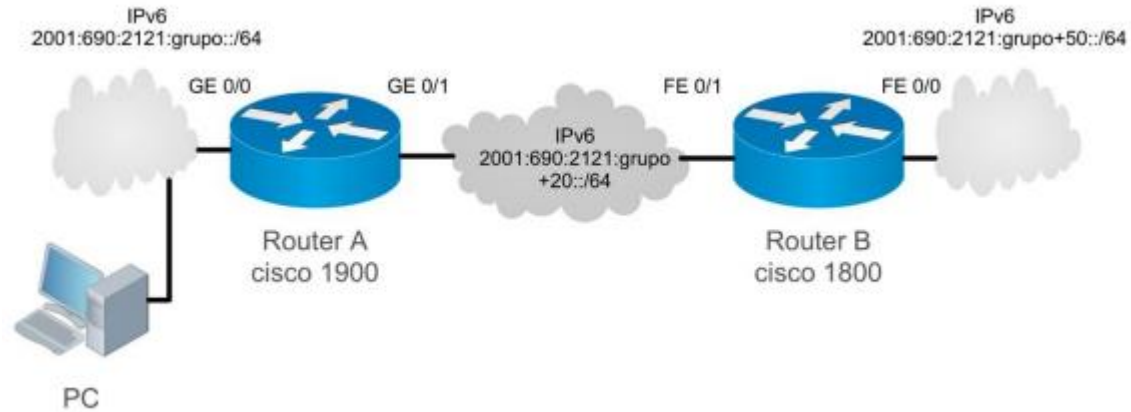


FIGURA 27 TOPOLOGIA DA REDE

Tabela de endereçamento

Dispositivo	Interface	Endereço IP	Máscara de Subrede	Default Gateway
Router A	GE 0/0	2001:690:2121:9::1	64	N/A
	GE 0/1	2001:690:2121:29::1	64	N/A
Router B	FE 0/0	2001:690:2121:59::1	64	N/A
	FE 0/1	2001:690:2121:29::2	64	N/A
PC	NIC	Auto-Config	-	-

FIGURA 28 TABELA DE ENDEREÇAMENTO

Nota 6: tal como na **nota 2**, está descrito na tabela de endereçamento que o Router A tem interface *Gigabit Ethernet*. No entanto, limitados pelo GNS3, utilizados interfaces *Fast Ethernet*.

Tarefa 1: Montagem da rede

Passo 1: Ligação dos cabos entre equipamentos

O cenário B é idêntico ao cenário A.

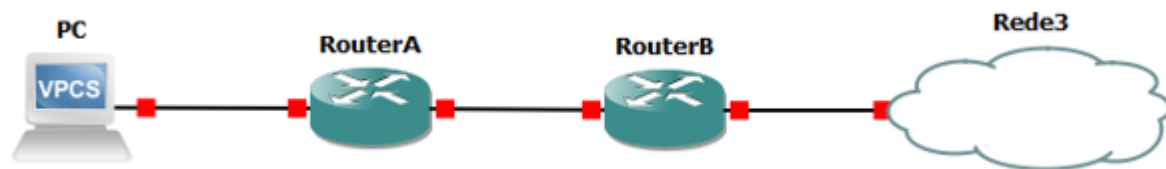


FIGURA 29 MONTAGEM DA REDE

Passo 2: Eliminação dos endereços IPv4 das *interfaces* dos routers

Para eliminar os endereços IPv4 das *interfaces* dos routers, executaram-se os seguintes comandos:

```
RouterA(config)#interface FastEthernet 0/0
RouterA(config-if)#no ip address 192.168.9.1 255.255.255.128
RouterA(config-if)#interface FastEthernet 0/1
RouterA(config-if)#no ip address 192.168.29.1 255.255.255.0
```

FIGURA 30 ELIMINAÇÃO DOS ENDEREÇOS IPV4 DO ROUTER A

```
RouterB(config)#interface FastEthernet 0/0
RouterB(config-if)#no ip address 192.168.59.1 255.255.255.0
RouterB(config-if)#interface FastEthernet 0/1
RouterB(config-if)#no ip address 192.168.29.2 255.255.255.0
```

FIGURA 31 ELIMINAÇÃO DOS ENDEREÇOS IPV4 DO ROUTER B

Tarefa 2: Configuração das *interfaces* dos routers

Passo 1: Configuração das *interfaces* de acordo com a tabela de endereçamento

Para configurar as *interfaces* dos routers de acordo com a tabela de endereçamento, executaram-se os seguintes comandos:

```
RouterA(config)#interface FastEthernet 0/0
RouterA(config-if)#ipv6 address 2001:690:2121:9::1/64
RouterA(config-if)#no shutdown
```

FIGURA 32 CONFIGURAÇÃO INTERFACE FASTETHERNET 0/0 - ROUTER A

```
RouterA(config)#interface FastEthernet 0/1
RouterA(config-if)#ipv6 address 2001:690:2121:29::1/64
RouterA(config-if)#no shutdown
```

FIGURA 33 CONFIGURAÇÃO INTERFACE FASTETHERNET 0/1 - ROUTER A

```
RouterB(config)#interface FastEthernet 0/0
RouterB(config-if)#ipv6 address 2001:690:2121:59::1/64
RouterB(config-if)#no shutdown
RouterB(config-if)#interface FastEthernet 0/1
RouterB(config-if)#ipv6 address 2001:690:2121:29::2/64
RouterB(config-if)#no shutdown
```

FIGURA 34 CONFIGURAÇÃO DAS INTERFACES FASTETHERNET 0/0 E 0/1 - ROUTER B

Passo 2: Verificar as configurações executadas no Passo 1

Para verificar se ficaram atribuídos às *interfaces* os endereços configurados, e ver os seus respetivos estados, executaram-se os seguintes comandos:

```
RouterA#show ipv6 interface brief
FastEthernet0/0          [up/up]
    FE80::C201:15FF:FE80:0
    2001:690:2121:9::1
FastEthernet0/1          [up/up]
    FE80::C201:15FF:FE80:1
    2001:690:2121:29::1
```

FIGURA 35 ESTADO DAS INTERFACES - ROUTER A

```
RouterB#show ipv6 interface brief
FastEthernet0/0      [up/up]
FE80::C202:28FF:FE6C:0
2001:690:2121:59::1
FastEthernet0/1      [up/up]
FE80::C202:28FF:FE6C:1
2001:690:2121:29::2
```

FIGURA 36 ESTADO DAS INTERFACES - ROUTER B

Passo 3: Configuração da interface GE 0/0 do Router A para enviar mensagens *router advertisement*

Para configurar a interface GE 0/0 para enviar mensagens *router advertisement* é preciso executar os seguintes comandos:

Nota 7: A *lifetime* dos endereços é de **300** segundos e o prefixo é **2001:690:2121:9::/64**. Estes dados estão no enunciado.

```
RouterA(config)#interface FastEthernet 0/0
RouterA(config-if)#no ipv6 nd suppress-ra
RouterA(config-if)#ipv6 nd ra-lifetime 300
RouterA(config-if)#ipv6 nd prefix 2001:690:2121:9::/64
```

FIGURA 37 CONFIGURAÇÃO DA INTERFACE FE 0/0

```
RouterA#debug ipv6 nd
ICMP Neighbor Discovery events debugging is on
```

FIGURA 38 ATIVAÇÃO DO MODO *DEBUG* PARA VER AS MENSAGENS DE *ROUTER ADVERTISEMENTS*

```
*Mar  1 01:19:17.611: ICMPv6-ND: Sending RA to FF02::1 on FastEthernet0/0
*Mar  1 01:19:17.611: ICMPv6-ND:      MTU = 1500
*Mar  1 01:19:17.611: ICMPv6-ND:      prefix = 2001:690:2121:9::/64 onlink autoconfig
*Mar  1 01:19:17.611: ICMPv6-ND:      2592000/604800 (valid/preferred)
```

FIGURA 39 MENSAGENS DE *ROUTER ADVERTISEMENT*

Nota 8: tal como nas **nota 6** e **2**, está descrito na tabela de endereçamento que o Router A tem interface *Gigabit Ethernet*. No entanto, limitados pelo GNS3, utilizados interfaces *Fast Ethernet*.

Nota 9: Para que a conexão funcione é necessário executar o comando **ipv6 unicast-routing**, que ativa as funcionalidades do IPv6. Sem ele, *router advertisements* e comunicações semelhantes não funcionam.

Passo 4: Verificação os estados das interfaces do PC

Estão atribuídos 2 endereços IPv6 à interface do PC. O endereço IPv6 *link-local* é obtido automaticamente a partir do seu endereço MAC, em que é gerado pela seguinte fórmula:

fe80:: + primeiros 6 algarismos do endereço MAC + ff:fe + últimos 6 algarismos do endereço MAC.

O endereço global provém do prefixo definido manualmente, a partir das mensagens RA (Router Advertisement) que o Router A fornece, que depois permite configurar automaticamente um endereço IPv6 para o PC.

```
PC1> show ipv6

NAME                : PC1[1]
LINK-LOCAL SCOPE    : fe80::250:79ff:fe66:6800/64
GLOBAL SCOPE        : 2001:690:2121:9:2050:79ff:fe66:6800/64
ROUTER LINK-LAYER   : c0:01:15:80:00:00
MAC                 : 00:50:79:66:68:00
LPORT               : 10014
RHOST:PORT           : 127.0.0.1:10015
MTU:                : 1500
```

FIGURA 40 ESTADO DAS INTERFACES DO PC

Passo 5: Verificação da conectividade entre o PC e o respetivo default gateway

Para verificar a conectividade entre o PC e o respetivo *default gateway* executou-se o seguinte comando:

```
PC1> ping fe80::c201:15ff:fe80:0

fe80::c201:15ff:fe80:0 icmp6_seq=1 ttl=64 time=50.762 ms
fe80::c201:15ff:fe80:0 icmp6_seq=2 ttl=64 time=13.415 ms
fe80::c201:15ff:fe80:0 icmp6_seq=3 ttl=64 time=14.693 ms
fe80::c201:15ff:fe80:0 icmp6_seq=4 ttl=64 time=15.887 ms
fe80::c201:15ff:fe80:0 icmp6_seq=5 ttl=64 time=14.905 ms
```

FIGURA 41 VERIFICAÇÃO DA CONECTIVIDADE ENTRE O PC E RESPETIVO DEFAULT GATEWAY

Nota 10: O *default gateway* do PC é o endereço *link-local* do router que enviou a mensagem RA (Router Advertisement);

Passo 6: Verificação de conectividade entre o PC e as *interfaces* do router B

Como não foram definidas rotas estáticas entre os routers A e B, a conectividade continua a não funcionar, tal como em IPv4.

```
PC1> ping 2001:690:2121:29::2  
host (2001:690:2121:29::2) not reachable
```

FIGURA 42 VERIFICAÇÃO DE CONECTIVIDADE ENTRE O PC E AS *INTERFACES* DO ROUTER B

Passo 7: Solução para resolver os problemas de conectividade no *Passo 6*

A solução para resolver este problema seria, tal como em IPv4, atribuir rotas estáticas entre os dois routers, desta vez para IPv6.

```
RouterA(config)#interface f0/1  
RouterA(config-if)#ipv6 route 2001:690:2121:59::/64 2001:690:2121:29::2
```

FIGURA 43 CONFIGURAÇÃO DE ROTA ESTÁTICA ENTRE ROUTER A E ROUTER B

```
PC1> ping 2001:690:2121:29::2  
2001:690:2121:29::2 icmp6_seq=1 ttl=63 time=90.041 ms  
2001:690:2121:29::2 icmp6_seq=2 ttl=63 time=40.467 ms  
2001:690:2121:29::2 icmp6_seq=3 ttl=63 time=46.365 ms  
2001:690:2121:29::2 icmp6_seq=4 ttl=63 time=45.330 ms  
2001:690:2121:29::2 icmp6_seq=5 ttl=63 time=45.652 ms
```

FIGURA 44 CONECTIVIDADE ENTRE O PC E AS *INTERFACES* DO ROUTER B

Tarefa 3: IPv6 neighbor discovery

Passo 1: Listagem da configuração da *interface* do router

```
RouterA#show ipv6 interface Fa0/0
FastEthernet0/0 is up, line protocol is up
IPv6 is enabled, link-local address is FE80::C201:15FF:FE80:0
Description: PC connection
Global unicast address(es):
  2001:690:2121:9::1, subnet is 2001:690:2121:9::/64
Joined group address(es):
  FF02::1
  FF02::2
  FF02::1:FF00:1
  FF02::1:FF80:0
MTU is 1500 bytes
ICMP error messages limited to one every 100 milliseconds
ICMP redirects are enabled
ND DAD is enabled, number of DAD attempts: 1
ND reachable time is 30000 milliseconds
ND advertised reachable time is 0 milliseconds
ND advertised retransmit interval is 0 milliseconds
ND router advertisements are sent every 200 seconds
ND router advertisements live for 300 seconds
Hosts use stateless autoconfig for addresses.
```

FIGURA 45 LISTAGEM DA CONFIGURAÇÃO DA *INTERFACE* FE 0/0 DO ROUTER A

O endereço *link-local* serve apenas para comunicações dentro da subrede onde se encontra o dispositivo. Por exemplo, neste caso é o default gateway atribuído ao PC. O endereço global *unicast* é apenas um endereço IPv6 que identifica exclusivamente 1 dispositivo.

Os endereços **FF02::(...)** são endereços dedicados a *multicast*, em que quando se envia um pacote para um endereço *multicast* todos os dispositivos conectados com esse endereço recebem o pacote.

FF02::1 é o endereço a que todos os dispositivos com IPv6 ativo adquirem, **FF02::2** é o endereço a que todos os routers com IPv6 adquirem.

Passo 2: Remoção do conteúdo da *neighbor cache* do router

Para se limpar a *neighbor cache* de um router executou-se o seguinte comando:

```
RouterA#clear ipv6 neighbors
```

FIGURA 46 COMANDO PARA LIMPAR O CONTEÚDO DA *NEIGHBOR CACHE* DE UM ROUTER

Passo 3: Iniciar uma captura com o *Wireshark*

Este passo é impossível de completar pois o *Wireshark* não é suportado na simulação.

```
PC1> wireshark -i 2001:690:"121:9:2050:79ff:fe66:6800/64"
Bad command: "wireshark -i 2001:690:"121:9:2050:79ff:fe66:6800/64". Use ? for help.
```

FIGURA 47 COMANDO *WIRESHARK* A NÃO FUNCIONAR

Passo 4: Verificar conectividade entre router A e PC

Para verificar a conectividade entre o router A e o PC, confirmou-se que as interfaces do router estavam *up*, verificou-se qual o endereço ipv6 global do PC e executámos o comando *ping* ao mesmo.

```
RouterA>show ipv6 interface brief
FastEthernet0/0          [up/up]
    FE80::C201:15FF:FE80:0
    2001:690:2121:9::1
FastEthernet0/1          [up/up]
    FE80::C201:15FF:FE80:1
    2001:690:2121:29::1
```

FIGURA 48 LISTAGEM DAS *INTERFACES* NO ROUTER A

```
PC1> show ipv6

NAME                : PC1[1]
LINK-LOCAL SCOPE    : fe80::250:79ff:fe66:6800/64
GLOBAL SCOPE        : 2001:690:2121:9:2050:79ff:fe66:6800/64
ROUTER LINK-LAYER   : c0:01:15:80:00:00
MAC                 : 00:50:79:66:68:00
LPORT               : 10014
RHOST:PORT          : 127.0.0.1:10015
MTU                 : 1500
```

FIGURA 49 LISTAGEM DOS ENDEREÇOS *IP* NO PC

```
RouterA#ping 2001:690:2121:9:2050:79ff:fe66:6800

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 2001:690:2121:9:2050:79FF:FE66:6800, timeout is 2 seconds:
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 16/21/28 ms
```

FIGURA 50 VERIFICAR CONECTIVIDADE ENTRE ROUTER A E PC

```
PC1> ping 2001:690:2121:29::1

2001:690:2121:29::1 icmp6_seq=1 ttl=64 time=30.896 ms
2001:690:2121:29::1 icmp6_seq=2 ttl=64 time=15.474 ms
2001:690:2121:29::1 icmp6_seq=3 ttl=64 time=14.266 ms
2001:690:2121:29::1 icmp6_seq=4 ttl=64 time=14.931 ms
2001:690:2121:29::1 icmp6_seq=5 ttl=64 time=14.876 ms
```

FIGURA 51 VERIFICAR CONECTIVIDADE ENTRE PC E ROUTER A

Passo 5: Explicação de como se processa, no IPv6, o processo similar ao ARP no IPv4

O protocolo *ARP* do IPv4 é um protocolo para descobrir o endereço MAC de um dispositivo para onde se quer enviar um pacote. Este protocolo funciona da seguinte forma: o dispositivo que quer enviar um pacote verifica se existe o endereço do recetor na tabela de *ARP*. Caso não exista, é enviado para toda a rede o endereço do recetor, criando “engarrafamento” no tráfego da rede.

No caso do IPv6, usa-se *ND (Neighbor Discovery)*. A maneira como este método permite obter um endereço MAC é da seguinte forma: o dispositivo que quer enviar um pacote solicita o endereço MAC do dispositivo a receber o pacote a partir de uma *ICMPv6 Neighbor Solicitation message*, ao qual o outro dispositivo responde com uma *ICMPv6 Neighbor Advertisement message*, fornecendo assim o seu endereço MAC.

As *ICMPv6 Neighbor Solicitation messages* são enviadas usando *Ethernet* especial e endereços Ipv6 de *multicast*.

Cenário C – Protocolo IPv6 em cenários de transição

Topologia da rede

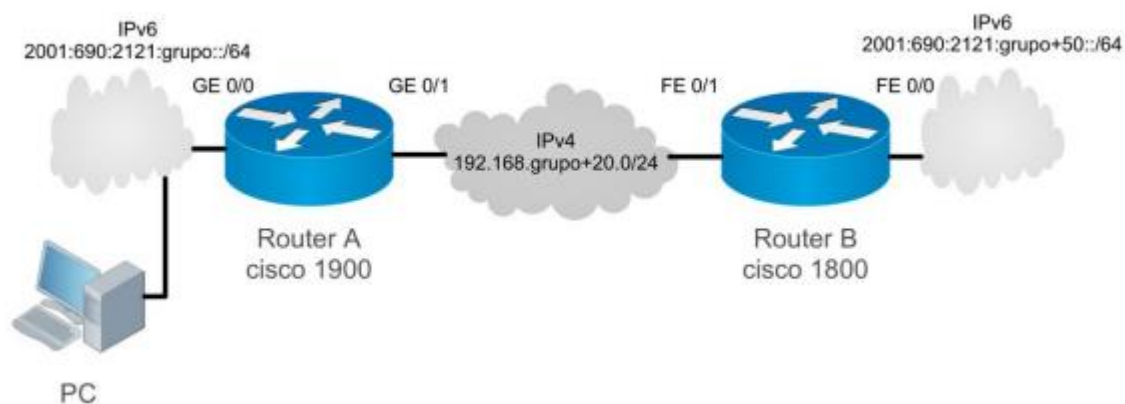


FIGURA 52 TOPOLOGIA DA REDE

Tabela de endereçamento

Dispositivo	Interface	Endereço IP	Máscara de Subrede	Default Gateway
Router A	GE 0/0	2001:690:2121:9::1	64	N/A
	GE 0/1	192.168.29.1	255.255.255.0	N/A
Router B	FE 0/0	2001:690:2121:59::1	64	N/A
	FE 0/1	192.168.29.2	255.255.255.0	N/A
PC	NIC	Auto-Config	-	-

Tarefa 1: Montagem da rede

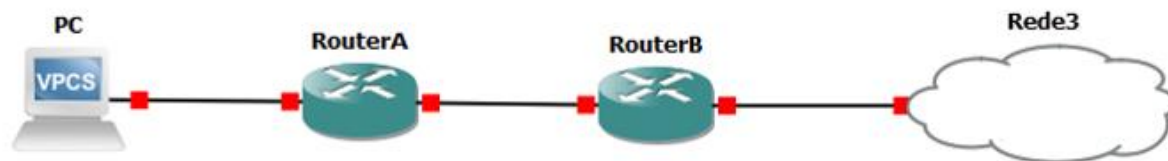


FIGURA 53 MONTAGEM DA REDE

Tarefa 2: Configuração das interfaces dos routers

Passo 1: Configuração das interfaces de acordo com a tabela de endereçamento

```
RouterA(config)#interface f0/0
RouterA(config-if)#ipv6 address 2001:690:2121:9::1/64
RouterA(config-if)#no shutdown
RouterA(config-if)#
*Mar 1 00:01:26.847: %LINK-3-UPDOWN: Interface FastEthernet0/0, changed state to up
*Mar 1 00:01:27.847: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0
, changed state to up
RouterA(config-if)#interface f0/1
RouterA(config-if)#ip address 192.168.29.1 255.255.255.0
RouterA(config-if)#no shutdown
RouterA(config-if)#
*Mar 1 00:02:09.059: %LINK-3-UPDOWN: Interface FastEthernet0/1, changed state to up
*Mar 1 00:02:10.059: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1
, changed state to up
RouterA(config-if)#exit
```

FIGURA 54 CONFIGURAÇÃO DAS INTERFACES - ROUTER A

```
RouterB(config)#interface f0/0
RouterB(config-if)#ipv6 address 2001:690:2121:59::1/64
RouterB(config-if)#no shutdown
RouterB(config-if)#interface
*Mar 1 00:04:26.911: %LINK-3-UPDOWN: Interface FastEthernet0/0, changed state to up
*Mar 1 00:04:27.911: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0
, changed state to up
RouterB(config-if)#interface f0/1
RouterB(config-if)#ip address 192.168.29.2 255.255.255.0
RouterB(config-if)#no shutdown
RouterB(config-if)#
*Mar 1 00:05:00.979: %LINK-3-UPDOWN: Interface FastEthernet0/1, changed state to up
*Mar 1 00:05:01.979: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1
, changed state to up
RouterB(config-if)#exit
```

FIGURA 55 CONFIGURAÇÃO DAS INTERFACES - ROUTER B

Passo 2: Verificação das configurações feitas no passo 1

```
RouterA#show ipv6 interface brief
FastEthernet0/0      [up/up]
FE80::C201:2BFF:FE90:0
2001:690:2121:9::1
FastEthernet0/1      [up/up]
RouterA#show ip interface brief
Interface            IP-Address      OK? Method Status      Protocol
FastEthernet0/0      unassigned      YES unset   up          up
FastEthernet0/1      192.168.29.1    YES manual  up          up
```

FIGURA 56 LISTAGEM DAS INTERFACES - ROUTER A

```
RouterB#show ipv6 interface brief
FastEthernet0/0      [up/up]
FE80::C202:2EFF:FE00:0
2001:690:2121:59::1
FastEthernet0/1      [up/up]
RouterB#show ip interface brief
Interface            IP-Address      OK? Method Status      Protocol
FastEthernet0/0      unassigned      YES unset   up          up
FastEthernet0/1      192.168.29.2    YES manual  up          up
```

FIGURA 57 LISTAGEM DAS INTERFACES - ROUTER B

Passo 3: Configuração de um túnel manual IPv6 sobre IPV4 de forma a existir conectividade entre as duas redes IPv6

```
RouterA(config)#interface tunnel 0
RouterA(config-if)#ipv6 address 3ffe:b00:c18:1::3/127
RouterA(config-if)#tunnel source FastEthernet 0/1
RouterA(config-if)#tunnel destination 192.168.29.2
RouterA(config-if)#
*Mar 1 00:19:56.299: %LINEPROTO-5-UPDOWN: Line protocol
d state to up
RouterA(config-if)#tunnel mode ipv6ip
```

FIGURA 58 CONFIGURAÇÃO DO TÚNEL - ROUTER A

```
RouterB(config)#interface tunnel 0
RouterB(config-if)#ip
*Mar 1 00:21:26.819: %LINEPROTO-5-UPDOWN: Line protocol
d state to down
RouterB(config-if)#ipv6 address 3ffe:b00:c18:1::4/127
RouterB(config-if)#tunnel source FastEthernet 0/1
RouterB(config-if)#tunnel destination 192.168.29.1
RouterB(config-if)#
*Mar 1 00:22:39.835: %LINEPROTO-5-UPDOWN: Line protocol
d state to up
RouterB(config-if)#tunnel mode ipv6ip
```

FIGURA 59 CONFIGURAÇÃO DO TÚNEL - ROUTER B

Passo 4: Verificação de conectividade entre dispositivos das redes IPv4

Configuraram-se as rotas para a conectividade entre dispositivos das redes IPv4.

```
RouterA(config)#ip route 192.168.29.0 255.255.255.0 192.168.29.3  
RouterA(config)#ipv6 route 2001:690:2121:59::/64 Tunnel0 3ffe:b00:c18:1::4
```

FIGURA 60 CONFIGURAÇÃO DAS ROTAS - ROUTER A

```
RouterB(config)#ip route 192.168.29.0 255.255.255.0 192.168.29.4  
RouterB(config)#ipv6 route 2001:690:2121:9::/64 Tunnel0 3ffe:b00:c18:1::3
```

FIGURA 61 CONFIGURAÇÃO DAS ROTAS - ROUTER B

Após essas configurações, verificou-se se efetivamente existia conectividade.

```
PC> ping 2001:690:2121:59::1  
  
2001:690:2121:59::1 icmp6_seq=1 ttl=63 time=44.937 ms  
2001:690:2121:59::1 icmp6_seq=2 ttl=63 time=45.468 ms  
2001:690:2121:59::1 icmp6_seq=3 ttl=63 time=46.284 ms  
2001:690:2121:59::1 icmp6_seq=4 ttl=63 time=45.753 ms  
2001:690:2121:59::1 icmp6_seq=5 ttl=63 time=45.180 ms
```

FIGURA 62 VERIFICAÇÃO DE CONECTIVIDADE DO PC À INTERFACE F0/0 DO ROUTER B

Conclusão

Com este trabalho prático pretendeu-se demonstrar conhecimentos sobre protocolos IPv4 e IPv6 em modo nativo e em cenários de transição, e encaminhamento baseado em rotas estáticas.

Anexos

Nesta secção estão presentes os *output* dos comandos pedidos no enunciado, para os devidos equipamentos.

NOTA 11: Por lapso, não foi guardado o registo do comando ***show history*** em todo o projeto.

Anexo 1: Output dos comandos do cenário A – Router A

show running-config

```
1. Current configuration : 1195 bytes
2. version 12.4
3. service timestamps debug datetime msec
4. service timestamps log datetime msec
5. no service password-encryption
6. hostname RouterA
7. boot-start-marker
8. boot-end-marker
9. enable secret 5 $1$0t8C$twF53JC2N0dsB2eqkx09b1
10. no aaa new-model
11. memory-size iomem 5
12. no ip icmp rate-limit unreachable
13. ip cef
14. no ip domain lookup
15. ip auth-proxy max-nodata-conns 3
16. ip admission max-nodata-conns 3
17. ip tcp synwait-time 5
18. interface FastEthernet0/0
19. description PC connection
20. ip address 192.168.9.1 255.255.255.128
21. duplex auto
22. speed auto
23. interface FastEthernet0/1
24. description Router B connection
25. ip address 192.168.29.1 255.255.255.0
26. duplex auto
27. speed auto
28. ip forward-protocol nd
29. ip route 192.168.59.0 255.255.255.0 192.168.59.1
30. ip route 192.168.59.0 255.255.255.0 192.168.29.2
31. no ip http server
32. no ip http secure-server
33. no cdp log mismatch duplex
34. control-plane
35. banner motd ^C trabalho pratico 1 ^C
36. line con 0
37. exec-timeout 0 0
38. privilege level 15
39. password class
40. logging synchronous
41. login
42. line aux 0
43. exec-timeout 0 0
44. privilege level 15
45. logging synchronous
46. line vty 0 4
47. password class
48. login
49. end
50.
```

show ip route

```
1. Codes: C - connected, S - static, R - RIP, M - mobile, B - BGP
2.         D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
3.         N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
4.         E1 - OSPF external type 1, E2 - OSPF external type 2
5.         i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
6.         ia - IS-IS inter area, * - candidate default, U - per-user static route
7.         o - ODR, P - periodic downloaded static route
8.
9. Gateway of last resort is not set
10.
11. C    192.168.29.0/24 is directly connected, FastEthernet0/1
12. S    192.168.59.0/24 [1/0] via 192.168.29.2
13.      192.168.9.0/25 is subnetted, 1 subnets
14. C      192.168.9.0 is directly connected, FastEthernet0/0
15.
```

show ip traffic

```
1. IP statistics:
2.   Rcvd: 0 total, 0 local destination
3.         0 format errors, 0 checksum errors, 0 bad hop count
4.         0 unknown protocol, 0 not a gateway
5.         0 security failures, 0 bad options, 0 with options
6.   Opts: 0 end, 0 nop, 0 basic security, 0 loose source route
7.         0 timestamp, 0 extended security, 0 record route
8.         0 stream ID, 0 strict source route, 0 alert, 0 cipso, 0 ump
9.         0 other
10.  Frags: 0 reassembled, 0 timeouts, 0 couldn't reassemble
11.         0 fragmented, 0 fragments, 0 couldn't fragment
12.  Bcast: 0 received, 0 sent
13.  Mcast: 0 received, 0 sent
14.  Sent: 0 generated, 0 forwarded
15.  Drop: 0 encapsulation failed, 0 unresolved, 0 no adjacency
16.         0 no route, 0 unicast RPF, 0 forced drop
17.         0 options denied
18.  Drop: 0 packets with source IP address zero
19.  Drop: 0 packets with internal loop back IP address
20.         0 physical broadcast
21.
22. ICMP statistics:
23.   Rcvd: 0 format errors, 0 checksum errors, 0 redirects, 0 unreachable
24.         0 echo, 0 echo reply, 0 mask requests, 0 mask replies, 0 quench
25.         0 parameter, 0 timestamp, 0 info request, 0 other
26.         0 irdp solicitations, 0 irdp advertisements
27.   Sent: 0 redirects, 0 unreachable, 0 echo, 0 echo reply
28.         0 mask requests, 0 mask replies, 0 quench, 0 timestamp
29.         0 info reply, 0 time exceeded, 0 parameter problem
30.         0 irdp solicitations, 0 irdp advertisements
31.
32. TCP statistics:
33.   Rcvd: 0 total, 0 checksum errors, 0 no port
34.   Sent: 0 total
35.
36. BGP statistics:
37.   Rcvd: 0 total, 0 opens, 0 notifications, 0 updates
38.         0 keepalives, 0 route-refresh, 0 unrecognized
39.   Sent: 0 total, 0 opens, 0 notifications, 0 updates
40.         0 keepalives, 0 route-refresh
41.
42. IP-EIGRP statistics:
43.   Rcvd: 0 total
44.   Sent: 0 total
45.
46. PIMv2 statistics: Sent/Received
```

```
47. Total: 0/0, 0 checksum errors, 0 format errors
48. Registers: 0/0 (0 non-rp, 0 non-sm-group), Register Stops: 0/0, Hellos: 0/0
49. Join/Prunes: 0/0, Asserts: 0/0, grafts: 0/0
50. Bootstraps: 0/0, Candidate_RP_Advertisements: 0/0
51. Queue drops: 0
52. State-Refresh: 0/0
53.
54. IGMP statistics: Sent/Received
55. Total: 0/0, Format errors: 0/0, Checksum errors: 0/0
56. Host Queries: 0/0, Host Reports: 0/0, Host Leaves: 0/0
57. DVMRP: 0/0, PIM: 0/0
58. Queue drops: 0
59.
60. UDP statistics:
61. Rcvd: 0 total, 0 checksum errors, 0 no port
62. Sent: 0 total, 0 forwarded broadcasts
63.
64. OSPF statistics:
65. Rcvd: 0 total, 0 checksum errors
66.      0 hello, 0 database desc, 0 link state req
67.      0 link state updates, 0 link state acks
68.
69. Sent: 0 total
70.      0 hello, 0 database desc, 0 link state req
71.      0 link state updates, 0 link state acks
72.
73. ARP statistics:
74. Rcvd: 1 requests, 3 replies, 0 reverse, 0 other
75. Sent: 0 requests, 6 replies (0 proxy), 0 reverse
```

Anexo 2: Output dos comandos do cenário A – Router B

show running-config

```
1. Current configuration : 1200 bytes
2. version 12.4
3. service timestamps debug datetime msec
4. service timestamps log datetime msec
5. no service password-encryption
6. hostname RouterB
7. boot-start-marker
8. boot-end-marker
9. enable secret 5 $1$B/90$bTLevDew9RMS.kK34BAHV0
10. no aaa new-model
11. memory-size iomem 5
12. no ip icmp rate-limit unreachable
13. ip cef
14. no ip domain lookup
15. ip auth-proxy max-nodata-conns 3
16. ip admission max-nodata-conns 3
17. ip tcp synwait-time 5
18. interface FastEthernet0/0
19. description rede 3 connection
20. ip address 192.168.59.1 255.255.255.0
21. duplex auto
22. speed auto
23. interface FastEthernet0/1
24. description router A connection
25. ip address 192.168.29.2 255.255.255.0
26. duplex auto
27. speed auto
28. ip forward-protocol nd
29. ip route 192.168.9.0 255.255.255.128 192.168.29.1
30. ip route 192.168.9.0 255.255.255.128 129.168.29.1
31. no ip http server
32. no ip http secure-server
33. no cdp log mismatch duplex
34. control-plane
35. banner motd ^C Trabalho Pratico 1 ^C
36. line con 0
37. exec-timeout 0 0
38. privilege level 15
39. password class
40. logging synchronous
41. login
42. line aux 0
43. exec-timeout 0 0
44. privilege level 15
45. logging synchronous
46. line vty 0 4
47. password class
48. login
49. end
50.
```

show ip route

```
1. Codes: C - connected, S - static, R - RIP, M - mobile, B - BGP
2.         D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
3.         N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
4.         E1 - OSPF external type 1, E2 - OSPF external type 2
5.         i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
6.         ia - IS-IS inter area, * - candidate default, U - per-user static route
7.         o - ODR, P - periodic downloaded static route
8.
9. Gateway of last resort is not set
10.
11. C    192.168.29.0/24 is directly connected, FastEthernet0/1
12. C    192.168.59.0/24 is directly connected, FastEthernet0/0
13.     192.168.9.0/25 is subnetted, 1 subnets
14. S      192.168.9.0 [1/0] via 192.168.29.1
15.
```

show ip traffic

```
1. IP statistics:
2.   Rcvd: 0 total, 0 local destination
3.         0 format errors, 0 checksum errors, 0 bad hop count
4.         0 unknown protocol, 0 not a gateway
5.         0 security failures, 0 bad options, 0 with options
6.   Opts: 0 end, 0 nop, 0 basic security, 0 loose source route
7.         0 timestamp, 0 extended security, 0 record route
8.         0 stream ID, 0 strict source route, 0 alert, 0 cipso, 0 ump
9.         0 other
10.  Frags: 0 reassembled, 0 timeouts, 0 couldn't reassemble
11.         0 fragmented, 0 fragments, 0 couldn't fragment
12.  Bcast: 0 received, 0 sent
13.  Mcast: 0 received, 0 sent
14.  Sent: 0 generated, 0 forwarded
15.  Drop: 0 encapsulation failed, 0 unresolved, 0 no adjacency
16.         0 no route, 0 unicast RPF, 0 forced drop
17.         0 options denied
18.  Drop: 0 packets with source IP address zero
19.  Drop: 0 packets with internal loop back IP address
20.         0 physical broadcast
21.
22. ICMP statistics:
23.   Rcvd: 0 format errors, 0 checksum errors, 0 redirects, 0 unreachable
24.         0 echo, 0 echo reply, 0 mask requests, 0 mask replies, 0 quench
25.         0 parameter, 0 timestamp, 0 info request, 0 other
26.         0 irdp solicitations, 0 irdp advertisements
27.   Sent: 0 redirects, 0 unreachable, 0 echo, 0 echo reply
28.         0 mask requests, 0 mask replies, 0 quench, 0 timestamp
29.         0 info reply, 0 time exceeded, 0 parameter problem
30.         0 irdp solicitations, 0 irdp advertisements
31.
32. TCP statistics:
33.   Rcvd: 0 total, 0 checksum errors, 0 no port
34.   Sent: 0 total
35.
36. BGP statistics:
37.   Rcvd: 0 total, 0 opens, 0 notifications, 0 updates
38.         0 keepalives, 0 route-refresh, 0 unrecognized
39.   Sent: 0 total, 0 opens, 0 notifications, 0 updates
40.         0 keepalives, 0 route-refresh
41.
42. IP-EIGRP statistics:
43.   Rcvd: 0 total
44.   Sent: 0 total
45.
46. PIMv2 statistics: Sent/Received
```

```
47. Total: 0/0, 0 checksum errors, 0 format errors
48. Registers: 0/0 (0 non-rp, 0 non-sm-group), Register Stops: 0/0, Hellos: 0/0
49. Join/Prunes: 0/0, Asserts: 0/0, grafts: 0/0
50. Bootstraps: 0/0, Candidate_RP_Advertisements: 0/0
51. Queue drops: 0
52. State-Refresh: 0/0
53.
54. IGMP statistics: Sent/Received
55. Total: 0/0, Format errors: 0/0, Checksum errors: 0/0
56. Host Queries: 0/0, Host Reports: 0/0, Host Leaves: 0/0
57. DVMRP: 0/0, PIM: 0/0
58. Queue drops: 0
59.
60. UDP statistics:
61. Rcvd: 0 total, 0 checksum errors, 0 no port
62. Sent: 0 total, 0 forwarded broadcasts
63.
64. OSPF statistics:
65. Rcvd: 0 total, 0 checksum errors
66.      0 hello, 0 database desc, 0 link state req
67.      0 link state updates, 0 link state acks
68.
69. Sent: 0 total
70.      0 hello, 0 database desc, 0 link state req
71.      0 link state updates, 0 link state acks
72.
73. ARP statistics:
74. Rcvd: 0 requests, 3 replies, 0 reverse, 0 other
75. Sent: 0 requests, 6 replies (0 proxy), 0 reverse
76.
```


Anexo 3: Output dos comandos do cenário B – Router A

show running-config

```
1. Current configuration : 1206 bytes
2. version 12.4
3. service timestamps debug datetime msec
4. service timestamps log datetime msec
5. no service password-encryption
6. hostname RouterA
7. boot-start-marker
8. boot-end-marker
9. enable secret 5 $1$sGNC$R9VACq8gyyVoH0RfscFpv.
10. no aaa new-model
11. memory-size iomem 5
12. no ip icmp rate-limit unreachable
13. ip cef
14. no ip domain lookup
15. ip auth-proxy max-nodata-conns 3
16. ip admission max-nodata-conns 3
17. ipv6 unicast-routing
18. ip tcp synwait-time 5
19. interface FastEthernet0/0
20. description PC connection
21. no ip address
22. duplex auto
23. speed auto
24. ipv6 address 2001:690:2121:9::1/64
25. ipv6 nd ra-lifetime 300
26. ipv6 nd prefix 2001:690:2121:9::/64
27. interface FastEthernet0/1
28. description Router B conneciton
29. no ip address
30. duplex auto
31. speed auto
32. ipv6 address 2001:690:2121:29::1/64
33. ip forward-protocol nd
34. no ip http server
35. no ip http secure-server
36. no cdp log mismatch duplex
37. control-plane
38. banner motd ^AUTHORIZED ACCESS ONLY^C
39. line con 0
40. exec-timeout 0 0
41. privilege level 15
42. password class
43. logging synchronous
44. login
45. line aux 0
46. exec-timeout 0 0
47. privilege level 15
48. logging synchronous
49. line vty 0 4
50. password class
51. login
52. end
53.
```

show ip route

```
1. Codes: C - connected, S - static, R - RIP, M - mobile, B - BGP
2.         D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
3.         N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
4.         E1 - OSPF external type 1, E2 - OSPF external type 2
5.         i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
6.         ia - IS-IS inter area, * - candidate default, U - per-user static route
7.         o - ODR, P - periodic downloaded static route
8.
9. Gateway of last resort is not set
10.
```

show ip traffic

```
1. IP statistics:
2.   Rcvd: 0 total, 0 local destination
3.         0 format errors, 0 checksum errors, 0 bad hop count
4.         0 unknown protocol, 0 not a gateway
5.         0 security failures, 0 bad options, 0 with options
6.   Opts: 0 end, 0 nop, 0 basic security, 0 loose source route
7.         0 timestamp, 0 extended security, 0 record route
8.         0 stream ID, 0 strict source route, 0 alert, 0 cipso, 0 ump
9.         0 other
10.  Frags: 0 reassembled, 0 timeouts, 0 couldn't reassemble
11.         0 fragmented, 0 fragments, 0 couldn't fragment
12.  Bcast: 0 received, 0 sent
13.  Mcast: 0 received, 0 sent
14.  Sent: 0 generated, 0 forwarded
15.  Drop: 0 encapsulation failed, 0 unresolved, 0 no adjacency
16.         0 no route, 0 unicast RPF, 0 forced drop
17.         0 options denied
18.  Drop: 0 packets with source IP address zero
19.  Drop: 0 packets with internal loop back IP address
20.         0 physical broadcast
21.
22. ICMP statistics:
23.   Rcvd: 0 format errors, 0 checksum errors, 0 redirects, 0 unreachable
24.         0 echo, 0 echo reply, 0 mask requests, 0 mask replies, 0 quench
25.         0 parameter, 0 timestamp, 0 info request, 0 other
26.         0 irdp solicitations, 0 irdp advertisements
27.   Sent: 0 redirects, 0 unreachable, 0 echo, 0 echo reply
28.         0 mask requests, 0 mask replies, 0 quench, 0 timestamp
29.         0 info reply, 0 time exceeded, 0 parameter problem
30.         0 irdp solicitations, 0 irdp advertisements
31.
32. TCP statistics:
33.   Rcvd: 0 total, 0 checksum errors, 0 no port
34.   Sent: 0 total
35.
36. BGP statistics:
37.   Rcvd: 0 total, 0 opens, 0 notifications, 0 updates
38.         0 keepalives, 0 route-refresh, 0 unrecognized
39.   Sent: 0 total, 0 opens, 0 notifications, 0 updates
40.         0 keepalives, 0 route-refresh
41.
42. IP-EIGRP statistics:
43.   Rcvd: 0 total
44.   Sent: 0 total
45.
46. PIMv2 statistics: Sent/Received
47.   Total: 0/0, 0 checksum errors, 0 format errors
48.   Registers: 0/0 (0 non-rp, 0 non-sm-group), Register Stops: 0/0, Hellos: 0/0
49.   Join/Prunes: 0/0, Asserts: 0/0, grafts: 0/0
50.   Bootstraps: 0/0, Candidate_RP_Advertisements: 0/0
51.   Queue drops: 0
```

```
52. State-Fresh: 0/0
53.
54. IGMP statistics: Sent/Received
55. Total: 0/0, Format errors: 0/0, Checksum errors: 0/0
56. Host Queries: 0/0, Host Reports: 0/0, Host Leaves: 0/0
57. DVMRP: 0/0, PIM: 0/0
58. Queue drops: 0
59.
60. UDP statistics:
61. Rcvd: 0 total, 0 checksum errors, 0 no port
62. Sent: 0 total, 0 forwarded broadcasts
63.
64. OSPF statistics:
65. Rcvd: 0 total, 0 checksum errors
66.      0 hello, 0 database desc, 0 link state req
67.      0 link state updates, 0 link state acks
68.
69. Sent: 0 total
70.      0 hello, 0 database desc, 0 link state req
71.      0 link state updates, 0 link state acks
72.
73. ARP statistics:
74. Rcvd: 0 requests, 0 replies, 0 reverse, 0 other
75. Sent: 0 requests, 0 replies (0 proxy), 0 reverse
76.
```

Anexo 4: Output dos comandos do cenário B - Router B

show running-config

```
1. Current configuration : 1128 bytes
2. version 12.4
3. service timestamps debug datetime msec
4. service timestamps log datetime msec
5. no service password-encryption
6. hostname RouterB
7. boot-start-marker
8. boot-end-marker
9. enable secret 5 $1$TAZB$DiSPn6sYSv3MRBOrJMU8Q0
10. no aaa new-model
11. memory-size iomem 5
12. no ip icmp rate-limit unreachable
13. ip cef
14. no ip domain lookup
15. ip auth-proxy max-nodata-conns 3
16. ip admission max-nodata-conns 3
17. ip tcp synwait-time 5
18. interface FastEthernet0/0
19. description Rede 3 connection
20. no ip address
21. duplex auto
22. speed auto
23. ipv6 address 2001:690:2121:59::1/64
24. interface FastEthernet0/1
25. description Router A connection
26. no ip address
27. duplex auto
28. speed auto
29. ipv6 address 2001:690:2121:29::2/64
30. ip forward-protocol nd
31. no ip http server
32. no ip http secure-server
33. no cdp log mismatch duplex
34. control-plane
35. banner motd ^AUTHORIZED ACCESS ONLY^C
36. line con 0
37. exec-timeout 0 0
38. privilege level 15
39. password class
40. logging synchronous
41. login
42. line aux 0
43. exec-timeout 0 0
44. privilege level 15
45. logging synchronous
46. line vty 0 4
47. password class
48. login
49. end
50.
```

show ip route

```
1. Codes: C - connected, S - static, R - RIP, M - mobile, B - BGP
2.         D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
3.         N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
4.         E1 - OSPF external type 1, E2 - OSPF external type 2
5.         i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
6.         ia - IS-IS inter area, * - candidate default, U - per-user static route
7.         o - ODR, P - periodic downloaded static route
8.
9. Gateway of last resort is not set
10.
```

show ip traffic

```
1. IP statistics:
2.   Rcvd: 0 total, 0 local destination
3.         0 format errors, 0 checksum errors, 0 bad hop count
4.         0 unknown protocol, 0 not a gateway
5.         0 security failures, 0 bad options, 0 with options
6.   Opts: 0 end, 0 nop, 0 basic security, 0 loose source route
7.         0 timestamp, 0 extended security, 0 record route
8.         0 stream ID, 0 strict source route, 0 alert, 0 cipso, 0 ump
9.         0 other
10.  Frags: 0 reassembled, 0 timeouts, 0 couldn't reassemble
11.         0 fragmented, 0 fragments, 0 couldn't fragment
12.  Bcast: 0 received, 0 sent
13.  Mcast: 0 received, 0 sent
14.  Sent: 0 generated, 0 forwarded
15.  Drop: 0 encapsulation failed, 0 unresolved, 0 no adjacency
16.         0 no route, 0 unicast RPF, 0 forced drop
17.         0 options denied
18.  Drop: 0 packets with source IP address zero
19.  Drop: 0 packets with internal loop back IP address
20.         0 physical broadcast
21.
22. ICMP statistics:
23.   Rcvd: 0 format errors, 0 checksum errors, 0 redirects, 0 unreachable
24.         0 echo, 0 echo reply, 0 mask requests, 0 mask replies, 0 quench
25.         0 parameter, 0 timestamp, 0 info request, 0 other
26.         0 irdp solicitations, 0 irdp advertisements
27.   Sent: 0 redirects, 0 unreachable, 0 echo, 0 echo reply
28.         0 mask requests, 0 mask replies, 0 quench, 0 timestamp
29.         0 info reply, 0 time exceeded, 0 parameter problem
30.         0 irdp solicitations, 0 irdp advertisements
31.
32. TCP statistics:
33.   Rcvd: 0 total, 0 checksum errors, 0 no port
34.   Sent: 0 total
35.
36. BGP statistics:
37.   Rcvd: 0 total, 0 opens, 0 notifications, 0 updates
38.         0 keepalives, 0 route-refresh, 0 unrecognized
39.   Sent: 0 total, 0 opens, 0 notifications, 0 updates
40.         0 keepalives, 0 route-refresh
41.
42. IP-EIGRP statistics:
43.   Rcvd: 0 total
44.   Sent: 0 total
45.
46. PIMv2 statistics: Sent/Received
47.   Total: 0/0, 0 checksum errors, 0 format errors
48.   Registers: 0/0 (0 non-rp, 0 non-sm-group), Register Stops: 0/0, Hellos: 0/0
49.   Join/Prunes: 0/0, Asserts: 0/0, grafts: 0/0
50.   Bootstraps: 0/0, Candidate_RP_Advertisements: 0/0
51.   Queue drops: 0
```

```
52. State-Fresh: 0/0
53.
54. IGMP statistics: Sent/Received
55. Total: 0/0, Format errors: 0/0, Checksum errors: 0/0
56. Host Queries: 0/0, Host Reports: 0/0, Host Leaves: 0/0
57. DVMRP: 0/0, PIM: 0/0
58. Queue drops: 0
59.
60. UDP statistics:
61. Rcvd: 0 total, 0 checksum errors, 0 no port
62. Sent: 0 total, 0 forwarded broadcasts
63.
64. OSPF statistics:
65. Rcvd: 0 total, 0 checksum errors
66.      0 hello, 0 database desc, 0 link state req
67.      0 link state updates, 0 link state acks
68.
69. Sent: 0 total
70.      0 hello, 0 database desc, 0 link state req
71.      0 link state updates, 0 link state acks
72.
73. ARP statistics:
74. Rcvd: 0 requests, 0 replies, 0 reverse, 0 other
75. Sent: 0 requests, 0 replies (0 proxy), 0 reverse
76.
```

Anexo 5: Output dos comandos do cenário C – Router A

show running-config

```
1. Current configuration : 1103 bytes
2. version 12.4
3. service timestamps debug datetime msec
4. service timestamps log datetime msec
5. no service password-encryption
6. hostname RouterA
7. boot-start-marker
8. boot-end-marker
9. no aaa new-model
10. memory-size iomem 5
11. no ip icmp rate-limit unreachable
12. ip cef
13. no ip domain lookup
14. ip auth-proxy max-nodata-conns 3
15. ip admission max-nodata-conns 3
16. ipv6 unicast-routing
17. ip tcp synwait-time 5
18. interface Tunnel0
19. no ip address
20. ipv6 address 3FFE:B00:C18:1::3/127
21. tunnel source FastEthernet0/1
22. tunnel destination 192.168.29.2
23. tunnel mode ipv6ip
24. interface FastEthernet0/0
25. no ip address
26. duplex auto
27. speed auto
28. ipv6 address 2001:690:2121:9::1/64
29. interface FastEthernet0/1
30. ip address 192.168.29.1 255.255.255.0
31. duplex auto
32. speed auto
33. ip forward-protocol nd
34. no ip http server
35. no ip http secure-server
36. no cdp log mismatch duplex
37. control-plane
38. line con 0
39. exec-timeout 0 0
40. privilege level 15
41. logging synchronous
42. line aux 0
43. exec-timeout 0 0
44. privilege level 15
45. logging synchronous
46. line vty 0 4
47. login
48. end
49.
```

show ip route

```
1. Codes: C - connected, S - static, R - RIP, M - mobile, B - BGP
2.         D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
3.         N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
4.         E1 - OSPF external type 1, E2 - OSPF external type 2
5.         i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
6.         ia - IS-IS inter area, * - candidate default, U - per-user static route
7.         o - ODR, P - periodic downloaded static route
8.
9. Gateway of last resort is not set
10.
11. C    192.168.29.0/24 is directly connected, FastEthernet0/1
12.
```

show ip traffic

```
1. IP statistics:
2.   Rcvd: 16 total, 16 local destination
3.         0 format errors, 0 checksum errors, 0 bad hop count
4.         0 unknown protocol, 0 not a gateway
5.         0 security failures, 0 bad options, 0 with options
6.   Opts: 0 end, 0 nop, 0 basic security, 0 loose source route
7.         0 timestamp, 0 extended security, 0 record route
8.         0 stream ID, 0 strict source route, 0 alert, 0 cipso, 0 ump
9.         0 other
10.  Frags: 0 reassembled, 0 timeouts, 0 couldn't reassemble
11.         0 fragmented, 0 fragments, 0 couldn't fragment
12.  Bcast: 0 received, 0 sent
13.  Mcast: 0 received, 0 sent
14.  Sent: 0 generated, 0 forwarded
15.  Drop: 3 encapsulation failed, 0 unresolved, 0 no adjacency
16.         0 no route, 0 unicast RPF, 0 forced drop
17.         0 options denied
18.  Drop: 0 packets with source IP address zero
19.  Drop: 0 packets with internal loop back IP address
20.         0 physical broadcast
21.
22. ICMP statistics:
23.   Rcvd: 0 format errors, 0 checksum errors, 0 redirects, 0 unreachable
24.         0 echo, 0 echo reply, 0 mask requests, 0 mask replies, 0 quench
25.         0 parameter, 0 timestamp, 0 info request, 0 other
26.         0 irdp solicitations, 0 irdp advertisements
27.   Sent: 0 redirects, 0 unreachable, 0 echo, 0 echo reply
28.         0 mask requests, 0 mask replies, 0 quench, 0 timestamp
29.         0 info reply, 0 time exceeded, 0 parameter problem
30.         0 irdp solicitations, 0 irdp advertisements
31.
32. TCP statistics:
33.   Rcvd: 0 total, 0 checksum errors, 0 no port
34.   Sent: 0 total
35.
36. BGP statistics:
37.   Rcvd: 0 total, 0 opens, 0 notifications, 0 updates
38.         0 keepalives, 0 route-refresh, 0 unrecognized
39.   Sent: 0 total, 0 opens, 0 notifications, 0 updates
40.         0 keepalives, 0 route-refresh
41.
42. IP-EIGRP statistics:
43.   Rcvd: 0 total
44.   Sent: 0 total
45.
46. PIMv2 statistics: Sent/Received
47.   Total: 0/0, 0 checksum errors, 0 format errors
48.   Registers: 0/0 (0 non-rp, 0 non-sm-group), Register Stops: 0/0, Hellos: 0/0
49.   Join/Prunes: 0/0, Asserts: 0/0, grafts: 0/0
```



```
50.  Bootstraps: 0/0, Candidate_RP_Advertisements: 0/0
51.  Queue drops: 0
52.  State-Refresh: 0/0
53.
54.  IGMP statistics: Sent/Received
55.    Total: 0/0, Format errors: 0/0, Checksum errors: 0/0
56.    Host Queries: 0/0, Host Reports: 0/0, Host Leaves: 0/0
57.    DVMRP: 0/0, PIM: 0/0
58.    Queue drops: 0
59.
60.  UDP statistics:
61.    Rcvd: 0 total, 0 checksum errors, 0 no port
62.    Sent: 0 total, 0 forwarded broadcasts
63.
64.  OSPF statistics:
65.    Rcvd: 0 total, 0 checksum errors
66.         0 hello, 0 database desc, 0 link state req
67.         0 link state updates, 0 link state acks
68.
69.    Sent: 0 total
70.         0 hello, 0 database desc, 0 link state req
71.         0 link state updates, 0 link state acks
72.
73.  ARP statistics:
74.    Rcvd: 0 requests, 4 replies, 0 reverse, 0 other
75.    Sent: 1 requests, 3 replies (0 proxy), 0 reverse
76.
```

Anexo 6: Output dos comandos do cenário C – Router B

show running-config

```
1. Current configuration : 1104 bytes
2. version 12.4
3. service timestamps debug datetime msec
4. service timestamps log datetime msec
5. no service password-encryption
6. hostname RouterB
7. boot-start-marker
8. boot-end-marker
9. no aaa new-model
10. memory-size iomem 5
11. no ip icmp rate-limit unreachable
12. ip cef
13. no ip domain lookup
14. ip auth-proxy max-nodata-conns 3
15. ip admission max-nodata-conns 3
16. ipv6 unicast-routing
17. ip tcp synwait-time 5
18. interface Tunnel0
19. no ip address
20. ipv6 address 3FFE:B00:C18:1::4/127
21. tunnel source FastEthernet0/1
22. tunnel destination 192.168.29.1
23. tunnel mode ipv6ip
24. interface FastEthernet0/0
25. no ip address
26. duplex auto
27. speed auto
28. ipv6 address 2001:690:2121:59::1/64
29. interface FastEthernet0/1
30. ip address 192.168.29.2 255.255.255.0
31. duplex auto
32. speed auto
33. ip forward-protocol nd
34. no ip http server
35. no ip http secure-server
36. no cdp log mismatch duplex
37. control-plane
38. line con 0
39. exec-timeout 0 0
40. privilege level 15
41. logging synchronous
42. line aux 0
43. exec-timeout 0 0
44. privilege level 15
45. logging synchronous
46. line vty 0 4
47. login
48. end
49.
```

show ip route

```
1. Codes: C - connected, S - static, R - RIP, M - mobile, B - BGP
2.         D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
3.         N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
4.         E1 - OSPF external type 1, E2 - OSPF external type 2
5.         i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
6.         ia - IS-IS inter area, * - candidate default, U - per-user static route
7.         o - ODR, P - periodic downloaded static route
8.
9. Gateway of last resort is not set
10.
11. C    192.168.29.0/24 is directly connected, FastEthernet0/1
12.
```

show ip traffic

```
1. IP statistics:
2.   Rcvd: 13 total, 13 local destination
3.         0 format errors, 0 checksum errors, 0 bad hop count
4.         0 unknown protocol, 0 not a gateway
5.         0 security failures, 0 bad options, 0 with options
6.   Opts: 0 end, 0 nop, 0 basic security, 0 loose source route
7.         0 timestamp, 0 extended security, 0 record route
8.         0 stream ID, 0 strict source route, 0 alert, 0 cipso, 0 ump
9.         0 other
10.  Frags: 0 reassembled, 0 timeouts, 0 couldn't reassemble
11.         0 fragmented, 0 fragments, 0 couldn't fragment
12.  Bcast: 0 received, 0 sent
13.  Mcast: 0 received, 0 sent
14.  Sent: 0 generated, 0 forwarded
15.  Drop: 0 encapsulation failed, 0 unresolved, 0 no adjacency
16.         0 no route, 0 unicast RPF, 0 forced drop
17.         0 options denied
18.  Drop: 0 packets with source IP address zero
19.  Drop: 0 packets with internal loop back IP address
20.         0 physical broadcast
21.
22. ICMP statistics:
23.   Rcvd: 0 format errors, 0 checksum errors, 0 redirects, 0 unreachable
24.         0 echo, 0 echo reply, 0 mask requests, 0 mask replies, 0 quench
25.         0 parameter, 0 timestamp, 0 info request, 0 other
26.         0 irdp solicitations, 0 irdp advertisements
27.   Sent: 0 redirects, 0 unreachable, 0 echo, 0 echo reply
28.         0 mask requests, 0 mask replies, 0 quench, 0 timestamp
29.         0 info reply, 0 time exceeded, 0 parameter problem
30.         0 irdp solicitations, 0 irdp advertisements
31.
32. TCP statistics:
33.   Rcvd: 0 total, 0 checksum errors, 0 no port
34.   Sent: 0 total
35.
36. BGP statistics:
37.   Rcvd: 0 total, 0 opens, 0 notifications, 0 updates
38.         0 keepalives, 0 route-refresh, 0 unrecognized
39.   Sent: 0 total, 0 opens, 0 notifications, 0 updates
40.         0 keepalives, 0 route-refresh
41.
42. IP-EIGRP statistics:
43.   Rcvd: 0 total
44.   Sent: 0 total
45.
46. PIMv2 statistics: Sent/Received
47.   Total: 0/0, 0 checksum errors, 0 format errors
48.   Registers: 0/0 (0 non-rp, 0 non-sm-group), Register Stops: 0/0, Hellos: 0/0
49.   Join/Prunes: 0/0, Asserts: 0/0, grafts: 0/0
```

```
50.  Bootstraps: 0/0, Candidate_RP_Advertisements: 0/0
51.  Queue drops: 0
52.  State-Refresh: 0/0
53.
54.  IGMP statistics: Sent/Received
55.    Total: 0/0, Format errors: 0/0, Checksum errors: 0/0
56.    Host Queries: 0/0, Host Reports: 0/0, Host Leaves: 0/0
57.    DVMRP: 0/0, PIM: 0/0
58.    Queue drops: 0
59.
60.  UDP statistics:
61.    Rcvd: 0 total, 0 checksum errors, 0 no port
62.    Sent: 0 total, 0 forwarded broadcasts
63.
64.  OSPF statistics:
65.    Rcvd: 0 total, 0 checksum errors
66.          0 hello, 0 database desc, 0 link state req
67.          0 link state updates, 0 link state acks
68.
69.    Sent: 0 total
70.          0 hello, 0 database desc, 0 link state req
71.          0 link state updates, 0 link state acks
72.
73.  ARP statistics:
74.    Rcvd: 1 requests, 3 replies, 0 reverse, 0 other
75.    Sent: 0 requests, 4 replies (0 proxy), 0 reverse
76.
```