


FF-1 — blank 1 of 1

Channel with ears — flat pattern, one piece (4 bends 90°, web on top) · blank 20.139" × 6.818" · HR steel sheet 10 ga (0.135") · 1 per vehicle

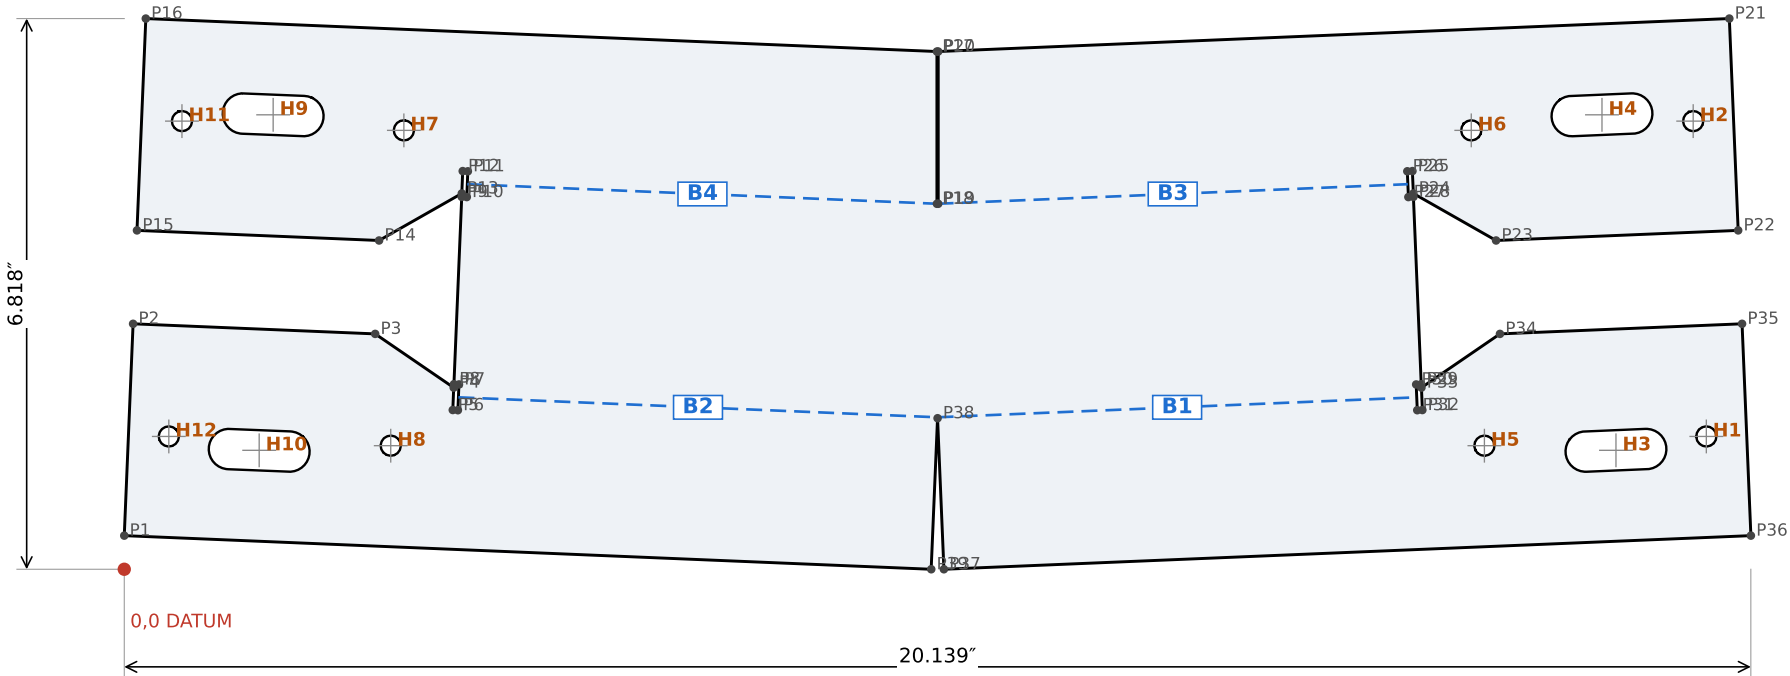

HOLES (centre X, Y from datum)

H1	Ø0.250"	X 19.588	Y 1.644
H2	Ø0.250"	X 19.425	Y 5.548
H3	slot 1.250 × 0.500"	@2° X 18.469	Y 1.473
H4	slot 1.250 × 0.500"	@2° X 18.296	Y 5.627
H5	Ø0.250"	X 16.840	Y 1.530
H6	Ø0.250"	X 16.678	Y 5.434
H7	Ø0.250"	X 3.462	Y 5.434
H8	Ø0.250"	X 3.299	Y 1.530
H9	slot 1.250 × 0.500"	@-2° X 1.844	Y 5.627
H10	slot 1.250 × 0.500"	@-2° X 1.670	Y 1.473
H11	Ø0.250"	X 0.714	Y 5.548
H12	Ø0.250"	X 0.552	Y 1.644

BENDS (bend centre line, from datum) IR = t = 10 ga (0.135")

B1	(1)/(3) 90°	(10.070, 1.881) → (16.002, 2.129)
B2	(2)/(4) 90°	(4.137, 2.129) → (10.070, 1.881)
B3	radius-bend edge	(10.070, 4.525) → (15.892, 4.768)
B4	radius-bend edge	(4.247, 4.768) → (10.070, 4.525)
radius-bend edge = start/end of a large-radius bend (bump bend between them)		

OUTLINE POINTS (X, Y from datum)

P1	0.000	0.416
P2	0.109	3.039
P3	3.107	2.914
P4	4.079	2.249
P5	4.067	1.972
P6	4.131	1.969
P7	4.144	2.288
P8	4.082	2.291
P9	4.178	4.610
P10	4.241	4.608
P11	4.254	4.927
P12	4.191	4.930
P13	4.179	4.653
P14	3.155	4.071
P15	0.158	4.196
P16	0.267	6.818
P17	10.062	6.410
P18	10.062	4.525
P19	10.078	4.525
P20	10.078	6.410
P21	19.873	6.818
P22	19.982	4.196
P23	16.985	4.071
P24	15.960	4.653
P25	15.949	4.930
P26	15.886	4.927
P27	15.899	4.608
P28	15.961	4.610
P29	16.058	2.291
P30	15.995	2.288
P31	16.009	1.969
P32	16.072	1.971
P33	16.061	2.249
P34	17.033	2.914
P35	20.030	3.039
P36	20.140	0.416
P37	10.148	0.000
P38	10.070	1.870
P39	9.991	0.000

NOTES

1. Cut from the DXF file (1:1, inches). This sheet is for checking.
2. Material: HR steel sheet 10 ga (0.135") (t). Inside bend radius = t.
3. Flat pattern already includes bend allowance (K = 0.44, R = t).
4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
5. Deburr all edges. Curved edges: smooth arcs per DXF.
- * one blank: the web is a chevron 6"+6" (ends ¼" out); bend the walls 90° down on the dashed lines, each in 2 hits (6" to the middle); outer wall has a V-notch — closes after bending, weld it; inner wall has a slit — opens ~0.16" after bending, weld it; the ears reach past the bend line; 1/16" relief slit at the bend end

FF-1 — blank 1 of 1	HR steel sheet 10 ga (0.135")	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Channel with ears — flat pattern, one piece (4 bends 90°, web on top)	QTY: 1 per vehicle	cut ±0.010" · bends ±1° · IR = t	SHEET 1 / 1