


FR-2 (bent version) — blank 1 of 1

FR-2 one piece (top + 2 U legs) · blank 22.078" × 3.250" · HR steel sheet 10 ga (0.135") · 1 per side · FR + FL (mirror) = 2 per vehicle

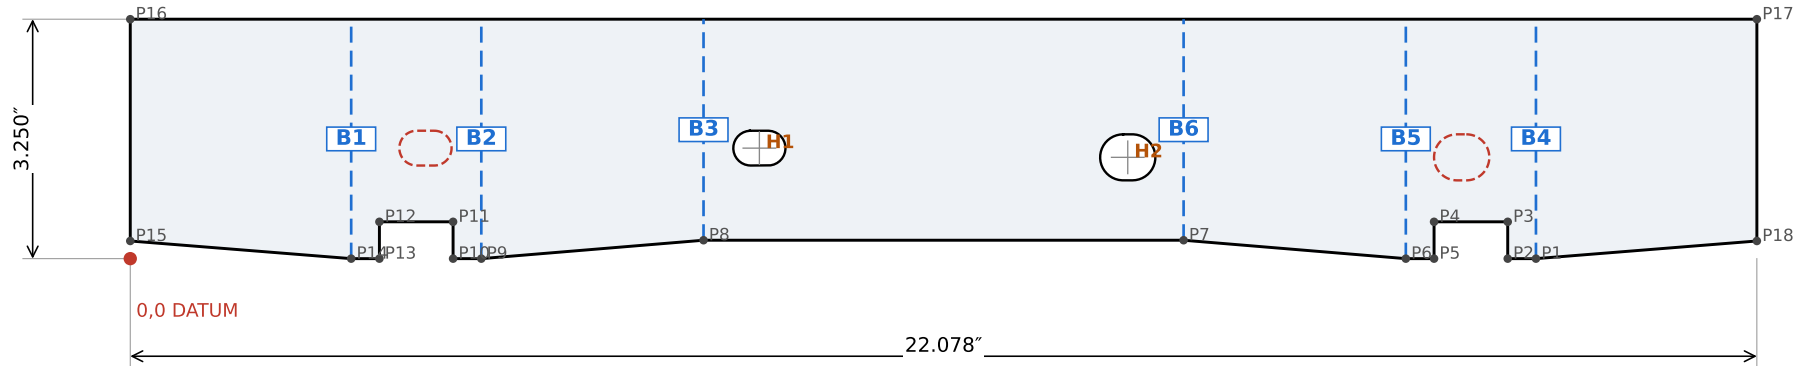

HOLES (centre X, Y from datum)

H1 slot 0.709 × 0.472" @0° X 8.539 Y 1.500
H2 slot 0.750 × 0.625" @0° X 13.539 Y 1.375

DRILL AFTER WELDING (red dashed — do NOT laser cut)

D1 slot 0.709 × 0.472" X 4.007 Y 1.500
D2 slot 0.750 × 0.625" X 18.072 Y 1.375

BENDS (bend centre line, from datum) IR = t = 10 ga (0.135")

B1 (1) 90° ↓ (2.999, 0.000) → (2.999, 3.250)
B2 (3) 90° ↓ (4.765, 0.000) → (4.765, 3.250)
B3 (5) 90° ↓ (7.781, 0.250) → (7.781, 3.250)
B4 (2) 90° ↓ (19.080, 0.000) → (19.080, 3.250)
B5 (4) 90° ↓ (17.314, 0.000) → (17.314, 3.250)
B6 (6) 90° ↓ (14.297, 0.250) → (14.297, 3.250)

OUTLINE POINTS (X, Y from datum)

P1 19.080 0.000
P2 18.697 0.000
P3 18.697 0.500
P4 17.697 0.500
P5 17.697 0.000
P6 17.314 0.000
P7 14.297 0.250
P8 7.781 0.250
P9 4.765 0.000
P10 4.382 0.000
P11 4.382 0.500
P12 3.382 0.500
P13 3.382 0.000
P14 2.999 0.000
P15 0.000 0.240
P16 0.000 3.250
P17 22.078 3.250
P18 22.078 0.240

NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
- 2. Material: HR steel sheet 10 ga (0.135") (t). Inside bend radius = t.
- 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
- 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
- 5. Deburr all edges. Curved edges: smooth arcs per DXF.
- 6. FR side as drawn; FL side = mirror image (flip the blank).
- * one blank, 6 bends 90° the same way (R = t): inner walls first, then the bottoms, then the outer walls; top ovals laser cut; do NOT cut the leg-bottom ovals — drill after welding through the top ovals; ½" notch at the front edge of

FR-2 (bent version) — blank 1 of 1	HR steel sheet 10 ga (0.135")	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
FR-2 one piece (top + 2 U legs)	QTY: 1 per side · FR + FL (mirror) = 2 per vehicle	cut ±0.010" · bends ±1° · IR = t	SHEET 1 / 1