


FR-7 (welded version) — blank 1 of 3

Side plate with tab · blank 3.750″ × 5.000″ · HR steel sheet 10 ga (0.135″) · 2 per side · FR + FL (mirror) = 4 per vehicle

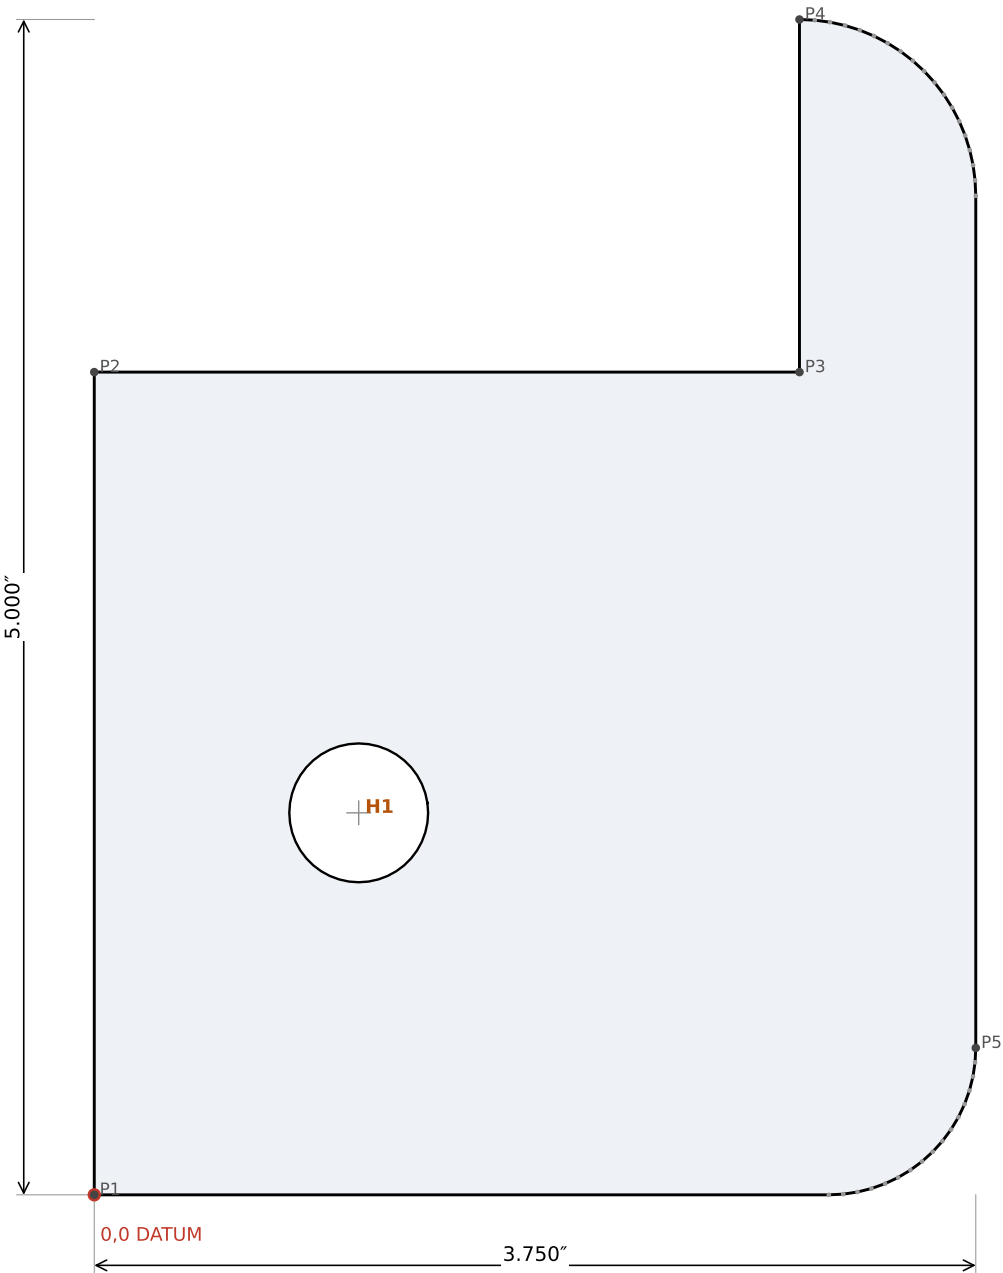

HOLES (centre X, Y from datum)

H1   Ø0.591″   X 1.125   Y 1.625

OUTLINE POINTS (X, Y from datum)

P1   0.000   0.000  
P2   0.000   3.500  
P3   3.000   3.500  
P4   3.000   5.000  
P5   3.750   0.625

FREE-FORM CURVE 1 (grey dots, follow DXF) — points X, Y

3.065   4.997  
3.130   4.989  
3.194   4.974  
3.256   4.955  
3.317   4.930  
3.375   4.899  
3.430   4.864  
3.482   4.824  
3.530   4.780  
3.575   4.732  
3.614   4.680  
3.650   4.625  
3.680   4.567  
3.705   4.506  
3.724   4.444  
3.739   4.380  
3.747   4.315  
3.750   4.250

FREE-FORM CURVE 2 (grey dots, follow DXF) — points X, Y

3.747   0.564  
3.738   0.503  
3.723   0.444  
3.702   0.386  
3.676   0.330  
3.645   0.278  
3.608   0.229  
3.567   0.183  
3.522   0.142  
3.472   0.105  
3.420   0.074  
3.364   0.048  
3.306   0.027  
3.247   0.012  
3.186   0.003  
3.125   0.000


NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
- 2. Material: HR steel sheet 10 ga (0.135″) (t). Inside bend radius = t.
- 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
- 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
- 5. Deburr all edges. Curved edges: smooth arcs per DXF.
- 6. FR side as drawn; FL side = mirror image (flip the blank).

|                                      |                                                    |                                  |                               |
|--------------------------------------|----------------------------------------------------|----------------------------------|-------------------------------|
| FR-7 (welded version) — blank 1 of 3 | HR steel sheet 10 ga (0.135″)                      | inches · flat blank, 1:1 in DXF  | Sienna WAV frame · 2026-10-02 |
| Side plate with tab                  | QTY: 2 per side · FR + FL (mirror) = 4 per vehicle | cut ±0.010″ · bends ±1° · IR = t | SHEET 1 / 3                   |

FR-7 (welded version) — blank 2 of 3

Bottom plate · blank 2.231" × 3.125" · HR steel sheet 10 ga (0.135") · 1 per side · FR + FL (mirror) = 2 per vehicle

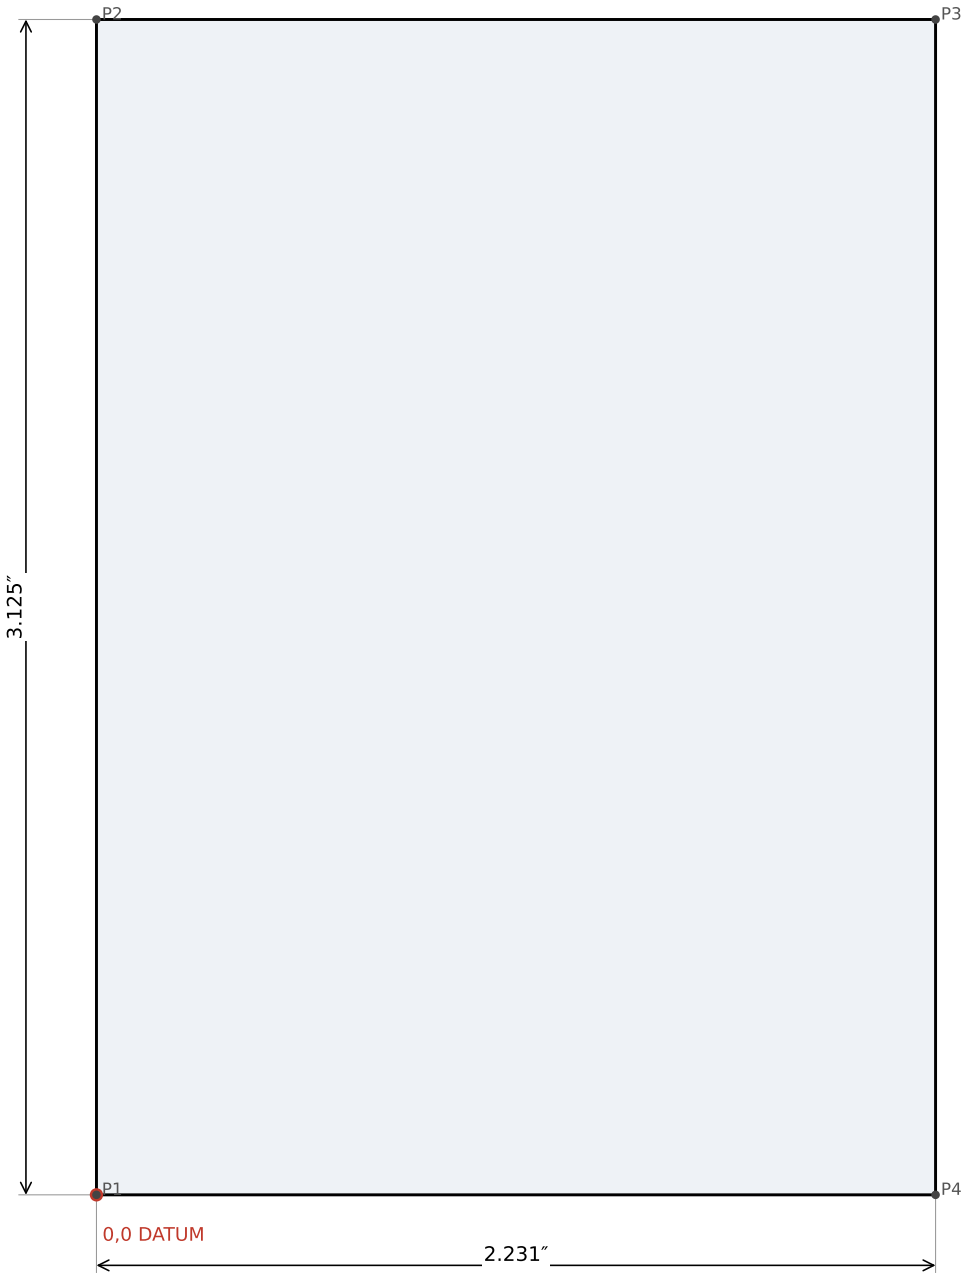

HOLES (centre X, Y from datum)

none

OUTLINE POINTS (X, Y from datum)

|    |       |       |
|----|-------|-------|
| P1 | 0.000 | 0.000 |
| P2 | 0.000 | 3.125 |
| P3 | 2.231 | 3.125 |
| P4 | 2.231 | 0.000 |


NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
- 2. Material: HR steel sheet 10 ga (0.135") (t). Inside bend radius = t.
- 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
- 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
- 5. Deburr all edges. Curved edges: smooth arcs per DXF.
- 6. FR side as drawn; FL side = mirror image (flip the blank).

|                                      |                                                    |                                  |                               |
|--------------------------------------|----------------------------------------------------|----------------------------------|-------------------------------|
| FR-7 (welded version) — blank 2 of 3 | HR steel sheet 10 ga (0.135")                      | inches · flat blank, 1:1 in DXF  | Sienna WAV frame · 2026-10-02 |
| Bottom plate                         | QTY: 1 per side · FR + FL (mirror) = 2 per vehicle | cut ±0.010" · bends ±1° · IR = t | SHEET 2 / 3                   |

FR-7 (welded version) — blank 3 of 3

Back plate (hole Ø0.5) · blank 2.231" × 3.625" · HR steel sheet 10 ga (0.135") · 1 per side · FR + FL (mirror) = 2 per vehicle

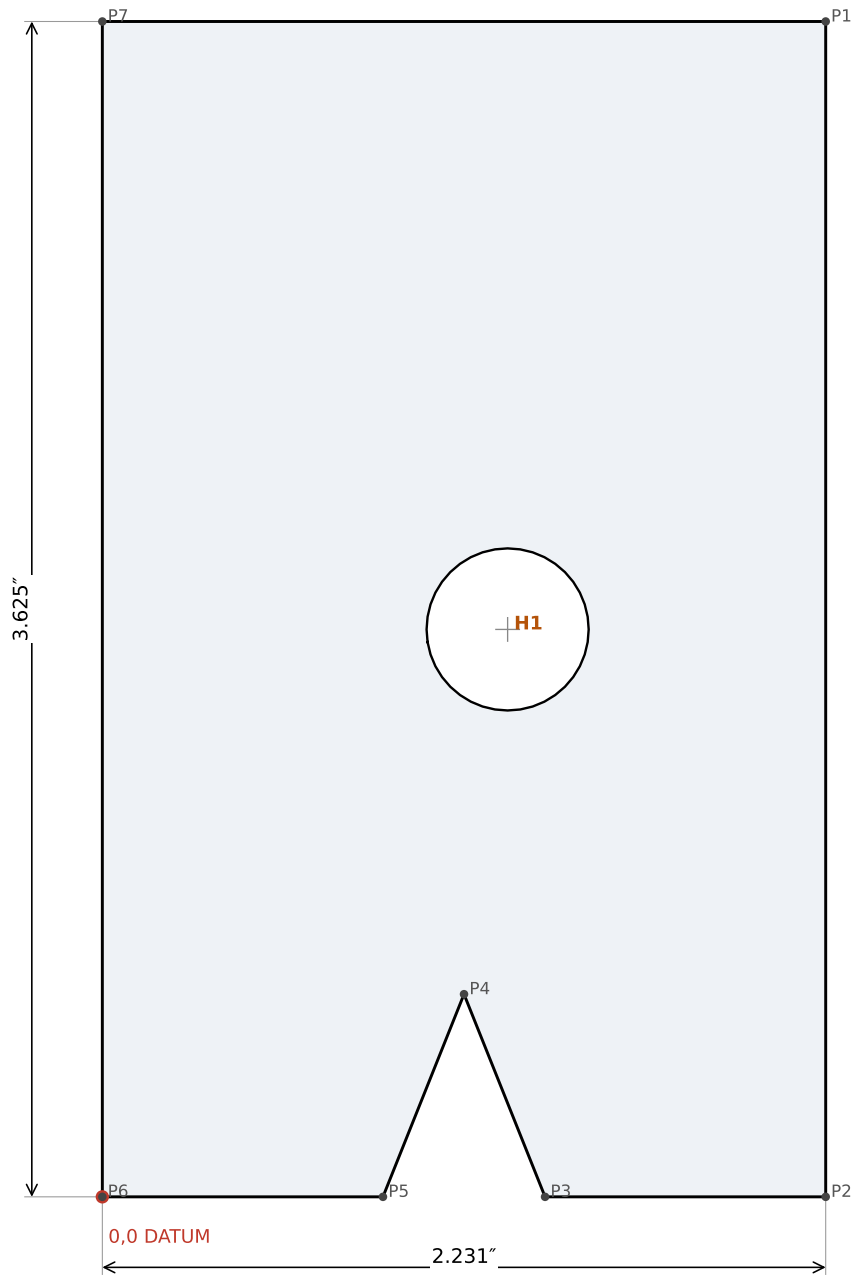

HOLEs (centre X, Y from datum)

H1    Ø0.500"    X 1.250    Y 1.750

OUTLINE POINTs (X, Y from datum)

|    |       |       |
|----|-------|-------|
| P1 | 2.231 | 3.625 |
| P2 | 2.231 | 0.000 |
| P3 | 1.365 | 0.000 |
| P4 | 1.115 | 0.625 |
| P5 | 0.866 | 0.000 |
| P6 | 0.000 | 0.000 |
| P7 | 0.000 | 3.625 |

NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
- 2. Material: HR steel sheet 10 ga (0.135") (t). Inside bend radius = t.
- 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
- 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
- 5. Deburr all edges. Curved edges: smooth arcs per DXF.
- 6. FR side as drawn; FL side = mirror image (flip the blank).

|                                      |                                                    |                                  |                               |
|--------------------------------------|----------------------------------------------------|----------------------------------|-------------------------------|
| FR-7 (welded version) — blank 3 of 3 | HR steel sheet 10 ga (0.135")                      | inches · flat blank, 1:1 in DXF  | Sienna WAV frame · 2026-10-02 |
| Back plate (hole Ø0.5)               | QTY: 1 per side · FR + FL (mirror) = 2 per vehicle | cut ±0.010" · bends ±1° · IR = t | SHEET 3 / 3                   |