

DAMIAO | 达妙科技

DM-J8009P-2EC Geared Motor (Crossed Roller Bearing)

User Manual V1.1 2026-01-16



Revision History		
Date	Version	Changes
2026-01-16	V1.1	Motor Parameters Corrected

Table of Contents

Disclaimer.....	4
Safety Precautions	4
Motor Features	4
Naming Conventions	5
Specifications	6
◆ Operating Voltage	7
◆ Maximum Phase Current	7
◆ Maximum Rotational Speed.....	8
◆ Torque Constant	8
Torque–Speed (T–N) Curve	8
Packing List	8
Interface & Pin Description	9
Motor Dimensions and Mounting	9
LED Status	10
Operating Modes	10
◆ MIT Mode	10
◆ Position-Velocity Mode	11
◆ Velocity Mode	11
◆ Force-Position Hybrid Mode	11
◆ Mode Switching	12
CAN Communication	12
◆ CAN Baud Rate Configuration	13
◆ Feedback Frames.....	13
◆ Control Frame in MIT Mode.....	14
◆ Control Frame in Position Velocity Mode	15
◆ Control Frame in Velocity Mode.....	16
◆ Control Frame in Force-Position Hybrid Mode.....	16
◆ Enable.....	16
◆ Disable.....	17
◆ Set Zero Position.....	17
◆ Clear Faults.....	17
◆ Read Parameters.....	17
◆ Write Parameters	17

Table of Contents

◆ Save Parameters	18
◆ Mode Switching	18
◆ CAN Baud Rate Configuration	19
◆ Register Map	20
Motor Debugging Procedure.....	22
◆ Device Connection	23
◆ Motor-side Encoder Calibration	24
◆ Parameter Identification.....	25
◆ Output Shaft Encoder Calibration (Dual Encoder Motors)	26
◆ Parameter Management	28
◆ Debugging via CAN	32
Firmware Version Check and Upgrade.....	48
◆ Version Check	48
◆ Firmware Upgrade via Serial Port.....	48
◆ CAN Firmware Upgrade	49

Disclaimer

Thank you for choosing the DAMIAO DM-J8009P-2EC Gear Motor (hereinafter referred to as the "Motor") from DAMIAO Technology.

Before using this product, please read this manual and all safety precautions provided by DAMIAO Technology and follow them strictly. Failure to do so may result in personal injury, product damage, or damage to surrounding property. By using this product, you acknowledge that you have read, understood, and agreed to all terms and conditions in this document and all related documentation. You agree to use this product only for lawful and intended purposes. You assume full responsibility for the use of this product and any consequences arising from it. DAMIAO Technology shall not be liable for any direct or indirect damage, injury, or legal liability arising from the use of this product.

DAMIAO is a trademark of Shenzhen Damiao Technology Co., Ltd. All product names and brands mentioned herein are the property of their respective owners. This manual is protected under applicable copyright laws. All rights are reserved. No part of this document may be reproduced in any form or by any means without prior written permission from Shenzhen DAMIAO Technology Co., Ltd. Shenzhen Damiao Technology Co., Ltd. reserves the right of final interpretation of this document and all related materials. This document is subject to change without prior notice.

Safety Precautions

1. Operate the motor strictly within the specified environmental conditions and maximum winding temperature limits. Failure to do so may result in permanent damage.
2. Prevent foreign objects from entering the rotor. Otherwise, abnormal operation may occur.
3. Inspect all components before use. Do not operate the motor if any components are missing, worn, or damaged.
4. Ensure correct wiring and proper, secure motor installation.
5. Do not touch the rotating or energized parts during operation to avoid injury. High torque operation may generate heat. Avoid contact to prevent burns.
6. Do not disassemble the motor. Unauthorized disassembly may affect control accuracy or cause malfunction.

Motor Features

1. Dual encoders provide single-turn absolute position feedback at the output shaft, ensuring position information is retained even after power loss.
2. Integrated motor and driver design offers compact structure with high integration.
3. Supports PC-based configuration, monitoring, and firmware upgrades.
4. Provides real-time feedback of motor Velocity, position, torque, and temperature via CAN bus.
5. Features dual temperature protection mechanisms.
6. Supports trapezoidal acceleration and deceleration profiles in position mode.

DM - J 43 40 X - 2EC VX.X (48V)
Separable Motor

Default: 24V drive
48V: 48V drive

Specifications

Please operate the motor within the specifications listed below.

The output shaft of the DM-J8009P-2EC uses a cross roller bearing, while the DM-J8009-2EC uses a thin-section deep groove ball bearing.

Motor Specifications	Model	DM-J8009P-2EC
	Rated Voltage	24V (Support 24-48V)
	Rated Phase Current	20A
	Peak Phase Current	40A
	Rated Torque	20NM
	Peak Torque	40NM
	Rated Speed	100rpm
	Maximum No-Load Speed	160rpm@24V 320rpm@48V
Motor characteristics	Reduction Ratio	9: 1
	Pole Pairs	21
	Phase Inductance	80uh
	Phase Resistance	0.145Ω
Mechanical & Physical	Outer Diameter	98mm
	Height	61.7mm
	Weight	~ 930g
Encoder	Resolution (bits)	14 bits
	Number Of Encoders	2
	Type	Magnetic Encoder (single-turn absolute)
Communication Interfaces	Control Interface	CAN@1Mbps
	Configuration Interface	UART@921600bps
Control & Protection	Control Modes	MIT Mode
		Position-Velocity Mode
		Velocity Mode
		Force-Position Hybrid Mode
	Protection	Drive over-temperature protection: shutdown at 120° C; the motor exits Enable Mode when triggered.
		Motor over-temperature protection (configurable, recommended ≤ 100° C); the motor exits Enable Mode when triggered.


Control & Protection	Protection	Over-voltage protection (configurable, recommended $\leq 52V$); exits Enable Mode when triggered.
		Communication Loss Protection: the motor exits Enable Mode if no CAN command is received within the specified timeout period.
		Over-current protection (configurable, recommended $\leq 39A$); exits Enable Mode when triggered.
		Under-voltage protection: the motor exits Enable Mode if supply voltage falls below the threshold (recommended $\geq 15V$).

◆ Operating Voltage

The operating voltage range for the driver is 24V to 48V. Hot-swapping is not recommended above 36V. The minimum operating voltage is 15V, and the maximum operating voltage is 52V.

◆ Maximum Phase Current

The maximum phase current of the driver can be obtained from the startup serial output:

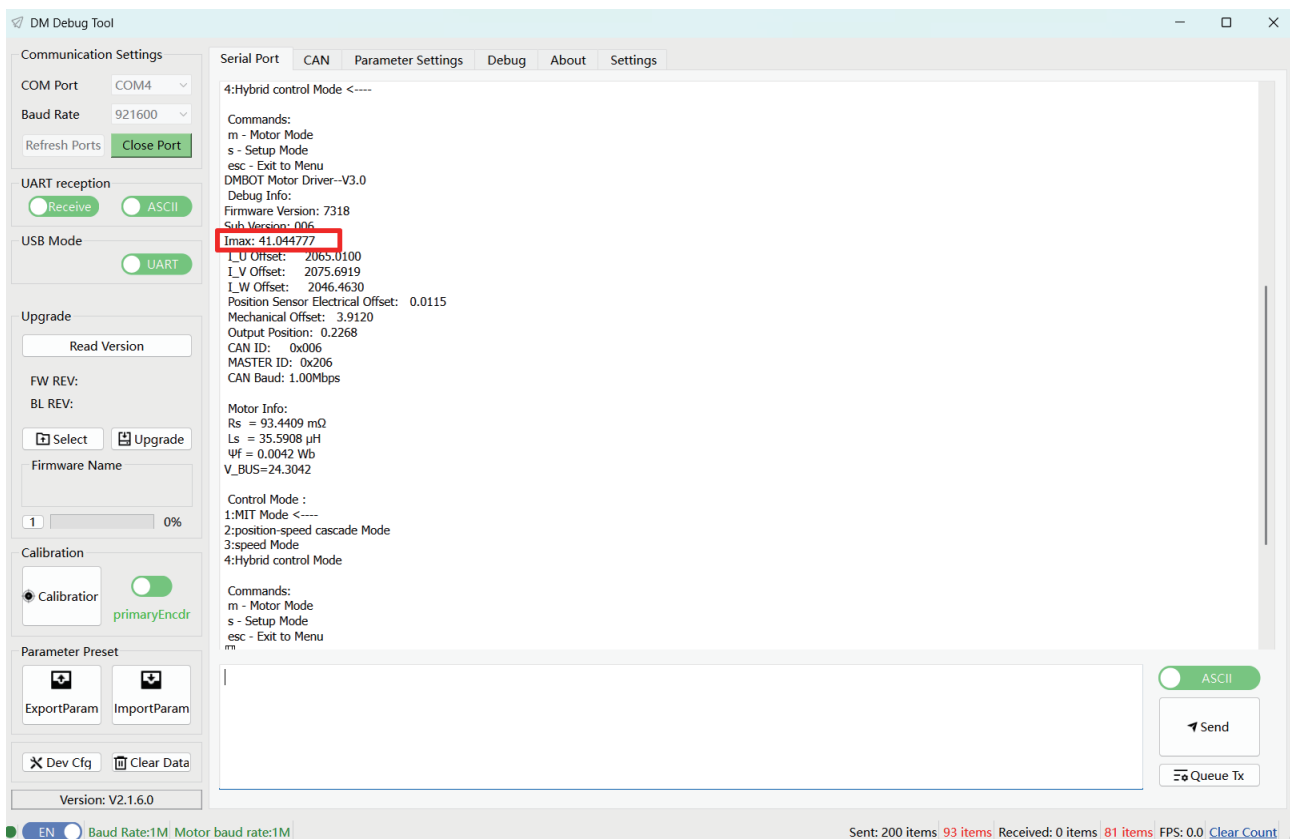

The maximum phase current percentage can be limited by setting a percentage in the configuration tool. The default value is 0.8 (i.e., 80% of the measurable maximum current). It is recommended that this value not exceed 98%.

◆ Maximum Rotational Speed

The maximum rotational speed is limited by multiple factors, including the power supply voltage (V_{BUS}), rotor flux linkage (ψ_f), and gear ratio (GR). An upper limit can typically be calculated using the following formula:

$$V_{MAX}(rad/s) = 0.57735 * \frac{V_{BUS}}{N_{pp} \times GR \times \psi_f} (rad/s)$$

where V_{BUS} is the supply voltage, N_{pp} is the number of pole pairs, and ψ_f is the rotor flux linkage.

◆ Torque Constant


The torque constant of the motor can be considered constant within its rated range. With a gearbox, it can be calculated using the following formula:

$$K_t = 1.5 * N_{pp} * \psi_f * GR * GREF$$

Where N_{pp} is the number of pole pairs, ψ_f is the rotor flux linkage, GR is the gear ratio, and GREF is the gearbox torque transmission coefficient.

Torque-Speed (T-N) Curve




The following curve shows the measured performance at 24 V and an ambient temperature of 25° C:

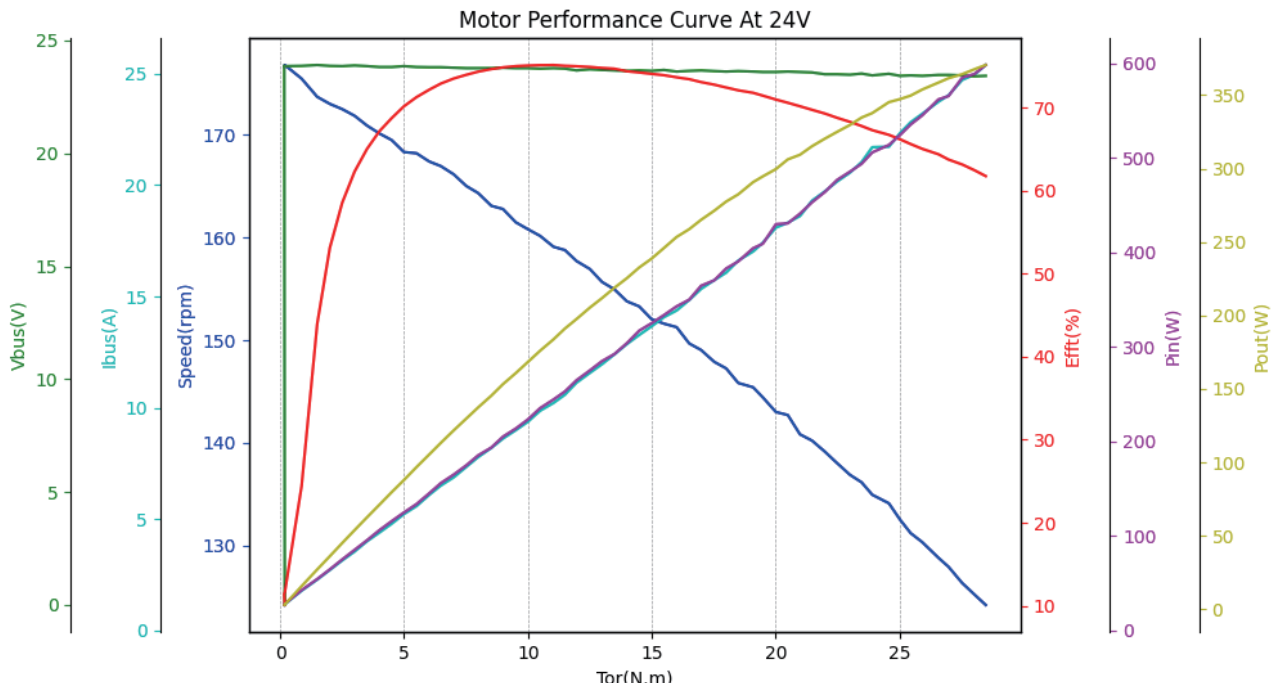

Packing List


1. Motor (with integrated driver) × 1
2. Power cable: XT30 male-to-female cable(200 mm) × 1
3. CAN interface: GH1.25 2-Pin Cable (300mm) × 1
4. Debug serial cable: GH1.25 3-pin cable (300mm) × 1

Interface & Pin Description

Interface / Pin No.	Interface Diagram (Pinout)	Instruction
Power Interface-1		Connect the power supply using the XT30 male-to-female cable. The rated voltage is 24 V (supports 24–48 V) .
CAN interface-2		Connect external controller via the CAN communication interface to receive CAN control commands and transmit motor status feedback.
Debug Serial Interface (Port 3)	 GND RX TX	Connect to a PC via the GH1.25 3-pin cable using a USB-to-CAN adapter (or USB-to-serial module) for parameters configuration and firmware upgrades.

Motor Dimensions and Mounting

Please install the motor onto the target equipment according to the motor mounting hole dimensions and layout.

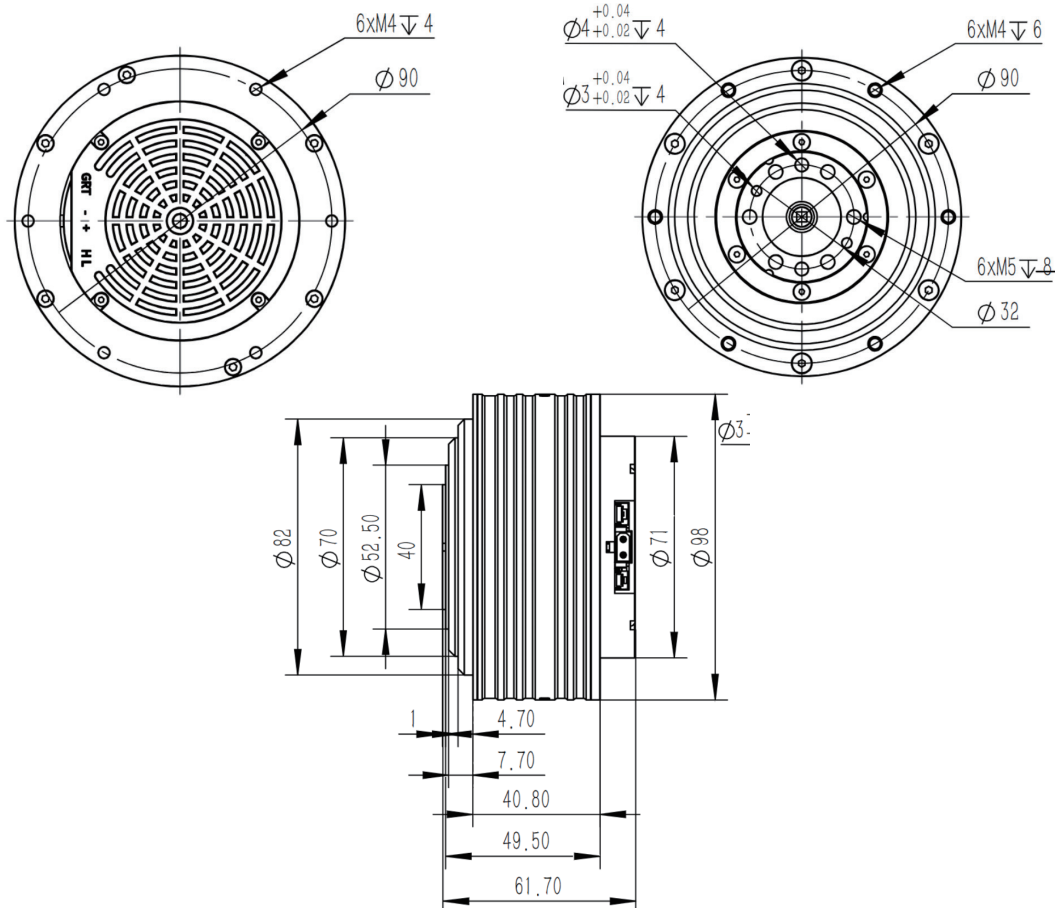

LED Status


Normal Status	Solid Green	Enable Mode (ERR = 1), normal operation
	Solid Red	Disable Mode (ERR = 0) (Default state after power-on)
Fault Status	Flashing Red	Fault codes and fault conditions: 3——Output shaft calibration error; 4——Sensor output error; 5——Motor encoder calibration error; 8——Over-voltage; 9——Under-voltage; A——Over-current; B——MOS over-temperature; C——Motor winding over-temperature; D——Communication loss; E——Overload; Fault conditions can be identified via the feedback frames or displayed in the the Damiao configuration software.

Operating Modes

◆ MIT Mode

The MIT mode is compatible with the standard MIT control method, enabling seamless switching while allowing flexible configuration of control limits (P_MAX, V_MAX, T_MAX).

CAN commands are converted into torque values. The torque is then used as the reference for current control. See block diagram below.

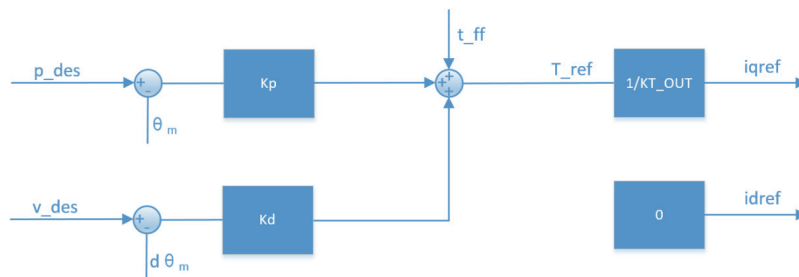


Based on the MIT model, various control strategies can be derived. For instance, when $k_p=0$ and $k_d \neq 0$, a constant rotational speed can be achieved by setting v_des . When $k_p=0$ and $k_d=0$, a torque output is applied directly by setting t_ff (feedforward torque).

Note: When controlling position, k_d must not be set to zero, as this may cause motor oscillation or even loss of control.

◆ Position-Velocity Mode

This mode uses three control loops: position, velocity, and current(torque). The position loop sets the target for the velocity loop. The velocity loop then sets the target for the current loop. See block diagram below.

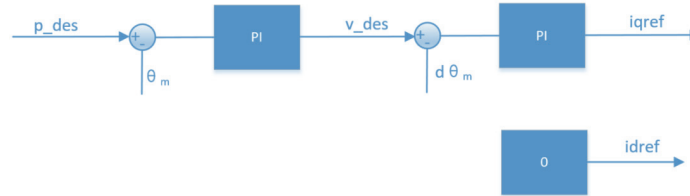

p_des represents the target position, while v_des limits the maximum absolute velocity during motion.


When tuned using recommended parameters from the configuration tool, this mode provides high accuracy and smooth motion, at the cost of slower response time.

In addition to v_des , acceleration and deceleration can also be configured. If additional oscillations occur, increasing acceleration/deceleration may help stabilize the system.

Note: The units of p_des and v_des are rad and rad/s respectively, and both are of type float. The damping factor must be set to a non-zero positive value. Refer to the notes for velocity mode.

◆ Velocity Mode


This mode keeps the motor running at the target velocity. See block diagram below.

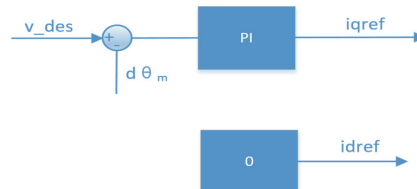

Note: The unit of v_des is rad/s, and its data type is float. To enable automatic parameter calculation via the configuration tool, the damping factor must be set to a non-zero positive value, typically between 2.0 and 10.0. An excessively low damping factor may cause velocity oscillations and significant overshoot, while an excessively high damping factor may increase the rise time. The recommended value is 4.0.

◆ Force-Position Hybrid Mode

The force-position hybrid control mode is based on position-velocity control, with additional torque adjustment. Allows control of both position and output torque at the same time. See block diagram below.

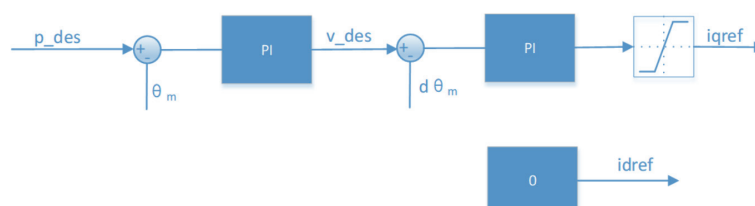

A current command saturation stage is added after the velocity loop output command. This limits the current loop reference within the specified range.

◆ Mode Switching

Mode switching can be configured via the host PC over a serial port. Simply select the desired mode and click "Write Parameters". Once applied, the motor will automatically reset, and the selected mode is stored in the motor driver. It will be retained after power cycling.

Alternatively, modification can be changed via the CAN interface by updating the mode register. For details, refer to the "Mode Switching" section in the next chapter.

When using the CAN method, the motor will not reset, but the following five variables will be cleared to zero:

- Position command value
- Velocity command value
- Torque command value (MIT mode)
- k_p (MIT mode)
- k_d (MIT mode)

Note: If the "Save Parameters" command is not issued, the mode will not be stored. It will be lost after power loss and will load the last saved mode upon power-up.

CAN Communication

After calibration, parameter identification, and parameter configuration are completed, the motor is ready for operation.

Control is performed using CAN standard frames (STD). The default baud rate is 1 Mbps, which can be modified via commands. Refer to the "CAN Baud Rate" section for details.

Frame Types:

CAN communication is divided into two types:

- Command Frames

Frames received by the driver, used to send control commands to the motor.

- Feedback Frames

Frames transmitted by the driver to the upper-level controller, containing motor status data.

Feedback Mechanism:

Feedback operates in a request-response manner. When the driver receives a CAN frame whose ID matches the configured motor CAN ID:

- ① The lower 8 bits are used for validation.
- ② The upper 3 bits are ignored.

Once a match is detected, the driver will transmit the current motor status to the CAN bus.

Frame Format:

The command frame format and frame ID vary depending on the selected control mode. The feedback frame format remains the same across all control modes.

◆ CAN Baud Rate Configuration

The CAN baud rate can be configured in two ways:

1. Configuration via Serial Interface

The baud rate can be set through the host PC software via the serial interface.

- ① Select the desired baud rate.
- ② Click "Write Parameters" to apply.

After the setting is successfully written:

- ① The motor will automatically reboot.
- ② The baud rate will be stored in the driver.
- ③ The setting will persist after power cycling.

2. Configuration via CAN Interface

The baud rate can also be modified via the CAN interface by writing to the corresponding baud rate register. See "CAN Baud Rate" in this chapter for details.

Note: When modifying the baud rate via CAN, the operation may fail if multiple devices are present on the bus.

Use this method with caution. It is strongly recommended to configure the baud rate before connecting multiple devices.

◆ Feedback Frames

The feedback frame ID is set via the configuration tool (Master ID), with a default value of 0. It primarily reports the motor position, velocity, and torque with the frame format defined as follows:

Feedback message	D[0]	D[1]	D[2]	D[3]	D[4]	D[5]	D[6]	D[7]
MST_ID	ID ERR<<4	POS[15:8]	POS[7:0]	VEL[11:4]	VEL[3:0] T[11:8]	T[7:0]	T_MOS	T_Rotor

- ID: Controller ID, using the lower 8 bits of CAN_ID
- ERR: Status code, with the following meanings
- 0—Disabled (Default state after power-on)
- 1—Enabled
- 8—Over-voltage
- 9—Under-voltage
- A—Over-current
- B—MOSFET over-temperature
- C—Motor coil over-temperature

- D——Communication Lost
- E——Overload
- POS: Motor position
- VEL: Motor velocity
- T: Motor torque
- T_MOS: Average MOSFET temperature on the driver (°C)
- T_Rotor: Average motor coil temperature (°C)

Position, velocity, and torque are converted from floating-point data to signed fixed-point data using a linear mapping:

① Position: 16-bit signed fixed-point representation.

② Velocity: 12-bit signed fixed-point representation.

③ Torque: 12-bit signed fixed-point representation.

See the figures below:






Fig. 1: Position linear mapping

Fig. 2: Velocity linear mapping

Fig. 3: Torque linear mapping

Notes:

- ① After power-on, the reported position is limited to the range $[-\pi, \pi]$ rad.
- ② The unit of position is rad (radians), representing the output shaft position (after gear reduction). All references to position below follow this definition.
- ③ The unit of velocity is rad/s, representing the output shaft velocity (after gear reduction). All references to velocity below follow this definition.
- ④ The unit of torque is Nm, representing the output shaft torque (after gear reduction). All references to torque below follow this definition.

◆ Control Frame in MIT Mode

Control Message	D[0]	D[1]	D[2]	D[3]	D[4]	D[5]	D[6]	D[7]
ID	p_des [15:8]	p_des [7:0]	v_des [11:4]	v_des[3:0] Kp[11:8]	Kp [7:0]	Kd [11:4]	Kd[3:0] t_ff[11:8]	t_ff [7:0]

- Frame ID: Equals the configured CAN ID
- P_des: Desired position

- V_des: Desired velocity
- Kp: Position proportional gain
- Kd: Position derivative gain
- T_ff: Feedforward torque

All parameter follows the mapping rules described in the previous section. The ranges for p_des, v_des, and t_ff can be configured via the configuration tool. Kp range: [0,500], Kd range: [0,5].

A standard CAN frame contains 8 bytes. In MIT mode, the control command packs Position, Velocity, Kp, Kd, and Torque into these 8 bytes:

- Position: 16 bits (2 bytes)
- Velocity: 12 bits
- Kp: 12 bits
- Kd: 12 bits

MIT commands are transmitted by linearly scaling floating-point values into integer representations. The driver converts the received integers back into floating-point values using the same scaling. Two conversion functions are used: float_to_uint, uint_to_float.

Conversion Method:

```
1. float uint_to_float(int x_int, float x_min, float x_max, int bits){
2.  /// converts unsigned int to float, given range and number of bits ///
3.  float span = x_max - x_min
4.  float offset = x_min
5.  return ((float)x_int)*span/((float)((1<bits)-1)) + offset
6. }
```

```
1. int float_to_uint(float x, float x_min, float x_max, int bits){
2.  /// Converts a float to an unsigned int, given range and number of bits ///
3.  float span = x_max - x_min
4.  float offset = x_min
5.  return (int) ((x-offset)*((float)((1<bits)-1))/span)
6. }
```

The conversion requires predefined minimum and maximum values for each variable, which can be configured on the parameter setting page. Default ranges: KP: 0.0 ~ 500.0, KD: 0.0 ~ 5.0.

Position, velocity, and torque are preset to ± 12.5 , ± 45 , and ± 54 . These values can be adjusted according to the motor specifications. When sending control commands, the scaling ranges must remain consistent with the configured values.

Otherwise, the commands will be scaled incorrectly.

◆ Control Frame in Position Velocity Mode

Control Message	D[0]	D[1]	D[2]	D[3]	D[4]	D[5]	D[6]	D[7]
0x100+ID	p_des				v_des			

- Frame ID :equals the configured CAN ID plus an offset of 0x100.
- P_des: Desired position, float type, little-endian (low byte first, high byte last).
- V_des: Desired velocity, float type, little-endian (low byte first, high byte last).

The CAN ID used to send commands here is 0x100 + ID. The velocity command defines the maximum allowable velocity during operation.

◆ Control Frame in Velocity Mode

Control Message	D[0]	D[1]	D[2]	D[3]
0x200+ID	v_des			

- Frame ID equals the configured CAN ID plus an offset of 0x200.
- V_des: Desired velocity, float type, little-endian (low byte first, high byte last).

The CAN ID used to send commands here is 0x200 + ID.

◆ Control Frame in Force-Position Hybrid Mode

Control Message	D[0]	D[1]	D[2]	D[3]	D[4]	D[5]	D[6]	D[7]
0x300+ID	p_des				v_des		i_des	

- P_des: Desired position, in radians, float type, little-endian (low byte first, high byte last).
- V_des: Velocity limit, in rad/s, scaled by 100, unsigned 16-bit, little-endian (low byte first, high byte last). Valid range: 0–10000. Values exceeding 10000 are capped at 10000, corresponding to an actual velocity limit range of 0~100 rad/s.
- I_des: Torque current limit (per-unit), scaled by 10000, unsigned 16-bit type, little-endian (low byte first, high byte last). Valid range: 0-10000. Values exceeding 10000 are capped at 10000, corresponding to an actual current limit amplitude of 0-1.0.
- Per-unit current: Actual current divided by the maximum phase current.

◆ Enable

After power-up self-test, an "Enable" command must be sent to allow motor control. The "Enable" frame is a control frame, with the frame ID as described above. The data payload is identical across all modes as follows:

D[0]	D[1]	D[2]	D[3]	D[4]	D[5]	D[6]	D[7]
0xFF							0xFC

◆ Disable

The default power-on state of the motor is "Disable." In this state, the three-phase terminal voltages are identical, each being a 50% modulation of the power supply voltage. The "Disable" frame is a control frame, with the frame ID as described above. The data payload is defined as follows:

D[0]	D[1]	D[2]	D[3]	D[4]	D[5]	D[6]	D[7]
0xFF							0xFD

◆ Set Zero Position

The "Set Zero Position" frame is a control frame. This command sets the current output shaft position as the zero reference and resets the position command value to 0. The frame ID follows the definition above, and the data payload is defined as follows:

D[0]	D[1]	D[2]	D[3]	D[4]	D[5]	D[6]	D[7]
0xFF							0xFE

◆ Clear Faults

When faults such as overheating, sending a "Clear" can be sent to reset the fault state. The "Clear" frame is a control frame. The frame ID follows the definition above, and the data payload is defined as follows:

D[0]	D[1]	D[2]	D[3]	D[4]	D[5]	D[6]	D[7]
0xFF							0xFB

◆ Read Parameters

Message ID	Attribute	D[0]	D[1]	D[2]	D[3]
0x7FF	STD	CANID_L	CANID_H	0x33	RID

RID represents the register address; refer to the "Register Map" section for details in this manual.

Upon successful read, the value of the register is returned. The frame format is as follows:

Message ID	Attribute	D[0]	D[1]	D[2]	D[3]	D[4]	D[5]	D[6]	D[7]
MST_ID	STD	CANID_L	CANID_H	0x33	RID	Data			

The data is either a floating-point value or an unsigned integer, occupying 32 bits (4 bytes) in total. The least significant bit is D4, and the most significant bit is D7. The same convention applies below.

◆ Write Parameters

Message ID	Attribute	D[0]	D[1]	D[2]	D[3]	D[4]	D[5]	D[6]	D[7]
0x7FF	STD	CANID_L	CANID_H	0x55	RID	Data			

RID is defined as above. Upon successful write, the written value is returned. The frame format is identical to the transmitted frame.

Message ID	Attribute	D[0]	D[1]	D[2]	D[3]	D[4]	D[5]	D[6]	D[7]
MST_ID	STD	CANID_L	CANID_H	0x55	RID	Data			

Writing register data takes effect immediately but are not stored; They will be lost upon power-off unless a "Save Parameters" command is issued to store them in internal memory.

◆ Save Parameters

Message ID	Attribute	D[0]	D[1]	D[2]	D[3]
0x7FF	STD	CANID_L	CANID_H	0xAA	0x01

Upon successful execution, the return frame format is:

Message ID	Attribute	D[0]	D[1]	D[2]	D[3]
MST_ID	STD	CANID_L	CANID_H	0xAA	0x01

【Note】 :

- ① The "Save Parameters" command is only effective in Disabled Mode.
- ② All parameters are stored simultaneously during this operation.
- ③ This operation writes parameters to the on-chip flash memory. The maximum execution time is 30ms; please allow sufficient time.
- ④ The flash memory supports approximately 10,000 erase/write cycles. Avoid frequent execution of the "Save Parameters" command.

◆ Mode Switching

Multiple control modes are supported and can be switched as follows:

Code/ID	Mode
1	MIT
2	Position -Velocity
3	Velocity
4	Force-Position Hybrid Control

The mode can be changed by modifying the mode register (0x0A). During switching, the motor resets all command values to zero, including position, velocity, and torque feed-forward, KP, and KD in MIT

mode.

When switching to a position control mode, to avoid impact, it is recommended to first read the precise position (value in register 0x50) and perform the switch when the motor is at zero speed whenever possible.

Mode changes are not saved to flash memory and will be lost after power-off. Upon restart, the motor loads the last mode stored in flash.

◆ CAN Baud Rate Configuration

By writing specific value to the baud rate register (address 0x23), the current CAN communication baud rate can be modified. Supported baud rates are listed below:

Code/ID	Baud Rate
0	125K
1	200K
2	250K
3	500K
4	1M
5	2M
6	2.5M
7	3.2M
8	4M
9	5M

Baud Rate Switching Behavior:

After a successful update, the driver first transmits feedback using the original baud rate and then switch to communication using the new baud rate.

Baud Rate Handling at Power-Up:

At power-up, the driver determines the communication mode based on the stored baud rate.

- If the stored baud rate exceeds 5Mbps, the baud rate is reset to 1Mbps by default.
- If the baud rate is greater than 1 Mbps (excluding 1 Mbps), the driver operates in CAN FD mode.
- If the baud rate is $\leq$ 1 Mbps, the driver operates in CAN 2.0B mode.

CAN FD Compatibility Note:

A motor configured in CAN FD mode can still receive CAN 2.0B data frames. However, feedback frames are transmitted using CAN FD. As a result, if the upper-level controller only supports CAN 2.0B, it will not receive feedback data, the driver may continuously report communication errors.

Recovery Note:

For controllers operating in CAN 2.0B mode, even if the CAN ID is incorrectly configured, the baud rate can still be restored by sending a baud rate configuration command.

◆ Register Map

Address (HEX)	Address (DEC)	Name	Description	Access	Range	Type
0x00	0	UV_Value	Undervoltage Threshold	RW	(10.0,fmax]	float
0x01	1	KT_Value	Torque Constant	RW	[0.0,fmax]	float
0x02	2	OT_Value	Over-temperature Threshold	RW	[80.0,200)	float
0x03	3	OC_Value	Overcurrent Threshold	RW	(0.0,1.0)	float
0x04	4	ACC	Acceleration	RW	(0.0,fmax)	float
0x05	5	DEC	Deceleration	RW	[-fmax,0.0)	float
0x06	6	MAX_SPD	Max Velocity	RW	(0.0,fmax]	float
0x07	7	MST_ID	Master ID	RW	[0,0x7FF]	uint32
0x08	8	ESC_ID	Command CAN ID	RW	[0,0x7FF]	uint32
0x09	9	TIMEOUT	Timeout Threshold	RW	[0,2 ³² -1]	uint32
0x0A	10	CTRL_MODE	Control Mode	RW	[0,4]	uint32
0x0B	11	Damp	Viscous Damping	RO	—	float
0x0C	12	Inertia	Rotor Inertia	RO	—	float
0x0D	13	hw_ver	Reserved	RO	—	uint32
0x0E	14	sw_ver	Firmware Version	RO	—	uint32
0x0F	15	SN	Reserved	RO	—	uint32
0x10	16	NPP	Number of Pole Pairs	RO	—	uint32
0x11	17	Rs	Phase Resistance	RO	—	float
0x12	18	Ls	Phase Inductance	RO	—	float
0x13	19	Flux	Flux Linkage	RO	—	float
0x14	20	Gr	Gear Reduction Ratio	RO	—	float
0x15	21	PMAX	Position Mapping Range	RW	(0.0,fmax]	float
0x16	22	VMAX	Velocity Mapping Range	RW	(0.0,fmax]	float
0x17	23	TMAX	Torque Mapping Range	RW	(0.0,fmax]	float

Address (HEX)	Address (DEC)	Name	Description	Access	Range	Type
0x18	24	I_BW	Current-loop Bandwidth	RW	[100.0,1.0e4]	float
0x19	25	KP_ASR	Velocity Loop Kp	RW	[0.0,fmax]	float
0x1A	26	KI_ASR	Velocity Loop Ki	RW	[0.0,fmax]	float
0x1B	27	KP_APR	Position Loop Kp	RW	[0.0,fmax]	float
0x1C	28	KI_APR	Position Loop Ki	RW	[0.0,fmax]	float
0x1D	29	OV_Value	Overvoltage Threshold	RW	TBD	float
0x1E	30	GRES	Gear Torque Efficiency	RW	(0.0,1.0]	float
0x1F	31	Deta	Velocity Loop Damping Coefficient	RW	[1.0,30.0]	float
0x20	32	V_BW	Velocity Loop Filter Bandwidth	RW	(0.0,500.0)	float
0x21	33	IQ_c1	Iq Gain	RW	[100.0, 1.0e4]	float
0x22	34	VL_c1	Velocity Loop Gain Factor	RW	(0.0,1.0e4]	float
0x23	35	can_br	CAN Baud Rate	RW	[0,9]	uint32
0x24	36	sub_ver	Sub-version	RO	—	uint32
0x32	50	u_off	U-phase offset	RO	—	float
0x33	51	v_off	V-phase offset	RO	—	float
0x34	52	k1	Compensation Coefficient 1	RO	—	float
0x35	53	k2	Compensation Coefficient 2	RO	—	float
0x36	54	m_off	Angle offset	RO	—	float
0x37	55	dir	Direction	RO	—	float
0x50	80	p_m	Motor Position	RO	—	float
0x51	81	xout	Output Shaft Position	RO	—	float

Notes:



- ① RW: Read/Write.
- ② RO: Read-Only.
- ③ Motor output shaft position is calculated from the rotor position, in radians (rad).
- ④ Output shaft position refers is measured directly by the output shaft encoder, in radians (rad).

Motor Debugging Procedure

Please use version the configuration software version V1.7.0.0 or above for debugging. This guide uses version V2.1.6.0 as an example.

The procedures shown are based on the 8009 model in the 80 series and apply to other motors in the same family.

Before use, first locate the Chinese-English switch button in the lower-left corner of the interface, as shown below:

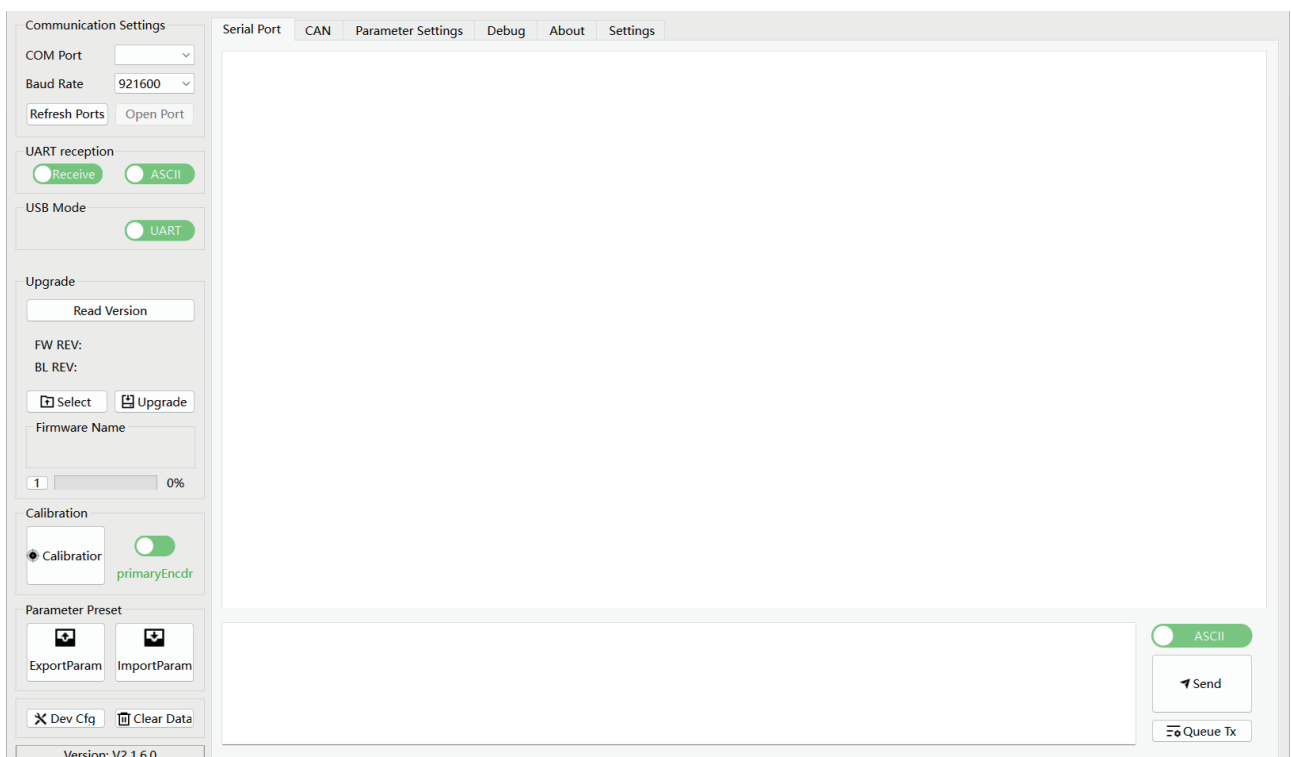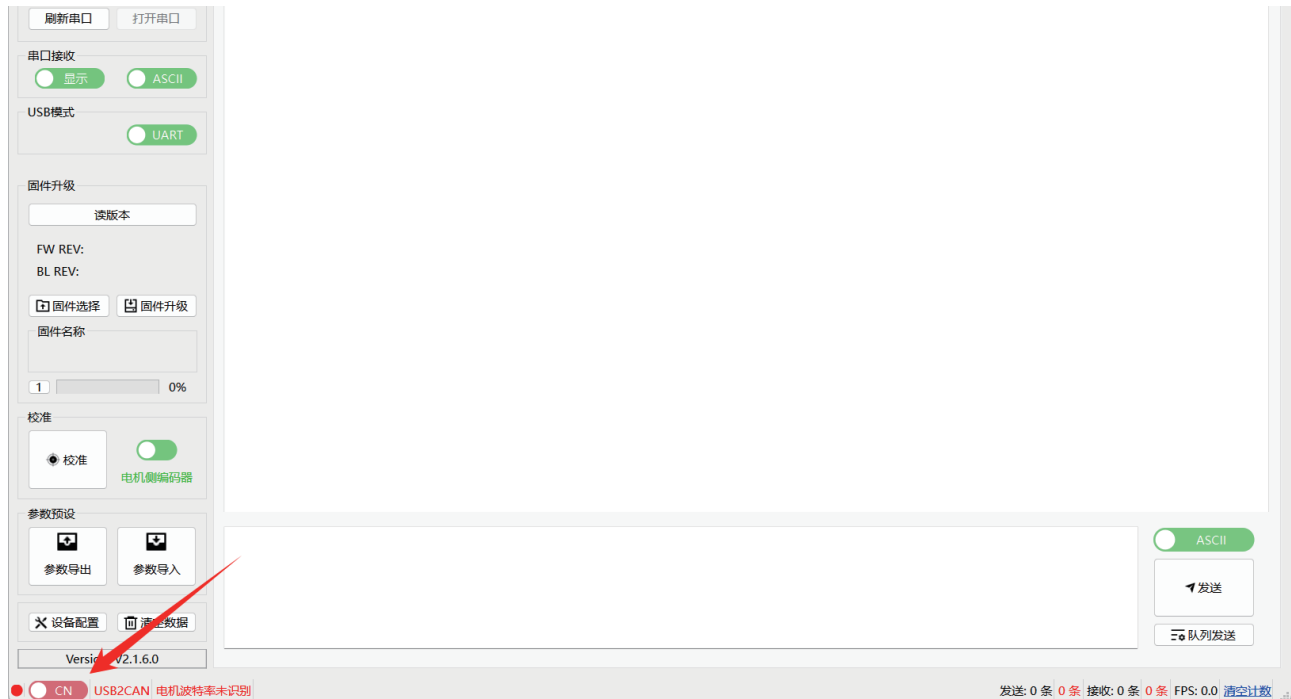


◆ Device Connection


Connect the following interfaces:

- UART interface
- CAN interface
- Power supply

Open the configuration software on the PC, select the correct serial port, and open the connection.

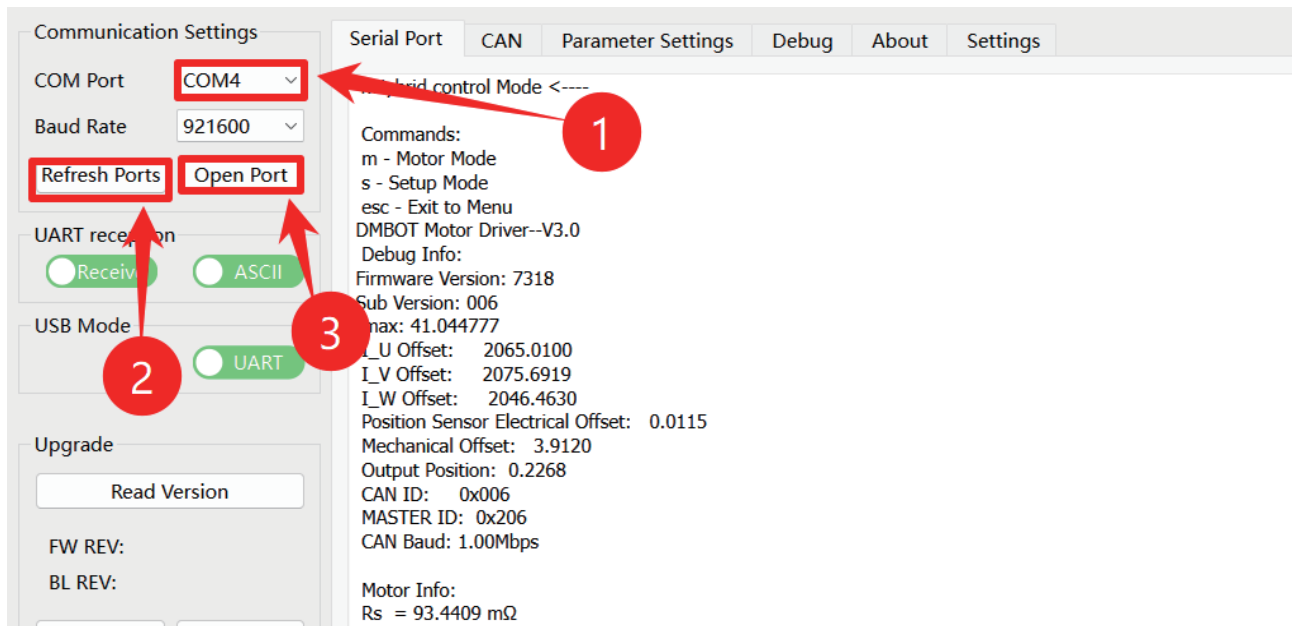

Once powered on, the motor will output status information via UART. "Control Mode" indicates the current control mode of the drive. Different modes use different command formats see CAN Communication).

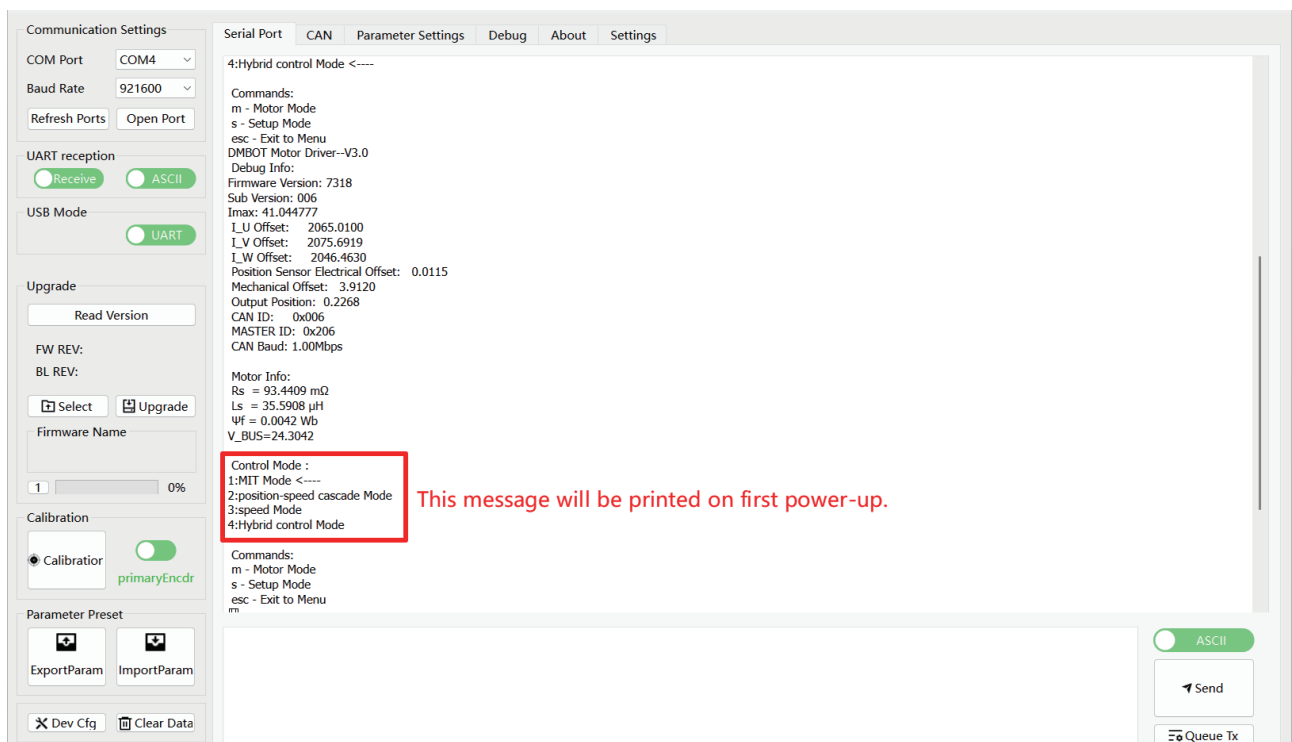

◆ Motor-side Encoder Calibration


Motor encoder calibration compensates for installation offsets.

During calibration, the motor will rotate forward and backward for one electrical cycle. Ensure the motor can rotate freely, preferably under no-load conditions, to prevent calibration failure. Motors are factory-calibrated. Recalibration is only required after hardware changes or abnormal behavior.

Procedure:

Step 1: Motor-side Encoder Calibration.

Click "Calibration" to start. The motor will rotate and report the number of pole pairs.

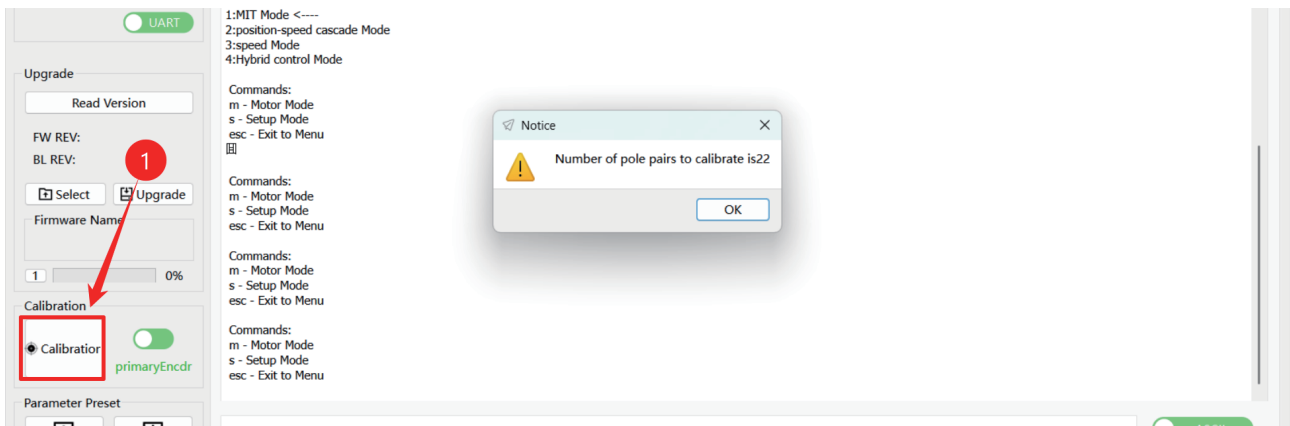


It will then automatically perform parameter identification, followed by encoder calibration.

During this process:

- The motor will move.
- Secure the motor to prevent movement .


A wave form will be displayed after calibration:

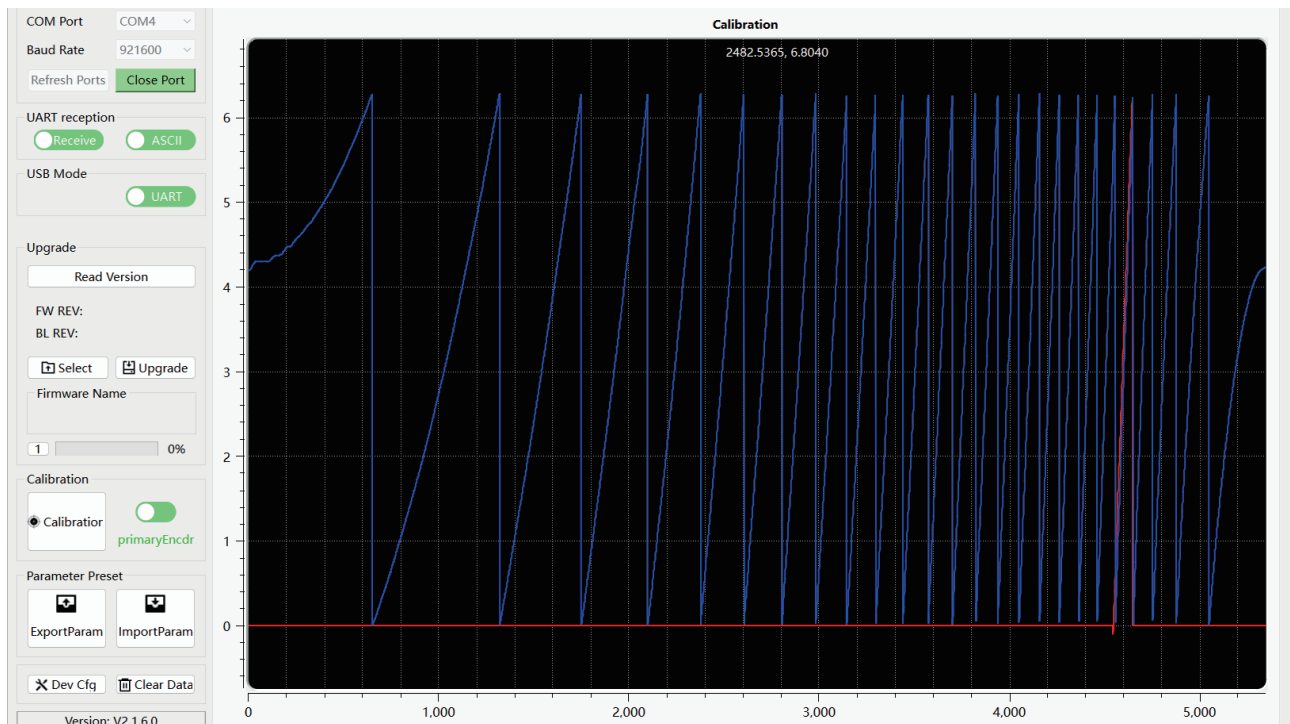

Validation guideline: The peak of the red curve should not significantly exceed the blue curve. If it does, calibration may fail, then please repeat the process.

Result Verification:

Step 2: Calibration data is uploaded automatically. An example is shown below:

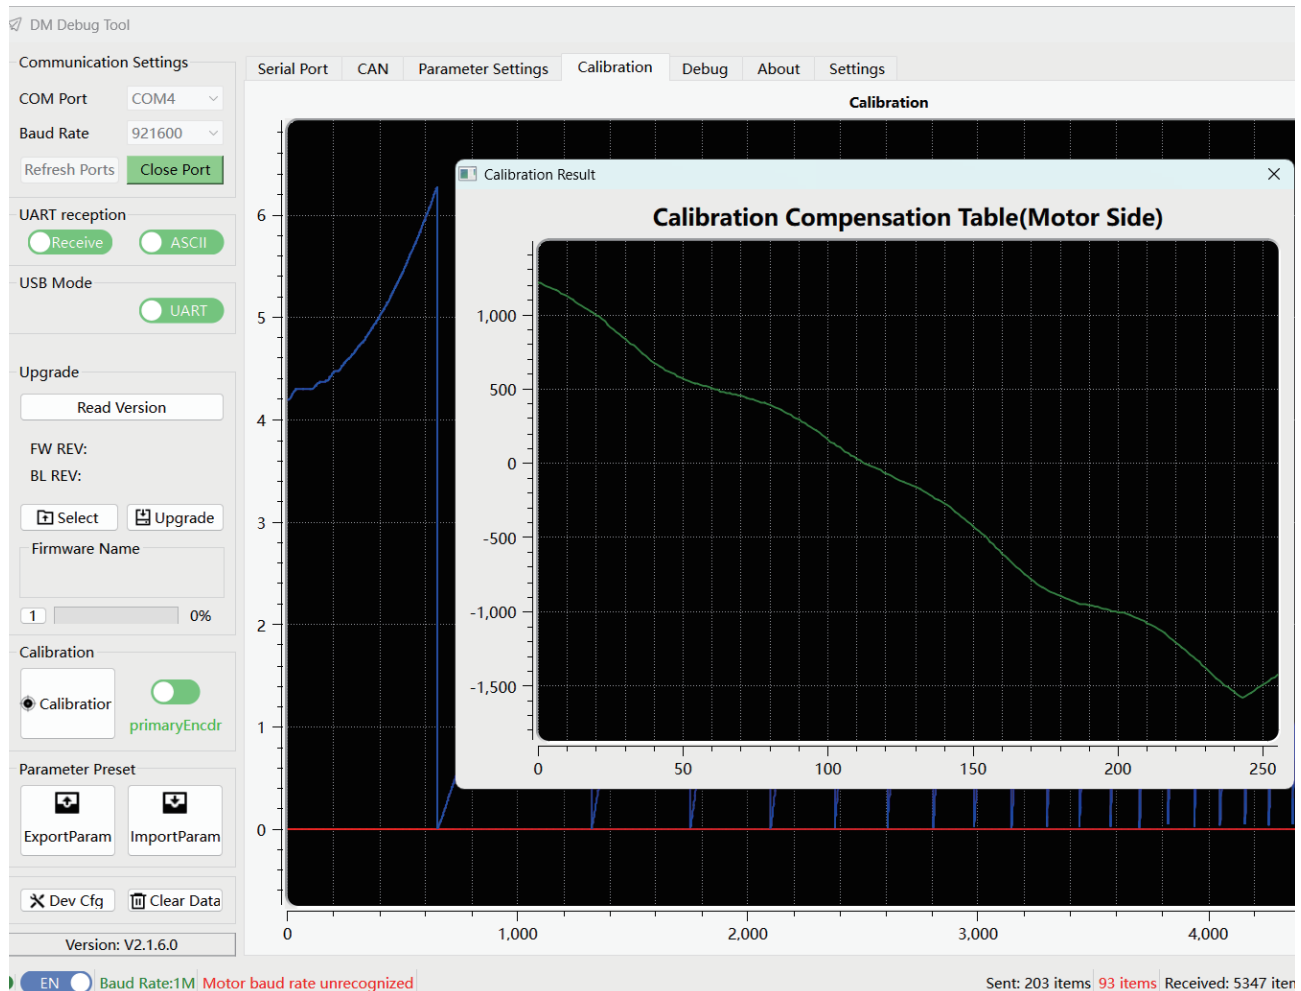

Step 3: Calibration Data Check and Storage.

Pay close attention to the value of Compensation Data. Recommended range: ± 300 .

Out-of-range values may indicate:

- Incorrect pole pair identification.
- Excessive mechanical resistance unstable rotation.
- Improper sensor installation.

Step 4: Troubleshooting

Check and resolve the issue based on the possible causes listed above.

◆ Parameter Identification

This process identifies key motor parameters:


- Phase resistance

- Phase inductance
- Flux linkage

These values are pre-calibrated at the factory and stored internally. It is ready for immediate use without requiring recalibration.

Procedure:

Go to Parameter Settings, click "Parameter Cali".The driver will initiate the identification process.

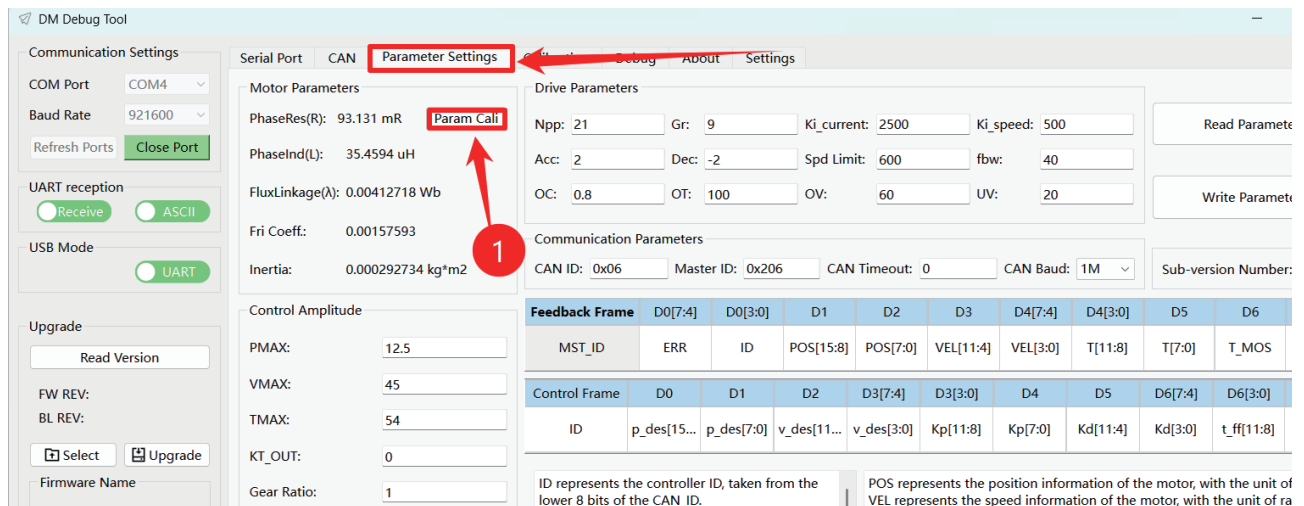

The motor will rotate during identification. Make sure no load is applied, and the motor is secured .

Results are uploaded automatically after completion.

Notes:

- ① Viscous coefficient is for reference only.
- ② Multiple runs may yield different results.
- ③ All parameters (except viscous coefficient) must be non-negative. If negative values occur, verify the motor status before proceeding with calibration.

◆ Output Shaft Encoder Calibration (Dual Encoder Motors)

Required for motors equipped with an output shaft encoder to enhance encoder accuracy.

Important Notes Before Calibration:

- During calibration, the motor will rotate forward one full revolution.
- Ensure the motor can rotate freely and operate under no load,otherwise, excessive calibration errors may occur.
- Motors are pre-calibrated at the factory, and the calibration data is stored in the motor. Under normal conditions, no additional calibration is required.

Output shaft encoder calibration should be performed if:

- The motor's driver board has been replaced.
- The output position has changed.
- Other abnormal conditions occur.

Performing calibration in these cases will ensure accurate motor operation. The following outlines the output shaft encoder calibration procedure.

Step 1: Output Shaft Encoder Calibration.

Click the slider next to the Calibration button until "Output Shaft Encoder" status is displayed, then click "Calibration".

The screenshot shows the software interface with the 'Calibration' tab selected. A red arrow points to the 'secondaryEncdr' slider, which is set to 1. The interface includes sections for Communication Settings, Motor Parameters, Drive Parameters, and Control Settings. A block diagram of the motor control system is also visible.

Motor Parameters:

- PhaseRes(R): 93.131 mR
- PhaseInd(L): 35.4594 uH
- FluxLinkage(λ): 0.00412718 Wb
- Fri Coeff: 0.00157593
- Inertia: 0.000292734 kg*m²

Drive Parameters:

- Npp: 21
- Gr: 9
- Ki_current: 2500
- Ki_speed: 500
- Acc: 2
- Dec: -2
- Spd Limit: 600
- fbw: 40
- OC: 0.8
- OT: 100
- OV: 60
- UV: 20

Communication Parameters:

- CAN ID: 0x06
- Master ID: 0x206
- CAN Timeout: 0
- CAN Baud: 1M
- Sub-version Number: 6

Feedback Frame:

MST_ID	ERR	ID	POS[15:8]	POS[7:0]	VEL[11:4]	VEL[3:0]	T[11:8]	T[7:0]	T_MOS	T_Rotor
D0[7:4]	D0[3:0]	D1	D2	D3	D4[7:4]	D4[3:0]	D5	D6	D7	

Control Frame:

ID	p_des[15:...	p_des[7:0]	v_des[11:...	v_des[3:0]	Kp[11:8]	Kp[7:0]	Kd[11:4]	Kd[3:0]	t_ff[11:8]	t_ff[7:0]
D0	D1	D2	D3[7:4]	D3[3:0]	D4	D5	D6[7:4]	D6[3:0]	D7	

Control Settings:

- Control Mode: 1: MIT Mode
- Current BW: 1000
- Speed KP: 0.015
- Speed KI: 0.002
- Position KP: 54
- Position KI: 0

Block Diagram:


```

graph LR
    p_des --> Sum1((+))
    v_des --> Sum2((+))
    Sum1 --> Kp[Kp]
    Sum2 --> Ki[Ki]
    Kp --> Sum3((+))
    Ki --> Sum3
    Sum3 --> T_ref[T_ref]
    T_ref --> Iqref[Iqref]
    Iqref --> Idref[Idref]
    Idref --> 0[0]
  
```


Legend:

- ID represents the controller ID, taken from the lower 8 bits of the CAN ID.
- ERR indicates the status, corresponding to the status types:
 - 0 - Disabled; 1 - Enabled;
 - 2 - Motor side not recognized;
 - 3 - Output shaft not recognized;
- POS represents the position information of the motor, with the unit of rad
- VEL represents the speed information of the motor, with the unit of rad/s
- T represents the torque information of the motor, with the unit of N-m
- T_MOS represents the average temperature of the MOS on the driver, with the unit of °C
- T_Rotor represents the average temperature of the internal windings of the motor, with the unit of °C

The motor begins rotating one full revolution and uploads the raw encoder data waveform, as shown below:

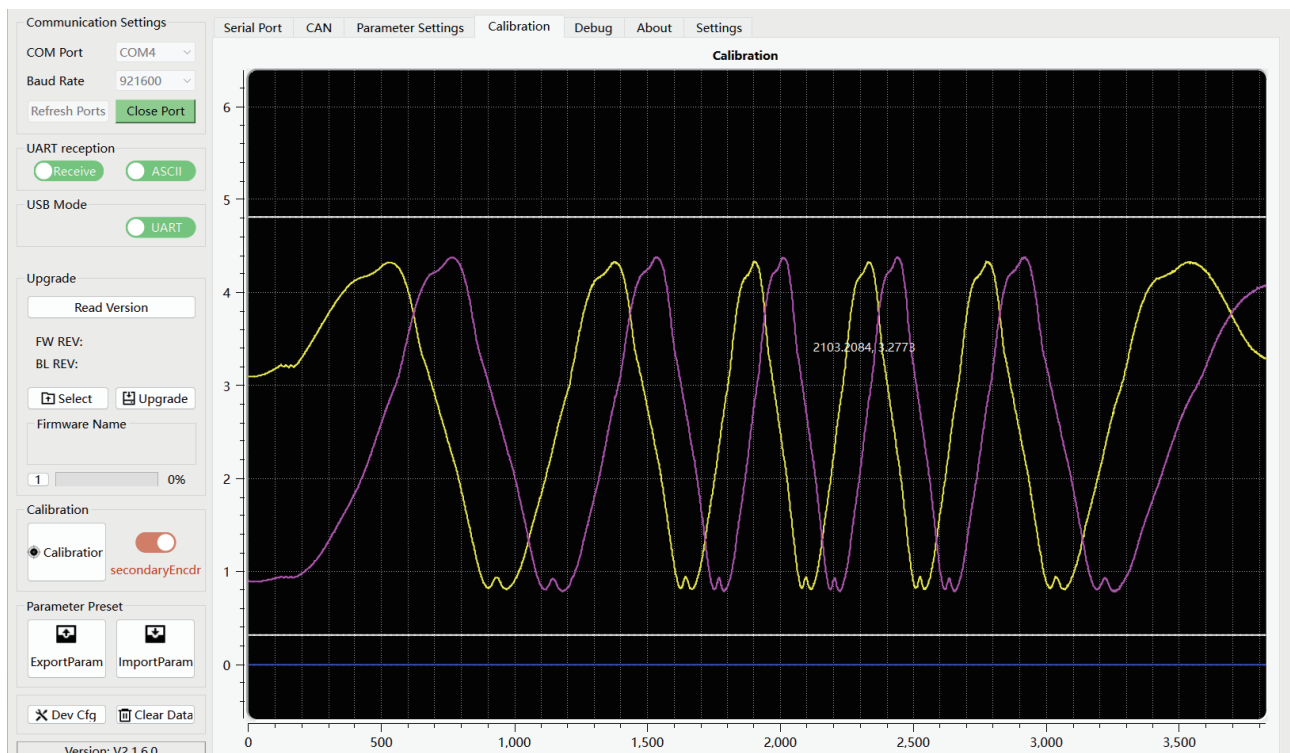

Step 2: Calibration results are uploaded automatically:

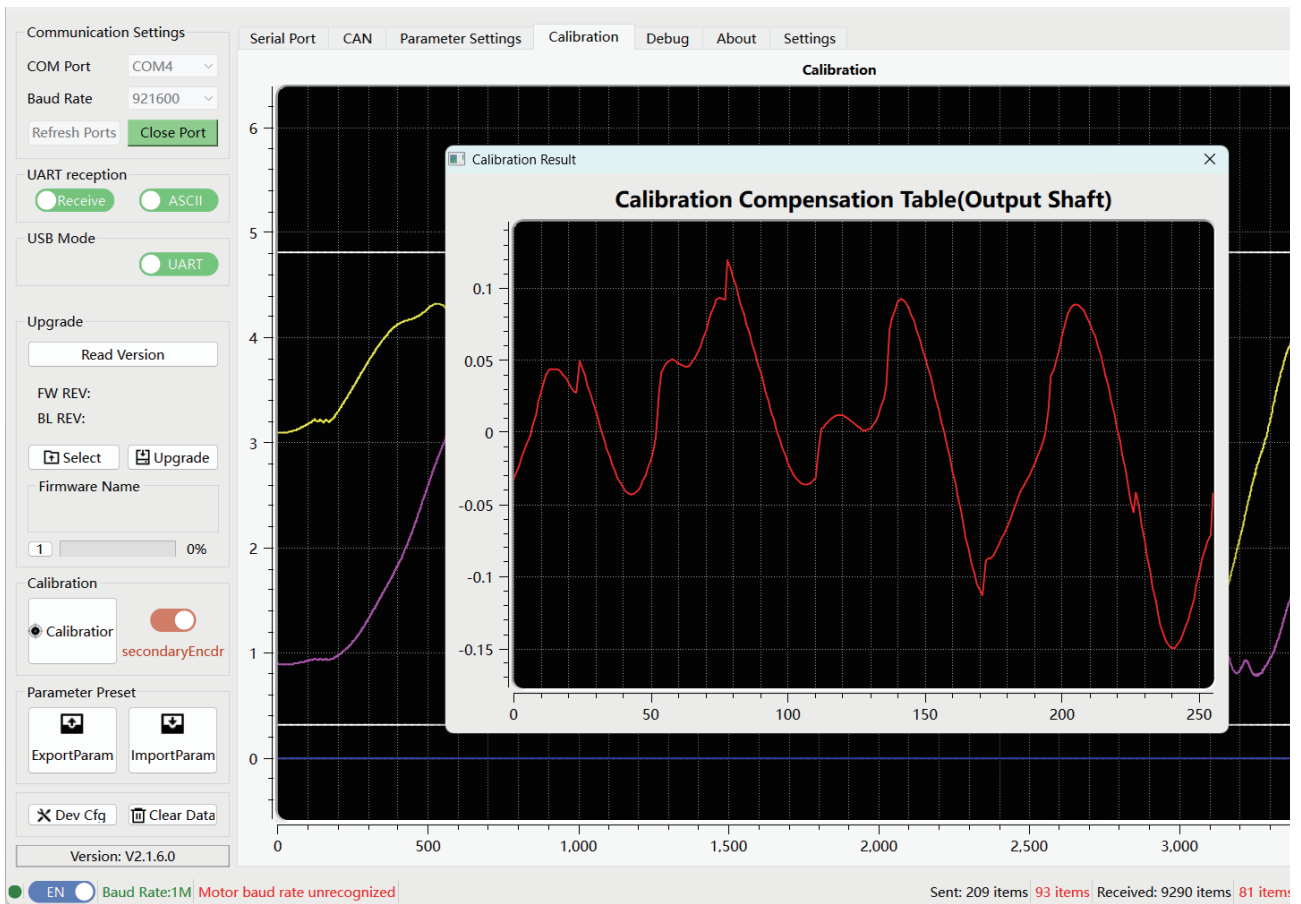

Step 3: Calibration Data Verification.

The driver performs internal validation:


- If deviation is excessive, please see Error Code 3.
- Red LED will flash.


This typically indicates an encoder issue. Contact after-sales support for resolution.

◆ Parameter Management

1. Read parameters

Go to "Parameter Settings" tab, click "Read Parameters". The drive will upload all stored parameters. Please carefully check the parameters.

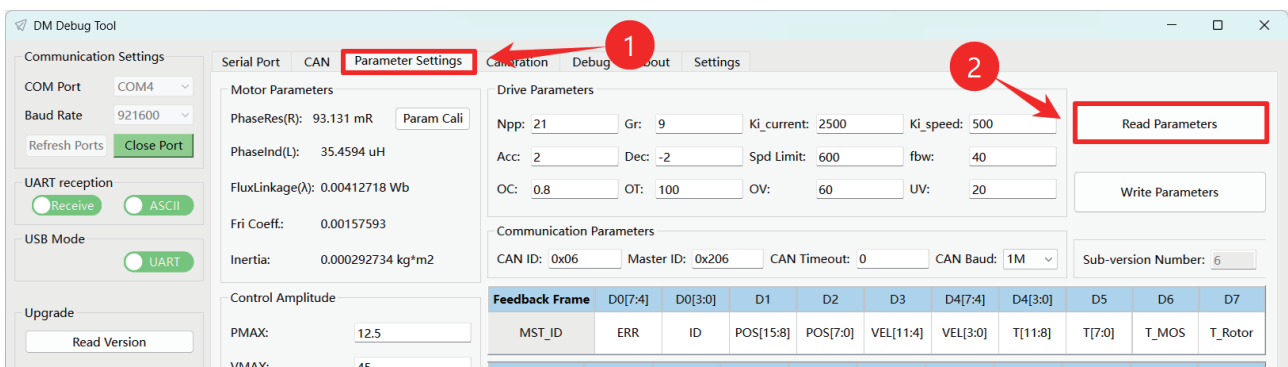

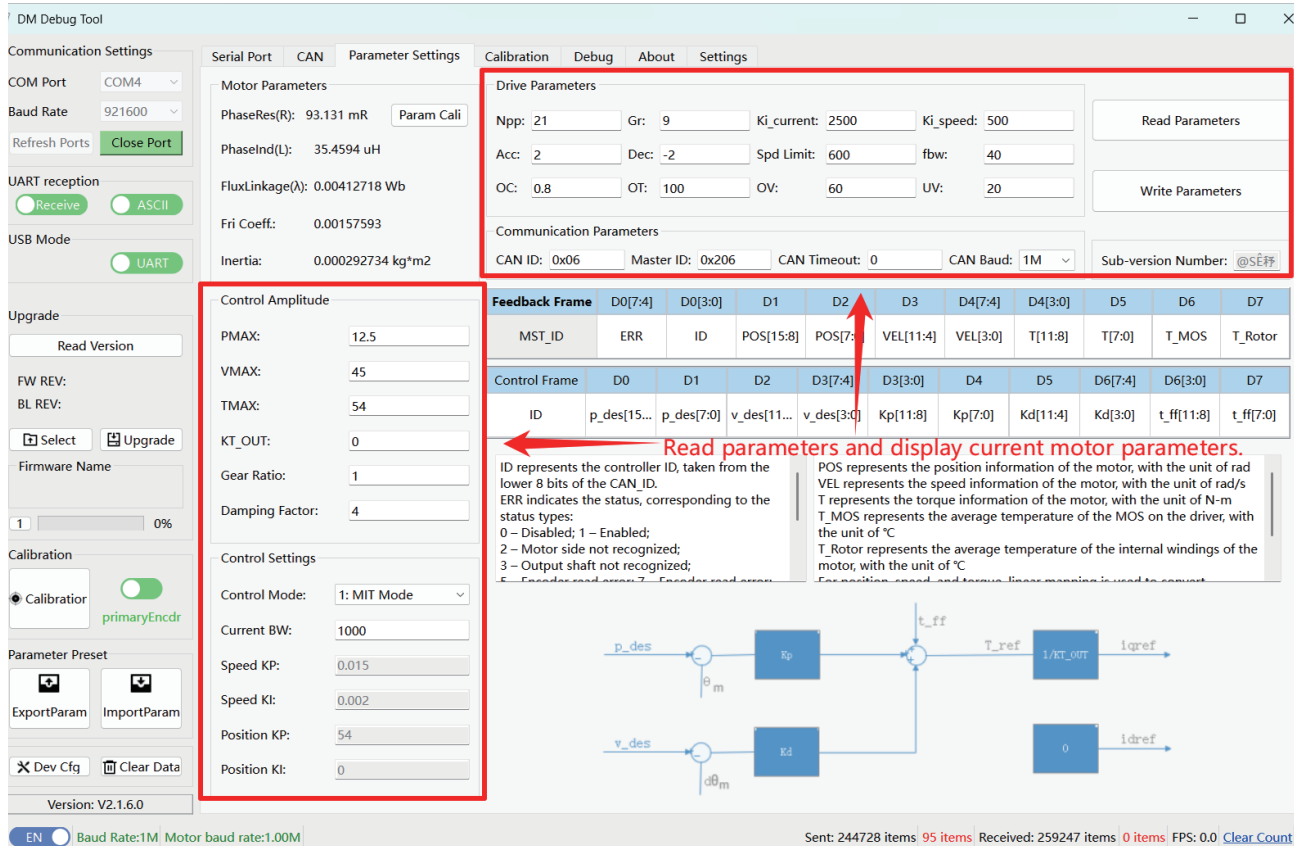

Parameter Categories:

(1) Drive Parameters: Settings for the driver

- Pole Pairs

Auto-detected. Do not modify.

- Undervoltage Threshold

Default: 20 V

If the supply voltage falls below this set value, the driver will disable motor control to prevent unstable operation.

- Overvoltage Threshold

Defines the upper limit of the supply voltage.

If exceeded, the driver will report a fault and exit the enabled state.

If overvoltage is detected at power-up, the fault will persist.

- Acceleration/Deceleration

Limits the rate of change of motor velocity in non-MIT modes.

Unit: Krad/s^2 .

Deceleration is represented as a negative value.

- Reduction Ratio

Defines the mechanical transmission ratio.

Affects output velocity, position scaling, and torque feedback.

This parameter is preconfigured. Do not modify.

- **Overtemperature Threshold**

Temperature protection threshold for motor windings.

Recommended $\leq 100^{\circ}\text{C}$.

When exceeded, the driver will disable output and report a fault.

- **CAN_ID:**

Identifier used for command frames (hexadecimal format).

Must be unique on the CAN bus.

Recommended value: < 16 to avoid conflict with system-reserved IDs.

- **Master ID**

Feedback CAN ID used for feedback frames transmitted by the driver, hexadecimal;

- **CAN Timeout:**

Defines the communication timeout period.

If no valid CAN command is received within the specified time, the driver will trigger motor protection.

Time base: $50\text{ }\mu\text{s}$ per count.

Only effective when the motor is enabled.

- **Velocity Limit:**

Used only in velocity mode to prevent overspeed of the motor rotor (before deceleration). Unit: rad/s.

- **Current Limit**

Limits the maximum phase current as a percentage of rated current. Used for torque protection and safe operation.

- **CAN Baud Rate**

Configures the communication data rate (bps) of the CAN bus, supporting 125Kbps-5Mbps.

- **Ki_current (Current Loop Gain)**

Auxiliary parameter for current loop control.

Typically pre-tuned and not recommended for manual adjustment.

- **fbw (Velocity Loop Filter Bandwidth)**

Defines the bandwidth of the velocity signal filter.

Unit: Hz.

- **Minor Version**

Firmware minor version number.

- **Ki_speed (Velocity Loop Gain)**

Auxiliary gain for velocity loop control. Recommended adjustable range: 200-800.

Note: After a successful parameter read, the values in the debugging interface will be updated automatically(e.g., PMAX, ID).

(2) Motor Parameters

Motor parameters are automatically identified during calibration and stored in the driver(Recalibration is required when replacing the driver board).

(3) Control Limits: These parameters define the valid range for command input and feedback scaling.

- **PMAX / VMAX / TMAX**

Define the mapping range for position, velocity, and torque.

In MIT mode:

Used to scale incoming command values.

In other modes:

Used to scale feedback data.

Refer to the "CAN Communication" section for mapping rules.

- **KT_OUT**

Motor torque constant. Set to 0 when motor parameter identification is accurate.

- **Torque Ratio**

Defines the torque transmission efficiency of the gearbox.

Value range: (0, 1].

- **Damping factor**

Ratio of current loop bandwidth to velocity loop bandwidth ratio, Currently not used.

(4) Control settings

- **Control Mode**

The driver supports the following modes:

MIT Mode, Position-Velocity Mode, Velocity Mode, Force-Position Hybrid Mode.

- **Current Bandwidth**

Defines the response speed of the current control loop, default 1000.

- **Velocity Loop Gains (KP / KI)**

Control parameters for velocity regulation.


- **Position Loop Gains (KP / KI)**

Control parameters for position tracking.

2. Write parameters

Verify parameters such as drive parameters, control amplitude, and control settings. Modify parameters as required, then click "Write Parameters" to save them to the driver.

After writing: the driver will automatically reboot, updated parameters take effect immediately.

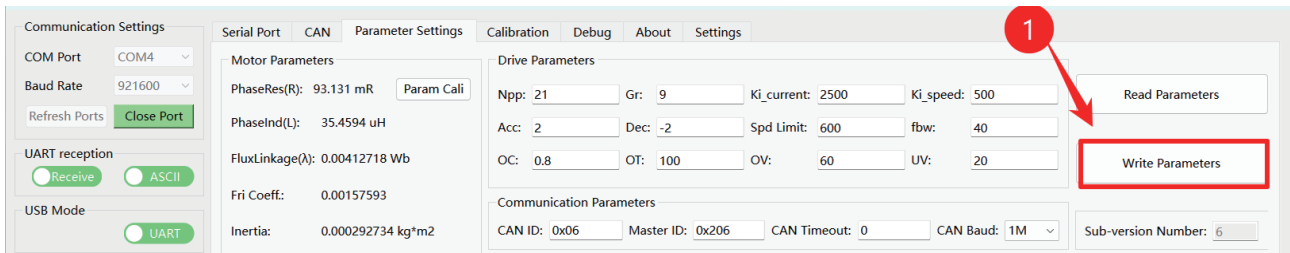

[Notes]:

- ① The motor must be in disabled state before writing parameters.
- ② No manual power cycle is required.
- ③ Writing parameters during operation may cause unexpected behavior.

◆ Debugging via CAN

Debugging is available only when the CAN interface is connected.

- Only one motor can be debugged at a time.
- Ensure correct CAN wiring before operation.


Before Starting:

- Verify wiring connections.
- Confirm the active control mode.
- Ensure CAN IDs are correctly configured.

1. Control Mode Selection and Verification


Control Mode Selection:

Go to "Parameter Settings", click "Control Mode" and select one of the following: MIT Mode, Position-velocity Mode, velocity Mode, or Force-Position Hybrid Mode.

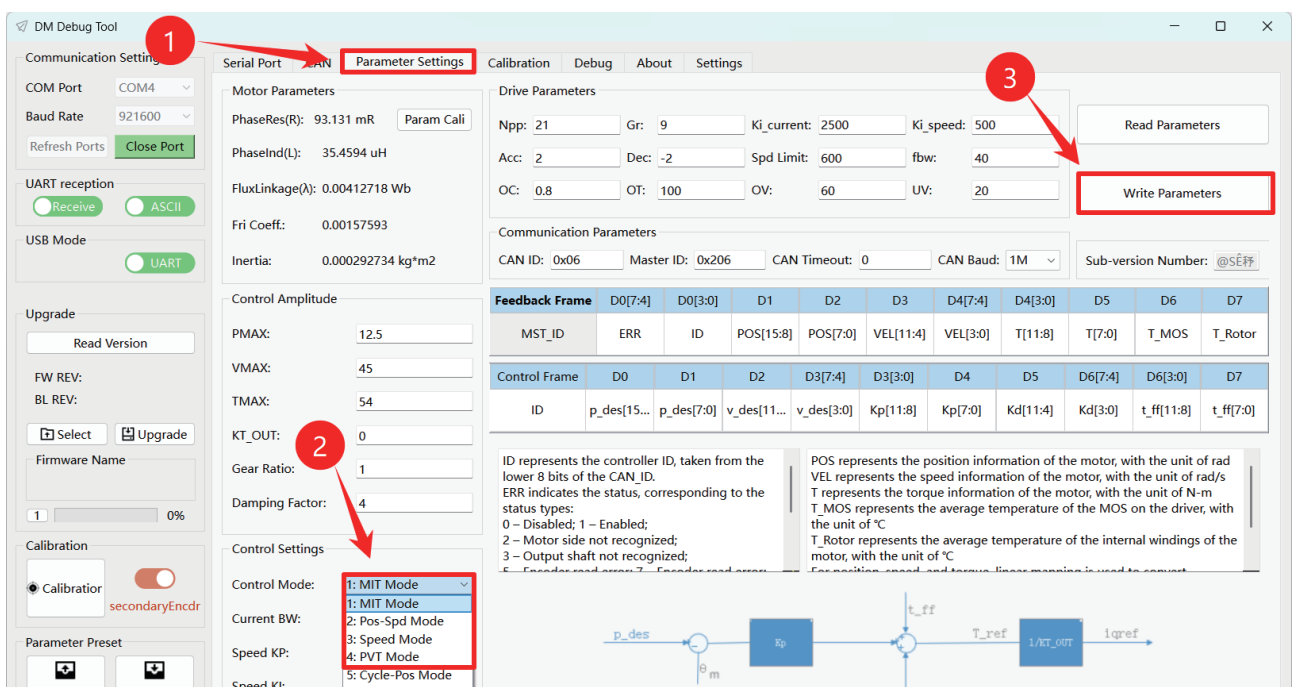


Click "Write Parameters" to apply the selected control mode. A confirmation message "Parameter write successful!" will appear.

Note: After writing, the driver will reboot automatically, and the selected mode becomes active.

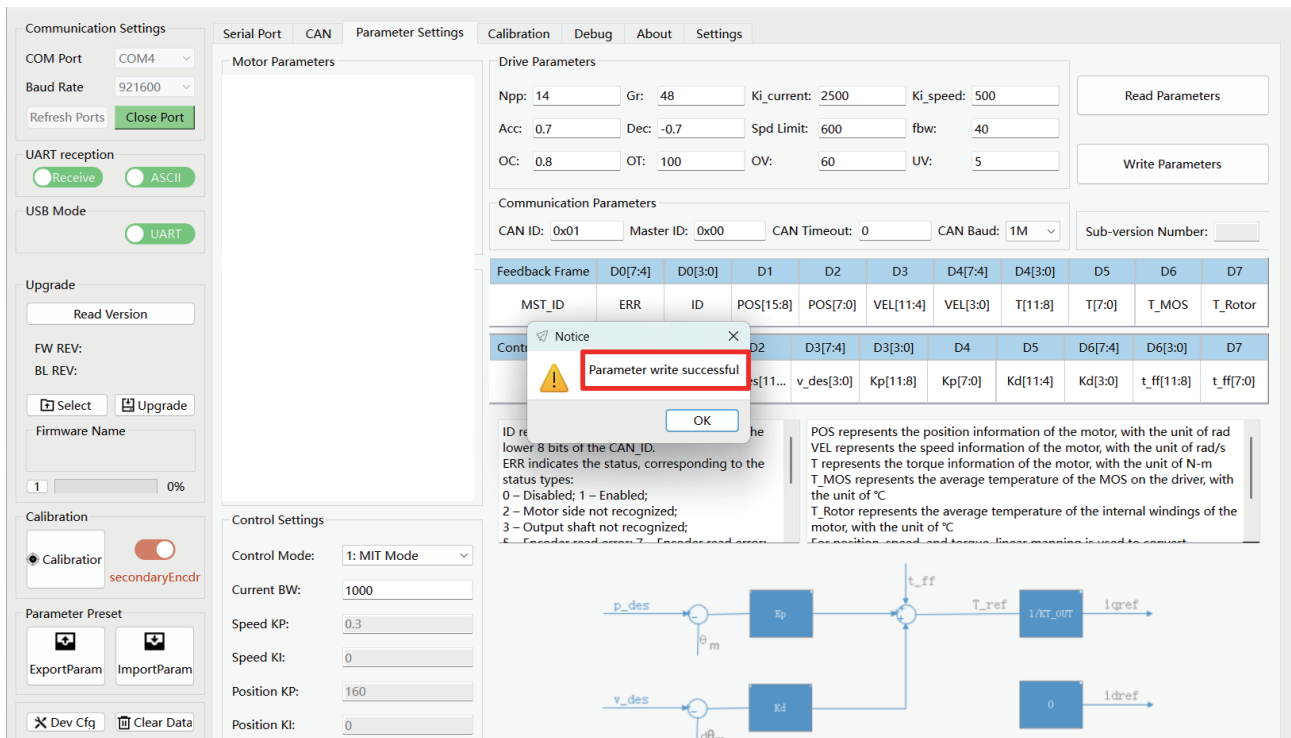


Control Mode Verification:

Option 1: Check the serial output at power-on. The mode indicated by the arrow is the currently active control mode.

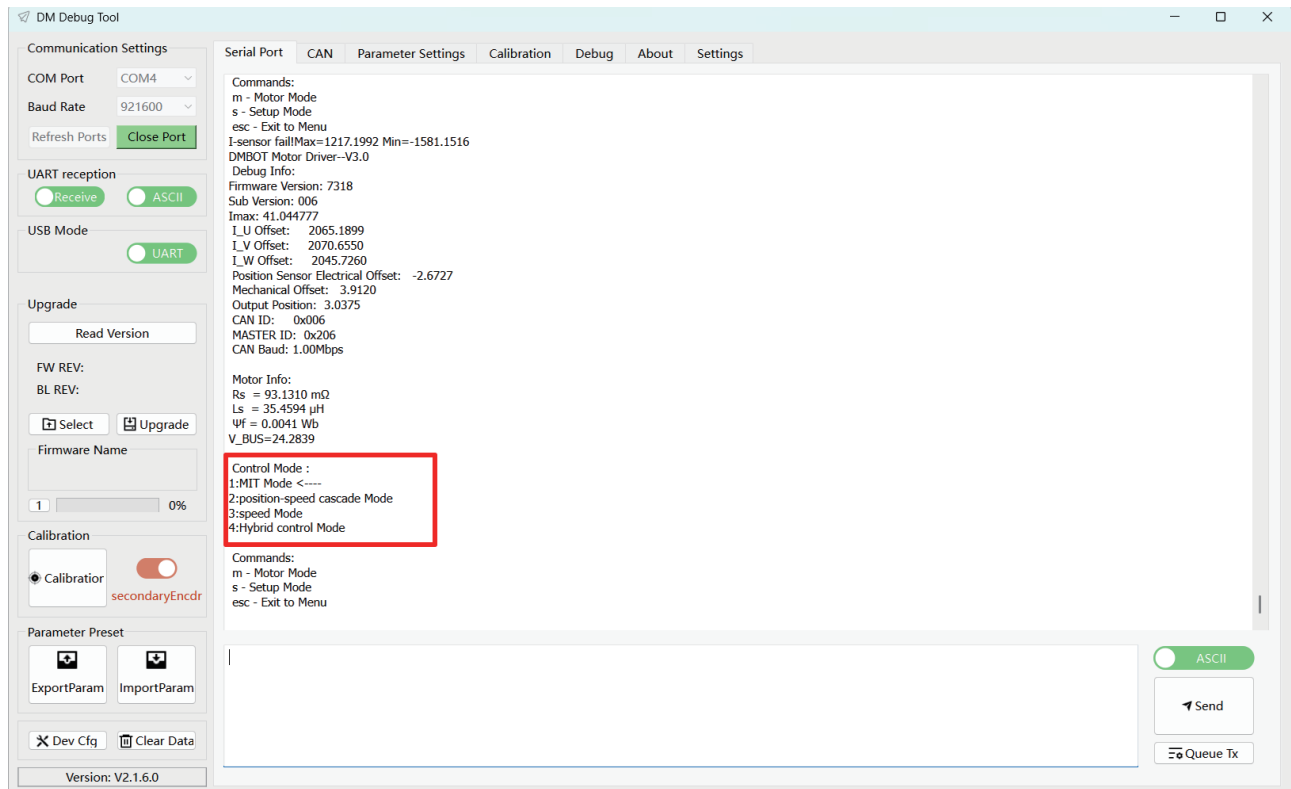


Option 2: Refresh the parameter page and read the displayed information to verify the control mode.

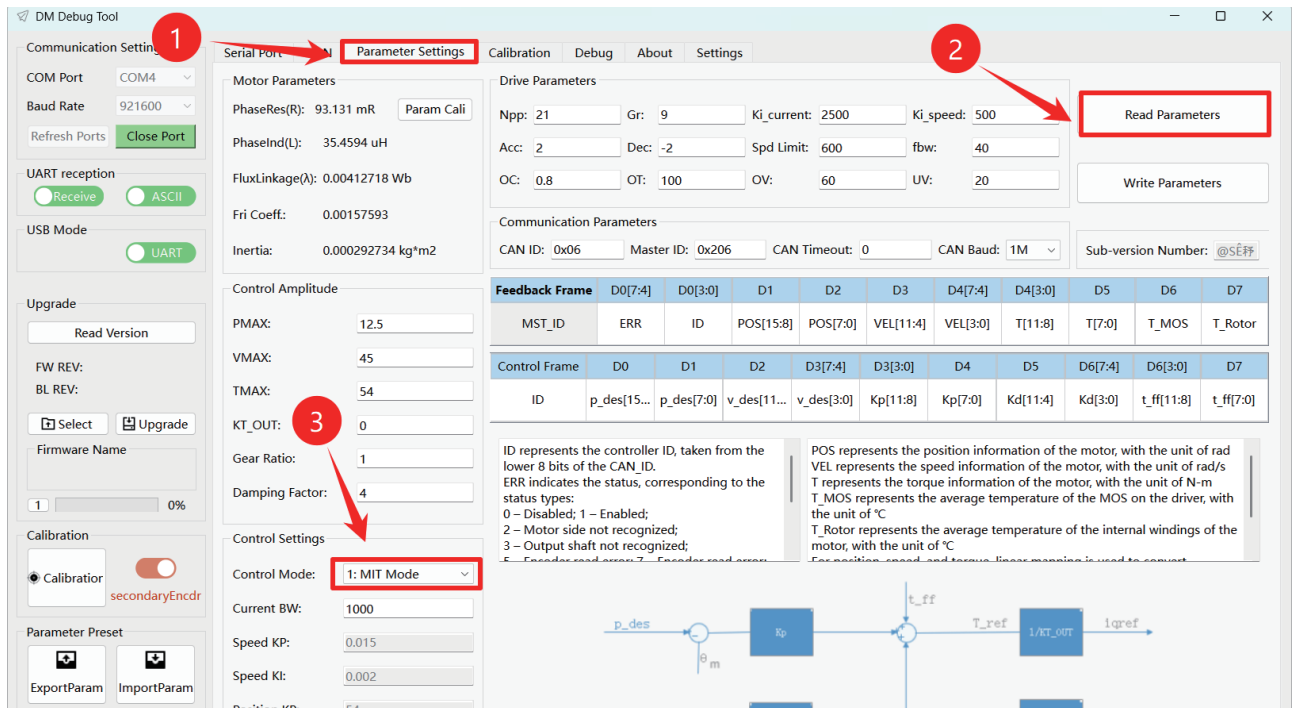


2. MIT Mode

(1) Mode Selection: In the debugging page, select MIT mode as described in Control Mode Selection & Verification. Confirm the current control mode and open the corresponding MIT tab.

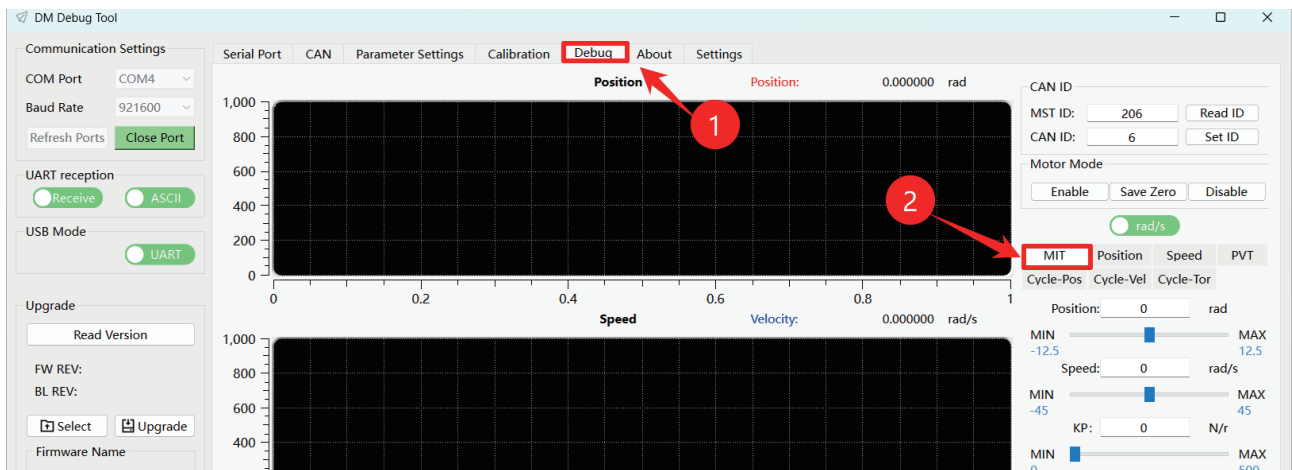


(2) CAN ID: Ensure the CAN ID is correct (obtainable via serial port printouts, parameter settings page, or read/set buttons in the debugging interface).

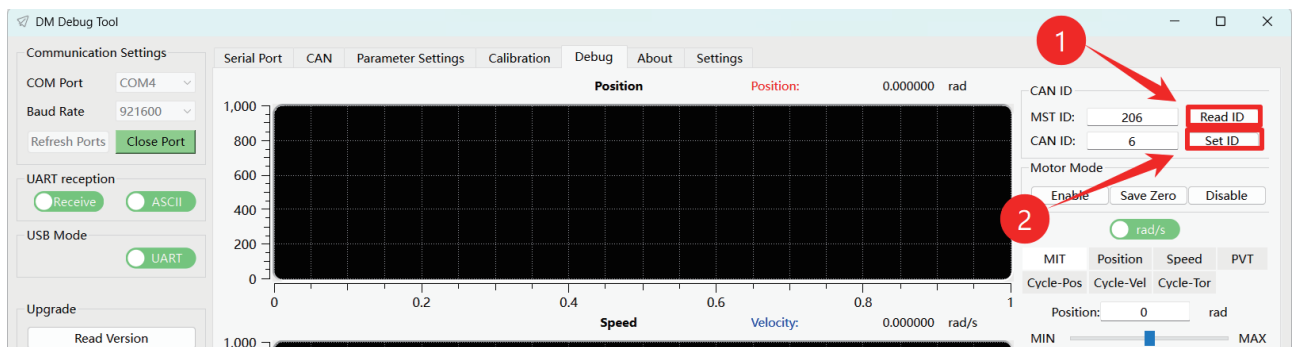

(3) Control Options: The MIT model supports three control methods: velocity, position, and torque.

① Velocity Control

Step 1: Click "Enable" in the Motor Mode section. The driver's green LED will light (motor enabled).

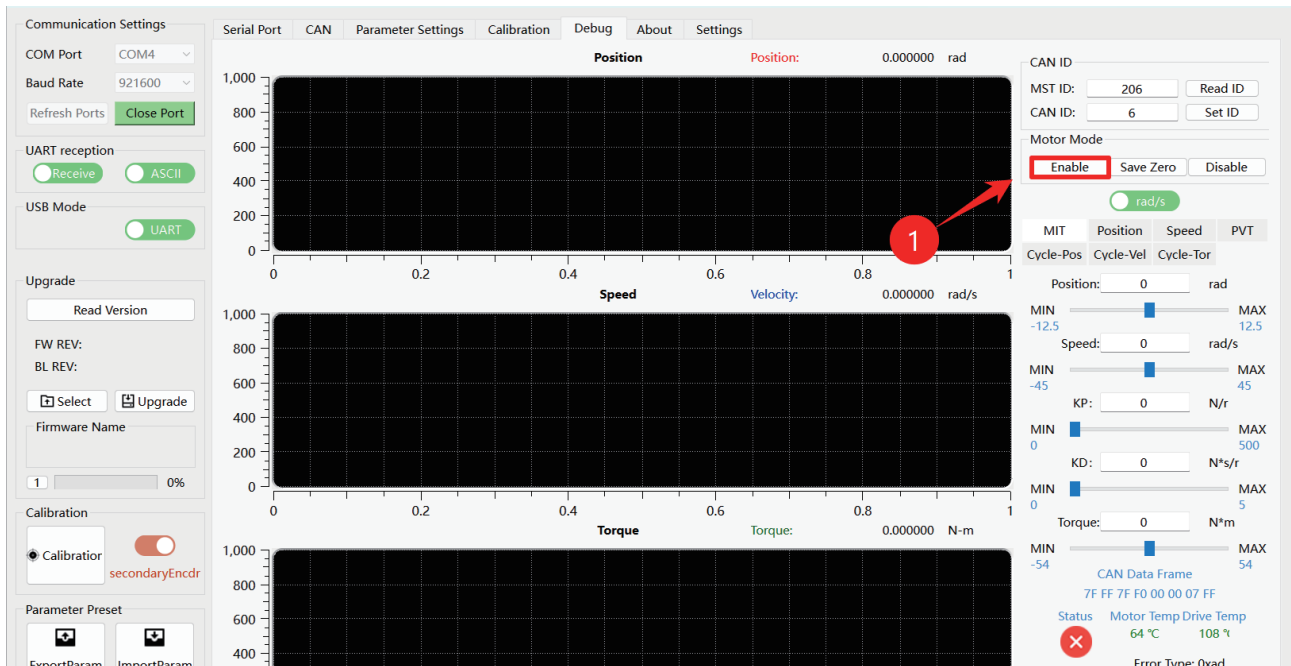


Step 2: Set the target velocity.

Example: Velocity = 5 rad/s, KD = 3 N*s/r, other gains = 0.

Enable "Timed" for periodic send, then click "Update" and "Send".


Monitor parameter curves in the debugging interface.



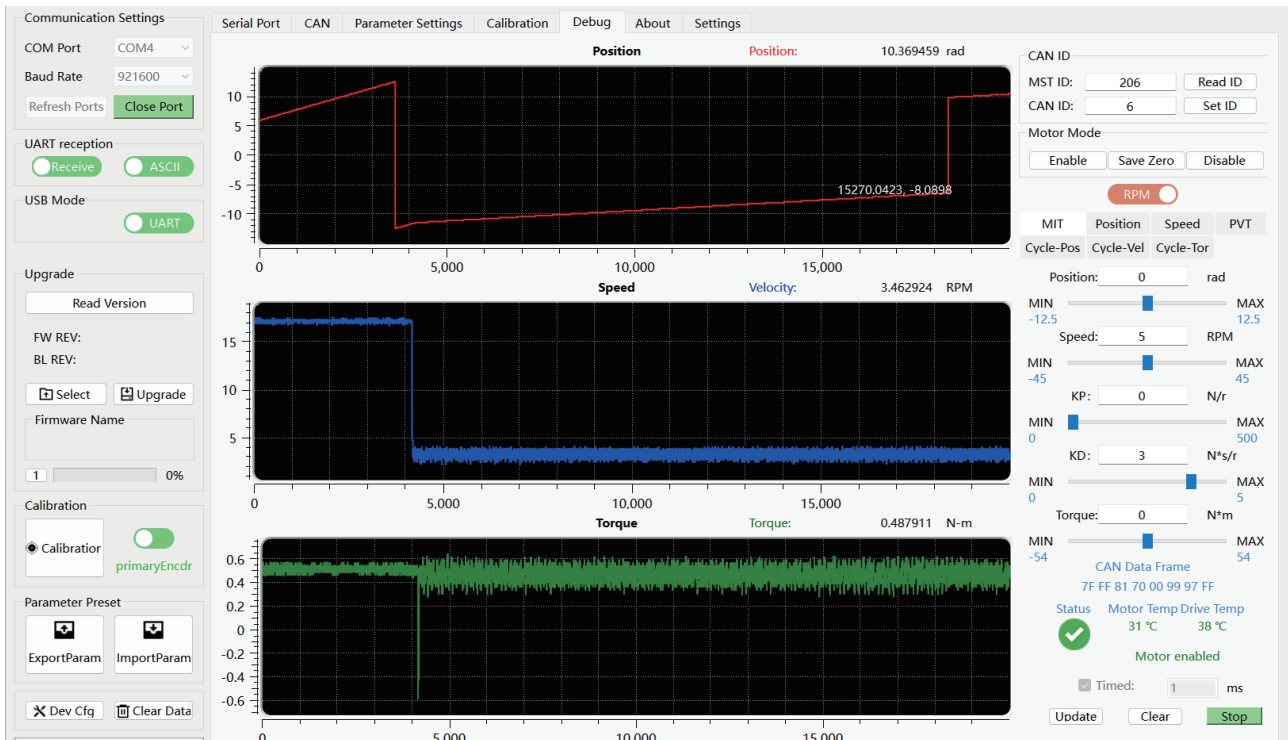



Adjust control parameters as needed while testing. Keep "Timed" for periodic send enabled and click "Update" to apply changes.

Monitor real-time motor and driver temperature, status, and feedback frames. For frame format and status types, see "Feedback Frames" for details.

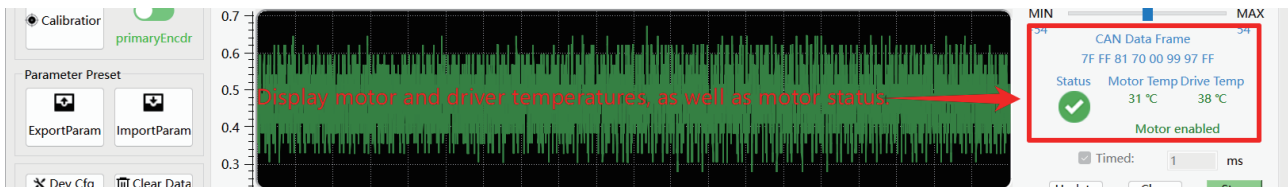


Step 3: Exit procedure: Click "Stop", then "Disable", the Red LED ON (motor disabled).

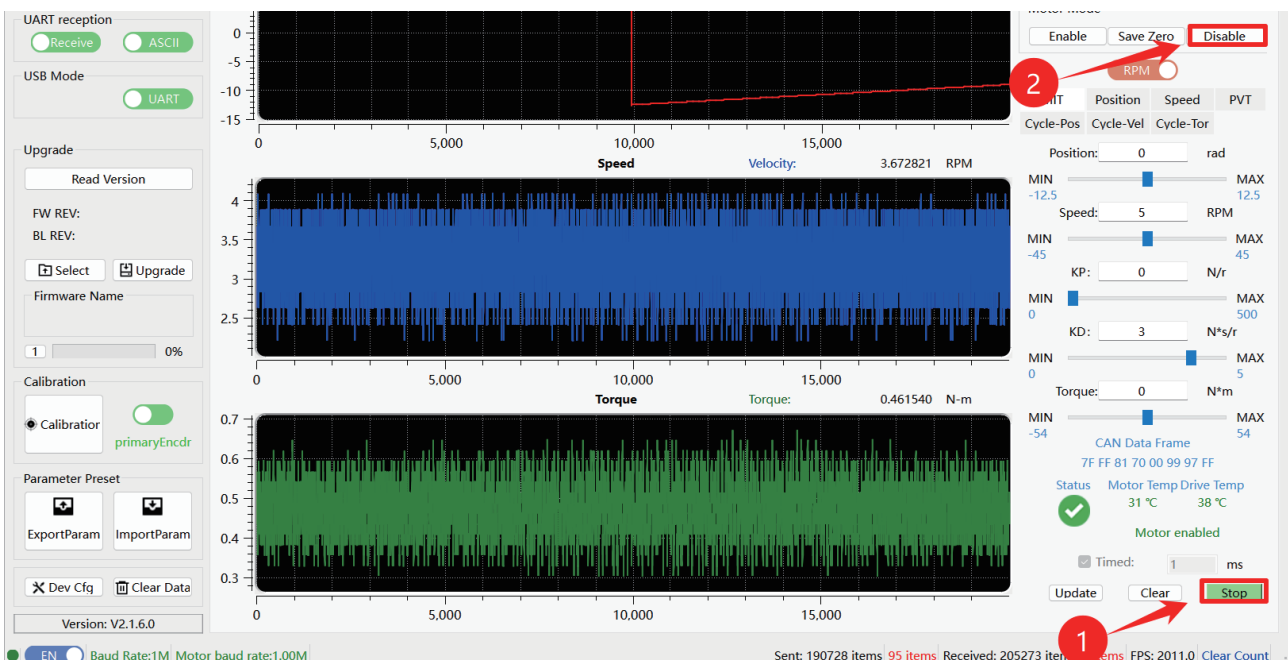

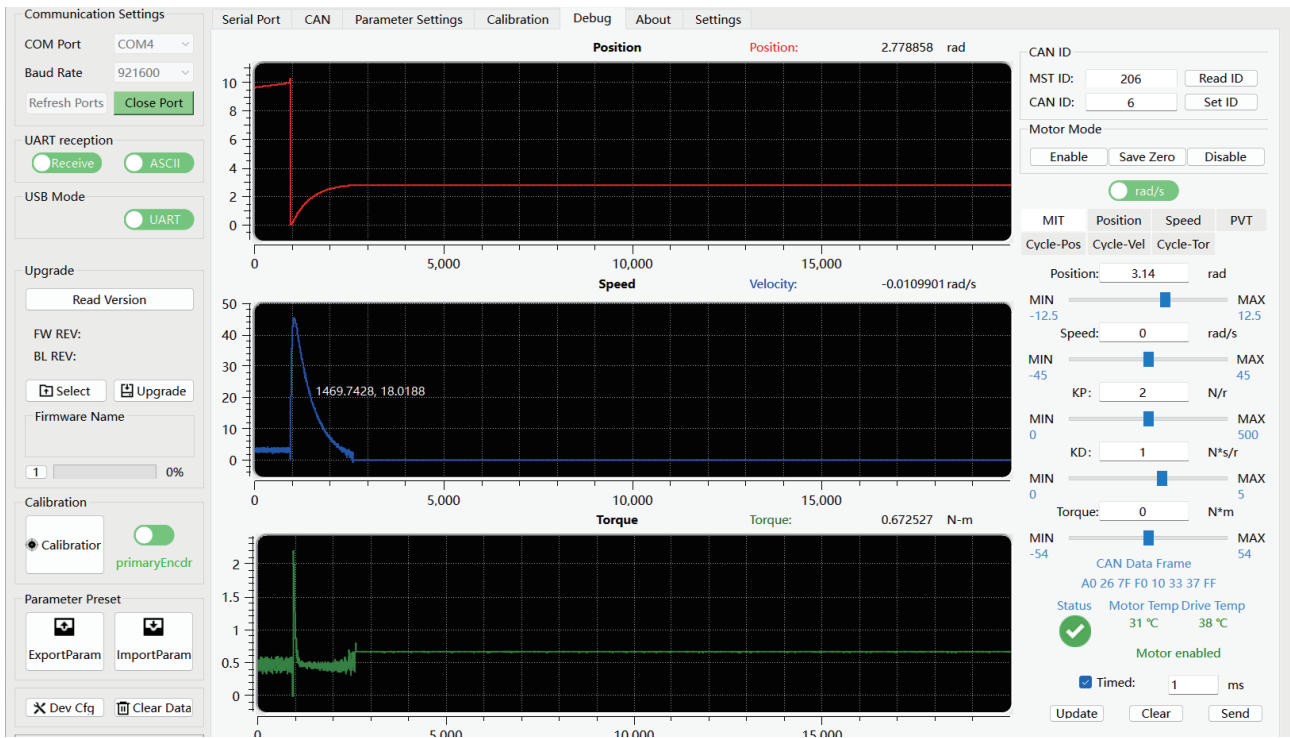


Adjust control parameters as needed while testing. Keep "Timed" for periodic send enabled and click "Update" to apply changes.

Monitor real-time motor and driver temperature, status, and feedback frames. For frame format and status types, see "Feedback Frames" for details.

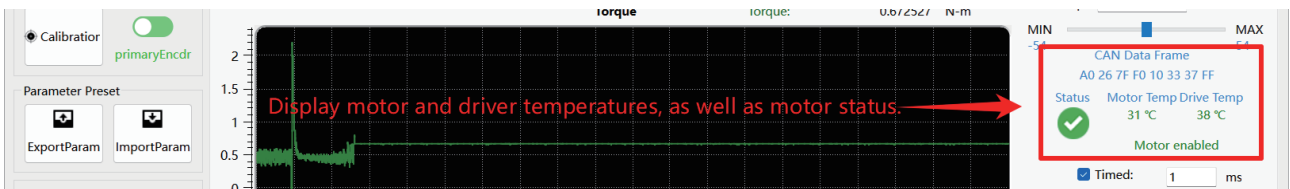


Step 3: Exit procedure: Click "Stop", then "Disable", the Red LED ON (motor disabled).

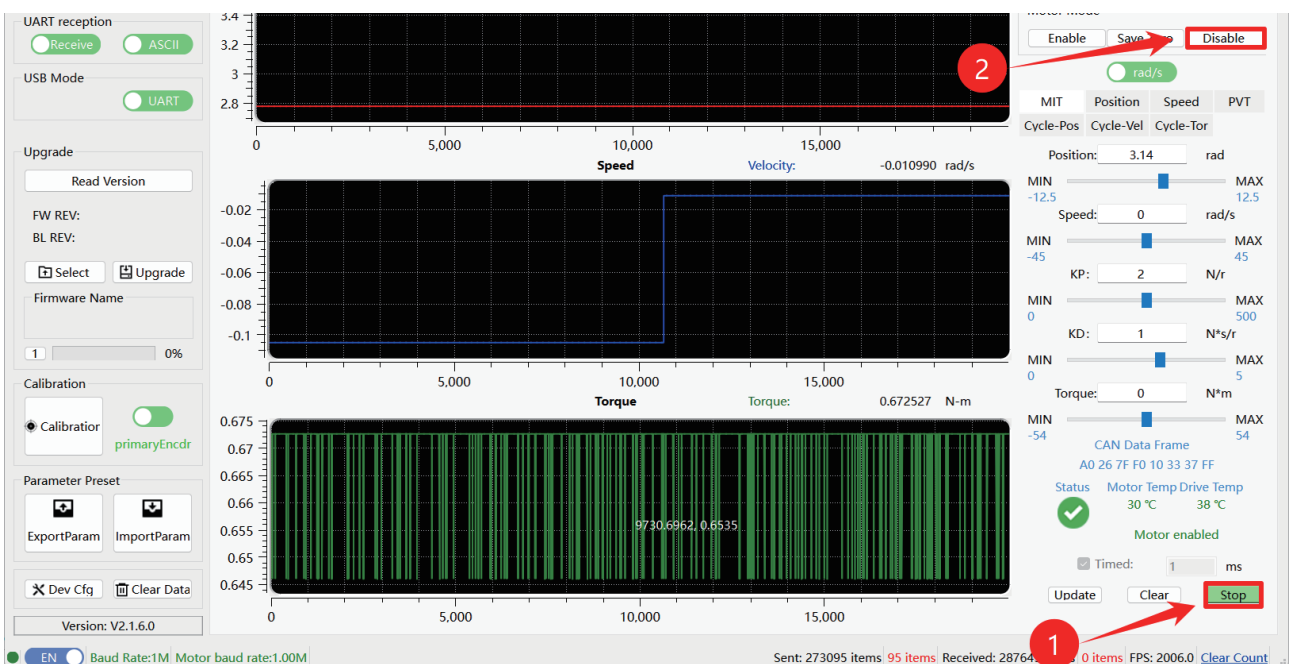

③ Torque Control

Step 1: Click "Enable" in the Motor Mode section. The driver's green LED will light (motor enabled).

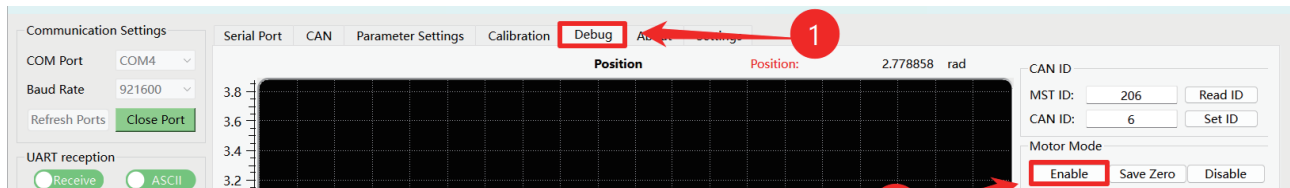

Step 2: Set the target torque.



Note: Even small torque commands can accelerate the motor to max speed if unloaded.

Example: Torque = 2 N*m, others = 0.

Enable "Timed" for periodic send, then click "Update" and "Send".


Monitor parameter curves in the debugging interface.

Ensure the motor is physically fixed.

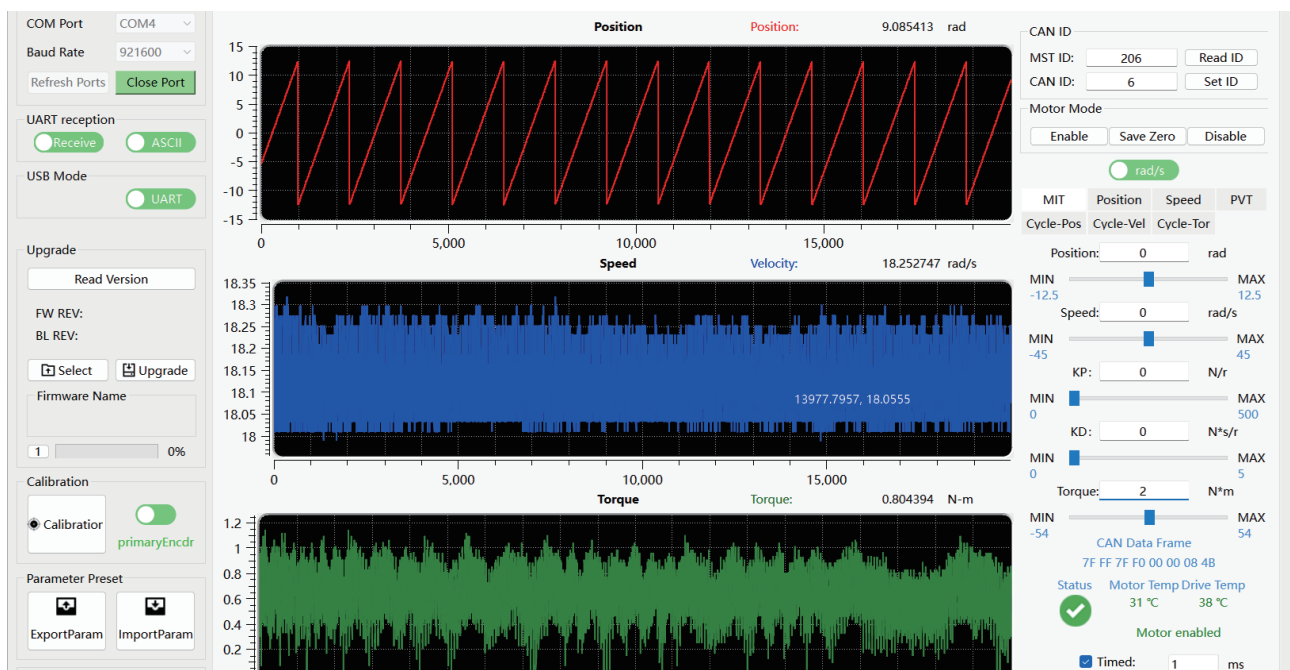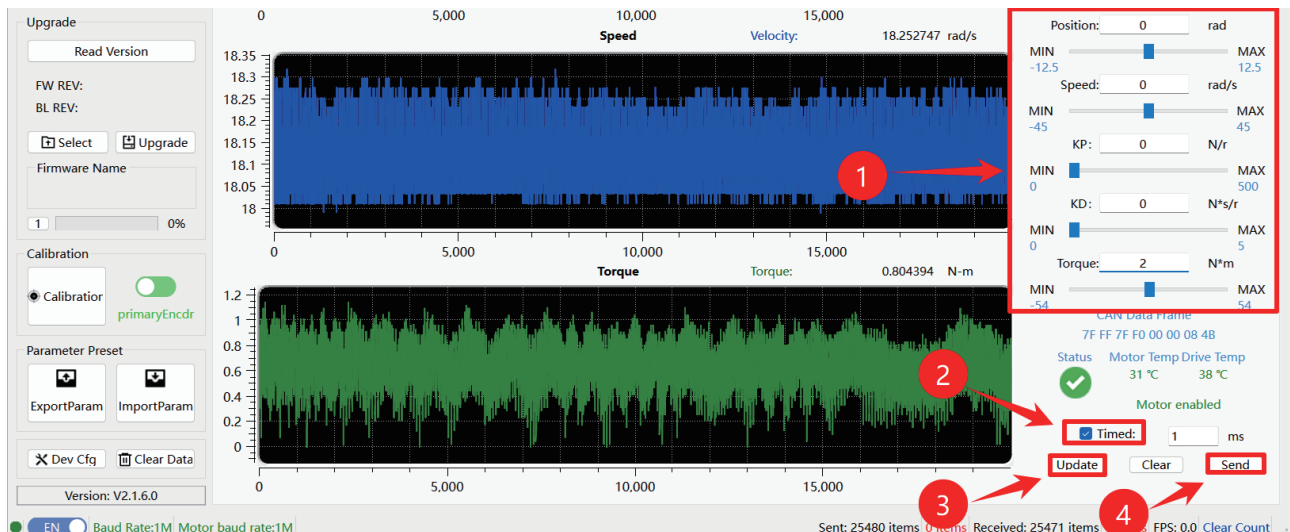


Adjust control parameters as needed while testing. Keep "Timed" for periodic send enabled and click "Update" to apply changes.

Monitor real-time motor and driver temperature, status, and feedback frames. For frame format and status types, see "Feedback Frames" for details.

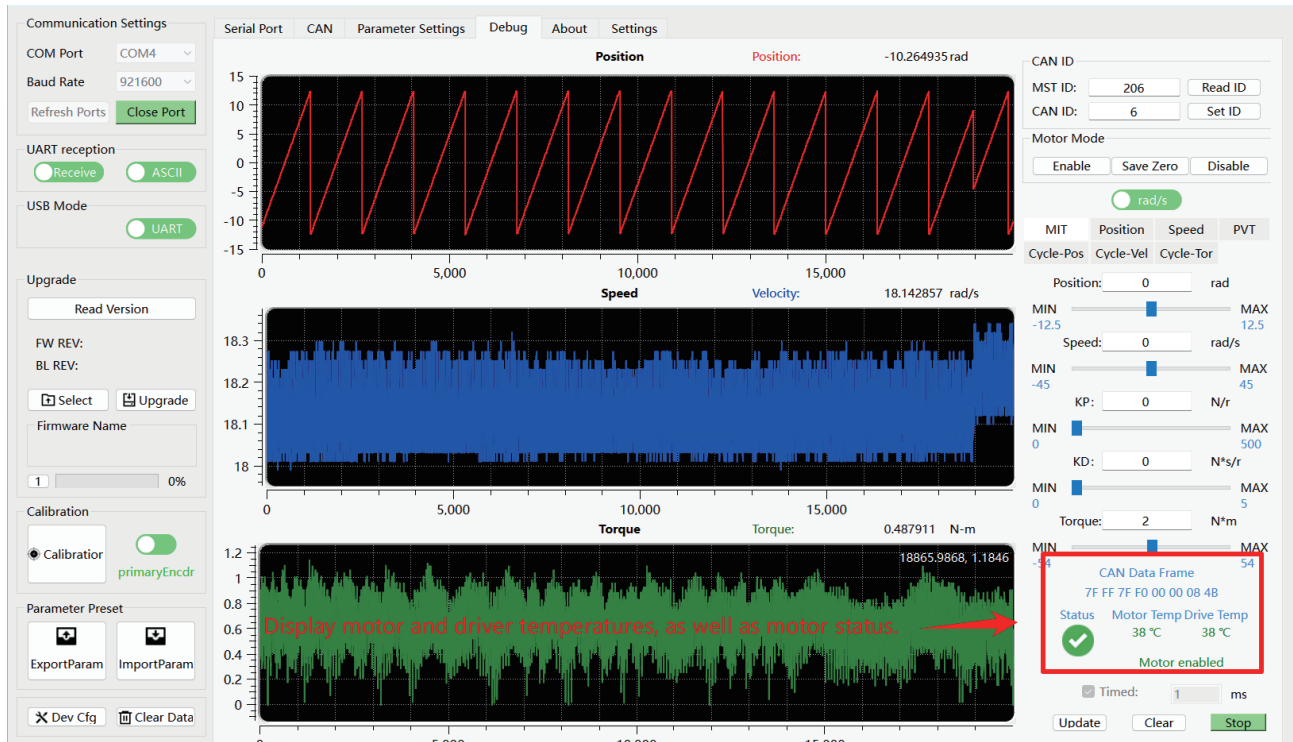

Step 3: Exit procedure: Click "Stop", then "Disable", the Red LED ON (motor disabled).

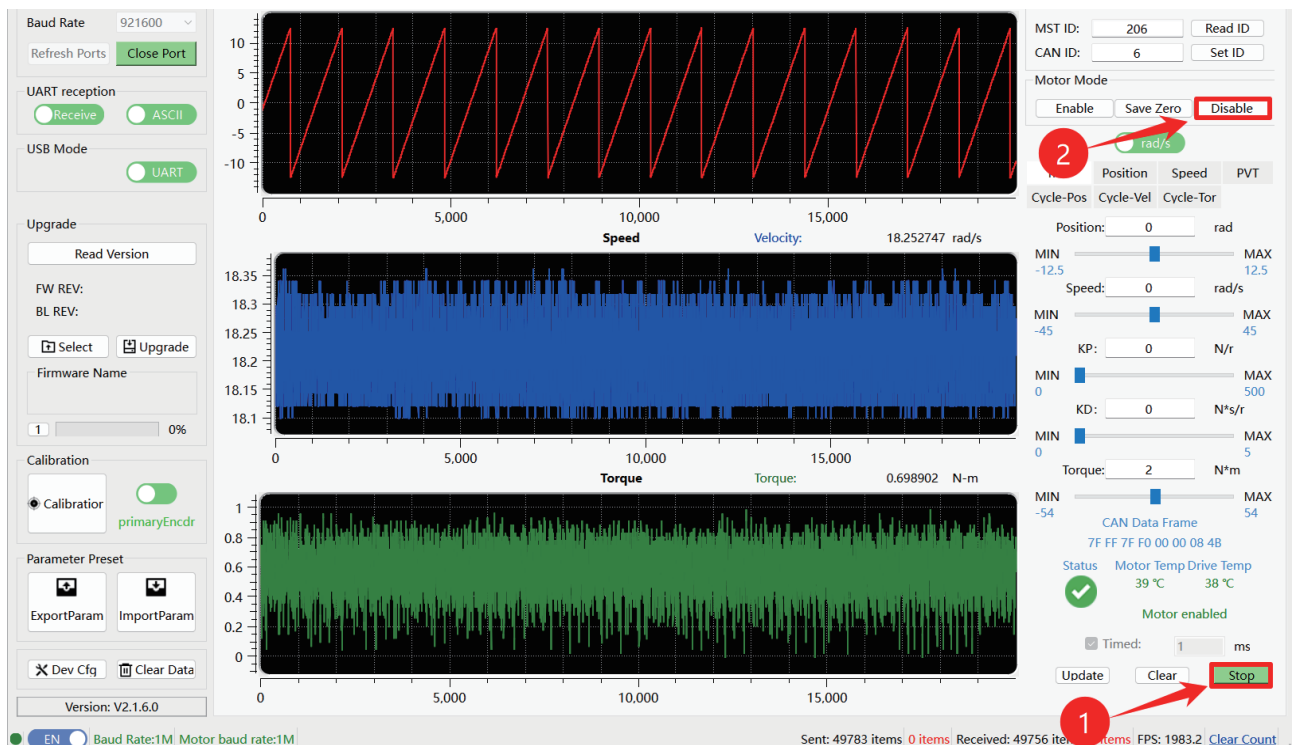


3. Position Velocity Mode


(1) Mode Selection:

In the debugging page, select Position Velocity mode as described in Control Mode.


Confirm the current control mode and open the corresponding "Position" tab.

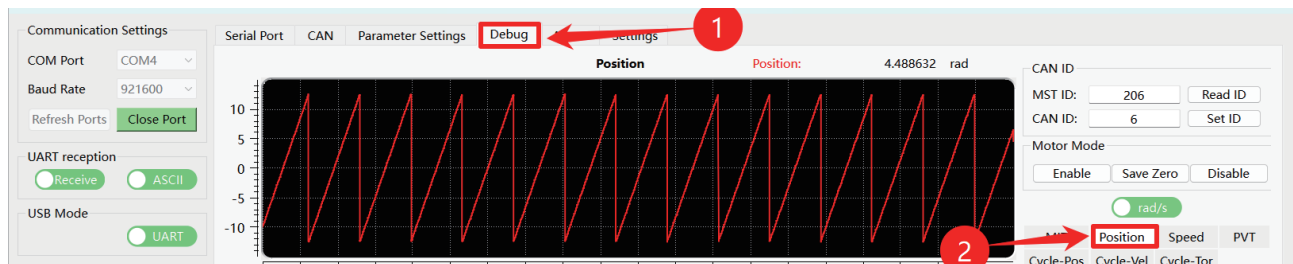

(2) CAN ID: Ensure the CAN ID is correct (obtainable via serial port printouts, parameter settings page, or read/set buttons in the debugging interface).

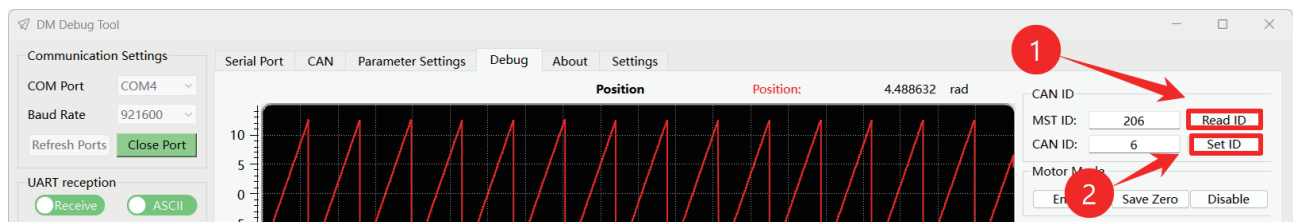


(3) Click "Enable" in the Motor Mode section. The driver's green LED will light (motor enabled).

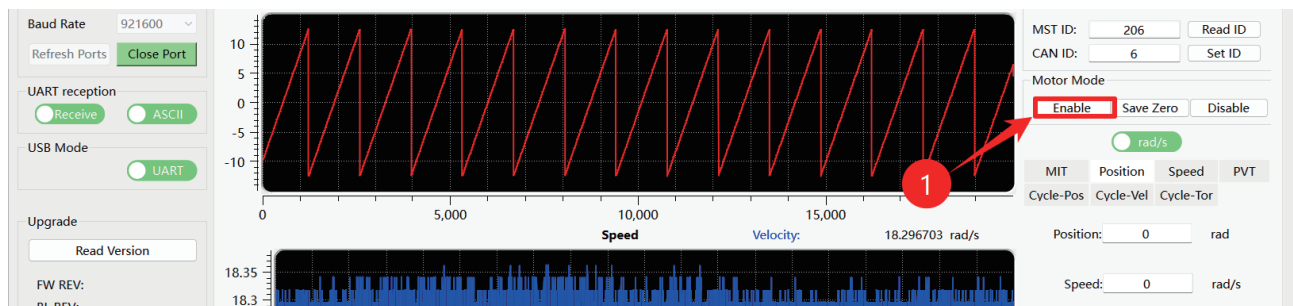

(4) Set the command parameters so that the motor moves to the target position at the specified velocity.

Before setting the parameters, check the motor's initial position and use it as a reference.


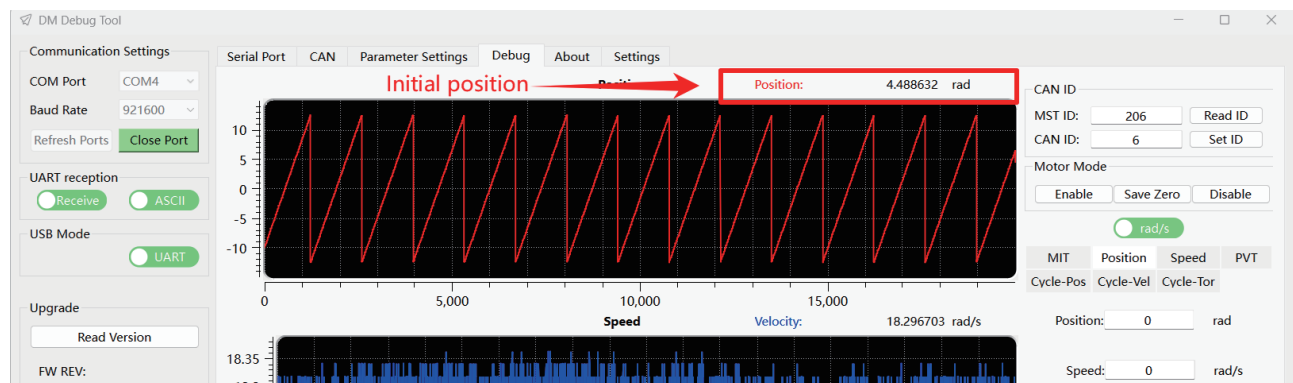


Example: Position = 10 rad, Velocity = 5 rad/s.

Enable "Timed" for periodic send, then click "Update" and "Send".


Monitor parameter curves in the debugging interface.

Ensure the motor is physically fixed.

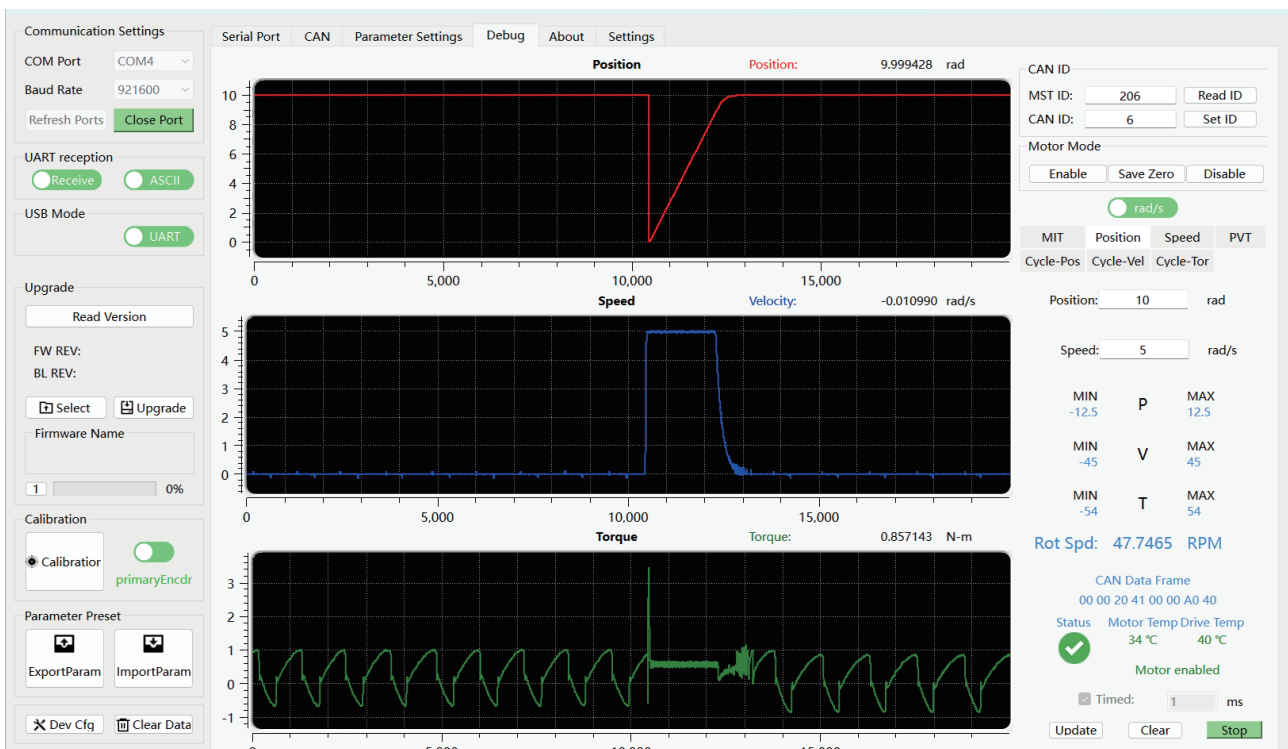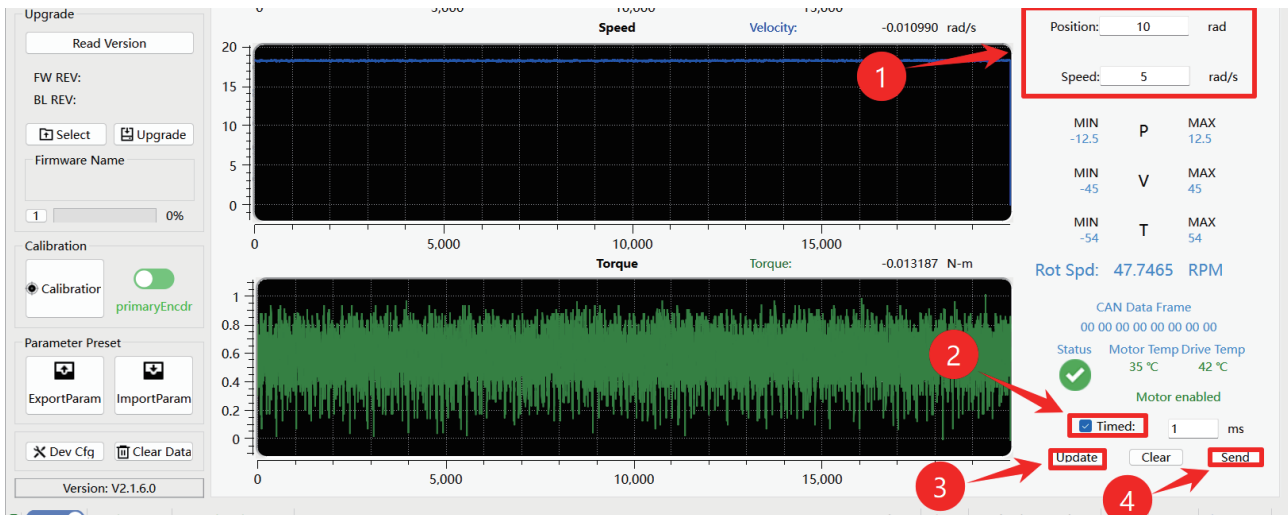


Adjust control parameters as needed while testing. Keep "Timed" enabled and click "Update" to apply changes.

Monitor real-time motor and driver temperature, status, and feedback frames. For frame format and status types, see "Feedback Frames" for details.

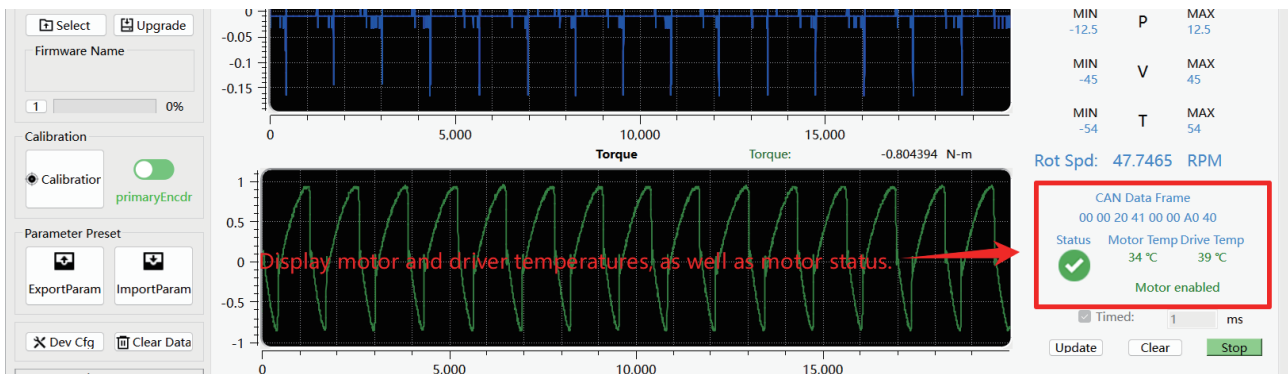


(5) Exit procedure: Click "Stop", then "Disable", the Red LED ON (motor disabled).

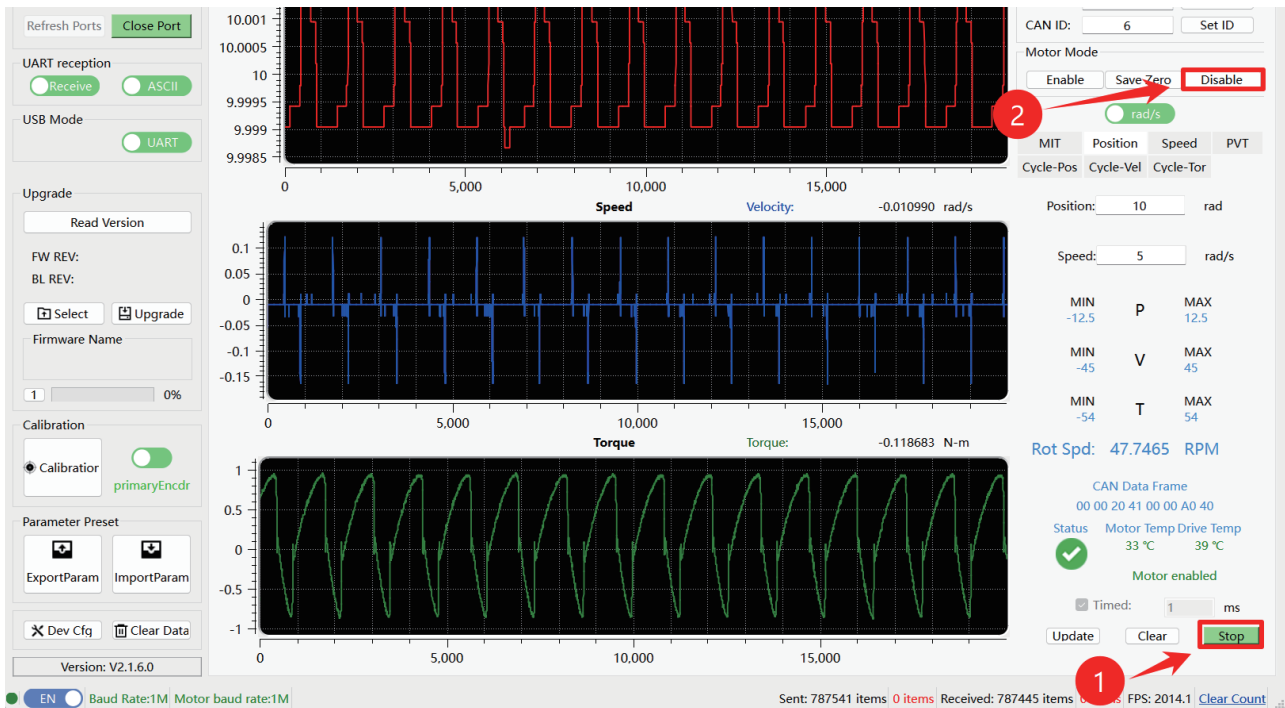


4. Velocity Mode


(1) In the debugging page, select Velocity mode as described in Control Mode. Confirm the current control mode and open the corresponding "Speed" tab.

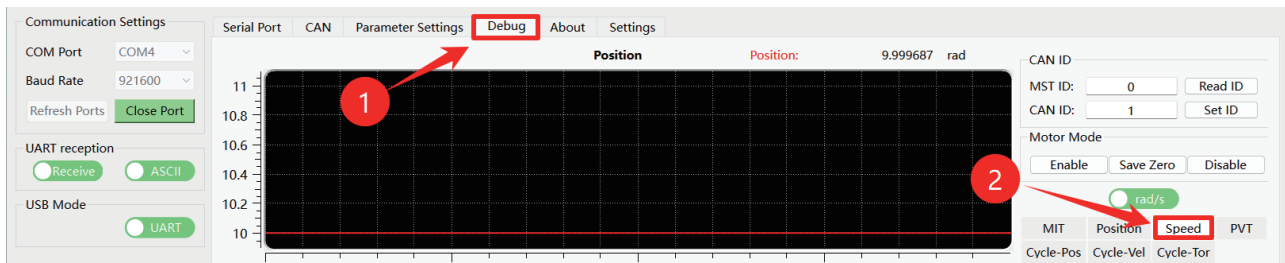

(2) Ensure the CAN ID is correct (obtainable via serial port printouts, parameter settings page, or read/set buttons in the debugging interface).

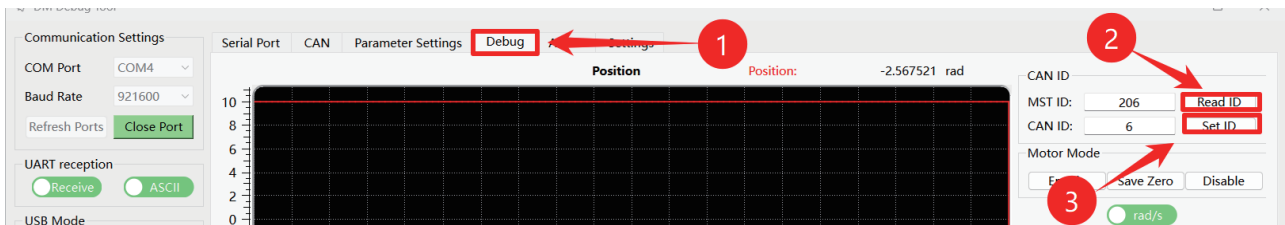

(3) Click "Enable" in the Motor Mode section. The driver's green LED will light (motor enabled).

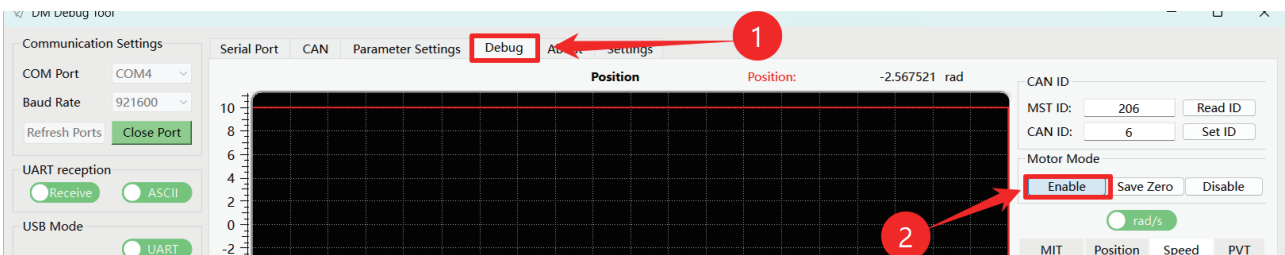



(4) Set the target speed

Example: Speed = 5 rad/s.

Enable "Timed" for periodic send, then click "Update" and "Send".


Monitor parameter curves in the debugging interface.

Ensure the motor is physically fixed.

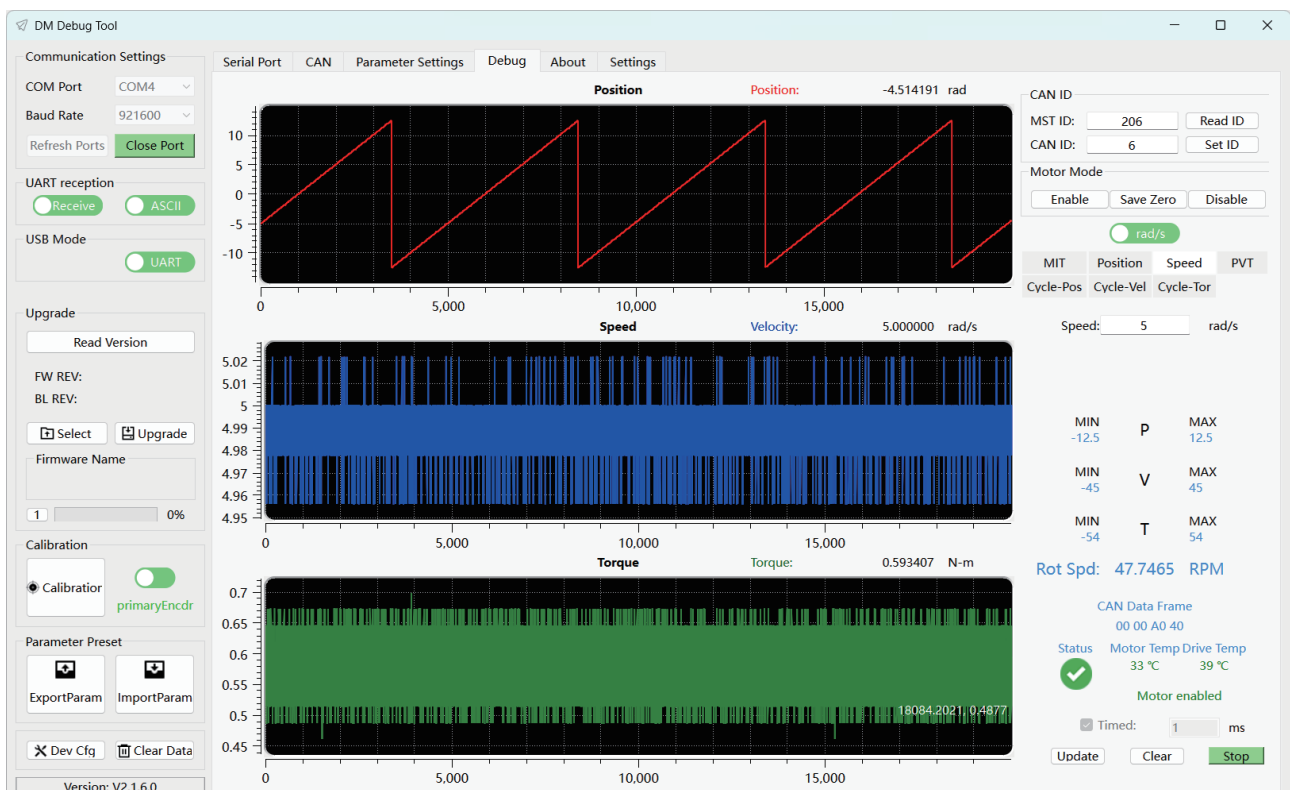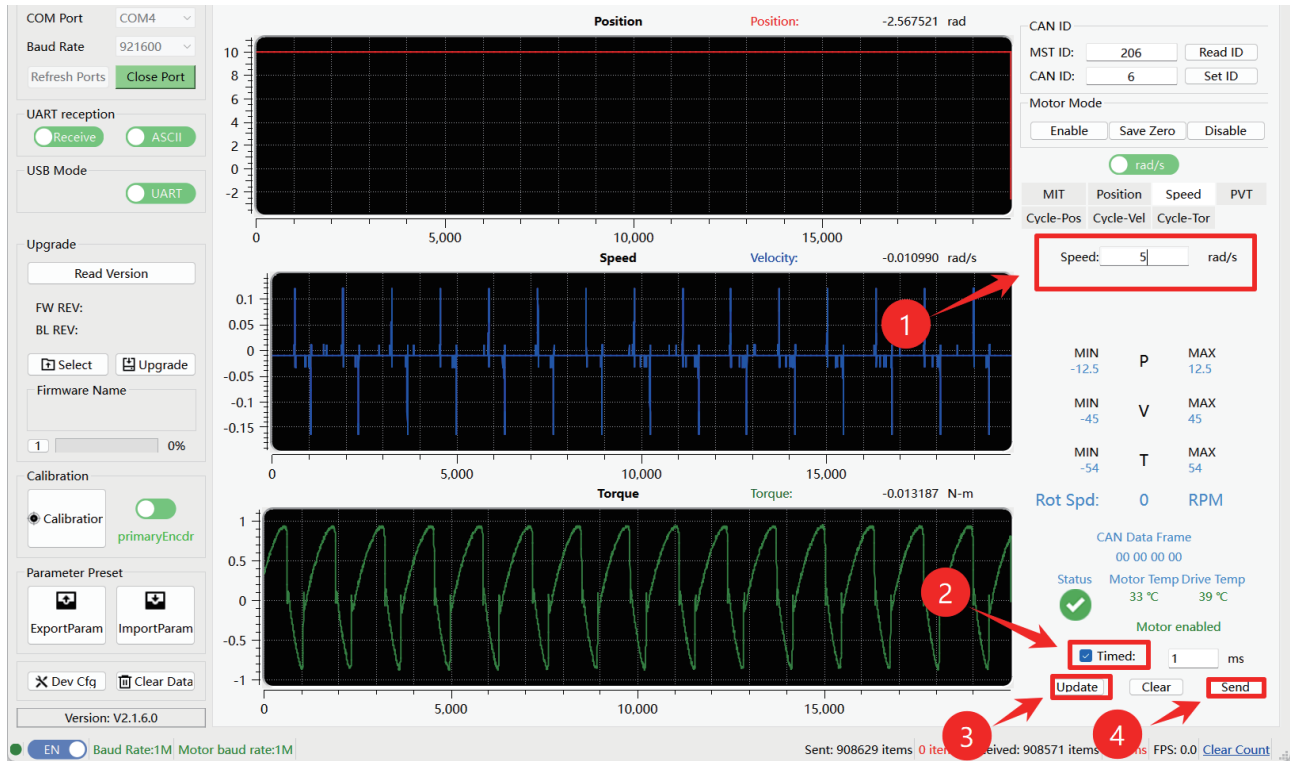


Adjust control parameters as needed while testing. Keep "Timed" for periodic send enabled and click "Update" to apply changes.

Monitor real-time motor and driver temperature, status, and feedback frames. For frame format and status types, see "Feedback Frames" for details.

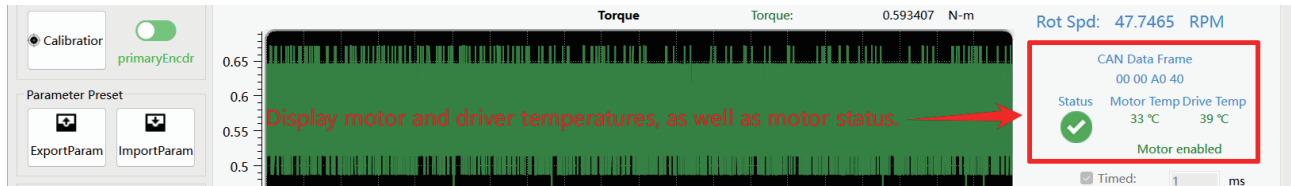


(5) Exit procedure: Click "Stop", then "Disable", the Red LED ON (motor disabled).

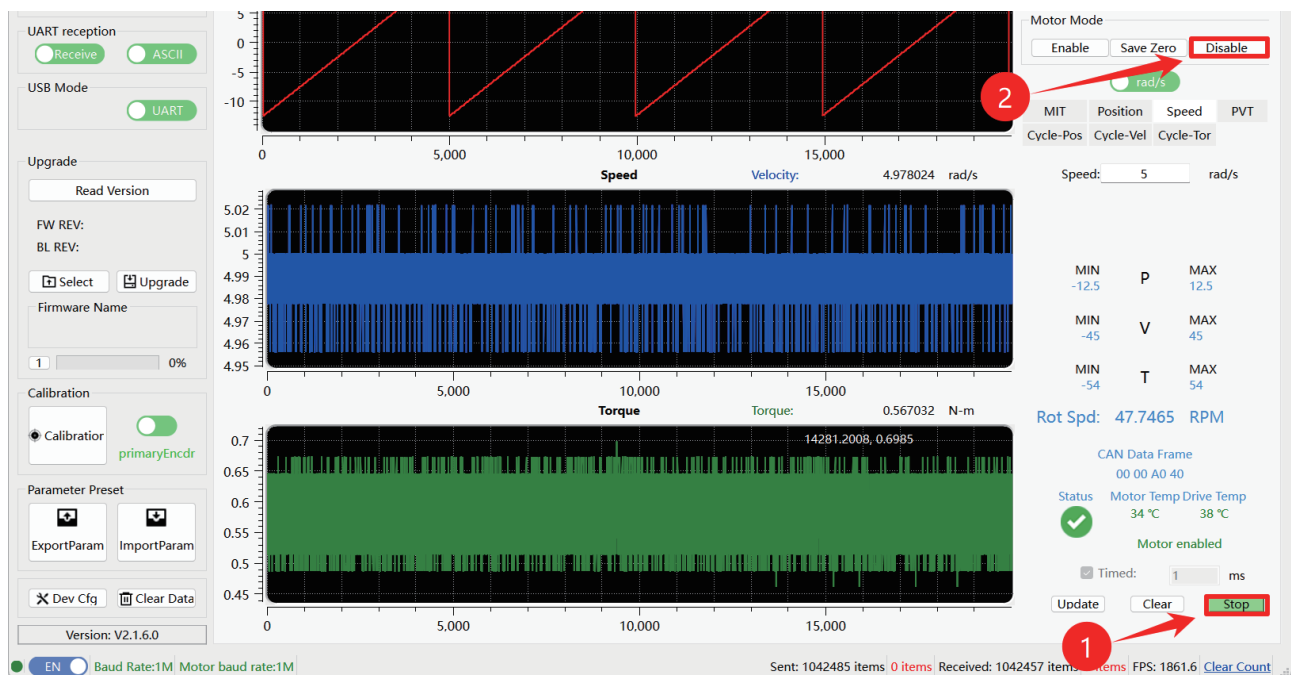


5. Force-Position Hybrid Control Mode


(1) In the debugging page, select Force-Position Hybrid Control Mode as described in Control Mode Confirm the current control mode and open the corresponding "PVT" tab.

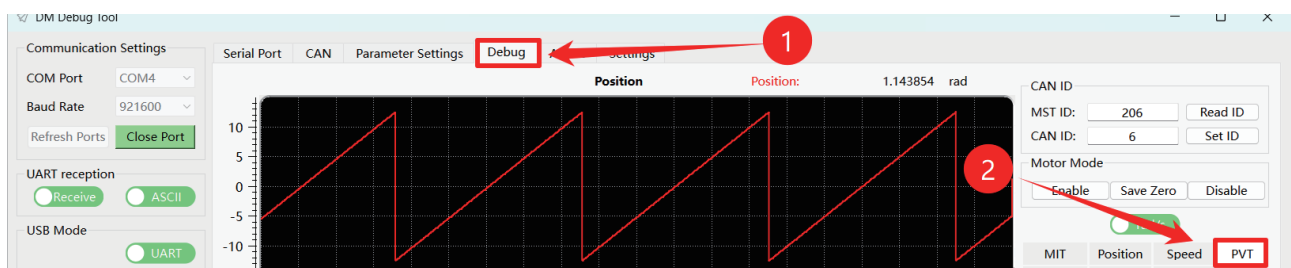

(2) Ensure the CAN ID is correct (obtainable via serial port printouts, parameter settings page, or read/set buttons in the debugging interface).

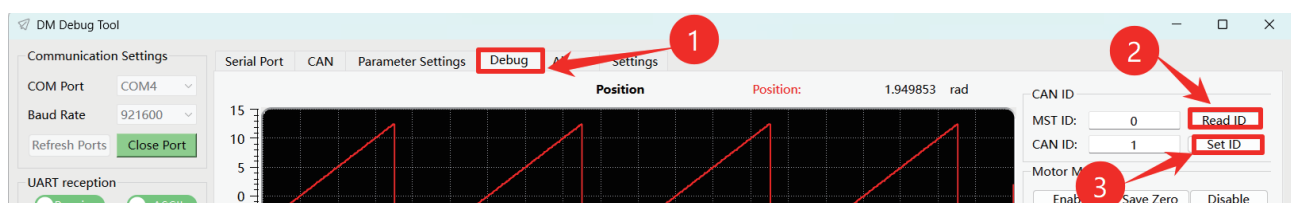


(3) Click "Enable" in the Motor Mode section. The driver's green LED will light (motor enabled).

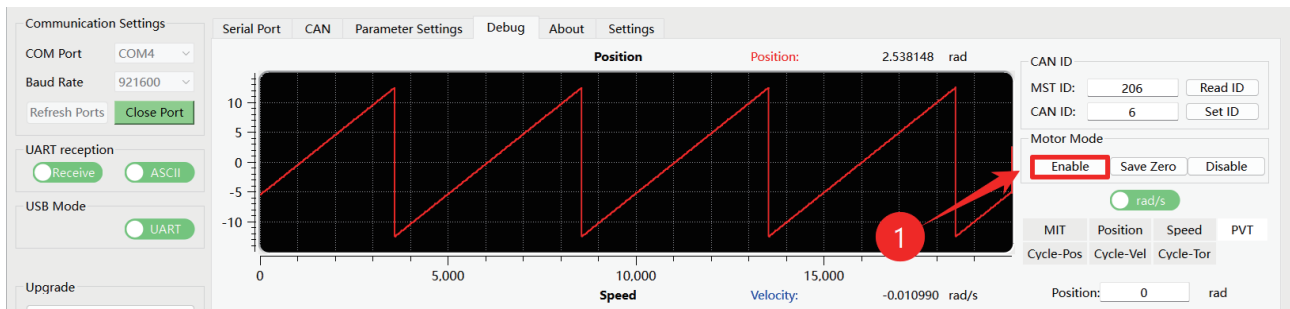

(4) Set the command parameters so that the motor moves to the target position at the specified velocity.

Before setting the parameters, check the motor's initial position and use it as a reference.

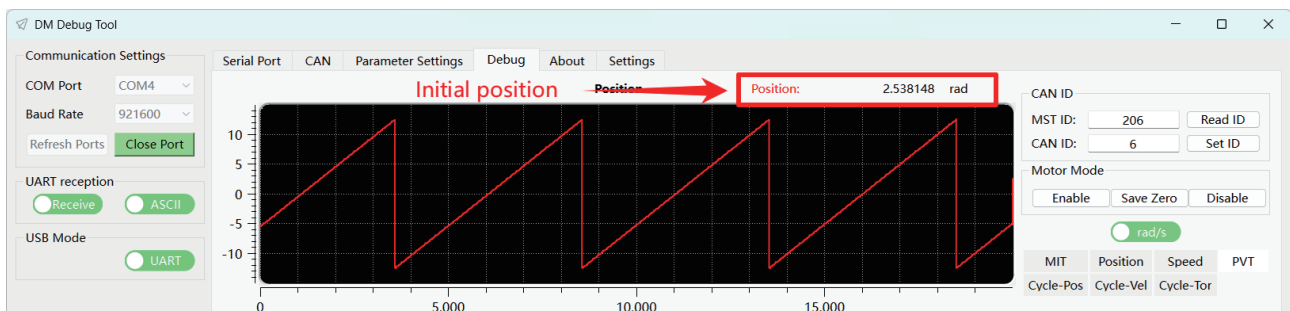



Example: Position = 10 rad, Speed = 5 rad/s, current = 0.2%FS.

Enable "Timed" for periodic send, then click "Update" and "Send".

Monitor parameter curves in the debugging interface.

Ensure the motor is physically fixed.

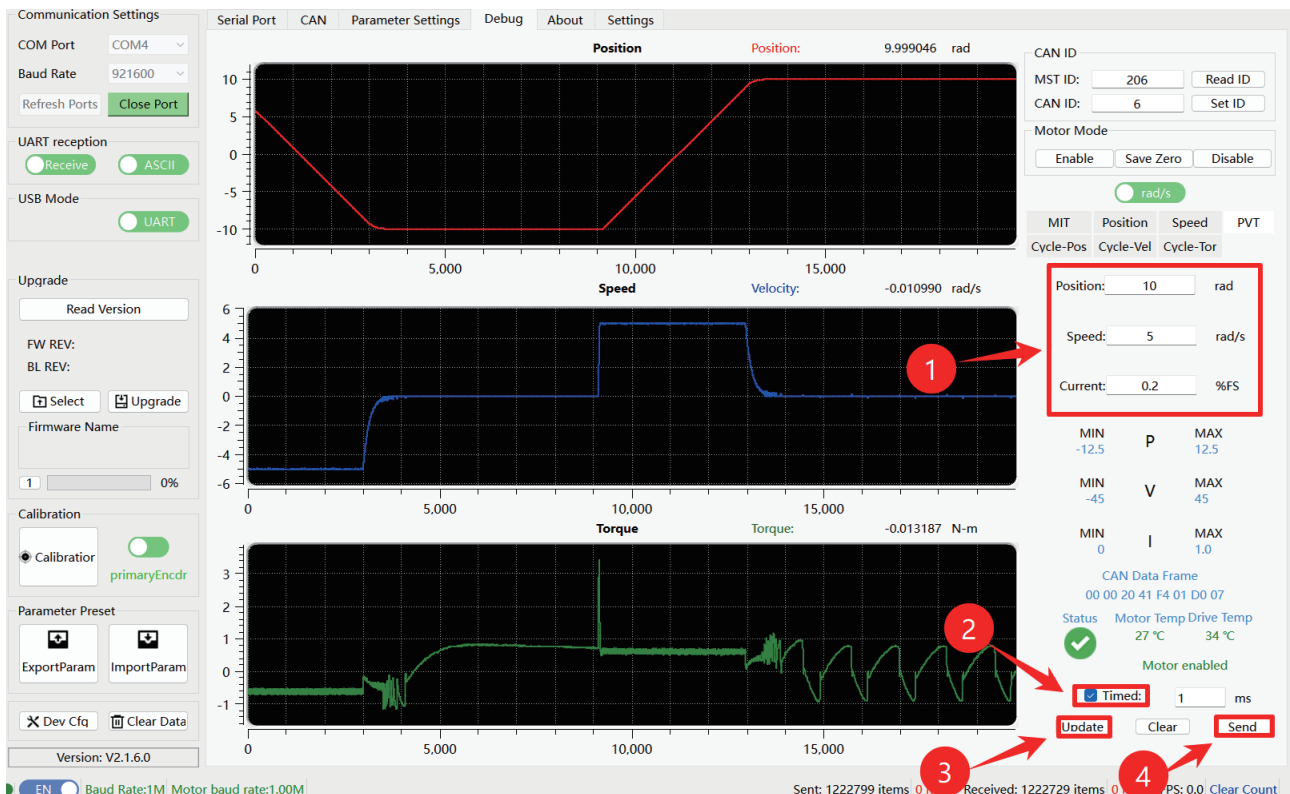

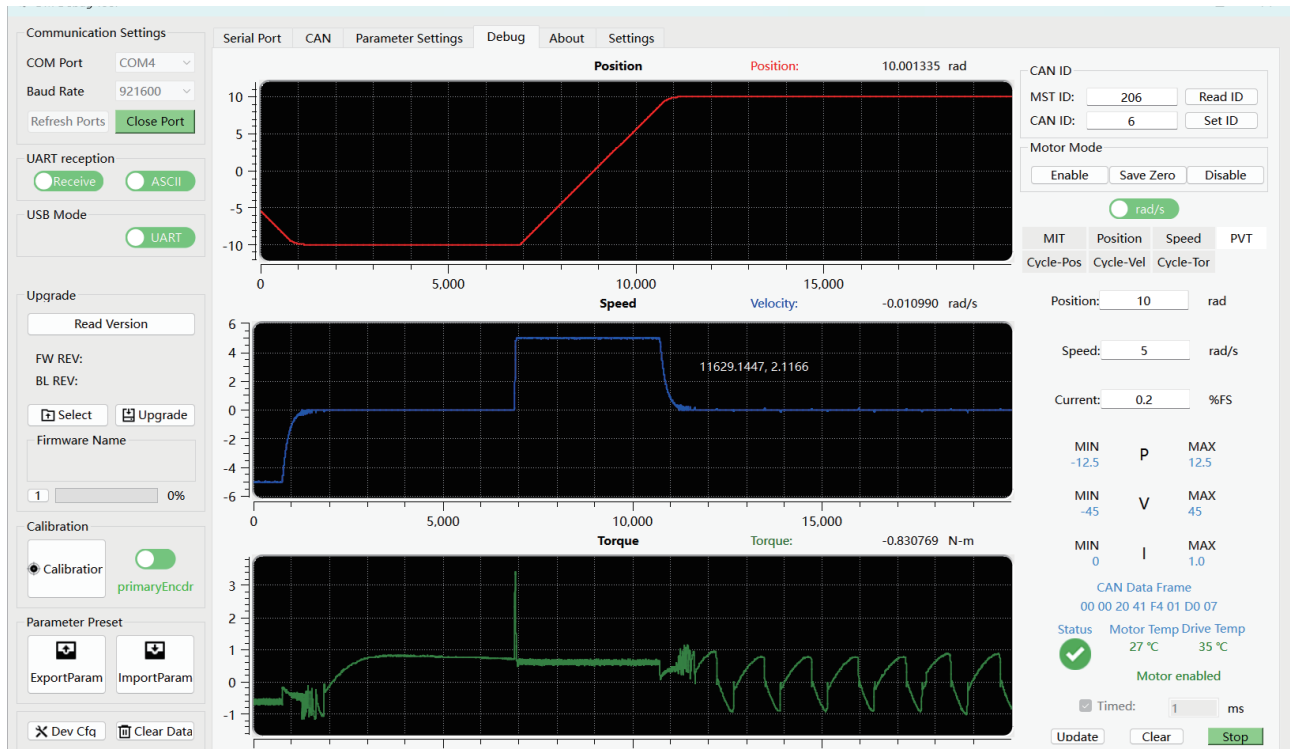


Adjust control parameters as needed while testing. Keep "Periodic Send" enabled and click "Update" to apply changes.

Monitor real-time motor and driver temperature, status, and feedback frames. For frame format and status types, see "Feedback Frames" for details.



(5) Exit procedure: Click "Stop", then "Disable", the Red LED ON (motor disabled).

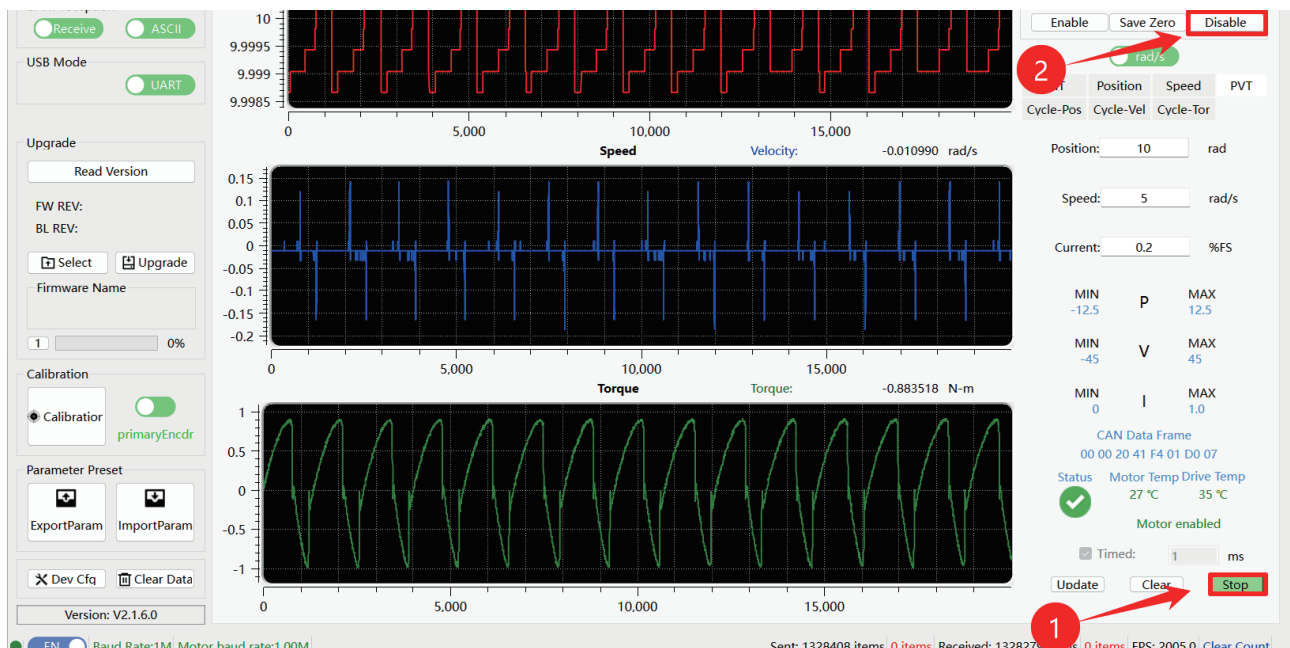

Firmware Version Check and Upgrade

◆ Version Check


Connect the motor via serial port, CAN port, and power supply.

Select the correct serial port on the PC and open it.

Click "Read Version" to display the current firmware version of the driver.

Before performing any firmware upgrade, always read and confirm the current version. Unless otherwise specified, select firmware versions with a prefix of "73" for upgrading.

Using an incorrect firmware version may cause unexpected issues.

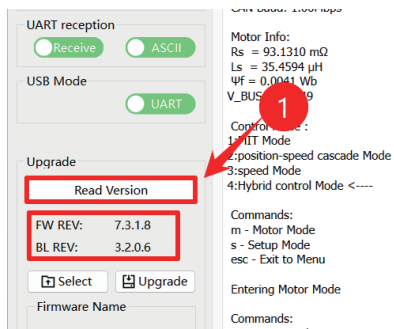

◆ Firmware Upgrade via Serial Port


When new features are released or bug fixes are available, the firmware can be upgraded via the serial interface.


Before upgrading, ensure the serial connection is established.

Upgrade Procedure:

- Click "Select" and choose the appropriate firmware file .
- After loading, the firmware name will be displayed in the interface.
- Verify the firmware is correct, then click "Upgrade Firmware".
- Wait for the progress bar to complete.

The upgrade status can also be monitored through the serial interface.

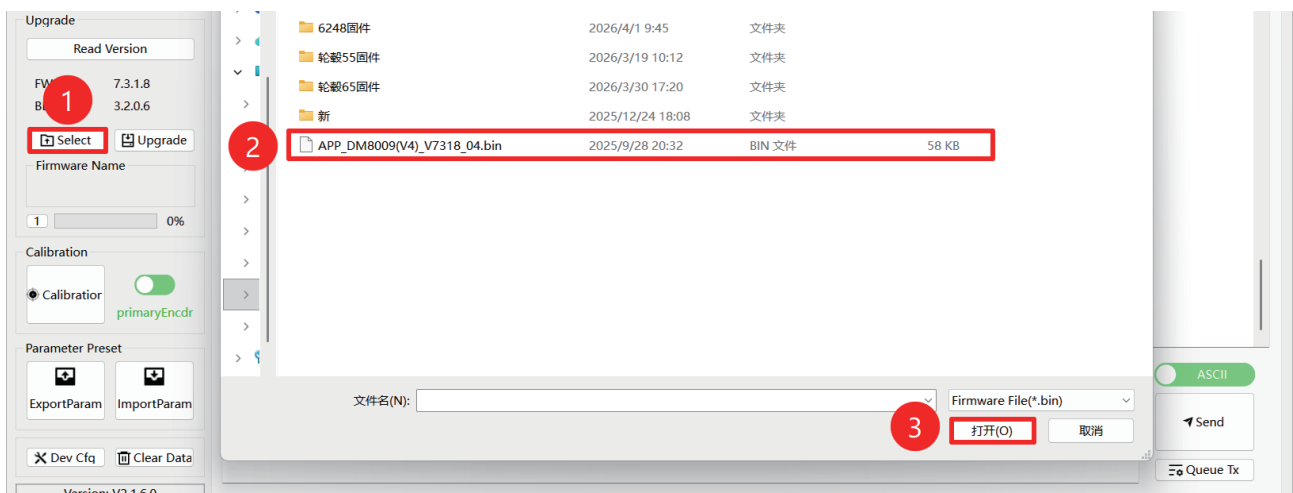

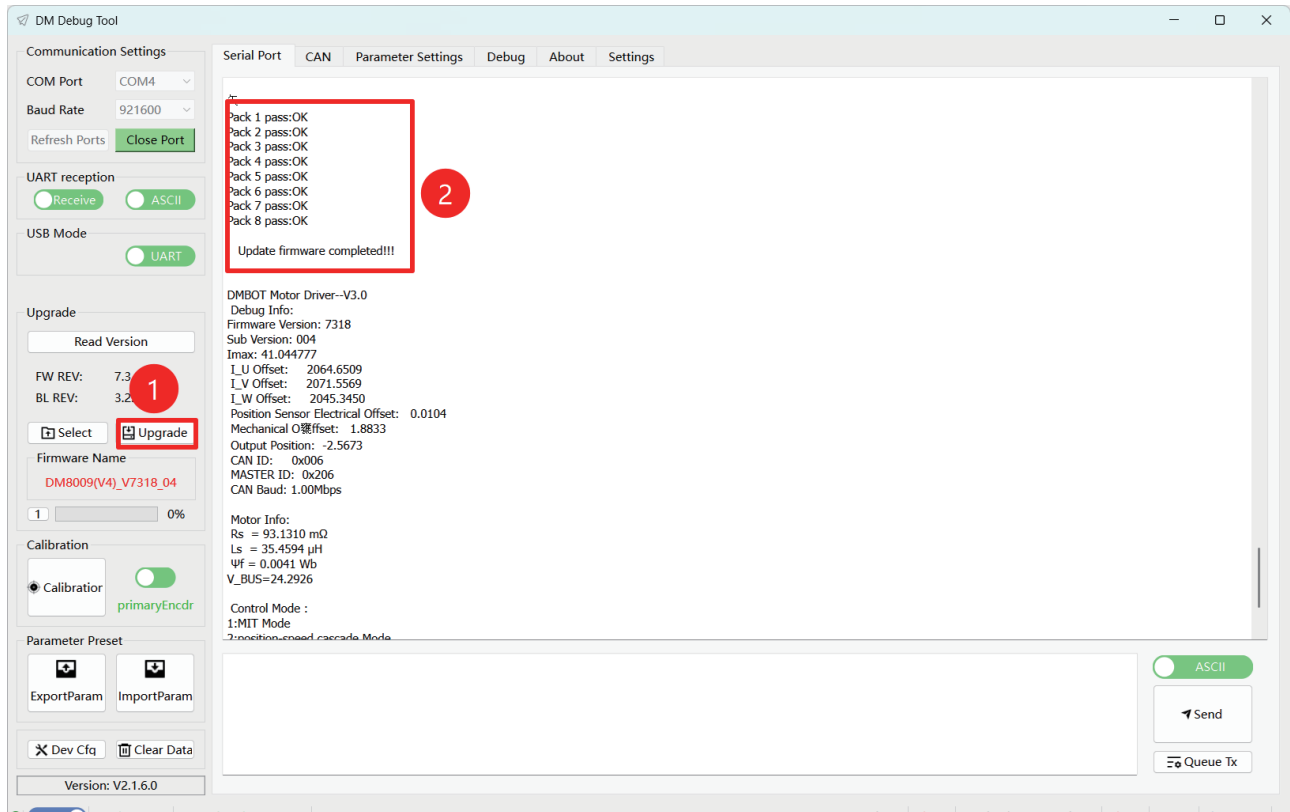

◆ CAN Firmware Upgrade

Firmware upgrade via CAN is supported for Bootloader version 3.2.0.5 and above. The CAN baud rate must match the one configured on the driver board.

Currently, firmware upgrade is supported only via a USB-to-CAN adapter.


Preparation:

Before starting, connect the CAN interface and ensure communication is functioning properly.

Then, in the interface:

- Switch the communication mode from UART to CAN.
- Enter the target motor CAN ID in the left panel.

If the CAN bus is not detected, a prompt will be displayed as shown below:

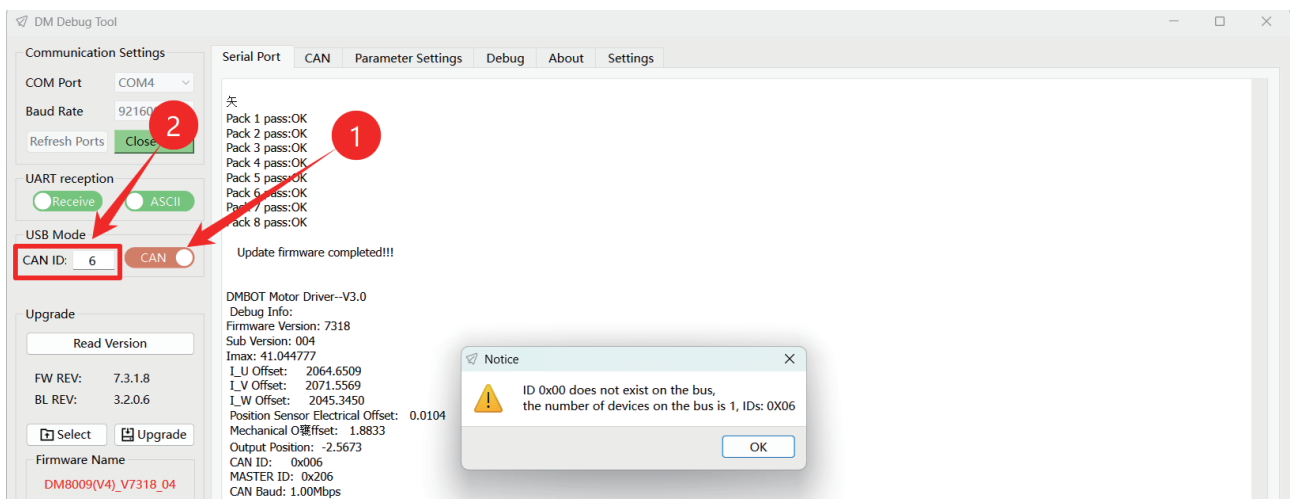


If the connection is successful, no message will be displayed.

Upgrade Procedure:

- Click "Select" and choose the desired firmware file.
- After loading, the firmware name will be displayed in the interface.
- Verify the firmware is correct, then click "Upgrade".
- Wait for the progress bar to complete.

The upgrade status can also be monitored through the serial interface.

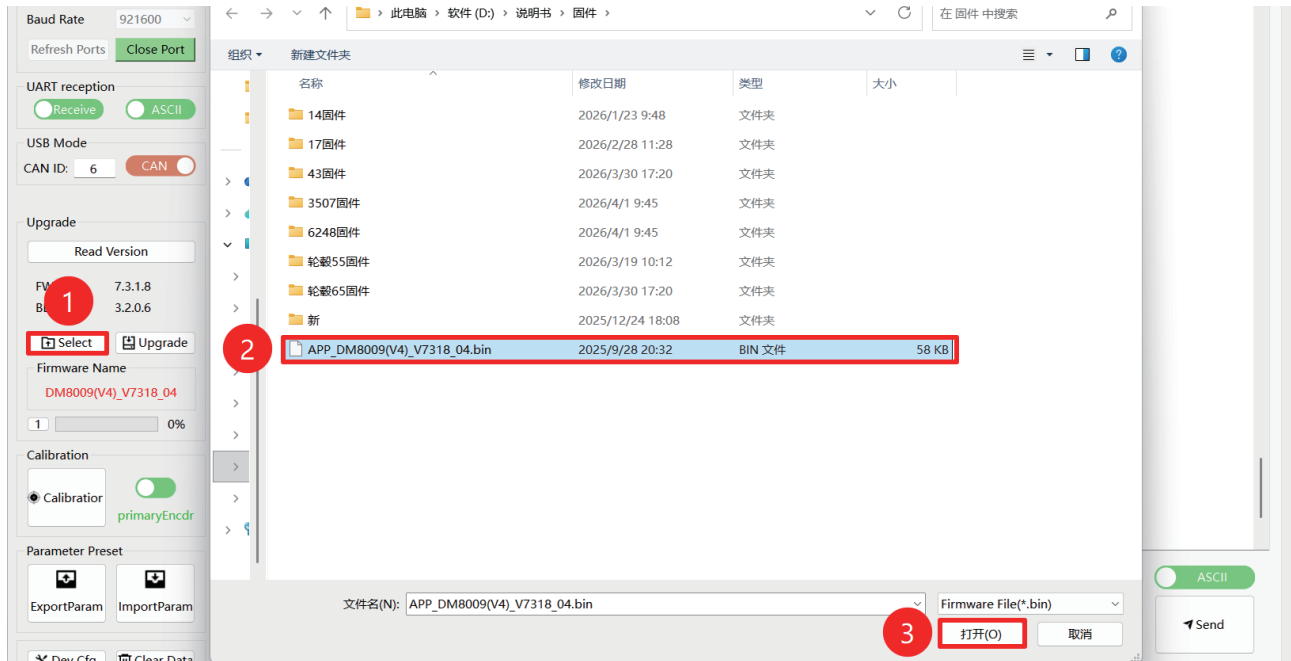

Once the upgrade is complete, a confirmation message will be displayed in the serial interface:

