
PFNET Python Documentation

Release 1.3

Tomas Tinoco De Rubira

June 05, 2016

CONTENTS

| | | |
|----------|-------------------------------|-----------|
| 1 | Getting Started | 3 |
| 1.1 | Dependencies | 3 |
| 1.2 | Download | 3 |
| 1.3 | Installation | 3 |
| 1.4 | Example | 4 |
| 2 | Power Networks | 5 |
| 2.1 | Overview | 5 |
| 2.2 | Loading Data | 5 |
| 2.3 | Components | 5 |
| 2.4 | Properties | 8 |
| 2.5 | Variables | 9 |
| 2.6 | Projections | 11 |
| 2.7 | Contingencies | 12 |
| 3 | Data Parsers | 15 |
| 3.1 | MATPOWER Case Files | 15 |
| 3.2 | ARTERE Case Files | 15 |
| 3.3 | RAW Case Files | 15 |
| 4 | Visualization | 17 |
| 4.1 | Overview | 17 |
| 5 | Optimization Problems | 19 |
| 5.1 | Objective Function | 19 |
| 5.2 | Constraints | 22 |
| 5.3 | Problems | 26 |
| 6 | API Reference | 29 |
| 6.1 | Vector | 29 |
| 6.2 | Matrix | 29 |
| 6.3 | Bus | 29 |
| 6.4 | Branch | 34 |
| 6.5 | Generator | 37 |
| 6.6 | Shunt | 39 |
| 6.7 | Load | 40 |
| 6.8 | Variable Generator | 42 |
| 6.9 | Battery | 43 |
| 6.10 | Network | 44 |
| 6.11 | Contingency | 52 |
| 6.12 | Graph | 53 |

| | | |
|----------|--------------------------------|-----------|
| 6.13 | Function | 54 |
| 6.14 | Constraint | 55 |
| 6.15 | Optimization Problem | 57 |
| 6.16 | References | 59 |
| 7 | Indices and tables | 61 |
| | Bibliography | 63 |
| | Python Module Index | 65 |
| | Python Module Index | 67 |
| | Index | 69 |

Welcome! This is the documentation for the Python wrapper of PFNET, last updated June 05, 2016.

What is PFNET?

PFNET is a library for modeling and analyzing electric power networks. It provides data parsers, network visualization routines, and fast and customizable constraint and objective function evaluators for modeling network optimization problems.

License

PFNET is released under the BSD 2-clause license.

Contributors

- [Tomas Tinoco De Rubira](#) (principal developer)

Documentation Contents

GETTING STARTED

This section describes how to get started with PFNET in Python. In particular, it covers required packages, installation, and provides a quick example showing how to use this package.

1.1 Dependencies

PFNET for Python has the following dependencies:

- **Numpy** ($\geq 1.8.2$): the fundamental package for scientific computing in Python.
- **Scipy** ($\geq 0.13.3$): a collection of mathematical algorithms and functions built on top of Numpy.
- **PFNET** ($= 1.3$): underlying C routines wrapped by this package (`libpfnet`).
- **Graphviz** (≥ 2.38): graph visualization library (`libgvc`) (Optional).
- **Raw parser** (≥ 1.0): library for parsing power flow files in PSSE raw format version 32 (`libraw_parser`) (Optional).

1.2 Download

The latest version of PFNET can be downloaded from <https://github.com/ttinoco/PFNET>.

1.3 Installation

After building the C library `libpfnet`, the PFNET Python module can be installed using:

```
> sudo python setup.py install
```

from the `python` directory of the PFNET package.

If `libpfnet` was built without visualization capabilities, the argument `--no_graphviz` should be passed to `setup.py`. Similarly, if `libpfnet` was built without raw parsing capabilities, the argument `--no_raw_parser` should be passed to `setup.py`.

The installation can be tested using `nose` as follows:

```
> nosetests -v --exe
```

1.4 Example

As a quick example of how to use the PFNET Python module, consider the task of constructing a power network from a [MATPOWER](#)-converted power flow file and computing the average bus degree. This can be done as follows:

```
>>> import numpy as np
>>> from pfnet import Network

>>> net = Network()
>>> net.load('ieee14.mat')

>>> print np.average([b.degree for b in net.buses])
2.86
```


POWER NETWORKS

This section describes how to create and analyze power networks using PFNET.

2.1 Overview

Power networks in PFNET are represented by objects of type `Network`. These objects are initially empty and need to be loaded with data contained in specific types of files. Once the data is loaded, the network and its components can be analyzed, visualized, and used to construct network optimization problems. After a network optimization problem is solved, the network object can be updated with the solution to perform further analysis.

An important attribute of the `Network` class is `base_power`. This quantity, which has units of MVA, is useful for converting power quantities in per unit system base power to MW or MVA.

2.2 Loading Data

Power networks can be loaded with data using the `load()` class method. This method takes as input the filename of a supported power flow file. Information about the data parsers available in PFNET and the supported file formats can be found in Section *Data Parsers*. The following simple example shows how to load data from a power flow `mat` file:

```
>>> from pfnet import Network

>>> net = Network()
>>> print net.num_buses
0

>>> net.load('ieee14.mat')
>>> print net.num_buses
14
```

2.3 Components

Power networks have several components. These are *buses*, *branches*, *generators*, *shunt devices*, *loads*, and *variable generators* (i.e., non-dispatchable). For obtaining an overview of the components that form a network, the class method `show_components()` can be used:

```
>>> net.show_components()
```

```
Network Components
-----
```

```
buses          : 14
  slack        : 1
  reg by gen    : 5
  reg by tran   : 0
  reg by shunt  : 0
shunts         : 1
  fixed        : 1
  switched v    : 0
branches       : 20
  lines        : 17
  fixed trans   : 3
  phase shifters : 0
  tap changers v : 0
  tap changers Q : 0
generators     : 5
  slack        : 1
  reg          : 5
  P adjust     : 5
loads          : 11
  P adjust     : 0
vargens        : 0
```

2.3.1 Buses

Buses in a power network are objects of type `Bus`. Each bus has an `index`, a `number`, and a `name` attribute that can be used to identify this bus in a network. The `index` is associated with the location of the bus in the underlying C array of bus structures, while the `number` and `name` attributes are specified in the input data. An `index`, a `number`, or a `name` can be used to extract a specific bus from a network using the `Network` class methods `get_bus()`, `get_bus_by_number()`, and `get_bus_by_name()`, respectively:

```
>>> bus = net.get_bus(10)

>>> print bus.index == 10
True

>>> other_bus = net.get_bus_by_number(bus.number)

>>> print bus == other_bus
True
```

For convenience, a list of all the buses in the network is contained in the `buses` attribute of the `Network` class.

Buses in a network can have different properties. For example, some buses can be slack buses and others can have their voltage magnitudes regulated by generators, tap-changing transformers, or switched shunt devices. The `Bus` class provides methods for checking whether a bus has specific properties. The following example shows how to get a list of all the buses whose voltage magnitudes are regulated by generators:

```
>>> reg_buses = [b for b in net.buses if b.is_regulated_by_gen()]

>>> print len(reg_buses), net.get_num_buses_reg_by_gen()
5 5
```

A bus also has information about the devices that are connected to it or that are regulating its voltage magnitude. For example, the attributes `gens` and `reg_trans` contain a list of generators connected to the bus and a list of tap-changing transformers regulating its voltage magnitude, respectively.

2.3.2 Branches

Branches in a power network are objects of type `Branch` and are represented mathematically by the model described in Section 2.1.2 of [TTR2015]. Each branch has an `index` attribute that can be used to identify this branch in a network. The `Network` class method `get_branch()` can be used to extract a branch of a given `index`:

```
>>> branch = net.get_branch(5)

>>> print branch.index == 5
True
```

For convenience, a list of all the branches in the network is contained in the `branches` attribute of the `Network` class.

Branches in a power network can have different properties. For example, some branches can be transmission lines, fixed transformers, tap-changing transformers, or phase-shifting transformers. Tap-changing transformers in turn can control the reactive power flowing through the branch or the voltage magnitude of a bus. The `Branch` class provides methods for checking whether a branch has specific properties. The following example shows how to get a list of all the branches that are transmission lines:

```
>>> lines = [br for br in net.branches if br.is_line()]

>>> print len(lines), net.get_num_lines()
17 17
```

For branches that are transformers, the `Branch` class attributes `ratio` and `phase` correspond to the transformer's tap ratio and phase shift, respectively. These attributes correspond to the quantities a_{km} and ϕ_{km} of the branch model described in Section 2.1.2 of [TTR2015]. The quantity a_{mk} in this model is always one.

2.3.3 Generators

Generators in a power network are objects of type `Generator`. Each generator has an `index` attribute that can be used to identify this generator in a network. The `Network` class method `get_gen()` can be used to extract a generator of a given `index`:

```
>>> gen = net.get_gen(2)

>>> print gen.index == 2
True
```

For convenience, a list of all the generators in the network is contained in the `generators` attribute of the `Network` class.

Generators in a power network can have different properties. For example, some generators can be slack generators and others can provide bus voltage magnitude regulation. The `Generator` class provides methods for checking whether a generator has specific properties. The following example shows how to get a list of all the slack generators:

```
>>> slack_gens = [g for g in net.generators if g.is_slack()]

>>> print len(slack_gens), net.get_num_slack_gens()
1 1
```

The active and reactive powers that a generator injects into the bus to which it is connected are obtained from the `P` and `Q` attributes of the `Generator` class. These quantities are given in units of per unit `system base power`. The following example computes the total active power injected into the network by generators in units of MW:

```
>>> print sum([g.P for g in net.generators])*net.base_power
272.4
```

2.3.4 Shunt Devices

Shunt devices in a power network are objects of type `Shunt`. Each shunt has an `index` attribute that can be used to identify this shunt in a network. The `Network` class method `get_shunt()` can be used to extract a shunt of a given `index`:

```
>>> shunt = net.get_shunt(0)

>>> print shunt.index == 0
True
```

For convenience, a list of all the shunt devices in the network is contained in the `shunts` attribute of the `Network` class.

As with other network components, shunt devices can have different properties. Some shunt devices can be fixed while others can be switchable and configured to regulate a bus voltage magnitude.

2.3.5 Loads

Loads in a power network are objects of type `Load`. As with other components, the `index` attribute is used to identify a load in the network. A list of all the loads in the network is contained in the `loads` attribute of the `Network` class.

Similar to generators, the active and reactive powers that a load consumes from the bus to which it is connected are obtained from the `P` and `Q` attributes of the `Load` class. They are also given in units of per unit `system base power`.

2.3.6 Variable Generators

Variable generators in a power network are objects of type `VarGenerator`. They represent non-dispatchable energy sources such as wind generators or farms and photovoltaic power plants. As with other components, the `index` attribute is used to identify a variable generator in the network. In addition to the `index` attribute, a `name` attribute is also available, which can be used to extract a specific variable generator from the network using the `Network` class method `get_vargen_by_name()`. A list of all the variable generators in the network is also contained in the `var_generators` attribute of the `Network` class.

Similar to generators, the active and reactive powers produced by a variable generator are obtained from the `P` and `Q` attributes of the `VarGenerator` class in units of per unit `system base power`. This is the output of the device in the absence of uncertainty. When there is uncertainty, the output of the device is subject to variations about `P` that have a standard deviation given by the attribute `P_std`. Output limits of a variable generator are given by the `P_min`, `P_max`, `Q_min`, and `Q_max` attributes.

The output of variable generators in a network is subject to random variations that can be correlated, especially for devices that are “nearby”. The method `create_vargen_P_sigma()` of the `Network` class allows constructing a covariance matrix for these variations based on a “correlation distance” `N` and a given correlation coefficient. The cross-covariance between the variation of two devices that are connected to buses that are less than `N` branches away from each other is set such that it is consistent with the given correlation coefficient.

Lastly, since many power network input files do not have variable generator information, these devices can be added to the network by using the `add_vargens()` method of the `Network` class.

2.4 Properties

A `Network` object has several quantities or `properties` that provide important information about the state of the network. The following table provides a description of each of these properties.

| Names | Description | Units |
|-------------|---|----------|
| bus_v_max | Maximum bus voltage magnitude | per unit |
| bus_v_min | Minimum bus voltage magnitude | per unit |
| bus_v_vio | Maximum bus voltage magnitude limit violation | per unit |
| bus_P_mis | Maximum absolute bus active power mismatch | MW |
| bus_Q_mis | Maximum absolute bus reactive power mismatch | MVAr |
| gen_P_cost | Total active power generation cost | \$/hour |
| gen_v_dev | Maximum set point deviation of generator-regulated voltage | per unit |
| gen_Q_vio | Maximum generator reactive power limit violation | MVAr |
| gen_P_vio | Maximum generator active power limit violation | MW |
| tran_v_vio | Maximum band violation of transformer-regulated voltage | per unit |
| tran_r_vio | Maximum tap ratio limit violation of tap-changing transformer | unitless |
| tran_p_vio | Maximum phase shift limit violation of phase-shifting transformer | radians |
| shunt_v_vio | Maximum band violation of shunt-regulated voltage | per unit |
| shunt_b_vio | Maximum susceptance limit violation of switched shunt device | per unit |
| load_P_util | Total active power consumption utility | \$/hour |
| load_P_vio | Maximum load active power limit violation | MW |
| num_actions | Number of control adjustments (greater than 2% of control range) | unitless |

All of these properties are attributes of the `Network` class. If there is a change in the network, the class method `update_properties()` needs to be called in order for the network properties to reflect the change. The following example shows how to update and extract properties:

```
>>> print net.bus_v_max
1.09

>>> for bus in net.buses:
...     bus.v_mag = bus.v_mag + 0.1
...

>>> print net.bus_v_max
1.09

>>> net.update_properties()

>>> print net.bus_v_max
1.19
```

For convenience, all the network properties can be extracted at once in a dictionary using the `get_properties()` class method:

```
>>> properties = net.get_properties()

>>> print properties['bus_v_max']
1.19
```

2.5 Variables

Network quantities can be specified to be `variables`. This is useful to represent network quantities with vectors and turn the network properties described above as functions of these vectors.

To set network quantities as variables, the `Network` class method `set_flags()` is used. This method takes as arguments a *component type*, a *flag mask* for specifying which flags types to set, a *property mask* for targeting components with specific properties, and a *variable mask* for specifying which component quantities should be affected.

Property masks are component-specific. They can be combined using `logical OR` to make properties more complex. More information can be found in the following sections:

- *Bus Properties*
- *Branch Properties*
- *Generator Properties*
- *Load Properties*
- *Shunt Properties*
- *Variable Generator Properties*

Variable masks are also component-specific. They can be combined using `logical OR` to target more than one component quantity. More information can be found in the following sections:

- *Bus Variables*
- *Branch Variables*
- *Generator Variables*
- *Load Variables*
- *Shunt Variables*
- *Variable Generator Variables*

The following example shows how to set as variables all the voltage magnitudes and angles of buses regulated by generators:

```
>>> import pfnet as pf

>>> net = pf.Network()
>>> net.load('ieee14.mat')

>>> print net.num_vars
0

>>> net.set_flags(pf.OBJ_BUS,
...               pf.FLAG_VARS,
...               pf.BUS_PROP_REG_BY_GEN,
...               pf.BUS_VAR_VMAG|pf.BUS_VAR_VANG)

>>> print net.num_vars, 2*net.get_num_buses_reg_by_gen()
10 10
```

Network components have a `has_flags()` method that allows checking whether flags of a certain type associated with specific quantities are set.

Once variables have been set, the *vector* containing all the current variable values can be extracted using `get_var_values()`:

```
>>> values = net.get_var_values()

>>> print type(values)
<type 'numpy.ndarray'>

>>> print values.shape
(10,)
```

The network components that have quantities set as variables have indices that can be used to locate these quantities in the vector of all variable values:

```
>>> bus = [b for b in net.buses if b.is_reg_by_gen()][0]

>>> print bus.has_flags(pf.FLAG_VARS, pf.BUS_VAR_VMAG)
True

>>> bus.has_flags(pf.FLAG_VARS, pf.BUS_VAR_VANG)
True

>>> print bus.v_mag, net.get_var_values()[bus.index_v_mag]
1.09 1.09

>>> print bus.v_ang, net.get_var_values()[bus.index_v_ang]
-0.23 -0.23
```

A vector of variable values can be used to update the corresponding network quantities. This is done with the `Network` class method `set_var_values()`:

```
>>> bus.has_flags(pf.FLAG_VARS, pf.BUS_VAR_VANG)
True

>>> values = net.get_var_values()

>>> print bus.v_mag
1.09

>>> values[bus.index_v_mag] = 1.20
>>> net.set_var_values(values)

>>> print bus.v_mag
1.20
```

As we will see in later, variables are also useful for constructing network optimization problems.

The class method `get_var_values()` can also be used to get upper or lower limits of the variables. To do this, a valid *variable value code* must be passed to this method.

In addition to the class method `set_flags()`, which allows specifying variables of components having certain properties, one can also use the `Network` class method `set_flags_of_component()` to specify variables of individual components. This is useful when the desired components cannot be targeted using a property mask. For example, the following code illustrates how to set as variables the voltage magnitudes of buses whose indices are multiples of three:

```
>>> net.clear_flags()

>>> for bus in net.buses:
...     if bus.index % 3 == 0:
...         net.set_flags_of_component(bus, pf.FLAG_VARS, pf.BUS_VAR_VMAG)

>>> print net.num_vars, len([b for b in net.buses if b.index % 3 == 0]), net.num_buses
5 5 14
```

2.6 Projections

As explained above, once the network variables have been set, a vector with the current values of the selected variables is obtained with the class method `get_var_values()`. To extract subvectors that contain values

of specific variables, projection matrices can be used. These *matrices* can be obtained using the class method `get_var_projection()`, which take as arguments a *component type* and a variable mask, e.g., *bus variable masks*. The next example sets the variables of the network to be the bus voltage magnitudes and angles of all the buses, extracts the vector of values of all variables, and then extracts two subvectors having only voltage magnitudes and only voltage angles, respectively:

```
>>> import numpy as np
>>> import pfnet as pf

>>> net = pf.Network()
>>> net.load('ieee14.mat')

>>> net.set_flags(pf.OBJ_BUS,
...               pf.FLAG_VARS,
...               pf.BUS_PROP_ANY,
...               pf.BUS_VAR_VMAG|pf.BUS_VAR_VANG)

>>> print net.num_vars, 2*net.num_buses
28 28

>>> P1 = net.get_var_projection(pf.OBJ_BUS,pf.BUS_VAR_VMAG)
>>> P2 = net.get_var_projection(pf.OBJ_BUS,pf.BUS_VAR_VANG)

>>> print type(P1)
<class 'scipy.sparse.coo.coo_matrix'>

>>> x = net.get_var_values()
>>> v_mags = P1*x
>>> v_angs = P2*x

>>> print v_mags
[ 1.036  1.05   1.055  1.057  1.051  1.056  1.09   1.062  1.07   1.02
  1.019  1.01   1.045  1.06 ]

>>> print v_angs
[-0.27995081 -0.26459191 -0.26302112 -0.2581342  -0.26354472 -0.26075219
 -0.23317599 -0.23335052 -0.24818582 -0.15323991 -0.18029251 -0.22200588
 -0.0869174   0. ]

>>> print np.linalg.norm(x - (P1.T*v_mags+P2.T*v_angs))
0.0
```

2.7 Contingencies

PFNET provides a convenient way to specify and analyze network contingencies. A contingency is represented by an object of type `Contingency`, and is characterized by one or more *generator* or *branch* outages. The lists of generator and branch outages of a contingency can be specified at construction, or by using the class methods `add_gen_outage()` and `add_branch_outage()`, respectively. The following example shows how to construct a contingency:

```
>>> import pfnet as pf

>>> net = pf.Network()
>>> net.load('ieee14.mat')

>>> gen = net.get_gen(3)
```



```
>>> branch = net.get_branch(2)

>>> c1 = pf.Contingency(gens=[gen],branches=[branch])

>>> print c1.num_gen_outages, c1.num_branch_outages
1 1
```

Once a contingency has been constructed, it can be applied and later cleared. This is done using the class methods `apply()` and `clear()`. The `apply()` function sets the specified generator and branches on outage and disconnects them from the network. Voltage regulation and other controls provided by generator or transformers on outage are lost. The `clear()` function undoes the changes made by the `apply()` function. The following example shows how to apply and clear contingencies, and illustrates some of the side effects:

```
>>> print c1.has_gen_outage(gen), c1.has_branch_outage(branch)
True True

>>> gen_bus = gen.bus
>>> branch_bus = branch.bus_from

>>> # generator and branch connected to buses
>>> print gen in gen_bus.gens, branch in branch_bus.branches
True True

>>> c1.apply()

>>> print gen.is_on_outage(), branch.is_on_outage()
True True

>>> # generator and branch disconnected from buses
>>> print gen in gen_bus.gens, branch in branch_bus.branches
False False

>>> c1.clear()

>>> print gen.is_on_outage(), branch.is_on_outage()
False False

>>> # generator and branch connected to buses again
>>> print gen in gen_bus.gens, branch in branch_bus.branches
True True
```


DATA PARSERS

This section describes the different data parsers available in PFNET and the supported file types.

3.1 MATPOWER Case Files

MATPOWER is a **MATLAB** package for solving power flow and optimal power flow problems. It contains several power flow and optimal power flow cases defined in **MATLAB** files. These “M” files can be converted to CSV files using the script `mpc2mat.m`. These MATPOWER-converted CSV files have extension `.mat` and can be used to load power networks in PFNET.

3.2 ARTERE Case Files

PFNET can load networks from case files used by **ARTERE**, which is a software for performing power flow computations using the Newton-Raphson method. These files should have extension `.art`. Details about these data files can be found in the document “**ARTERE: description of data files**”.

Currently, PFNET has limited support of these files. More specifically:

- Components with open breakers are ignored.
- For LTC-V devices, tap positions are treated as continuous and the optional fields are ignored.
- The SWITCH, TRFO, PSHIFT-P, TURLIM, SVC, LFRESV, BUSPART and BRAPART records are not supported.
- Computation control parameters are ignored.

3.2.1 Added Records

Variable generators, batteries, base power, etc.

3.3 RAW Case Files

If built with raw parsing capabilities, which requires linking PFNET with `libraw_parser`, PFNET can load power networks from files with extension `.raw`. These files are used by the software PSS®E and are widely used by North American power system operators.

VISUALIZATION

This section describes how to visualize power networks using PFNET. To have this capability, PFNET needs the [Graphviz](#) library `libgvc`.

4.1 Overview

To visualize a power network, a [Graph](#) object needs to be created. To do this, one needs to specify the power [Network](#) that is to be associated with the graph:

```
>>> import pfnet as pf

>>> net = pf.Network()
>>> net.load('ieee14.mat')

>>> g = pf.Graph(net)
```


Then, a layout must be created for graph. This can be done using the [Graph](#) class method `set_layout`. This method uses the [sfdp algorithm](#) of [Graphviz](#).

The [Graph](#) class provides routines for coloring nodes (network buses) according to different criteria. For example, buses can be colored according to reactive power mismatches:

```
>>> g.set_layout()

>>> g.color_nodes_by_mismatch(pf.BUS_MIS_REACTIVE)

>>> g.view()
```

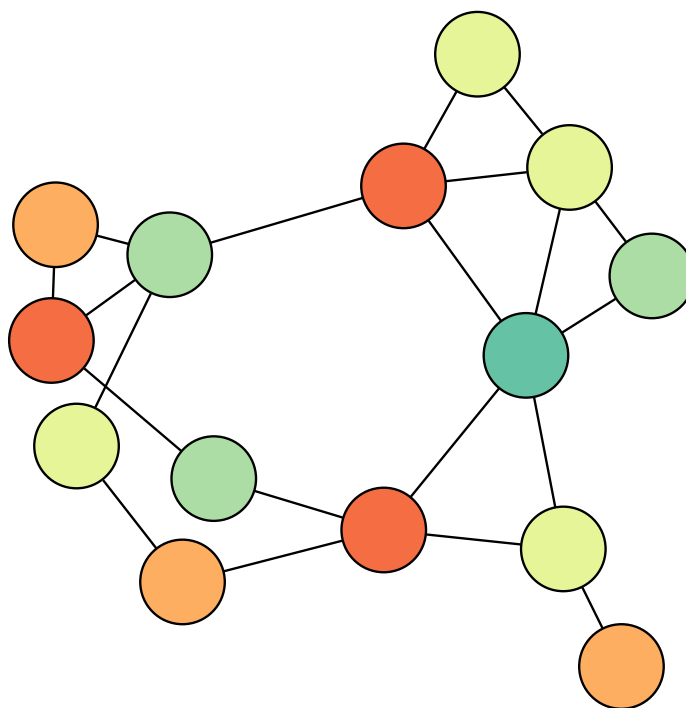

OPTIMIZATION PROBLEMS

This section describes how to formulate power network optimization problems using PFNET.

5.1 Objective Function

The objective function ϕ for a network optimization problem created using PFNET is of the form

$$\phi(x) = \sum_i w_i \varphi_i(x),$$

where w_i are weights, φ_i are general linear or nonlinear functions, and x is a vector of values of network quantities that have been set as variables. Each weight-function pair in the summation is represented by an object of type `Function`. To instantiate an object of this type, the function type and weight need to be specified as well as the `Network` object that is to be associated with the function. The following example sets all bus voltage magnitudes as variables and constructs a function that penalizes voltage magnitude deviations from ideal values:

```
>>> import pfnet as pf

>>> net = pf.Network()
>>> net.load('ieee14.mat')

>>> net.set_flags(pf.OBJ_BUS,
...              pf.FLAG_VARS,
...              pf.BUS_PROP_ANY,
...              pf.BUS_VAR_VMAG)

>>> func = pf.Function(pf.FUNC_TYPE_REG_VMAG, 0.3, net)

>>> print func.type == pf.FUNC_TYPE_REG_VMAG
True

>>> print func.weight
0.3
```

After a `Function` object is created, its value, gradient and Hessian are zero, an empty vector, and an empty matrix, respectively. Before evaluating the function at a specific vector of values, it must be analyzed using the `Function` class method `analyze()`. This routine analyzes the function and allocates the required vectors and matrices for storing its gradient and Hessian. After this, the function can be evaluated using the method `eval()`:

```
>>> x = net.get_var_values()

>>> func.analyze()

>>> func.eval(x)
```

The value $\varphi_i(x)$, gradient $\nabla\varphi_i(x)$ and Hessian $\nabla^2\varphi_i(x)$ of a function can then be extracted from the `phi`, `gphi` and `Hphi` attributes, respectively:

```
>>> print x.shape
(14,)

>>> print func.phi
0.255

>>> print type(func.gphi), func.gphi.shape
<type 'numpy.ndarray'> (14,)

>>> print type(func.Hphi), func.Hphi.shape
<class 'scipy.sparse.coo.coo_matrix'> (14, 14)
```

For the Hessian matrix, only the lower triangular part is stored.

Details about each of the different function types available in PFNET are provided below.

5.1.1 Voltage magnitude regularization

This function has type `FUNC_TYPE_REG_VMAG`. It penalizes deviations of bus voltage magnitudes from ideal values. It is defined by the expression

$$\varphi(x) := \frac{1}{2} \sum_k \left(\frac{v_k - v_k^t}{\Delta v} \right)^2 + \frac{1}{2} \sum_k \left(\frac{v_k^y}{\Delta v} \right)^2 + \frac{1}{2} \sum_k \left(\frac{v_k^z}{\Delta v} \right)^2 + \frac{1}{2} \sum_k \left(\frac{v_k^h}{\Delta v} \right)^2 + \frac{1}{2} \sum_k \left(\frac{v_k^l}{\Delta v} \right)^2,$$

where v are bus voltage magnitudes, v^t are voltage magnitude set points (one for buses not regulated by generators), v^y and v^z are positive and negative deviations of v from v^t , v^h and v^l are voltage band upper and lower limit violations, and Δv is a normalization factor. Only terms that include optimization variables are included in the summation.

5.1.2 Voltage magnitude soft limit penalty

This function has type `FUNC_TYPE_SLIM_VMAG`. It reduces voltage (soft) limit violations by penalizing deviations of bus voltage magnitudes from the mid point of their ranges. It is defined by the expression

$$\varphi(x) := \frac{1}{2} \sum_k \left(\frac{v_k - \bar{v}_k}{\Delta v} \right)^2,$$

where v are bus voltage magnitudes, \bar{v} are the mid points of their ranges, and Δv is a normalization factor. Only terms that include optimization variables are included in the summation.

5.1.3 Voltage angle regularization

This function has type `FUNC_TYPE_REG_VANG`. It penalizes large bus voltage angles and voltage angle differences across branches. It is defined by the expression

$$\varphi(x) := \frac{1}{2} \sum_k \left(\frac{\theta_k}{\Delta\theta} \right)^2 + \frac{1}{2} \sum_{(k,m)} \left(\frac{\theta_k - \theta_m - \phi_{km}}{\Delta\theta} \right)^2,$$

where θ are bus voltage angles, ϕ are branch phase shifts, and $\Delta\theta$ is a normalization factor. Only terms that include optimization variables are included in the summation.

5.1.4 Generator powers regularization

This function has type `FUNC_TYPE_REG_PQ`. It penalizes deviations of generator powers from the midpoint of their ranges. It is defined by the expression

$$\varphi(x) := \frac{1}{2} \sum_k \left(\frac{P_k^g - \bar{P}_k}{\Delta P} \right)^2 + \frac{1}{2} \sum_k \left(\frac{Q_k^g - \bar{Q}_k}{\Delta Q} \right)^2,$$

where P^g and Q^g are generator active and reactive powers, \bar{P} and \bar{Q} are midpoints of generator active and reactive power ranges, and $\Delta P = \Delta Q$ are normalization factors. Only terms that include optimization variables are included in the summation.

5.1.5 Active power generation cost

This function has type `FUNC_TYPE_GEN_COST`. It measures active power generation cost by the expression

$$\varphi(x) := \sum_k q_{k0} + q_{k1} P_k + q_{k2} P_k^2,$$

where P_k are generator active powers in per unit base system power, and q_{k0} , q_{k1} , and q_{k2} are constant coefficients. These coefficients correspond to the attributes `cost_coeff_Q0`, `cost_coeff_Q1` and `cost_coeff_Q2` of each `Generator` object.

5.1.6 Net Active Power Consumption Cost

This function has type `FUNC_TYPE_NETCON_COST`. It measures the cost of net active power consumption of each bus using the price specified in the `price` attribute of each `Bus` object.

5.1.7 Active power consumption utility

This function has type `FUNC_TYPE_LOAD_UTIL`. It measures active power consumption utility by the expression

$$\varphi(x) := \sum_k q_{k0} + q_{k1} P_k + q_{k2} P_k^2,$$

where P_k are load active powers in per unit base system power, and q_{k0} , q_{k1} , and q_{k2} are constant coefficients. These coefficients correspond to the attributes `util_coeff_Q0`, `util_coeff_Q1` and `util_coeff_Q2` of each `Load` object.

5.1.8 Transformer tap ratio regularization

This function has type `FUNC_TYPE_REG_RATIO`. It penalizes deviations of tap ratios of tap-changing transformers from their initial value. It is defined by the expression

$$\varphi(x) := \frac{1}{2} \sum_k \left(\frac{t_k - t_k^0}{\Delta t} \right)^2 + \frac{1}{2} \sum_k \left(\frac{t_k^y}{\Delta t} \right)^2 + \frac{1}{2} \sum_k \left(\frac{t_k^z}{\Delta t} \right)^2,$$

where t are tap ratios of tap-changing transformers, t^0 are their initial values, t^y and t^z are positive and negative deviations of t from t^0 , and Δt is a normalization factor. Only terms that include optimization variables are included in the summation.

5.1.9 Transformer phase shift regularization

This function has type `FUNC_TYPE_REG_PHASE`. It penalizes deviations of phase shifts of phase shifting transformers from their initial value. It is defined by the expression

$$\varphi(x) := \frac{1}{2} \sum_k \left(\frac{\phi_k - \phi_k^0}{\Delta\phi} \right)^2$$

where ϕ are phase shifts of phase-shifting transformers, ϕ^0 are their initial values, and $\Delta\phi$ is a normalization factor. Only terms that include optimization variables are included in the summation.

5.1.10 Switched shunt susceptance regularization

This function has type `FUNC_TYPE_REG_SUSC`. It penalizes deviations of susceptances of switched shunt devices from their initial value. It is defined by the expression

$$\varphi(x) := \frac{1}{2} \sum_k \left(\frac{b_k - b_k^0}{\Delta b} \right)^2 + \frac{1}{2} \sum_k \left(\frac{b_k^y}{\Delta b} \right)^2 + \frac{1}{2} \sum_k \left(\frac{b_k^z}{\Delta b} \right)^2,$$

where b are susceptances of switched shunt devices, b^0 are their initial values, b^y and b^z are positive and negative deviations of b from b^0 , and Δb is a normalization factor. Only terms that include optimization variables are included in the summation.

5.1.11 Sparsity inducing penalty for controls

This function has type `FUNC_TYPE_SP_CONTROLS`. It encourages sparse control adjustments with the expression

$$\varphi(x) := \sum_k \sqrt{\left(\frac{u_k - u_k^0}{\Delta u_k} \right)^2 + \epsilon},$$

where u are control quantities, u^0 are their current values, and ϵ is a small positive scalar. The normalization factors Δu_k are given by

$$\Delta u_k := \max\{u_k^{\max} - u_k^{\min}, \delta\},$$

where u^{\max} and u^{\min} are control limits, and δ is a small positive scalar. The control quantities that are considered by this function are specified using the `Network` class methods `set_flags()` or `set_flags_of_component()` using the flag type `FLAG_SPARSE`.

5.2 Constraints

Constraints in PFNET are of the form

$$\begin{aligned} Ax &= b \\ f(x) &= 0 \\ l &\leq Gx \leq u, \end{aligned}$$

where A and G are sparse matrices, b , l and u are vectors, f is a vector-valued nonlinear function, and x is a vector of values of network quantities that have been set as variables. They are represented by objects of type `Constraint`. To create an object of this type, the constraint type and the network to be associated with the constraint need to be specified. The following example sets all bus voltage magnitudes and angles as variables and constructs the power flow constraints:

```

>>> import pfnet as pf

>>> net = pf.Network()
>>> net.load('ieee14.mat')

>>> net.set_flags(pf.OBJ_BUS,
...              pf.FLAG_VARS,
...              pf.BUS_PROP_ANY,
...              pf.BUS_VAR_VMAG|pf.BUS_VAR_VANG)

>>> print net.num_vars == 2*net.num_buses
True

>>> constr = pf.Constraint(pf.CONSTR_TYPE_PF, net)

>>> print constr.type == pf.CONSTR_TYPE_PF
True

```

Before a `Constraint` object can be used, it must be initialized using the `Constraint` class method `analyze()`. This routine analyzes the constraint and allocates the required vectors and matrices. After this, the constraint can be evaluated using the method `eval()`:

```

>>> x = net.get_var_values()

>>> constr.analyze()

>>> constr.eval(x)

```

The matrices and vectors associated with the linear constraints can be extracted from the `A`, `G`, `b`, `l` and `u` attributes of the `Constraint` object. The vector of violations and Jacobian matrix of the nonlinear constraints can be extracted from the attributes `f` and `J`, respectively. Also, the Hessian matrix of any individual nonlinear constraint $f_i(x) = 0$ can be extracted using the class method `get_H_single()`. The following example shows how to extract the largest power flow mismatch in per unit system base power and the Hessian matrix corresponding to the active power balance constraint of a bus:

```

>>> import numpy as np

>>> f = constr.f

>>> print type(f), f.shape
<type 'numpy.ndarray'> (28,)

>>> print np.linalg.norm(f, np.inf)
0.042

>>> bus = net.get_bus(5)
>>> Hi = constr.get_H_single(bus.index_P)

>>> print type(Hi), Hi.shape, Hi.nnz
<class 'scipy.sparse.coo.coo_matrix'> (28, 28) 27

```

As before, all Hessian matrices have stored only the lower triangular part. In addition to being possible to extract Hessian matrices of individual nonlinear constraints, it is also possible to construct any linear combination of these individual Hessian matrices. This can be done using the `Constraint` class method `combine_H()`. After this, the resulting matrix can be extracted from the `H_combined` attribute:

```

>>> coefficients = np.random.randn(f.size)

```

```
>>> constr.combine_H(coefficients)
>>> H = constr.H_combined

>>> print type(H), H.shape, H.nnz
<class 'scipy.sparse.coo.coo_matrix'> (28, 28) 564
```

Lastly, Lagrange multiplier estimates of the linear and nonlinear constraints can be used to store sensitivity information in the network components associated with the constraints. This is done using the class method `store_sensitivities()`. Component-specific attributes that store sensitivity information are described in the *API Reference* section.

Details about each of the different constraint types available in PFNET are provided below.

5.2.1 AC Power balance

This constraint has type `CONSTR_TYPE_PF`. It enforces active and reactive power balance at every bus of the network. It is given by

$$(P_k^g + jQ_k^g) - (P_k^l + jQ_k^l) - S_k^{sh} - \sum_{m \in [n]} S_{km} = 0, \forall k \in [n],$$

where P^g and Q^g are generator active and reactive powers, P^l and Q^l are load active and reactive powers, S^{sh} are apparent powers flowing out of buses through shunt devices, S are apparent powers flowing out of buses through branches, n is the number of buses, and $[n] := \{1, \dots, n\}$.

5.2.2 DC Power balance

This constraint has type `CONSTR_TYPE_DCPF`. It enforces “DC” active power balance at every bus of the network. It is given by

$$P_k^g - P_k^l + \sum_{m \in [n]} b_{km} (\theta_k - \theta_m - \phi_{km}) = 0, \forall k \in [n],$$

where P^g are generator active powers, P^l are load active powers, b_{km} are branch susceptances, θ_k are bus voltage angles, ϕ_{km} are phase shifts of phase-shifting transformers, n is the number of buses, and $[n] := \{1, \dots, n\}$.

5.2.3 Branch DC power flow limits

This constraint has type `CONSTR_TYPE_DC_FLOW_LIM`. It enforces branch “DC” power flow limits due to thermal ratings. It is given by

$$-P_{km}^{\max} \leq -b_{km} (\theta_k - \theta_m - \phi_{km}) \leq P_{km}^{\max},$$

for each branch (k, m) , where b_{km} are branch susceptances, θ_k are bus voltage angles, ϕ_{km} are phase shifts of phase-shifting transformers, and P_{km}^{\max} are branch power flow limits.

5.2.4 Variable fixing

This constraint has type `CONSTR_TYPE_FIX`. It constrains specific variables to be fixed at their current value. The variables to be fixed are specified using the `Network` class methods `set_flags()` or `set_flags_of_component()` with the flag type `FLAG_FIXED`.

5.2.5 Variable bounding

This constraint has type `CONSTR_TYPE_BOUND`. It constrains specific variables to be inside their bounds. The variables to be bounded are specified using the `Network` class methods `set_flags()` or `set_flags_of_component()` with the flag type `FLAG_BOUNDED`. These constraints are expressed as nonlinear equality constraints using the techniques described in Section 4.3.3 of [TTR2015].

For conventional linear bounds, the constraint type `CONSTR_TYPE_LBOUND` can be used.

5.2.6 Generator participation

This constraint has type `CONSTR_TYPE_PAR_GEN`. It enforces specific active power participations among slack generators, and reactive power participations among generators regulating the same bus voltage magnitude. For slack generators, all participate with equal active powers. For voltage regulating generators, each one participates with the same fraction of its total resources. More specifically, this constraint enforces

$$P_k^g = P_m^g,$$

for all slack generators k and m connected to the same bus, and

$$\frac{Q_k^g - Q_k^{\min}}{Q_k^{\max} - Q_k^{\min}} = \frac{Q_m^g - Q_m^{\min}}{Q_m^{\max} - Q_m^{\min}},$$

for all generators k and m regulating the same bus voltage magnitude, where Q^{\min} and Q^{\max} are generator reactive power limits.

5.2.7 Voltage set-point regulation by generators

This constraint has type `CONSTR_TYPE_REG_GEN`. It enforces voltage set-point regulation by generators. It approximates the constraints

$$\begin{aligned} v_k &= v_k^t + v_k^y - v_k^z \\ 0 &\leq (Q_k - Q_k^{\min}) \perp v_k^y \geq 0 \\ 0 &\leq (Q_k^{\max} - Q_k) \perp v_k^z \geq 0, \end{aligned}$$

for each bus k whose voltage is regulated by generators, where v are bus voltage magnitudes, v^t are their set points, v^y and v^z are positive and negative deviations of v from v^t , and Q , Q^{\max} and Q^{\min} are aggregate reactive powers and limits of the generators regulating the same bus voltage magnitude.

5.2.8 Voltage band regulation by transformers

This constraint has type `CONSTR_TYPE_REG_TRAN`. It enforces voltage band regulation by tap-changing transformers. It approximates the constraints

$$\begin{aligned} t_k &= t_k^0 + t_k^y - t_k^z \\ 0 &\leq (v_k + v_k^l - v_k^{\min}) \perp t_k^y \geq 0 \\ 0 &\leq (v_k^{\max} - v_k + v_k^h) \perp t_k^z \geq 0 \\ 0 &\leq (t_k^{\max} - t_k) \perp v_k^l \geq 0 \\ 0 &\leq (t_k - t_k^{\min}) \perp v_k^h \geq 0, \end{aligned}$$

for each bus k whose voltage is regulated by tap-changing transformers, where v are bus voltage magnitudes, v^{\max} and v^{\min} are their band limits, v^l and v^h are voltage violations of band lower and upper limits, t are transformer tap

ratios, t^0 , t^{\max} and t^{\min} are their current values and limits, and t^y and t^z are positive and negative deviations of t from t^0 . The above equations assume that the sensitivity between voltage magnitude and transformer tap ratio is positive. If it is negative, t^y and t^z are interchanged in the first two complementarity constraints, and v^l and v^h are interchanged in the bottom two complementarity constraints.

5.2.9 Voltage band regulation by switched shunts

This constraint has type `CONSTR_TYPE_REG_SHUNT`. It enforces voltage band regulation by switched shunt devices. It approximates the constraints

$$\begin{aligned} b_k &= b_k^0 + b_k^y - b_k^z \\ 0 &\leq (v_k + v_k^l - v_k^{\min}) \perp b_k^y \geq 0 \\ 0 &\leq (v_k^{\max} - v_k + v_k^h) \perp b_k^z \geq 0 \\ 0 &\leq (b_k^{\max} - b_k) \perp v_k^l \geq 0 \\ 0 &\leq (b_k - b_k^{\min}) \perp v_k^h \geq 0, \end{aligned}$$

for each bus k whose voltage is regulated by switched shunt devices, where v are bus voltage magnitudes, v^{\max} and v^{\min} are their band limits, v^l and v^h are voltage violations of band lower and upper limits, b are switched shunt susceptances, b^0 , b^{\max} and b^{\min} are their current values and limits, and b^y and b^z are positive and negative deviations of b from b^0 .

5.3 Problems

Optimization problems constructed with PFNET are of the form

$$\begin{aligned} &\text{minimize} && \varphi(x) \\ &\text{subject to} && Ax = b \\ & && f(x) = 0 \\ & && l \leq Gx \leq u, \end{aligned}$$

As already noted, the objective function φ is a weighted sum of functions φ_i . The linear and nonlinear constraints $Ax = b$, $l \leq Gx \leq u$, and $f(x) = 0$ correspond to one or more of the constraints described above. An optimization problem in PFNET is represented by an object of type `Problem`.

After instantiation, a `Problem` is empty and one needs to specify the `Network` that is to be associated with the problem, the `Constraints` to include, and the `Functions` that form the objective function. This can be done using the `Problem` class methods `set_network()`, `add_constraint()`, and `add_function()`. The following example shows how to construct a simple power flow problem and solve it using the Newton-Raphson method:

```
import pfnet as pf
from numpy import hstack
from numpy.linalg import norm
from scipy.sparse import bmat
from scipy.sparse.linalg import spsolve

def NRsolve(net):

    net.clear_flags()

    # bus voltage angles
    net.set_flags(pf.OBJ_BUS,
                 pf.FLAG_VARS,
```

```

        pf.BUS_PROP_NOT_SLACK,
        pf.BUS_VAR_VANG)

# bus voltage magnitudes
net.set_flags(pf.OBJ_BUS,
              pf.FLAG_VARS,
              pf.BUS_PROP_NOT_REG_BY_GEN,
              pf.BUS_VAR_VMAG)

# slack gens active powers
net.set_flags(pf.OBJ_GEN,
              pf.FLAG_VARS,
              pf.GEN_PROP_SLACK,
              pf.GEN_VAR_P)

# regulator gens reactive powers
net.set_flags(pf.OBJ_GEN,
              pf.FLAG_VARS,
              pf.GEN_PROP_REG,
              pf.GEN_VAR_Q)

p = pf.Problem()
p.set_network(net)
p.add_constraint(pf.CONSTR_TYPE_PF)           # power flow
p.add_constraint(pf.CONSTR_TYPE_PAR_GEN_P)    # generator participation
p.add_constraint(pf.CONSTR_TYPE_PAR_GEN_Q)    # generator participation
p.analyze()

x = p.get_init_point()
p.eval(x)

residual = lambda x: hstack((p.A*x-p.b,p.f))

while norm(residual(x)) > 1e-4:
    x = x + spsolve(bmat([[p.A],[p.J]],format='csr'),-residual(x))
    p.eval(x)

net.set_var_values(x)
net.update_properties()

```

The above routine can then be used as follows:

```

>>> net = Network()
>>> net.load('case3012wp.mat')

>>> print net.bus_P_mis, net.bus_Q_mis
2.79e+0 1.56e+1

>>> NRsolve(net)

>>> print net.bus_P_mis, net.bus_Q_mis
2.37e-6 3.58e-6

```

As shown in the example, the `Problem` class method `analyze()` needs to be called before the vectors and matrices associated with the problem constraints and functions can be used. The method `eval()` can then be used for evaluating the problem objective and constraint functions at different points. As is the case for `Constraints`, a `Problem` has a method `combine_H()` for forming linear combinations of individual constraint Hessians, and a method `store_sensitivities()` for storing sensitivity information in the network components associated with

the constraints.

API REFERENCE

6.1 Vector

class `numpy.ndarray`
See [numpy documentation](#).

6.2 Matrix

class `scipy.sparse.coo_matrix`
See [scipy documentation](#).

6.3 Bus

6.3.1 Bus Properties

`pfnet.BUS_PROP_ANY`
Any bus.

`pfnet.BUS_PROP_SLACK`
Slack bus.

`pfnet.BUS_PROP_REG_BY_GEN`
Bus with voltage magnitude regulated by one or more generators.

`pfnet.BUS_PROP_REG_BY_TRAN`
Bus with voltage magnitude regulated by one or more tap-changing transformers.

`pfnet.BUS_PROP_REG_BY_SHUNT`
Bus with voltage magnitude regulated by one or more switched shunt devices.

`pfnet.BUS_PROP_NOT_REG_BY_GEN`
Bus with voltage magnitude that is not regulated by generators.

`pfnet.BUS_PROP_NOT_SLACK`
Bus that is not a slack bus.

6.3.2 Bus Variables

`pfnet.BUS_VAR_VMAG`
Bus voltage magnitude.

`pfnet.BUS_VAR_VANG`

Bus voltage angle.

`pfnet.BUS_VAR_VDEV`

Bus voltage magnitude positive and negative set-point deviations.

`pfnet.BUS_VAR_VVIO`

Bus voltage magnitude upper and lower bound violations.

6.3.3 Bus Sensitivities

`pfnet.BUS_SENS_LARGEST`

Largest objective function sensitivity with respect to constraints involving this bus.

`pfnet.BUS_SENS_P_BALANCE`

Objective function sensitivity with respect to active power balance.

`pfnet.BUS_SENS_Q_BALANCE`

Objective function sensitivity with respect to reactive power balance.

`pfnet.BUS_SENS_V_MAG_U_BOUND`

Objective function sensitivity with respect to voltage magnitude upper bound.

`pfnet.BUS_SENS_V_MAG_L_BOUND`

Objective function sensitivity with respect to voltage magnitude lower bound.

`pfnet.BUS_SENS_V_ANG_U_BOUND`

Objective function sensitivity with respect to voltage angle upper bound.

`pfnet.BUS_SENS_V_ANG_L_BOUND`

Objective function sensitivity with respect to voltage angle lower bound.

`pfnet.BUS_SENS_V_REG_BY_GEN`

Objective function sensitivity with respect to voltage magnitude regulation by generators.

`pfnet.BUS_SENS_V_REG_BY_TRAN`

Objective function sensitivity with respect to voltage magnitude regulation by tap-changing transformers.

`pfnet.BUS_SENS_V_REG_BY_SHUNT`

Objective function sensitivity with respect to voltage magnitude regulation by switched shunt devices.

6.3.4 Bus Power Mismatches

`pfnet.BUS_MIS_LARGEST`

Largest bus power mismatch.

`pfnet.BUS_MIS_ACTIVE`

Bus active power mismatch.

`pfnet.BUS_MIS_REACTIVE`

Bus reactive power mismatch.

6.3.5 Bus Class

`class pfnet.Bus (alloc=True)`

Bus class.

Parameters `alloc`: {True, False}

P_mis

Bus active power mismatch (p.u. system base MVA) (float).

Q_mis

Bus reactive power mismatch (p.u. system base MVA) (float).

bats

List of `batteries` connected to this bus (list).

branches

List of `branches` incident on this bus (list).

branches_from

List of `branches` that have this bus on the “from” side (list).

branches_to

List of `branches` that have this bus on the “to” side (list).

degree

Bus degree (number of incident branches) (float).

gens

List of `generators` connected to this bus (list).

get_largest_mis (*self*)

Gets the bus power mismatch of largest absolute value.

Returns `mis` : float

get_largest_mis_type (*self*)

Gets the type of bus power mismatch of largest absolute value.

Returns `type` : int

get_largest_sens (*self*)

Gets the bus sensitivity of largest absolute value.

Returns `sens` : float

get_largest_sens_type (*self*)

Gets the type of bus sensitivity of largest absolute value.

Returns `type` : int

get_quantity (*self*, *type*)

Gets the bus quantity of the given type.

Parameters `type` : int (*Bus Sensitivities*., *Bus Power Mismatches*)

Returns `value` : float

get_total_gen_P (*self*)

Gets the total active power injected by generators connected to this bus.

Returns `P` : float

get_total_gen_Q (*self*)

Gets the total reactive power injected by generators connected to this bus.

Returns `Q` : float

get_total_gen_Q_max (*self*)

Gets the largest total reactive power that can be injected by generators connected to this bus.

Returns `Q_max` : float

get_total_gen_Q_min (*self*)

Gets the smallest total reactive power that can be injected by generators connected to this bus.

Returns **Q_min** : float

get_total_load_P (*self*)

Gets the total active power consumed by loads connected to this bus.

Returns **P** : float

get_total_load_Q (*self*)

Gets the total reactive power consumed by loads connected to this bus.

Returns **Q** : float

get_total_shunt_b (*self*)

Gets the combined susceptance of shunt devices connected to this bus.

Returns **b** : float

get_total_shunt_g (*self*)

Gets the combined conductance of shunt devices connected to this bus.

Returns **g** : float

has_flags (*self*, *fmask*, *vmask*)

Determines whether the bus has the flags associated with certain quantities set.

Parameters **fmask** : int (*Flag Types*)

vmask : int (*Bus Variables*)

Returns **flag** : {True, False}

index

Bus index (int).

index_P

Index of bus active power mismatch (int).

index_Q

Index for bus reactive power mismatch (int).

index_v_ang

Index of voltage angle variable (int).

index_v_mag

Index of voltage magnitude variable (int).

index_vh

Index of voltage high limit violation variable (int).

index_vl

Index of voltage low limit violation variable (int).

index_y

Index of voltage magnitude positive deviation variable (int).

index_z

Index of voltage magnitude negative deviation variable (int).

is_equal (*self*, *other*)

Determines whether bus is equal to given bus.

Parameters **other** : *Bus*

is_regulated_by_gen (*self*)

Determines whether the bus is regulated by a generator.

Returns flag: {True, False}

is_regulated_by_shunt (*self*)

Determines whether the bus is regulated by a shunt device.

Returns flag: {True, False}

is_regulated_by_tran (*self*)

Determines whether the bus is regulated by a transformer.

Returns flag: {True, False}

is_slack (*self*)

Determines whether the bus is a slack bus.

Returns flag: {True, False}

loads

List of `loads` connected to this bus (list).

name

Bus name (string).

number

Bus number (int).

obj_type

Object type (int).

price

Bus energy price (float) (\$ / (hr p.u.)).

reg_gens

List of `generators` regulating the voltage magnitude of this bus (list).

reg_shunts

List of `switched shunt devices` regulating the voltage magnitude of this bus (list).

reg_trans

List of `tap-changing transformers` regulating the voltage magnitude of this bus (list).

sens_P_balance

Objective function sensitivity with respect to bus active power balance (float).

sens_Q_balance

Objective function sensitivity with respect to bus reactive power balance (float).

sens_v_ang_l_bound

Objective function sensitivity with respect to voltage angle lower bound (float).

sens_v_ang_u_bound

Objective function sensitivity with respect to voltage angle upper bound (float).

sens_v_mag_l_bound

Objective function sensitivity with respect to voltage magnitude lower bound (float).

sens_v_mag_u_bound

Objective function sensitivity with respect to voltage magnitude upper bound (float).

sens_v_reg_by_gen

Objective function sensitivity with respect to bus voltage regulation by generators (float).

sens_v_reg_by_shunt

Objective function sensitivity with respect to bus voltage regulation by shunts (float).

sens_v_reg_by_tran

Objective function sensitivity with respect to bus voltage regulation by transformers (float).

show (*self*)

Shows bus properties.

v_ang

Bus voltage angle (radians) (float).

v_mag

Bus voltage magnitude (p.u. bus base kv) (float).

v_max

Bus voltage upper bound (p.u. bus base kv) (float).

v_min

Bus voltage lower bound (p.u. bus base kv) (float).

v_set

Bus voltage set point (p.u. bus base kv) (float). Equals one if bus is not regulated by a generator.

vargens

List of `variable generators` connected to this bus (list).

6.4 Branch

6.4.1 Branch Properties

`pfnet.BRANCH_PROP_ANY`

Any branch.

`pfnet.BRANCH_PROP_TAP_CHANGER`

Branch that is tap-changing transformer.

`pfnet.BRANCH_PROP_TAP_CHANGER_V`

Branch that is tap-changing transformer regulating a bus voltage magnitude.

`pfnet.BRANCH_PROP_TAP_CHANGER_Q`

Branch that is tap-changing transformer regulating reactive power flow.

`pfnet.BRANCH_PROP_PHASE_SHIFTER`

Branch that is phase-shifting transformer regulating active power flow.

`pfnet.BRANCH_PROP_NOT_OUT`

Branch that is not on outage.

6.4.2 Branch Variables

`pfnet.BRANCH_VAR_RATIO`

Transformer tap ratio.

`pfnet.BRANCH_VAR_RATIO_DEV`

Transformer tap ratio deviations from current value.

`pfnet.BRANCH_VAR_PHASE`

Transformer phase shift.

6.4.3 Branch Class

```
class pfnet.Branch (alloc=True)
    Branch class.

        Parameters alloc : {True, False}

    P_flow_DC
        Active power flow (DC approx.) from bus “from” to bus “to” (float).

    b
        Branch series susceptance (p.u.) (float).

    b_from
        Branch shunt susceptance at the “from” side (p.u.) (float).

    b_to
        Branch shunt susceptance at the “to” side (p.u.) (float).

    bus_from
        Bus connected to the “from” side.

    bus_to
        Bus connected to the “to” side.

    g
        Branch series conductance (p.u.) (float).

    g_from
        Branch shunt conductance at the “from” side (p.u.) (float).

    g_to
        Branch shunt conductance at the “to” side (p.u.) (float).

    has_flags (self, fmask, vmask)
        Determines whether the branch has the flags associated with specific quantities set.

        Parameters fmask : int (Flag Types)

        vmask : int (Branch Variables)

        Returns flag : {True, False}

    has_pos_ratio_v_sens (self)
        Determines whether tap-changing transformer has positive sensitivity between tap ratio and controlled bus voltage magnitude.

        Returns flag : {True, False}

    index
        Branch index (int).

    index_phase
        Index of transformer phase shift variable (int).

    index_ratio
        Index of transformer tap ratio variable (int).

    index_ratio_y
        Index of transformer tap ratio positive deviation variable (int).

    index_ratio_z
        Index of transformer tap ratio negative deviation variable (int).
```

is_equal (*self*, *other*)
 Determines whether branch is equal to given branch.

Parameters *other*: [Branch](#)

is_fixed_tran (*self*)
 Determines whether branch is fixed transformer.

Returns flag: {True, False}

is_line (*self*)
 Determines whether branch is transmission line.

Returns flag: {True, False}

is_on_outage (*self*)
 Determines whether branch in on outage.

Returns flag: {True, False}

is_phase_shifter (*self*)
 Determines whether branch is phase shifter.

Returns flag: {True, False}

is_tap_changer (*self*)
 Determines whether branch is tap-changing transformer.

Returns flag: {True, False}

is_tap_changer_Q (*self*)
 Determines whether branch is tap-changing transformer that regulates reactive power flow.

Returns flag: {True, False}

is_tap_changer_v (*self*)
 Determines whether branch is tap-changing transformer that regulates bus voltage magnitude.

Returns flag: {True, False}

obj_type
 Object type (int).

outage
 Flag that indicates whehter branch is on outage.

phase
 Transformer phase shift (radians) (float).

phase_max
 Transformer phase shift upper limit (radians) (float).

phase_min
 Transformer phase shift lower limit (radians) (float).

ratingA
 Branch thermal rating A (p.u. system base power) (float).

ratingB
 Branch thermal rating B (p.u. system base power) (float).

ratingC
 Branch thermal rating C (p.u. system base power) (float).

ratio
 Transformer tap ratio (float).

ratio_max

Transformer tap ratio upper limit (float).

ratio_min

Transformer tap ratio lower limit (float).

reg_bus

[Bus](#) whose voltage is regulated by this tap-changing transformer.

sens_P_l_bound

Objective function sensitivity with respect to active power flow lower bound (float).

sens_P_u_bound

Objective function sensitivity with respect to active power flow upper bound (float).

6.5 Generator

6.5.1 Generator Properties

`pfnet.GEN_PROP_ANY`

Any generator.

`pfnet.GEN_PROP_SLACK`

Slack generator.

`pfnet.GEN_PROP_REG`

Generator that regulates a bus voltage magnitude.

`pfnet.GEN_PROP_NOT_REG`

Generator that does not regulate a bus voltage magnitude.

`pfnet.GEN_PROP_NOT_SLACK`

Generator that is not a slack generator.

`pfnet.GEN_PROP_NOT_OUT`

Generator that is not on outage.

`pfnet.GEN_PROP_P_ADJUST`

Generator that can adjust its active power, e.g., $P_{\min} < P_{\max}$.

6.5.2 Generator Variables

`pfnet.GEN_VAR_P`

Generator active power.

`pfnet.GEN_VAR_Q`

Generator reactive power.

6.5.3 Generator Class

`class pfnet.Generator (alloc=True)`

Generator class.

Parameters `alloc`: {True, False}

P

Generator active power (p.u. system base MVA) (float).

P_cost
Active power generation cost (\$/hr).

P_max
Generator active power upper limit (p.u. system base MVA) (float).

P_min
Generator active power lower limit (p.u. system base MVA) (float).

Q
Generator reactive power (p.u. system base MVA) (float).

Q_max
Generator reactive power upper limit (p.u. system base MVA) (float).

Q_min
Generator reactive power lower limit (p.u. system base MVA) (float).

bus
[Bus](#) to which generator is connected.

cost_coeff_Q0
Coefficient for generation cost function (constant term, units of \$/hr).

cost_coeff_Q1
Coefficient for generation cost function (linear term, units of \$/(hr p.u.)).

cost_coeff_Q2
Coefficient for generation cost function (quadratic term, units of \$/(hr p.u.²)).

has_flags (*self*, *fmask*, *vmask*)
Determines whether the generator has the flags associated with certain quantities set.

Parameters *fmask* : int (*Flag Types*)

vmask : int (*Generator Variables*)

Returns *flag* : {True, False}

index
Generator index (int).

index_P
Index of generator active power variable (int).

index_Q
Index of generator reactive power variable (int).

is_P_adjustable (*self*)
Determines whether generator has adjustable active power.

Returns *flag* : {True, False}

is_equal (*self*, *other*)
Determines whether generator is equal to given generator.

Parameters *other* : [Generator](#)

is_on_outage (*self*)
Determines whether generator in on outage.

Returns *flag* : {True, False}

is_regulator (*self*)
Determines whether generator provides voltage regulation.

Returns flag : {True, False}

is_slack (*self*)

Determines whether generator is slack.

Returns flag : {True, False}

obj_type

Object type (int).

outage

Flag that indicates whehter generator is on outage.

reg_bus

[Bus](#) whose voltage is regulated by this generator.

sens_P_l_bound

Objective function sensitivity with respect to active power lower bound (float).

sens_P_u_bound

Objective function sensitivity with respect to active power upper bound (float).

6.6 Shunt

6.6.1 Shunt Properties

`pfnet.SHUNT_PROP_ANY`

Any shunt.

`pfnet.SHUNT_PROP_SWITCHED_V`

Switched shunt devices that regulates a bus voltage magnitude.

6.6.2 Shunt Variables

`pfnet.SHUNT_VAR_SUSC`

Switched shunt susceptance.

`pfnet.SHUNT_VAR_SUSC_DEV`

Switched shunt susceptance deviations from current point.

6.6.3 Shunt Class

`class pfnet.Shunt (alloc=True)`

Shunt class.

Parameters alloc : {True, False}

b

Shunt susceptance (p.u.) (float).

b_max

Shunt susceptance upper limit (p.u.) (float).

b_min

Shunt susceptance lower limit (p.u.) (float).

bus
Bus to which the shunt devices is connected.

g
 Shunt conductance (p.u.) (float).

has_flags (*self*, *fmask*, *vmask*)
 Determines whether the shunt devices has flags associated with certain quantities set.

Parameters *fmask* : int (*Flag Types*)

vmask : int (*Bus Variables*)

Returns *flag* : {True, False}

index
 Shunt index (int).

index_b
 Index of shunt susceptance variable (int).

index_y
 Index of shunt susceptance positive deviation variable (int).

index_z
 Index of shunt susceptance negative deviation variable (int).

is_fixed (*self*)
 Determines whether the shunt device is fixed (as opposed to switched).

Returns *flag* : {True, False}

is_switched_v (*self*)
 Determines whether the shunt is switchable and regulates bus voltage magnitude.

Returns *flag* : {True, False}

obj_type
 Object type (int).

reg_bus
Bus whose voltage magnitude is regulated by this shunt device.

6.7 Load

6.7.1 Load Properties

`pfnet.LOAD_PROP_ANY`
 Any load.

`pfnet.LOAD_PROP_P_ADJUST`
 Load that can adjust its active power, e.g., $P_{\min} < P_{\max}$.

6.7.2 Load Variables

`pfnet.LOAD_VAR_P`
 Load active power.

6.7.3 Load Class

`class pfnet.Load(alloc=True)`

Load class.

Parameters `alloc`: {True, False}

P

Load active power (p.u. system base MVA) (float).

P_max

Load active power upper limit (p.u. system base MVA) (float).

P_min

Load active power lower limit (p.u. system base MVA) (float).

P_util

Active power load utility (\$/hr).

Q

Load reactive power (p.u. system base MVA) (float).

bus

Bus to which load is connected.

has_flags(*self*, *fmask*, *vmask*)

Determines whether the load has the flags associated with certain quantities set.

Parameters `fmask`: int (*Flag Types*)

`vmask`: int (*Load Variables*)

Returns `flag`: {True, False}

index

Load index (int).

index_P

Index of load active power variable (int).

is_P_adjustable(*self*)

Determines whether the load has adjustable active power.

Returns `flag`: {True, False}

obj_type

Object type (int).

sens_P_l_bound

Objective function sensitivity with respect to active power lower bound (float).

sens_P_u_bound

Objective function sensitivity with respect to active power upper bound (float).

util_coeff_Q0

Coefficient for consumption utility function (constant term, units of \$/hr).

util_coeff_Q1

Coefficient for consumption utility function (linear term, units of \$/(hr p.u.)).

util_coeff_Q2

Coefficient for consumption utility function (quadratic term, units of \$/(hr p.u.^2)).

6.8 Variable Generator

6.8.1 Variable Generator Properties

`pfnet.VARGEN_PROP_ANY`
Any variable generator.

6.8.2 Variable Generator Variables

`pfnet.VARGEN_VAR_P`
Variable generator active power.

`pfnet.VARGEN_VAR_Q`
Variable generator reactive power.

6.8.3 Variable Generator Class

`class pfnet.VarGenerator (alloc=True)`
Variable generator class.

Parameters `alloc` : {True, False}

P
Variable generator active power (p.u. system base MVA) (float).

P_max
Variable generator active power upper limit (p.u. system base MVA) (float).

P_min
Variable generator active power lower limit (p.u. system base MVA) (float).

P_std
Variable generator active power standard deviation (p.u. system base MVA) (float).

Q
Variable generator reactive power (p.u. system base MVA) (float).

Q_max
Variable generator maximum reactive power (p.u. system base MVA) (float).

Q_min
Variable generator minimum reactive power (p.u. system base MVA) (float).

bus
[Bus](#) to which variable generator is connected.

has_flags (*self*, *fmask*, *vmask*)
Determines whether the variable generator has the flags associated with certain quantities set.

Parameters `fmask` : int (*Flag Types*)
`vmask` : int (*Variable Generator Variables*)

Returns `flag` : {True, False}

index
Variable generator index (int).

index_P
Index of variable generator active power variable (int).

index_Q
Index of variable generator reactive power variable (int).

name
Variable generator name (string).

obj_type
Object type (int).

6.9 Battery

6.9.1 Battery Properties

`pfnet.BAT_PROP_ANY`
Any battery.

6.9.2 Battery Variables

`pfnet.BAT_VAR_P`
Battery charging/discharging power.

`pfnet.BAT_VAR_E`
Battery energy level.

6.9.3 Battery Class

`class pfnet.Battery(alloc=True)`
Battery class.

Parameters `alloc`: {True, False}

E
Battery energy level (p.u. system base MVA times time unit) (float).

E_max
Battery energy level upper limit (p.u. system base MVA times time unit) (float).

P
Battery charging power (p.u. system base MVA) (float).

P_max
Battery charging power upper limit (p.u. system base MVA) (float).

P_min
Battery charging power lower limit (p.u. system base MVA) (float).

bus
`Bus` to which battery is connected.

eta_c
Battery charging efficiency (unitless) (float).

eta_d
Battery discharging efficiency (unitless) (float).

has_flags (*self*, *fmask*, *vmask*)

Determines whether the battery has the flags associated with certain quantities set.

Parameters **fmask** : int (*Flag Types*)

vmask : int (*Battery Variables*)

Returns **flag** : {True, False}

index

Battery index (int).

index_E

Index of battery energy level variable (int).

index_Pc

Index of battery charging power variable (int).

index_Pd

Index of battery discharging power variable (int).

obj_type

Object type (int).

6.10 Network

6.10.1 Component Types

`pfnet.OBJ_BUS`

Bus.

`pfnet.OBJ_GEN`

Generator.

`pfnet.OBJ_BRANCH`

Branch.

`pfnet.OBJ_SHUNT`

Shunt device.

`pfnet.OBJ_LOAD`

Load.

`pfnet.OBJ_VARGEN`

Variable generator (solar, wind, etc).

`pfnet.OBJ_BAT`

Battery.

`pfnet.OBJ_UNKNOWN`

Unknown network component.

6.10.2 Flag Types

`pfnet.FLAG_VARS`

For specifying quantities as variables.

`pfnet.FLAG_FIXED`

For specifying variables that should be fixed.

`pfnet.FLAG_BOUNDED`

For specifying variables that should be bounded.

`pfnet.FLAG_SPARSE`

For specifying control adjustments that should be sparse.

6.10.3 Variable Value Codes

`pfnet.CURRENT`

Current variable value.

`pfnet.UPPER_LIMIT`

Upper limit of variable.

`pfnet.LOWER_LIMIT`

Lower limit of variable.

6.10.4 Network Class

`class pfnet.Network (alloc=True)`

Network class.

Parameters `alloc` : {True, False}

add_vargens (*self*, *buses*, *penetration*, *uncertainty*, *corr_radius*, *corr_value*)

Adds variable generators to the network.

Parameters `buses` : list of `Buses`

penetration : float

percentage

uncertainty : float

percentage

corr_radius : int

number of branches

corr_value : float

correlation coefficient

adjust_generators (*self*)

Adjusts powers of slack and regulator generators connected to or regulating the same bus to correct generator participations without modifying the total power injected.

base_power

System base power (MVA) (float).

batteries

List of network `batteries` (list).

branches

List of network `branches` (list).

bus_P_mis

Largest bus active power mismatch in the network (MW) (float).

bus_Q_mis
Largest bus reactive power mismatch in the network (MVar) (float).

bus_v_max
Maximum bus voltage magnitude (p.u.) (float).

bus_v_min
Minimum bus voltage magnitude (p.u.) (float).

bus_v_vio
Maximum bus voltage magnitude limit violation (p.u.) (float).

buses
List of network `buses` (list).

clear_error (*self*)
Clear error flag and message string.

clear_flags (*self*)
Clears all the flags of all the network components.

clear_properties (*self*)
Clears all the network properties.

clear_sensitivities (*self*)
Clears all sensitivity information.

create_sorted_bus_list (*self*, *sort_by*)
Creates list of buses sorted in descending order according to a specific quantity.

Parameters *sort_by* : int (*Bus Sensitivities*, *Bus Power Mismatches*).
Returns *buses* : list of `Buses`

create_vargen_P_sigma (*self*, *spread*, *corr*)
Creates covariance matrix (lower triangular part) for variable vargen active powers.

Parameters *spread* : int
Determines correlation neighborhood in terms of number of edges.
corr : float
Desired correlation coefficient for neighboring vargens.
Returns *sigma* : `coo_matrix`

gen_P_cost
Total active power generation cost (\$/hr) (float).

gen_P_vio
Largest generator active power limit violation (MW) (float).

gen_Q_vio
Largest generator reactive power limit violation (MVar) (float).

gen_v_dev
Largest voltage magnitude deviation from set point of bus regulated by generator (p.u.) (float).

generators
List of network `generators` (list).

get_bat (*self*, *index*)
Gets battery with the given index.

Parameters *index* : int

Returns `bat` : `Battery`

get_branch (*self*, *index*)

Gets branch with the given index.

Parameters `index` : int

Returns `branch` : `Branch`

get_bus (*self*, *index*)

Gets bus with the given index.

Parameters `index` : int

Returns `bus` : `Bus`

get_bus_by_name (*self*, *name*)

Gets bus with the given name.

Parameters `name` : string

Returns `bus` : `Bus`

get_bus_by_number (*self*, *number*)

Gets bus with the given number.

Parameters `number` : int

Returns `bus` : `Bus`

get_gen (*self*, *index*)

Gets generator with the given index.

Parameters `index` : int

Returns `gen` : `Generator`

get_gen_buses (*self*)

Gets list of buses where generators are connected.

Returns `buses` : list

get_load (*self*, *index*)

Gets load with the given index.

Parameters `index` : int

Returns `gen` : `Load`

get_load_buses (*self*)

Gets list of buses where loads are connected.

Returns `buses` : list

get_num_P_adjust_gens (*self*)

Gets number of generators in the network that have adjustable active powers.

Returns `num` : int

get_num_P_adjust_loads (*self*)

Gets number of loads in the network that have adjustable active powers.

Returns `num` : int

get_num_bats (*self*)

Gets number of batteries in the network.

Returns `num` : int

get_num_branches (*self*)

Gets number of branches in the network.

Returns num : int

get_num_branches_not_on_outage (*self*)

Gets number of branches in the network that are not on outage.

Returns num : int

get_num_buses (*self*)

Gets number of buses in the network.

Returns num : int

get_num_buses_reg_by_gen (*self*)

Gets number of buses whose voltage magnitudes are regulated by generators.

Returns num : int

get_num_buses_reg_by_shunt (*self*, *only=False*)

Gets number of buses whose voltage magnitudes are regulated by switched shunt devices.

Returns num : int

get_num_buses_reg_by_tran (*self*, *only=False*)

Gets number of buses whose voltage magnitudes are regulated by tap-changing transformers.

Returns num : int

get_num_fixed_shunts (*self*)

Gets number of fixed shunts in the network.

Returns num : int

get_num_fixed_trans (*self*)

Gets number of fixed transformers in the network.

Returns num : int

get_num_gens (*self*)

Gets number of generators in the network.

Returns num : int

get_num_gens_not_on_outage (*self*)

Gets number of generators in the network that are not on outage.

Returns num : int

get_num_lines (*self*)

Gets number of transmission lines in the network.

Returns num : int

get_num_loads (*self*)

Gets number of loads in the network.

Returns num : int

get_num_phase_shifters (*self*)

Gets number of phase-shifting transformers in the network.

Returns num : int

get_num_reg_gens (*self*)

Gets number generators in the network that provide voltage regulation.

Returns `num` : int

get_num_shunts (*self*)

Gets number of shunts in the network.

Returns `num` : int

get_num_slack_buses (*self*)

Gets number of slack buses in the network.

Returns `num` : int

get_num_slack_gens (*self*)

Gets number of slack generators in the network.

Returns `num` : int

get_num_switched_shunts (*self*)

Gets number of switched shunts in the network.

Returns `num` : int

get_num_tap_changers (*self*)

Gets number of tap-changing transformers in the network.

Returns `num` : int

get_num_tap_changers_Q (*self*)

Gets number of tap-changing transformers in the network that regulate reactive flows.

Returns `num` : int

get_num_tap_changers_v (*self*)

Gets number of tap-changing transformers in the network that regulate voltage magnitudes.

Returns `num` : int

get_num_vargens (*self*)

Gets number of variable generators in the network.

Returns `num` : int

get_properties (*self*)

Gets network properties.

Returns `properties` : dict

get_shunt (*self*, *index*)

Gets shunt with the given index.

Parameters `index` : int

Returns `gen` : `Shunt`

get_var_projection (*self*, *obj_type*, *var*)

Gets projection matrix for specific object variables.

Parameters `obj_type` : int (*Component Types*)

`var` : int (*Bus Variables, Branch Variables, Generator Variables, Shunt Variables, Load Variables, Variable Generator Variables, Battery Variables*)

get_var_values (*self*, *code*=*CURRENT*)

Gets network variable values.

Parameters `code` : int (See var values)

Returns values : `ndarray`

get_vargen (*self*, *index*)

Gets variable generator with the given index.

Parameters index : `int`

Returns vargen : `VarGenerator`

get_vargen_by_name (*self*, *name*)

Gets vargen with the given name.

Parameters name : `string`

Returns vargen : `VarGenerator`

has_error (*self*)

Indicates whether the network has the error flag set due to an invalid operation.

load (*self*, *filename*)

Loads a network data contained in a specific file.

Parameters filename : `string`

load_P_util

Total active power consumption utility (\$/hr) (float).

load_P_vio

Largest load active power limit violation (MW) (float).

loads

List of network `loads` (list).

num_actions

Number of control adjustments (int).

num_bats

Number of batteries in the network (int).

num_bounded

Number of network quantities that have been set to bounded (int).

num_branches

Number of branches in the network (int).

num_buses

Number of buses in the network (int).

num_fixed

Number of network quantities that have been set to fixed (int).

num_gens

Number of generators in the network (int).

num_loads

Number of loads in the network (int).

num_shunts

Number of shunt devices in the network (int).

num_sparse

Number of network control quantities that have been set to sparse (int).

num_vargens

Number of variable generators in the network (int).

num_vars

Number of network quantities that have been set to variable (int).

set_flags (*self, obj_type, flags, props, vals*)

Sets flags of network components with specific properties.

Parameters **obj_type** : int (*Component Types*)

flags : int or list (*Flag Types*)

props : int or list (*Bus Properties, Branch Properties, Generator Properties, Shunt Properties, Load Properties, Variable Generator Properties, Battery Properties*)

vals : int or list (*Bus Variables, Branch Variables, Generator Variables, Shunt Variables, Load Variables, Variable Generator Variables, Battery Variables*)

set_flags_of_component (*self, obj, flags, vals*)

Sets flags of network components with specific properties.

Parameters **obj** : *Bus, Branch, Generator, Load, Shunt, VarGenerator, Battery*

flags : int or list (*Flag Types*)

vals : int or list (*Bus Variables, Branch Variables, Generator Variables, Shunt Variables, Load Variables, Variable Generator Variables, Battery Variables*)

set_var_values (*self, values*)

Sets network variable values.

Parameters **values** : *ndarray*

show_buses (*self, number, sort_by*)

Shows information about the most relevant network buses sorted by a specific quantity.

Parameters **number** : int

sort_by : int (*Bus Sensitivities, Bus Power Mismatches*)

show_components (*self*)

Shows information about the number of network components of each type.

show_properties (*self*)

Shows information about the state of the network component quantities.

shunt_b_vio

Largest switched shunt susceptance limit violation (p.u.) (float).

shunt_v_vio

Largest voltage magnitude band violation of voltage regulated by switched shunt device (p.u.) (float).

shunts

List of network *shunts* (list).

tran_p_vio

Largest transformer phase shift limit violation (float).

tran_r_vio

Largest transformer tap ratio limit violation (float).

tran_v_vio

Largest voltage magnitude band violation of voltage regulated by transformer (p.u.) (float).

update_properties (*self, values=None*)

Re-computes the network properties using the given values of the network variables. If no values are given, then the current values of the network variables are used.

Parameters **values** : `ndarray`

update_set_points (*self*)
Updates voltage magnitude set points of gen-regulated buses to be equal to the bus voltage magnitudes.

var_generators
List of network `variable` `generators` (list).

vargen_corr_radius
Correlation radius of variable generators (number of edges).

vargen_corr_value
Correlation value (coefficient) of variable generators.

6.11 Contingency

class `pfnet.Contingency` (*gens=None, branches=None, alloc=True*)
Contingency class.

Parameters **gens** : list or `Generators`

branches : list `Branchs`

alloc : {True, False}

add_branch_outage (*self, br*)
Adds branch outage to contingency.

Parameters **br** : `Branch`

add_gen_outage (*self, gen*)
Adds generator outage to contingency.

Parameters **gen** : `Generator`

apply (*self*)
Applies outages that characterize contingency.

clear (*self*)
Clears outages that characterize contingency.

has_branch_outage (*self, br*)
Determines whether contingency specifies the given branch as being on outage.

Parameters **branch** : `Branch`

Returns **result** : {True, False}

has_gen_outage (*self, gen*)
Determines whether contingency specifies the given generator as being on outage.

Parameters **gen** : `Generator`

Returns **result** : {True, False}

num_branch_outages
Number of branch outages.

num_gen_outages
Number of generator outages.

show (*self*)
Shows contingency information.

6.12 Graph

`class pfnet.Graph (net, alloc=True)`

Graph class.

Parameters `net` : `Network`

`alloc` : {True, False}

`clear_error (self)`

Clear error flag and message string.

`color_nodes_by_mismatch (self, mis_type)`

Colors the graphs nodes according to their power mismatch.

Parameters `mis_type` : int (*Bus Power Mismatches*)

`color_nodes_by_sensitivity (self, sens_type)`

Colors the graphs nodes according to their sensitivity.

Parameters `sens_type` : int (*Bus Sensitivities*)

`has_error (self)`

Indicates whether the graph has the error flag set due to an invalid operation.

`has_viz (self)`

Determines whether graph has visualization capabilities.

Returns `flag` : {True, False}

`set_edges_property (self, prop, value)`

Sets property of edges. See [Graphviz documentation](#).

Parameters `prop` : string

`value` : string

`set_layout (self)`

Determines and saves a layout for the graph nodes.

`set_node_property (self, bus, prop, value)`

Sets property of node. See [Graphviz documentation](#).

Parameters `bus` : `Bus`

`prop` : string

`value` : string

`set_nodes_property (self, prop, value)`

Sets property of nodes. See [Graphviz documentation](#).

Parameters `prop` : string

`value` : string

`view (self, inline=False)`

Displays the graph.

`write (self, format, filename)`

Writes the graph to a file.

Parameters `format` : string (*Graphviz output formats*)

`filename` : string

6.13 Function

6.13.1 Function Types

`pfnet.FUNC_TYPE_UNKNOWN`

Unknown function.

`pfnet.FUNC_TYPE_REG_VMAG`

Bus voltage magnitude regularization.

`pfnet.FUNC_TYPE_SLIM_VMAG`

Bus voltage magnitude soft limits penalty.

`pfnet.FUNC_TYPE_REG_VANG`

Bus voltage angle regularization.

`pfnet.FUNC_TYPE_REG_PQ`

Generator active and reactive power regularization.

`pfnet.FUNC_TYPE_GEN_COST`

Active power generation cost.

`pfnet.FUNC_TYPE_NETCON_COST`

Net power consumption cost.

`pfnet.FUNC_TYPE_LOAD_UTIL`

Active power consumption utility.

`pfnet.FUNC_TYPE_REG_RATIO`

Transformer tap ratio regularization.

`pfnet.FUNC_TYPE_REG_PHASE`

Transformer phase shift regularization.

`pfnet.FUNC_TYPE_REG_SUSC`

Switched shunt susceptance regularization.

`pfnet.FUNC_TYPE_SP_CONTROLS`

Sparsity-inducing penalty for control adjustments.

6.13.2 Function Class

`class pfnet.Function(int type, float weight, Network net, alloc=True)`

Function class.

Parameters `type` : int (*Function Types*)

`weight` : float

`net` : *Network*

`alloc` : {True, False}

Hcounter

Number of nonzero entries in Hessian matrix (int).

Hphi

Function Hessian matrix (only the lower triangular part) (*coo_matrix*).

analyze (*self*)

Analyzes function and allocates required vectors and matrices.

clear_error (*self*)
Clears internal error flag.

del_matvec (*self*)
Deletes matrices and vectors associated with this function.

eval (*self*, *var_values*)
Evaluates function value, gradient, and Hessian using the given variable values.

Parameters *var_values* : `ndarray`

gphi
Function gradient vector (`ndarray`).

phi
Function value (float).

type
Function type (int).

update_network (*self*)
Updates internal arrays to be compatible with any network changes.

weight
Function weight (float).

6.14 Constraint

6.14.1 Constraint Types

`pfnet.CONSTR_TYPE_PF`
Constraint for enforcing AC power balance at every bus of the network.

`pfnet.CONSTR_TYPE_DCPF`
Constraint for enforcing DC power balance at every bus of the network.

`pfnet.CONSTR_TYPE_FIX`
Constraint for fixing a subset of variables to their current value.

`pfnet.CONSTR_TYPE_BOUND`
Constraint for forcing a subset of variables to be within their bounds (nonlinear).

`pfnet.CONSTR_TYPE_LBOUND`
Constraint for forcing a subset of variables to be within their bounds (linear).

`pfnet.CONSTR_TYPE_PAR_GEN_P`
Constraint for enforcing generator active power participations.

`pfnet.CONSTR_TYPE_PAR_GEN_Q`
Constraint for enforcing generator reactive power participations.

`pfnet.CONSTR_TYPE_REG_GEN`
Constraint for enforcing voltage set point regulation by generators.

`pfnet.CONSTR_TYPE_REG_TRAN`
Constraint for enforcing voltage band regulation by tap-changing transformers.

`pfnet.CONSTR_TYPE_REG_SHUNT`
Constraint for enforcing voltage band regulation by switched shunt devices.

`pfnet.CONSTR_TYPE_DC_FLOW_LIM`
 Constraint for enforcing DC power flow limits on every branch

6.14.2 Constraint Class

`class pfnet.Constraint (int type, Network net, alloc=True)`
 Constraint class.

Parameters `type` : int (*Constraint Types*)

`net` : *Network*

`alloc` : {True, False}

A

Matrix for linear equality constraints (*coo_matrix*).

Aconstr_index

Index of linear equality constraint (int).

Acounter

Number of nonzero entries in the matrix of linear equality constraints (int).

G

Matrix for linear inequality constraints (*coo_matrix*).

Gconstr_index

Index of linear inequality constraint (int).

Gcounter

Number of nonzero entries in the matrix of linear inequality constraints (int).

H_combined

Linear combination of Hessian matrices of individual nonlinear equality constraints (only the lower triangular part) (*coo_matrix*).

J

Jacobian matrix of nonlinear equality constraints (*coo_matrix*).

Jconstr_index

Index of nonlinear equality constraint (int).

Jcounter

Number of nonzero entries in the Jacobian matrix of the nonlinear equality constraints (int).

analyze (*self*)

Analyzes constraint and allocates required vectors and matrices.

b

Right-hand side vector of linear equality constraints (*ndarray*).

clear_error (*self*)

Clears internal error flag.

combine_H (*self*, *coeff*, *ensure_psd=False*)

Forms and saves a linear combination of the individual constraint Hessians.

Parameters `coeff` : *ndarray*

`ensure_psd` : {True, False}

del_matvec (*self*)

Deletes matrices and vectors associated with this constraint.

eval (*self*, *var_values*)
Evaluates constraint violations, Jacobian, and individual Hessian matrices.

Parameters *var_values* : `ndarray`

f
Vector of nonlinear equality constraint violations (`ndarray`).

get_H_single (*self*, *i*)
Gets the Hessian matrix (only lower triangular part) of an individual constraint.

Parameters *i* : `int`

Returns *H* : `coo_matrix`

l
Lower bound vector of linear inequality constraints (`ndarray`).

store_sensitivities (*self*, *sA*, *sf*, *sGu*, *sGl*)
Stores Lagrange multiplier estimates of the constraints in the power network components.

Parameters *sA* : `ndarray`
sensitivities for linear equality constraints ($Ax = b$)

sf : `ndarray`
sensitivities for nonlinear equality constraints ($f(x) = 0$)

sGu : `ndarray`
sensitivities for linear inequality constraints ($Gx \leq u$)

sGl : `ndarray`
sensitivities for linear inequality constraints ($l \leq Gx$)

type
Constraint type (*Constraint Types*) (`int`).

u
Upper bound vector of linear inequality constraints (`ndarray`).

update_network (*self*)
Updates internal arrays to be compatible with any network changes.

6.15 Optimization Problem

6.15.1 Problem Class

class `pfnet.Problem`
Optimization problem class.

A
Constraint matrix of linear equality constraints (`coo_matrix`).

G
Constraint matrix of linear inequality constraints (`coo_matrix`).

H_combined
Linear combination of Hessian matrices of individual nonlinear equality constraints (only the lower triangular part) (`coo_matrix`).

Hphi
Objective function Hessian matrix (only the lower triangular part) (`coo_matrix`).

J
Jacobian matrix of the nonlinear equality constraints (`coo_matrix`).

add_constraint (*self*, *ctype*)
Adds constraint to optimization problem.

Parameters *ctype* : int (*Constraint Types*)

add_function (*self*, *ftype*, *weight*)
Adds function to optimization problem objective.

Parameters *ftype* : int (*Function Types*)

weight : float

analyze (*self*)
Analyzes function and constraint structures and allocates required vectors and matrices.

b
Right hand side vectors of the linear equality constraints (`ndarray`).

clear (*self*)
Resets optimization problem data.

combine_H (*self*, *coeff*, *ensure_psd*)
Forms and saves a linear combination of the individual constraint Hessians.

Parameters *coeff* : `ndarray`

ensure_psd : {True, False}

constraints
List of `constraints` of this optimization problem (list).

eval (*self*, *var_values*)
Evaluates objective function and constraints as well as their first and second derivatives using the given variable values.

Parameters *var_values* : `ndarray`

f
Vector of nonlinear equality constraints violations (`ndarray`).

find_constraint (*self*, *type*)
Finds constraint of give type among the constraints of this optimization problem.

Parameters *type* : int (*Constraint Types*)

functions
List of `functions` that form the objective function of this optimization problem (list).

get_init_point (*self*)
Gets initial solution estimate from the current value of the network variables.

Returns *point* : `ndarray`

get_lower_limits (*self*)
Gets vector of lower limits for the network variables.

Returns *limits* : `ndarray`

get_network (*self*)
Gets the power network associated with this optimization problem.

get_upper_limits (*self*)
 Gets vector of upper limits for the network variables.

Returns **limits** : `ndarray`

gphi
 Objective function gradient vector (`ndarray`).

l
 Lower bound for linear inequality constraints (`ndarray`).

lam
 Initial dual point (`ndarray`).

network
 Power network associated with this optimization problem (`Network`).

nu
 Initial dual point (`ndarray`).

phi
 Objective function value (float).

set_network (*self*, *net*)
 Sets the power network associated with this optimization problem.

show (*self*)
 Shows information about this optimization problem.

store_sensitivities (*self*, *sA*, *sf*, *sGu*, *sGl*)
 Stores Lagrange multiplier estimates of the constraints in the power network components.

Parameters **sA** : `ndarray`
 sensitivities for linear equality constraints ($Ax = b$)

sf : `ndarray`
 sensitivities for nonlinear equality constraints ($f(x) = 0$)

sGu : `ndarray`
 sensitivities for linear inequality constraints ($Gx \leq u$)

sGl : `ndarray`
 sensitivities for linear inequality constraints ($l \leq Gx$)

u
 Upper bound for linear inequality constraints (`ndarray`).

update_lin (*self*)
 Updates linear equality constraints.

x
 Initial primal point (`ndarray`).

6.16 References

INDICES AND TABLES

- *genindex*
- *modindex*
- *search*

BIBLIOGRAPHY

- [TTR2015] T. Tinoco De Rubira, *Numerical Optimization and Modeling Techniques for Power System Operations and Planning*. PhD thesis, Stanford University, March 2015.

p

pfnet, 1

p

pfnet, 1

A

A (pfnet.Constraint attribute), 56
 A (pfnet.Problem attribute), 57
 Aconstr_index (pfnet.Constraint attribute), 56
 Acounter (pfnet.Constraint attribute), 56
 add_branch_outage() (pfnet.Contingency method), 52
 add_constraint() (pfnet.Problem method), 58
 add_function() (pfnet.Problem method), 58
 add_gen_outage() (pfnet.Contingency method), 52
 add_vargens() (pfnet.Network method), 45
 adjust_generators() (pfnet.Network method), 45
 analyze() (pfnet.Constraint method), 56
 analyze() (pfnet.Function method), 54
 analyze() (pfnet.Problem method), 58
 apply() (pfnet.Contingency method), 52

B

b (pfnet.Branch attribute), 35
 b (pfnet.Constraint attribute), 56
 b (pfnet.Problem attribute), 58
 b (pfnet.Shunt attribute), 39
 b_from (pfnet.Branch attribute), 35
 b_max (pfnet.Shunt attribute), 39
 b_min (pfnet.Shunt attribute), 39
 b_to (pfnet.Branch attribute), 35
 base_power (pfnet.Network attribute), 45
 bats (pfnet.Bus attribute), 31
 batteries (pfnet.Network attribute), 45
 Battery (class in pfnet), 43
 Branch (class in pfnet), 35
 branches (pfnet.Bus attribute), 31
 branches (pfnet.Network attribute), 45
 branches_from (pfnet.Bus attribute), 31
 branches_to (pfnet.Bus attribute), 31
 Bus (class in pfnet), 30
 bus (pfnet.Battery attribute), 43
 bus (pfnet.Generator attribute), 38
 bus (pfnet.Load attribute), 41
 bus (pfnet.Shunt attribute), 39
 bus (pfnet.VarGenerator attribute), 42
 bus_from (pfnet.Branch attribute), 35
 bus_P_mis (pfnet.Network attribute), 45

bus_Q_mis (pfnet.Network attribute), 45
 bus_to (pfnet.Branch attribute), 35
 bus_v_max (pfnet.Network attribute), 46
 bus_v_min (pfnet.Network attribute), 46
 bus_v_vio (pfnet.Network attribute), 46
 buses (pfnet.Network attribute), 46

C

clear() (pfnet.Contingency method), 52
 clear() (pfnet.Problem method), 58
 clear_error() (pfnet.Constraint method), 56
 clear_error() (pfnet.Function method), 54
 clear_error() (pfnet.Graph method), 53
 clear_error() (pfnet.Network method), 46
 clear_flags() (pfnet.Network method), 46
 clear_properties() (pfnet.Network method), 46
 clear_sensitivities() (pfnet.Network method), 46
 color_nodes_by_mismatch() (pfnet.Graph method), 53
 color_nodes_by_sensitivity() (pfnet.Graph method), 53
 combine_H() (pfnet.Constraint method), 56
 combine_H() (pfnet.Problem method), 58
 Constraint (class in pfnet), 56
 constraints (pfnet.Problem attribute), 58
 Contingency (class in pfnet), 52
 cost_coeff_Q0 (pfnet.Generator attribute), 38
 cost_coeff_Q1 (pfnet.Generator attribute), 38
 cost_coeff_Q2 (pfnet.Generator attribute), 38
 create_sorted_bus_list() (pfnet.Network method), 46
 create_vargen_P_sigma() (pfnet.Network method), 46

D

degree (pfnet.Bus attribute), 31
 del_matvec() (pfnet.Constraint method), 56
 del_matvec() (pfnet.Function method), 55

E

E (pfnet.Battery attribute), 43
 E_max (pfnet.Battery attribute), 43
 eta_c (pfnet.Battery attribute), 43
 eta_d (pfnet.Battery attribute), 43
 eval() (pfnet.Constraint method), 56
 eval() (pfnet.Function method), 55

`eval()` (pfnet.Problem method), 58

F

`f` (pfnet.Constraint attribute), 57

`f` (pfnet.Problem attribute), 58

`find_constraint()` (pfnet.Problem method), 58

Function (class in pfnet), 54

functions (pfnet.Problem attribute), 58

G

`g` (pfnet.Branch attribute), 35

`G` (pfnet.Constraint attribute), 56

`G` (pfnet.Problem attribute), 57

`g` (pfnet.Shunt attribute), 40

`g_from` (pfnet.Branch attribute), 35

`g_to` (pfnet.Branch attribute), 35

`Gconstr_index` (pfnet.Constraint attribute), 56

`Gcounter` (pfnet.Constraint attribute), 56

`gen_P_cost` (pfnet.Network attribute), 46

`gen_P_vio` (pfnet.Network attribute), 46

`gen_Q_vio` (pfnet.Network attribute), 46

`gen_v_dev` (pfnet.Network attribute), 46

Generator (class in pfnet), 37

generators (pfnet.Network attribute), 46

`gens` (pfnet.Bus attribute), 31

`get_bat()` (pfnet.Network method), 46

`get_branch()` (pfnet.Network method), 47

`get_bus()` (pfnet.Network method), 47

`get_bus_by_name()` (pfnet.Network method), 47

`get_bus_by_number()` (pfnet.Network method), 47

`get_gen()` (pfnet.Network method), 47

`get_gen_buses()` (pfnet.Network method), 47

`get_H_single()` (pfnet.Constraint method), 57

`get_init_point()` (pfnet.Problem method), 58

`get_largest_mis()` (pfnet.Bus method), 31

`get_largest_mis_type()` (pfnet.Bus method), 31

`get_largest_sens()` (pfnet.Bus method), 31

`get_largest_sens_type()` (pfnet.Bus method), 31

`get_load()` (pfnet.Network method), 47

`get_load_buses()` (pfnet.Network method), 47

`get_lower_limits()` (pfnet.Problem method), 58

`get_network()` (pfnet.Problem method), 58

`get_num_bats()` (pfnet.Network method), 47

`get_num_branches()` (pfnet.Network method), 47

`get_num_branches_not_on_outage()` (pfnet.Network method), 48

`get_num_buses()` (pfnet.Network method), 48

`get_num_buses_reg_by_gen()` (pfnet.Network method), 48

`get_num_buses_reg_by_shunt()` (pfnet.Network method), 48

`get_num_buses_reg_by_tran()` (pfnet.Network method), 48

`get_num_fixed_shunts()` (pfnet.Network method), 48

`get_num_fixed_trans()` (pfnet.Network method), 48

`get_num_gens()` (pfnet.Network method), 48

`get_num_gens_not_on_outage()` (pfnet.Network method), 48

`get_num_lines()` (pfnet.Network method), 48

`get_num_loads()` (pfnet.Network method), 48

`get_num_P_adjust_gens()` (pfnet.Network method), 47

`get_num_P_adjust_loads()` (pfnet.Network method), 47

`get_num_phase_shifters()` (pfnet.Network method), 48

`get_num_reg_gens()` (pfnet.Network method), 48

`get_num_shunts()` (pfnet.Network method), 49

`get_num_slack_buses()` (pfnet.Network method), 49

`get_num_slack_gens()` (pfnet.Network method), 49

`get_num_switched_shunts()` (pfnet.Network method), 49

`get_num_tap_changers()` (pfnet.Network method), 49

`get_num_tap_changers_Q()` (pfnet.Network method), 49

`get_num_tap_changers_v()` (pfnet.Network method), 49

`get_num_vargens()` (pfnet.Network method), 49

`get_properties()` (pfnet.Network method), 49

`get_quantity()` (pfnet.Bus method), 31

`get_shunt()` (pfnet.Network method), 49

`get_total_gen_P()` (pfnet.Bus method), 31

`get_total_gen_Q()` (pfnet.Bus method), 31

`get_total_gen_Q_max()` (pfnet.Bus method), 31

`get_total_gen_Q_min()` (pfnet.Bus method), 31

`get_total_load_P()` (pfnet.Bus method), 32

`get_total_load_Q()` (pfnet.Bus method), 32

`get_total_shunt_b()` (pfnet.Bus method), 32

`get_total_shunt_g()` (pfnet.Bus method), 32

`get_upper_limits()` (pfnet.Problem method), 58

`get_var_projection()` (pfnet.Network method), 49

`get_var_values()` (pfnet.Network method), 49

`get_vargen()` (pfnet.Network method), 50

`get_vargen_by_name()` (pfnet.Network method), 50

`gphi` (pfnet.Function attribute), 55

`gphi` (pfnet.Problem attribute), 59

Graph (class in pfnet), 53

H

`H_combined` (pfnet.Constraint attribute), 56

`H_combined` (pfnet.Problem attribute), 57

`has_branch_outage()` (pfnet.Contingency method), 52

`has_error()` (pfnet.Graph method), 53

`has_error()` (pfnet.Network method), 50

`has_flags()` (pfnet.Battery method), 43

`has_flags()` (pfnet.Branch method), 35

`has_flags()` (pfnet.Bus method), 32

`has_flags()` (pfnet.Generator method), 38

`has_flags()` (pfnet.Load method), 41

`has_flags()` (pfnet.Shunt method), 40

`has_flags()` (pfnet.VarGenerator method), 42

`has_gen_outage()` (pfnet.Contingency method), 52

`has_pos_ratio_v_sens()` (pfnet.Branch method), 35

`has_viz()` (pfnet.Graph method), 53

Hcounter (pfnet.Function attribute), 54
 Hphi (pfnet.Function attribute), 54
 Hphi (pfnet.Problem attribute), 57

I

index (pfnet.Battery attribute), 44
 index (pfnet.Branch attribute), 35
 index (pfnet.Bus attribute), 32
 index (pfnet.Generator attribute), 38
 index (pfnet.Load attribute), 41
 index (pfnet.Shunt attribute), 40
 index (pfnet.VarGenerator attribute), 42
 index_b (pfnet.Shunt attribute), 40
 index_E (pfnet.Battery attribute), 44
 index_P (pfnet.Bus attribute), 32
 index_P (pfnet.Generator attribute), 38
 index_P (pfnet.Load attribute), 41
 index_P (pfnet.VarGenerator attribute), 42
 index_Pc (pfnet.Battery attribute), 44
 index_Pd (pfnet.Battery attribute), 44
 index_phase (pfnet.Branch attribute), 35
 index_Q (pfnet.Bus attribute), 32
 index_Q (pfnet.Generator attribute), 38
 index_Q (pfnet.VarGenerator attribute), 43
 index_ratio (pfnet.Branch attribute), 35
 index_ratio_y (pfnet.Branch attribute), 35
 index_ratio_z (pfnet.Branch attribute), 35
 index_v_ang (pfnet.Bus attribute), 32
 index_v_mag (pfnet.Bus attribute), 32
 index_vh (pfnet.Bus attribute), 32
 index_vl (pfnet.Bus attribute), 32
 index_y (pfnet.Bus attribute), 32
 index_y (pfnet.Shunt attribute), 40
 index_z (pfnet.Bus attribute), 32
 index_z (pfnet.Shunt attribute), 40
 is_equal() (pfnet.Branch method), 35
 is_equal() (pfnet.Bus method), 32
 is_equal() (pfnet.Generator method), 38
 is_fixed() (pfnet.Shunt method), 40
 is_fixed_tran() (pfnet.Branch method), 36
 is_line() (pfnet.Branch method), 36
 is_on_outage() (pfnet.Branch method), 36
 is_on_outage() (pfnet.Generator method), 38
 is_P_adjustable() (pfnet.Generator method), 38
 is_P_adjustable() (pfnet.Load method), 41
 is_phase_shifter() (pfnet.Branch method), 36
 is_regulated_by_gen() (pfnet.Bus method), 32
 is_regulated_by_shunt() (pfnet.Bus method), 33
 is_regulated_by_tran() (pfnet.Bus method), 33
 is_regulator() (pfnet.Generator method), 38
 is_slack() (pfnet.Bus method), 33
 is_slack() (pfnet.Generator method), 39
 is_switched_v() (pfnet.Shunt method), 40
 is_tap_changer() (pfnet.Branch method), 36

is_tap_changer_Q() (pfnet.Branch method), 36
 is_tap_changer_v() (pfnet.Branch method), 36

J

J (pfnet.Constraint attribute), 56
 J (pfnet.Problem attribute), 58
 Jconstr_index (pfnet.Constraint attribute), 56
 Jcounter (pfnet.Constraint attribute), 56

L

l (pfnet.Constraint attribute), 57
 l (pfnet.Problem attribute), 59
 lam (pfnet.Problem attribute), 59
 Load (class in pfnet), 41
 load() (pfnet.Network method), 50
 load_P_util (pfnet.Network attribute), 50
 load_P_vio (pfnet.Network attribute), 50
 loads (pfnet.Bus attribute), 33
 loads (pfnet.Network attribute), 50

N

name (pfnet.Bus attribute), 33
 name (pfnet.VarGenerator attribute), 43
 Network (class in pfnet), 45
 network (pfnet.Problem attribute), 59
 nu (pfnet.Problem attribute), 59
 num_actions (pfnet.Network attribute), 50
 num_bats (pfnet.Network attribute), 50
 num_bounded (pfnet.Network attribute), 50
 num_branch_outages (pfnet.Contingency attribute), 52
 num_branches (pfnet.Network attribute), 50
 num_buses (pfnet.Network attribute), 50
 num_fixed (pfnet.Network attribute), 50
 num_gen_outages (pfnet.Contingency attribute), 52
 num_gens (pfnet.Network attribute), 50
 num_loads (pfnet.Network attribute), 50
 num_shunts (pfnet.Network attribute), 50
 num_sparse (pfnet.Network attribute), 50
 num_vargens (pfnet.Network attribute), 50
 num_vars (pfnet.Network attribute), 50
 number (pfnet.Bus attribute), 33
 numpy.ndarray (built-in class), 29

O

obj_type (pfnet.Battery attribute), 44
 obj_type (pfnet.Branch attribute), 36
 obj_type (pfnet.Bus attribute), 33
 obj_type (pfnet.Generator attribute), 39
 obj_type (pfnet.Load attribute), 41
 obj_type (pfnet.Shunt attribute), 40
 obj_type (pfnet.VarGenerator attribute), 43
 outage (pfnet.Branch attribute), 36
 outage (pfnet.Generator attribute), 39

P

- P (pfnet.Battery attribute), 43
- P (pfnet.Generator attribute), 37
- P (pfnet.Load attribute), 41
- P (pfnet.VarGenerator attribute), 42
- P_cost (pfnet.Generator attribute), 37
- P_flow_DC (pfnet.Branch attribute), 35
- P_max (pfnet.Battery attribute), 43
- P_max (pfnet.Generator attribute), 38
- P_max (pfnet.Load attribute), 41
- P_max (pfnet.VarGenerator attribute), 42
- P_min (pfnet.Battery attribute), 43
- P_min (pfnet.Generator attribute), 38
- P_min (pfnet.Load attribute), 41
- P_min (pfnet.VarGenerator attribute), 42
- P_mis (pfnet.Bus attribute), 30
- P_std (pfnet.VarGenerator attribute), 42
- P_util (pfnet.Load attribute), 41
- pfnet (module), 1
- pfnet.BAT_PROP_ANY (built-in variable), 43
- pfnet.BAT_VAR_E (built-in variable), 43
- pfnet.BAT_VAR_P (built-in variable), 43
- pfnet.BRANCH_PROP_ANY (built-in variable), 34
- pfnet.BRANCH_PROP_NOT_OUT (built-in variable), 34
- pfnet.BRANCH_PROP_PHASE_SHIFTER (built-in variable), 34
- pfnet.BRANCH_PROP_TAP_CHANGER (built-in variable), 34
- pfnet.BRANCH_PROP_TAP_CHANGER_Q (built-in variable), 34
- pfnet.BRANCH_PROP_TAP_CHANGER_V (built-in variable), 34
- pfnet.BRANCH_VAR_PHASE (built-in variable), 34
- pfnet.BRANCH_VAR_RATIO (built-in variable), 34
- pfnet.BRANCH_VAR_RATIO_DEV (built-in variable), 34
- pfnet.BUS_MIS_ACTIVE (built-in variable), 30
- pfnet.BUS_MIS_LARGEST (built-in variable), 30
- pfnet.BUS_MIS_REACTIVE (built-in variable), 30
- pfnet.BUS_PROP_ANY (built-in variable), 29
- pfnet.BUS_PROP_NOT_REG_BY_GEN (built-in variable), 29
- pfnet.BUS_PROP_NOT_SLACK (built-in variable), 29
- pfnet.BUS_PROP_REG_BY_GEN (built-in variable), 29
- pfnet.BUS_PROP_REG_BY_SHUNT (built-in variable), 29
- pfnet.BUS_PROP_REG_BY_TRAN (built-in variable), 29
- pfnet.BUS_PROP_SLACK (built-in variable), 29
- pfnet.BUS_SENS_LARGEST (built-in variable), 30
- pfnet.BUS_SENS_P_BALANCE (built-in variable), 30
- pfnet.BUS_SENS_Q_BALANCE (built-in variable), 30
- pfnet.BUS_SENS_V_ANG_L_BOUND (built-in variable), 30
- pfnet.BUS_SENS_V_ANG_U_BOUND (built-in variable), 30
- pfnet.BUS_SENS_V_MAG_L_BOUND (built-in variable), 30
- pfnet.BUS_SENS_V_MAG_U_BOUND (built-in variable), 30
- pfnet.BUS_SENS_V_REG_BY_GEN (built-in variable), 30
- pfnet.BUS_SENS_V_REG_BY_SHUNT (built-in variable), 30
- pfnet.BUS_SENS_V_REG_BY_TRAN (built-in variable), 30
- pfnet.BUS_VAR_VANG (built-in variable), 30
- pfnet.BUS_VAR_VDEV (built-in variable), 30
- pfnet.BUS_VAR_VMAG (built-in variable), 29
- pfnet.BUS_VAR_VVIO (built-in variable), 30
- pfnet.CONSTR_TYPE_BOUND (built-in variable), 55
- pfnet.CONSTR_TYPE_DC_FLOW_LIM (built-in variable), 55
- pfnet.CONSTR_TYPE_DCPF (built-in variable), 55
- pfnet.CONSTR_TYPE_FIX (built-in variable), 55
- pfnet.CONSTR_TYPE_LBOUND (built-in variable), 55
- pfnet.CONSTR_TYPE_PAR_GEN_P (built-in variable), 55
- pfnet.CONSTR_TYPE_PAR_GEN_Q (built-in variable), 55
- pfnet.CONSTR_TYPE_PF (built-in variable), 55
- pfnet.CONSTR_TYPE_REG_GEN (built-in variable), 55
- pfnet.CONSTR_TYPE_REG_SHUNT (built-in variable), 55
- pfnet.CONSTR_TYPE_REG_TRAN (built-in variable), 55
- pfnet.CURRENT (built-in variable), 45
- pfnet.FLAG_BOUNDED (built-in variable), 44
- pfnet.FLAG_FIXED (built-in variable), 44
- pfnet.FLAG_SPARSE (built-in variable), 45
- pfnet.FLAG_VARS (built-in variable), 44
- pfnet.FUNC_TYPE_GEN_COST (built-in variable), 54
- pfnet.FUNC_TYPE_LOAD_UTIL (built-in variable), 54
- pfnet.FUNC_TYPE_NETCON_COST (built-in variable), 54
- pfnet.FUNC_TYPE_REG_PHASE (built-in variable), 54
- pfnet.FUNC_TYPE_REG_PQ (built-in variable), 54
- pfnet.FUNC_TYPE_REG_RATIO (built-in variable), 54
- pfnet.FUNC_TYPE_REG_SUSC (built-in variable), 54
- pfnet.FUNC_TYPE_REG_VANG (built-in variable), 54
- pfnet.FUNC_TYPE_REG_VMAG (built-in variable), 54
- pfnet.FUNC_TYPE_SLIM_VMAG (built-in variable), 54
- pfnet.FUNC_TYPE_SP_CONTROLS (built-in variable), 54
- pfnet.FUNC_TYPE_UNKNOWN (built-in variable), 54

pfnet.GEN_PROP_ANY (built-in variable), 37
 pfnet.GEN_PROP_NOT_OUT (built-in variable), 37
 pfnet.GEN_PROP_NOT_REG (built-in variable), 37
 pfnet.GEN_PROP_NOT_SLACK (built-in variable), 37
 pfnet.GEN_PROP_P_ADJUST (built-in variable), 37
 pfnet.GEN_PROP_REG (built-in variable), 37
 pfnet.GEN_PROP_SLACK (built-in variable), 37
 pfnet.GEN_VAR_P (built-in variable), 37
 pfnet.GEN_VAR_Q (built-in variable), 37
 pfnet.LOAD_PROP_ANY (built-in variable), 40
 pfnet.LOAD_PROP_P_ADJUST (built-in variable), 40
 pfnet.LOAD_VAR_P (built-in variable), 40
 pfnet.LOWER_LIMIT (built-in variable), 45
 pfnet.OBJ_BAT (built-in variable), 44
 pfnet.OBJ_BRANCH (built-in variable), 44
 pfnet.OBJ_BUS (built-in variable), 44
 pfnet.OBJ_GEN (built-in variable), 44
 pfnet.OBJ_LOAD (built-in variable), 44
 pfnet.OBJ_SHUNT (built-in variable), 44
 pfnet.OBJ_UNKNOWN (built-in variable), 44
 pfnet.OBJ_VARGEN (built-in variable), 44
 pfnet.SHUNT_PROP_ANY (built-in variable), 39
 pfnet.SHUNT_PROP_SWITCHED_V (built-in variable), 39
 pfnet.SHUNT_VAR_SUSC (built-in variable), 39
 pfnet.SHUNT_VAR_SUSC_DEV (built-in variable), 39
 pfnet.UPPER_LIMIT (built-in variable), 45
 pfnet.VARGEN_PROP_ANY (built-in variable), 42
 pfnet.VARGEN_VAR_P (built-in variable), 42
 pfnet.VARGEN_VAR_Q (built-in variable), 42
 phase (pfnet.Branch attribute), 36
 phase_max (pfnet.Branch attribute), 36
 phase_min (pfnet.Branch attribute), 36
 phi (pfnet.Function attribute), 55
 phi (pfnet.Problem attribute), 59
 price (pfnet.Bus attribute), 33
 Problem (class in pfnet), 57

Q

Q (pfnet.Generator attribute), 38
 Q (pfnet.Load attribute), 41
 Q (pfnet.VarGenerator attribute), 42
 Q_max (pfnet.Generator attribute), 38
 Q_max (pfnet.VarGenerator attribute), 42
 Q_min (pfnet.Generator attribute), 38
 Q_min (pfnet.VarGenerator attribute), 42
 Q_mis (pfnet.Bus attribute), 31

R

ratingA (pfnet.Branch attribute), 36
 ratingB (pfnet.Branch attribute), 36
 ratingC (pfnet.Branch attribute), 36
 ratio (pfnet.Branch attribute), 36
 ratio_max (pfnet.Branch attribute), 36

ratio_min (pfnet.Branch attribute), 37
 reg_bus (pfnet.Branch attribute), 37
 reg_bus (pfnet.Generator attribute), 39
 reg_bus (pfnet.Shunt attribute), 40
 reg_gens (pfnet.Bus attribute), 33
 reg_shunts (pfnet.Bus attribute), 33
 reg_trans (pfnet.Bus attribute), 33

S

scipy.sparse.coo_matrix (built-in class), 29
 sens_P_balance (pfnet.Bus attribute), 33
 sens_P_l_bound (pfnet.Branch attribute), 37
 sens_P_l_bound (pfnet.Generator attribute), 39
 sens_P_l_bound (pfnet.Load attribute), 41
 sens_P_u_bound (pfnet.Branch attribute), 37
 sens_P_u_bound (pfnet.Generator attribute), 39
 sens_P_u_bound (pfnet.Load attribute), 41
 sens_Q_balance (pfnet.Bus attribute), 33
 sens_v_ang_l_bound (pfnet.Bus attribute), 33
 sens_v_ang_u_bound (pfnet.Bus attribute), 33
 sens_v_mag_l_bound (pfnet.Bus attribute), 33
 sens_v_mag_u_bound (pfnet.Bus attribute), 33
 sens_v_reg_by_gen (pfnet.Bus attribute), 33
 sens_v_reg_by_shunt (pfnet.Bus attribute), 33
 sens_v_reg_by_tran (pfnet.Bus attribute), 34
 set_edges_property() (pfnet.Graph method), 53
 set_flags() (pfnet.Network method), 51
 set_flags_of_component() (pfnet.Network method), 51
 set_layout() (pfnet.Graph method), 53
 set_network() (pfnet.Problem method), 59
 set_node_property() (pfnet.Graph method), 53
 set_nodes_property() (pfnet.Graph method), 53
 set_var_values() (pfnet.Network method), 51
 show() (pfnet.Bus method), 34
 show() (pfnet.Contingency method), 52
 show() (pfnet.Problem method), 59
 show_buses() (pfnet.Network method), 51
 show_components() (pfnet.Network method), 51
 show_properties() (pfnet.Network method), 51
 Shunt (class in pfnet), 39
 shunt_b_vio (pfnet.Network attribute), 51
 shunt_v_vio (pfnet.Network attribute), 51
 shunts (pfnet.Network attribute), 51
 store_sensitivities() (pfnet.Constraint method), 57
 store_sensitivities() (pfnet.Problem method), 59

T

tran_p_vio (pfnet.Network attribute), 51
 tran_r_vio (pfnet.Network attribute), 51
 tran_v_vio (pfnet.Network attribute), 51
 type (pfnet.Constraint attribute), 57
 type (pfnet.Function attribute), 55

U

- [u \(pfnet.Constraint attribute\), 57](#)
- [u \(pfnet.Problem attribute\), 59](#)
- [update_lin\(\) \(pfnet.Problem method\), 59](#)
- [update_network\(\) \(pfnet.Constraint method\), 57](#)
- [update_network\(\) \(pfnet.Function method\), 55](#)
- [update_properties\(\) \(pfnet.Network method\), 51](#)
- [update_set_points\(\) \(pfnet.Network method\), 52](#)
- [util_coeff_Q0 \(pfnet.Load attribute\), 41](#)
- [util_coeff_Q1 \(pfnet.Load attribute\), 41](#)
- [util_coeff_Q2 \(pfnet.Load attribute\), 41](#)

V

- [v_ang \(pfnet.Bus attribute\), 34](#)
- [v_mag \(pfnet.Bus attribute\), 34](#)
- [v_max \(pfnet.Bus attribute\), 34](#)
- [v_min \(pfnet.Bus attribute\), 34](#)
- [v_set \(pfnet.Bus attribute\), 34](#)
- [var_generators \(pfnet.Network attribute\), 52](#)
- [vargen_corr_radius \(pfnet.Network attribute\), 52](#)
- [vargen_corr_value \(pfnet.Network attribute\), 52](#)
- [VarGenerator \(class in pfnet\), 42](#)
- [vargens \(pfnet.Bus attribute\), 34](#)
- [view\(\) \(pfnet.Graph method\), 53](#)

W

- [weight \(pfnet.Function attribute\), 55](#)
- [write\(\) \(pfnet.Graph method\), 53](#)

X

- [x \(pfnet.Problem attribute\), 59](#)