REV	DATE	DESCRIPTION	INIT
–	6/8/2026	INITIAL ISSUE.	MY
A	9/8/2026	INCORP. 1st EXTERNAL REVIEW (r/Machinists): Ø128 BASIC BC, "8X Ø9 EQUALLY SPACED", POSITION Ø0.9 Ⓜ A B; DATUM B FRAME ON Ø92.8 H7 FOS.	MY
B	12/8/2026	RECESS 4.0 TO 4.5 (STACK 3: PREVENT SPIGOT-TIP BOTTOMING ON RECESS FLOOR); POSITION Ø1.0 TO Ø0.9 Ⓜ A|B.	MY
C	13/8/2026	SELF-VALIDATION: 8X Ø9 UN-BOXED, ADD Ø9 +0.22/0 (H13, ISO 273 MEDIUM); Ø152 UN-BOXED (GENERAL TOL); N4 ADD "ASTM".	MY

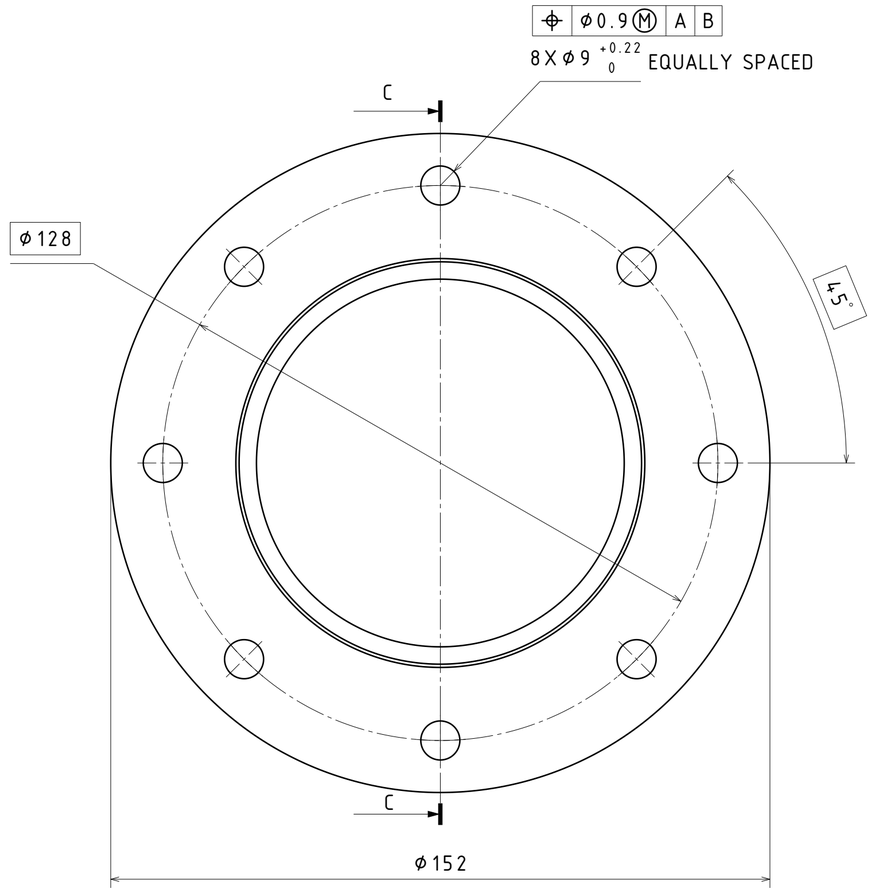

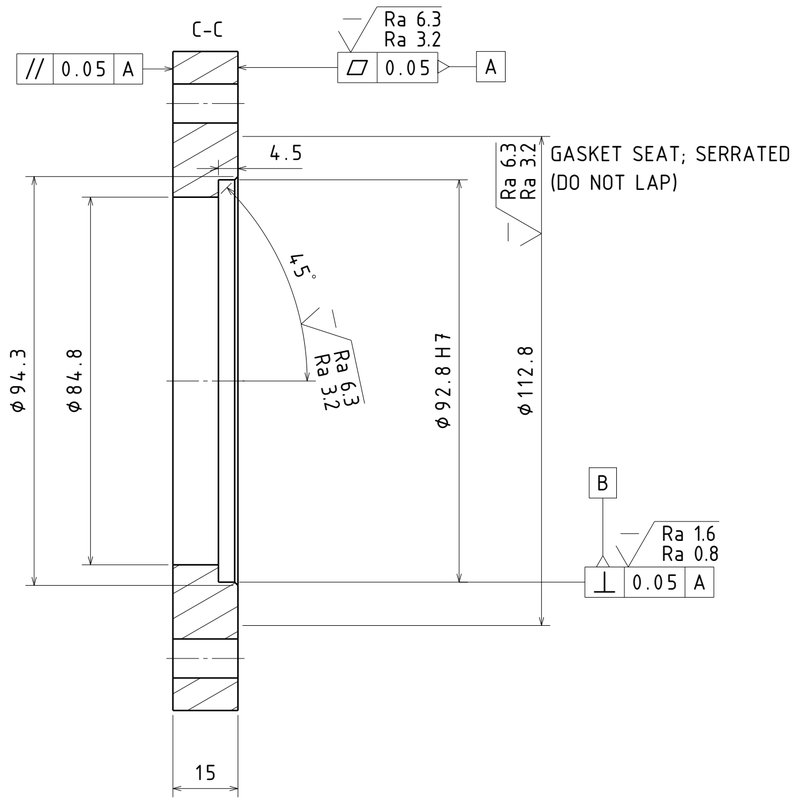

N1 GEOMETRIC TOLERANCING PER ASME Y14.5-2018. RULE #1 (ENVELOPE PRINCIPLE) APPLIES.
N2 DIMENSIONS IN MILLIMETRES. FIRST-ANGLE PROJECTION.
N3 UNLESS OTHERWISE SPECIFIED, GENERAL TOLERANCES PER THE TITLE-BLOCK TABLE.
N4 MATERIAL: BAR, STAINLESS STEEL, ASTM A479/A479M-25 TYPE 316, (UNS S31600), SOLUTION ANNEALED CONDITION.
N5 SCOPE: SHORT-DURATION / GROUND-TEST FIRING ONLY.
N6 DATUM A = MATING/SEAL FACE. DATUM B = REGISTER BORE Ø92.80.
N7 SURFACE TEXTURE PER ASME B46.1.
N8 FITS PER ISO 286. CLEARANCE HOLES PER ISO 273.
N9 GASKET AND FASTENERS ARE BOM ITEMS (NOT DETAIL-DRAWN).
N10 REMOVE ALL BURRS AND SHARP EDGES.

Linear Dimension Range (mm)	± tolerance (mm)
0.5–6	0.1
> 6 – 30	0.2
> 30 – 120	0.3
> 120 – 400	0.5
Angular (all)	± 0.5°
Broken edges/max corner radius, unless noted	0.3

DESIGNED BY: MARK YAMANAKA
DATE: 7/31/2026
CHECKED BY: TBD
DATE: TBD
SIZE: A2
SCALE: 1:1
WEIGHT (kg): 1.403
DRAWING NUMBER: CDN-002
SHEET: 1/1

C-D NOZZLE MOUNTING FLANGE

PROJECT A: DFM PACKAGE

This drawing is our property; it can't be reproduced or communicated without our written agreement.

H	–
G	–
F	–
E	–
D	–
C	13/8/2026
B	12/8/2026
A	9/8/2026
–	6/8/2026