VAC-U-MAX

37 Rutgers Street Belleville, NJ 07109 Tel: 973-759-4600 * 973-759-6449 E-mail: info@vac-u-max.com* www.vac-u-max.com

MDL55. Twin Venturi Vacuum for Flammable Liquids



TECHNICAL DATA:

- * Twin venturi power unit
 - Maximum suction power
 - Maximum air flow
 - Suction connection
 - Air operated, requires
 - Compressed air connection
 - Noise level
 - Weight
 - Standard finish

STANDARD EQUIPMENT:

- * Vacuum power head with:
 - Twin venturi suction source
 - Noise mufflers and guard for sound levels below 80 dbA
 - Manual HP air control valve
 - Twin Adjustable orifice assembly for vacuum control 8" Hg. - 16" Hg.
 - Auto vac liquid cut-off
 - Stainless Steel 2.0" Material inlet with Snap Closure.
 - Internal filter
 - Integral flame arrestor.
 - Cover hold down clamps.
 - Grounding lug.
 - Buna-N gasketing with grounding strap.
 - Coiled Cable Bonding Kit to bond power unit (cover) to dolly.
- * Collection Container, 55 gallon size with:
 - Fabricated steel base
 - 4 casters, 4" swivelling/static conductive
 - Drain valve

16" HG (208" H2O)

200 SCFM

2"

70 SCFM @ 60 PSI compressed air

3/4" NPT (female)

84 DBA @ 6" Hg

150 lbs.

Safety Red & Yellow


Model#	Construction	Standard Finish
23954/02	Carbon Steel	Safety Red &Yellow Powder Coat



37 Rutgers Street Belleville, NJ 07109 Tel: 973-759-4600 * 973-759-6449 E-mail: info@vac-u-max.com* www.vac-u-max.com

Accessories & Optional Equipment

Flammable Liquids Tool Kit (included with vacuum purchase)

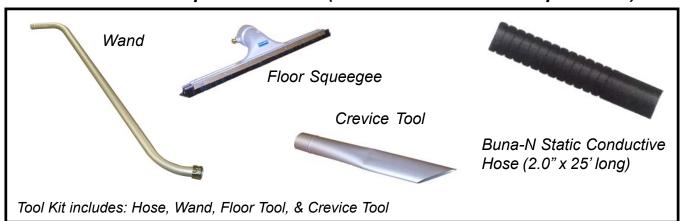

Suggested Spare Parts

Description	Part No.
Dust Filter, V-material, large	01278
Gasket, cover, Buna-N, catalog	24911
Gasket, inlet, Buna-N	25228
Hose, Buna-N, static-conductive, 2.0" ID x 25'	18503-2.0
Muffler, venturi exhaust, package of six	54711
AutoVac Liquid Cutoff, with copper float ball	07085

^{*} Please see VAC-U-MAX Tool Catalog for a larger selection of tools and accessories.