LEARN THE SOUND. RECREATE THE FEEL.

D.A PLUGINS

USER MANUAL

THE COMPLETE TEN-PLUGIN BUNDLE



92 PARAMETERS / 33 LEARN CONTROLS / OPTIONAL DETAILS

DVerb / DDelay / DComp / DEQ / DSat
DTrans / DStereo / DSess / DGate / DFX

DEVELOPMENT VERSION 0.4 / MANUAL REVISION 1.2

2026-10-23 / ENGLISH

Read this before you begin

Development edition, not a release certification

This manual documents the current source implementation. The complete bundle acceptance criteria are not yet met. Do not interpret the professional artwork or the word “AI” as evidence of a trained model, a certified reference match, a signed installer or validated operation in every DAW.

Product version
0.4

Manual revision
1.2 / Rack Collection 02 / Development

Document date
2026-10-23

Source snapshot
1aaf67d9d271

Language
English

Parameter coverage
92 parameters / 10 plugins

Illustrations and example settings

Hardware images are supplied design studies, not screenshots of the running plugin. Their example traces and meters are illustrative. All numerical recipes are suggested starting points, not included presets, measurements, guarantees or settings that suit every source.

In the combined PDF, English comes first and Persian second; printed page numbers restart for each edition.

English interface names are retained in the Persian edition so you can find the exact controls. PDF navigation includes a linked contents page and bookmarks. Parameter ranges/defaults are generated from the source registry rather than inferred from artwork.

Contents

Select a chapter or use the PDF bookmarks. Page references refer to this language edition.

01	Welcome & bundle overview	4
02	Installation, compatibility & updates	5
03	Quick start & safe signal flow	7
04	Interface, controls & meters	8
05	Learning modes, scopes & approval	9
06	Reference files & capture workflow	10
07	Factory presets & project tempo	11
08	DVerb — Reverb & ambience	12
09	DDelay — Stereo delay	17
10	DComp — Dynamics compressor	22
11	DEQ — Four-band equalizer	26
12	DSat — Harmonic saturation	31
13	DTrans — Transient designer	35
14	DStereo — Stereo designer	39
15	DSess — Frequency-dependent de-esser	43
16	DGate — Gate & level control	47
17	DFX — Modular multi-effects	51
18	Sessions, automation & recall	56
19	Troubleshooting & frequently asked questions	57
20	Technical reference & known limits	59
21	Glossary & parameter locator	60
22	Support, privacy & legal notices	63

Need a particular control? Search its English name or parameter ID in the PDF.

01 / D.A PLUGINS

Welcome & bundle overview

What this bundle does

D.A Plugins is a ten-effect suite for space, dynamics, tone, harmonics and stereo design. Its learning workflow analyzes audio and offers parameter proposals for inspection before approval. Manual operation remains available. This edition documents the current development implementation, not a finished commercial release.

Read the quick start first, then the chapter for your chosen plugin. Parameter references include the actual ID, manual range, factory default and a description. Example settings are starting points, not factory presets or guaranteed solutions.

Before listening

Turn monitoring down before changing modes, feedback, drive or large gains. Keep headroom in the host and compare at matched level. The suite is not a hearing-protection system, true-peak limiter or substitute for an independent safety limiter. Use project backups and test copies for development builds.

How to read this guide

A parameter label in English matches the current interface. A percentage describes an amplitude/control proportion, not necessarily perceived loudness. Some normalized controls, including Feedback, may display decimal values: 0.35 means 35%. A module scope is not always the same as a visual panel.

Choose your tool

DVerb — Reverb & ambience

DDelay — Stereo delay

DComp — Dynamics compressor

DEQ — Four-band equalizer

DSat — Harmonic saturation

DTrans — Transient designer

DStereo — Stereo designer

DSess — Frequency-dependent de-esser

DGate — Gate & level control

DFX — Modular multi-effects

02 / D.A PLUGINS

Installation, compatibility & updates

Obtain the correct build

Use a trusted build artifact for the correct operating system and CPU architecture. A ZIP of UI designs is not a plugin installer. The repository does not currently provide a signed commercial installer, activation manager or notarized release. CI output is not a blanket guarantee of DAW compatibility.

VST3 and Standalone are build targets on Windows, macOS and Linux; AU is a macOS target only. VST2, AAX and CLAP are not supplied. A host that requires AAX cannot load this bundle natively as an AAX plugin. No complete host/version certification matrix is published.

Manual installation

Close your DAW. Extract the matching plugin bundles without changing their internal structure. Copy VST3 bundles into a standard location accepted by your host; the next page lists common paths. On macOS, copy .component bundles for AU. Then reopen the host and rescan its plugin database.

If a platform rejects an unsigned build, do not disable system security globally or run an untrusted binary. Use the platform's supported per-item approval process only after verifying its origin, or ask the supplier for a properly signed build.

Host setup and standalone use

Insert the chosen effect on an audio track or return bus. The processors accept matching mono-in/mono-out or stereo-in/stereo-out layouts; they are not instruments, MIDI effects, surround processors or mono-to-stereo layout converters. A silent track provides no usable learning capture.

A Standalone target uses the JUCE wrapper rather than a DAW session. Select an appropriate audio device and routing in the wrapper if available. Avoid feeding loudspeaker output back into a microphone input. A DAW is the recommended environment for routing, automation and session recall.

Update or remove

Back up the session and keep the previous build before replacing files. Close the host, replace the matching bundle, rescan and test a copy of the session. Early four-parameter prototype states are not guaranteed to migrate. To remove a build, close the host and remove only its installed bundles, not shared host folders.

Installation paths & build notes

These are common platform locations, not a promise that every host scans them automatically. Keep each .vst3 or .component bundle intact and follow the host's scan instructions. Administrative permission may be required for shared system folders.

Windows / VST3

C:\Program Files\Common Files\VST3

macOS / VST3

/Library/Audio/Plug-Ins/VST3
~/Library/Audio/Plug-Ins/VST3

macOS / Audio Unit (AU)

/Library/Audio/Plug-Ins/Components
~/Library/Audio/Plug-Ins/Components

Linux / VST3

~/.vst3
/usr/lib/vst3 or /usr/local/lib/vst3 (host dependent)

If you are building from source

Advanced users need CMake 3.22+, a C++17 compiler and platform JUCE dependencies. JUCE 8.0.6 is fetched from a pinned, verified archive. Full setup and dependency lists are in README.md. Building does not install, sign, notarize or activate the product.

```
cmake -S . -B build -DCMAKE_BUILD_TYPE=Release
cmake --build build --config Release --parallel 2
ctest --test-dir build -C Release --output-on-failure
```

Build products: build/<Plugin>_artefacts/Release/. Use only formats/platforms whose build and host checks have actually passed for your revision.

build/<Plugin>_artefacts/Release/

03 / D.A PLUGINS

Quick start & safe signal flow

A first audition in six steps

1. Save a copy of the session and lower the monitor level. Choose the plugin that solves one identified problem. 2. Route a representative passage to the instance and confirm input/output activity. 3. Begin with small manual changes and sufficient host headroom.

4. Choose INPUT-AWARE LEARN, REFERENCE GUIDANCE or DESCRIPTION GUIDANCE. 5. Press a parameter Learn, a band/module Learn or LEARN ALL while audio plays. 6. Audition PREVIEW, then APPLY or REJECT; open DETAILS / LOG only if you need the analysis. Compare at matched level and save again after deciding.

Insert versus auxiliary return

On an insert, Mix sets the dry/processed balance before any final Output control. On an auxiliary reverb or delay return, use 100% wet and control effect level with the host send/return. DEQ and DGate have no global Mix parameter. DFX has both local blends and a global Mix.

There is no universal plugin power switch in the current editor. Use host bypass for a whole-instance comparison. Mix 0% is not necessarily bypass: Output gain can still apply, and time-effect buffers may keep running. Module OFF in DFX is not a promise of buffer reset.

An example processing order

A practical starting chain is editing > DGate if needed > corrective DEQ > DComp > DSess if needed > DSat sparingly > ambience on sends. This is a production suggestion, not a fixed internal bundle order. Move stages when the material benefits; avoid stacking level boosts without checking peaks.

04 / D.A PLUGINS

Interface, controls & meters

Knobs and choices

Drag a rotary control to adjust it; double-click a rotary control to restore its declared default. Click its value field to enter a supported numeric value. Values are bounded to the parameter range. Frequency entry supports Hz and kHz notation; do not assume every host accepts the same text syntax in its automation list.

Room/Hall/Plate/Shimmer, filter shape, saturation character, Stereo/Mono and DFX OFF/ON controls are discrete choices. They are host-attached parameters, not decorative buttons. Mode changes are not guaranteed click-free crossfades; lower the level and audition transitions.

Learning panel and workbench

The learning-mode menu selects how objectives are formed. LOAD FILE selects a local reference. DESCRIBE THE SOUND accepts the supported English keywords. DETAILS / LOG opens the optional report; it never opens automatically after Learn. BACK TO CONTROLS closes it. ADVANCED and MAIN CONTROLS switch control pages without changing parameter values. PREVIEW, APPLY, REJECT and UNDO control the proposal lifecycle, not a full session history.

What the displays mean

Reference waveforms and audio analysis views show available data in the native editor. Frequency views use a 2048-sample windowed analysis and 128 displayed points. DVerb spectral history is a sequence of spectra, not a measured decay-time plot. DStereo's vectorscope plots actual left/right samples. No signal can leave the display idle or empty.

DEQ draws a parameter-derived filter response. DComp, DGate and DSat draw explanatory transfer curves; a drawing is not an independently calibrated measurement of every dynamic state. The input/output readings are sample-peak dBFS-style displays, not LUFS, RMS loudness or inter-sample true peak. GR is an implementation readout with no certified meter-ballistics specification.

Window and artwork

The hardware interface scales uniformly and preserves its aspect ratio. Hover tooltips identify many controls. The illustrations in this manual are design studies, not native screenshots; example traces/meters in those images are not analysis results or performance claims.

05 / D.A PLUGINS

Learning modes, scopes & approval

Input-aware learn

The engine measures level, crest, coarse band energies and stereo features. Only 33 audio-informed controls have Learn. The other 59, including mixes, output trims, timing/routing and EQ frequency/Q/shape, stay manual in every scope. No trained neural network or model inference is shipped. Eligible values are still estimates, not uniquely identifiable settings.

Reference guidance

A valid reference is required before reference mode can succeed. In this revision it informs normalized DEQ band gains, Width parameters in DVerb/DDelay/DStereo, and DComp Makeup level. Other suggestions remain source/objective policies. There is no rendered-output comparison loop or optimization that recreates an arbitrary reference.

Description guidance

Enter English keywords: dark, warm, wide, smooth, cinematic. They request tonal, stereo, envelope or ambience objectives, while input audio is still required. Persian prose is not interpreted by the current keyword parser. Unknown-only descriptions fail; mixed text can silently use only recognized words.

Common negation words are rejected: “not dark” fails rather than activating dark. Only whole keywords match; “darkness” and “smoothie” do not match dark or smooth. Avoid complex instructions, exact emulation promises or unsupported adjectives. The phrase “dark, warm, wide, smooth, cinematic” is valid, but its result is an estimate to audition rather than a guarantee.

Choose the smallest useful scope

LEARN under one parameter proposes only that ID. A band/module action proposes the declared section. Each EQ band action learns only that band’s gain; frequency, Q and shape stay manual. LEARN ALL assembles only eligible controls for the plugin. It is not a coupled optimizer; an individual proposal does not secretly authorize changes elsewhere.

Preview, apply, reject, undo

Suggestions leave parameters unchanged until a deliberate action. PREVIEW temporarily writes the proposal so it can be heard. APPLY keeps it. REJECT restores the pre-preview values. UNDO restores one previously applied learning operation until a manual/host edit expires it; it is not a multilevel preset history. Closing the editor restores an unaccepted preview in the current implementation.

A manual/host edit invalidates older proposals and expires learning Undo; during Preview, untouched controls are restored while the real edit is kept. Avoid automating learned controls or changing settings while analysis is pending until that interaction is fully validated. Re-run after editing the source. Confidence is a heuristic score, not a calibrated probability or an audio-quality percentage.

06 / D.A PLUGINS

Reference files & capture workflow

Load and validate

Choose LOAD FILE and a readable WAV, AIFF/AIF or FLAC supported by the bundled JUCE basic decoders. The picker filters these extensions; not every possible codec variant is guaranteed. Files are decoded locally on a worker. The first 30 seconds only are analyzed; select a reference whose relevant passage is at the beginning.

The reader accepts sample rates from 8 kHz to 384 kHz and at least 1024 samples. Silent or invalid features fail validation. Mono references are duplicated to the stereo analysis buffer. Surround-specific channel mapping and perceptual downmix are not provided.

Capture the source

Keep the host passing non-silent audio while requesting a scope. The capture length is 65,536 input samples: about 1.49 s at 44.1 kHz, 1.37 s at 48 kHz or 0.68 s at 96 kHz. It is not the entire song. If playback is stopped or the host suspends the track, capture may time out after 15 seconds.

Use a representative phrase with transients and sustain, not a fade-in or an unusually loud isolated peak. Source analysis is of the input, not the already-processed output. New proposals replace values; they are not guaranteed incremental corrections to your current sound.

Cancellation and failures

REJECT/cancel invalidates pending results; a bounded worker can still finish in the background. A stale result must not be treated as a new approval. If Capture busy persists after stopping, let audio run so an older capture can complete and be discarded, then request a fresh analysis.

Ready means idle; Analyzing means capture/analysis is underway; Ready to audition means a proposal exists; Previewing means temporary audition; Applied means retained; Cancelled means discarded/restored. Failed or Reference unavailable is not a success. No installed neural-model status should be inferred from the hardware artwork.

07 / D.A PLUGINS

Factory presets & project tempo

50 programs per plugin

Each product includes Init plus 49 musical profile variants: 500 complete snapshots across the bundle. Select a program in the header browser, use its arrows, or use the host program list. Loading changes all settings including Mix and Output. Lower monitoring first. It cancels capture, pending analysis, preview and old learning undo rather than restoring an old preview over the new sound.

A star marks changes from the selected factory state. Save the DAW project for modified values and the selection index. Factory names are read-only. The per-product catalog lists every name; Design/Presets/FactoryPresets.json contains every parameter value. The practical recipes elsewhere are suggestions, not extra installed programs.

DDelay Sync and note divisions

Enable SYNC and choose a Division. Quarter-note milliseconds = 60,000 / host BPM; D multiplies a note by 1.5, T by 2/3. Available choices: 1/32, 1/32 D, 1/32 T, 1/16, 1/16 D, 1/16 T, 1/8, 1/8 D, 1/8 T, 1/4, 1/4 D, 1/4 T, 1/2, 1/2 D, 1/1.

HOST means valid host tempo; HOLD keeps the last valid BPM if tempo disappears; FALLBACK uses 120 before any valid tempo. Supported BPM is 10–400. Standalone has no project tempo. Sync disables the free-time/modulation controls and stereo offset. There is no audio tempo detection, tap tempo or song-position retrigger.

Compatibility and listening

Legacy DDelay states without new IDs start in FREE MS. DVerb/DFX now use input allpass diffusion, input-only low/mid shaping and an orthogonal late network without continuous tank saturation. Old stored values are preserved, but the changed algorithm changes the sound. Keep the previous binary for exact old-session recall. Listening examples are original synthetic signals, not proof of musical acceptance.

08 / D.A PLUGINS


DVerb — Reverb & ambience

DVerb places a source in an algorithmic ambience using an eight-line feedback-delay network. Pre-delay separates the dry event from the reverb onset; damping, diffusion and modulation shape the return. It is an effect-design tool, not a convolution player or an exact reconstruction of a sampled room.

Input > Pre-delay > Damped / diffused FDN > Stereo width > Dry/wet mix



Main controls — design study, not a native screenshot.

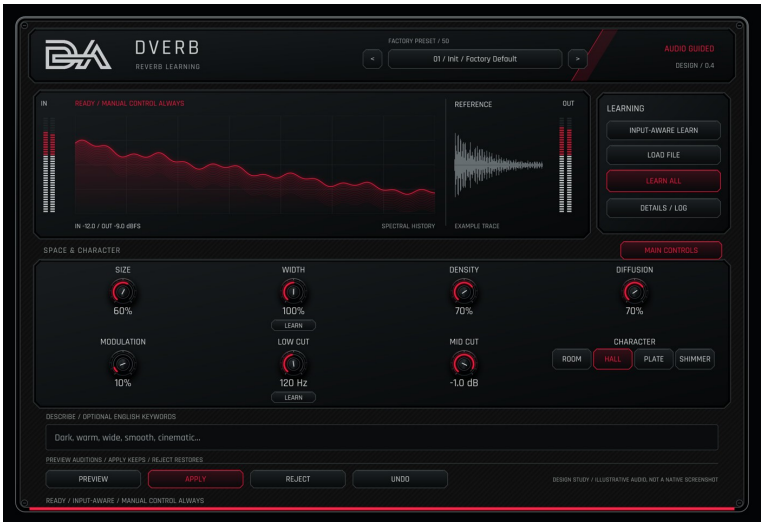

Advanced controls — design study, not a native screenshot.

Typical uses

Short space on drums and instruments / Longer ambience around vocals, pads and sound design / Octave-up shimmer textures

DVerb / Parameter reference

Ranges are manual limits; learning may propose a narrower interval. Defaults are source factory values, not the example image values. The learning badge identifies a strategy type, not guaranteed estimation accuracy.

Pre-delay

Range: 0 ms to 200 ms | Default: 20 ms | ID: predelay

Time before the reverb excitation. Increase it to separate the dry attack from the ambience; it does not delay the dry path.

LEARN: audio-informed estimate

Size

Range: 0% to 100% | Default: 60% | ID: size

Scales network delay lengths. Larger values change spacing and perceived scale; they are not room dimensions in metres.

MANUAL ONLY: preserved by every Learn scope

Decay

Range: 0.1 s to 12 s | Default: 2 s | ID: decay

Controls feedback decay design. Longer values sustain the ambience, but actual decay also depends on damping, diffusion, size and mode.

LEARN: audio-informed estimate

Tone

Range: 500 Hz to 18000 Hz | Default: 10000 Hz | ID: tone

Low-pass damping cutoff in the reverb network. Lower values produce a darker return; this is a frequency control, not a dB tone tilt.

LEARN: audio-informed estimate

Mix

Range: 0% to 100% | Default: 25% | ID: mix

Linear blend of original and reverberant signal. Use 100% for a conventional fully wet auxiliary return.

MANUAL ONLY: preserved by every Learn scope

Width

Range: 0% to 200% | Default: 100% | ID: width

Scales the side component of the wet reverb: 0% mono wet, 100% nominal, 200% double side. It does not widen the dry component.

LEARN: audio-informed estimate

DVerb / Controls continued

Density

Range: 0% to 100% | Default: 70% | ID: density

Changes excitation of additional network lines. Lower values emphasize fewer initial paths; higher values feed a denser initial network.

MANUAL ONLY: preserved by every Learn scope

Diffusion

Range: 0% to 100% | Default: 70% | ID: diffusion

Controls four serial input-allpass feedback coefficients. Higher values disperse incoming attacks before the always-orthogonal tank; it no longer blends the tank matrix with identity.

MANUAL ONLY: preserved by every Learn scope

Modulation

Range: 0% to 100% | Default: 10% | ID: modulation

Depth of slow delay-length motion. It adds movement and can introduce pitch texture; no separate rate parameter is exposed.

MANUAL ONLY: preserved by every Learn scope

Low cut

Range: 20 Hz to 1000 Hz | Default: 120 Hz | ID: lowcut

High-pass on the excitation before the tank, not a repeated filter on every circulation. Raise it to reduce low-frequency buildup.

LEARN: audio-informed estimate

Mid cut

Range: -12 dB to 0 dB | Default: -1 dB | ID: midcut

Broad fixed midrange cut applied once to the excitation. It does not repeatedly hollow the tail and is not a tunable parametric band.

MANUAL ONLY: preserved by every Learn scope

Room/Hall/Plate/Shimmer

Range: Room / Hall / Plate / Shimmer | Default: Hall | ID: mode

Room, Hall and Plate use different delay scaling; Shimmer adds octave-up granular feedback. This is a discrete choice, not a wet level.

MANUAL ONLY: preserved by every Learn scope

DVerb / In practice

Starting recipe — adjust by ear

1. For a vocal send, start with Hall, 20–40 ms Pre-delay and 1.5–2.5 s Decay.
2. Set Mix to 100% on the auxiliary return; adjust the send level in the host.
3. Try Low Cut around 120–200 Hz, then lower Tone if the return obscures consonants or cymbals.
4. Adjust Density and Diffusion for the desired build-up. Use modest Modulation before trying Shimmer.
5. Listen to the tail after the source stops; shorten Decay or reduce the send if successive phrases blur.

How learning behaves here

Learn is available for Pre-delay, Decay, Tone, Width and Low Cut only. Crest and coarse spectral features inform starting points; Width can use the reference. Size, Mix, mode, Density, Diffusion, Modulation and Mid Cut stay manual. No reference RT60 or room impulse response is inferred.

> **Important implementation limit**
>
> Decay is a design control, not a calibrated RT60 readout. Room, Hall and Plate change the network timing; they do not identify a particular physical venue or hardware model. Shimmer is a two-grain pitch-feedback effect whose artifacts need auditioning.

Listening and workflow tip

Use the Space or Colour scope to keep a change focused. Width above 100% increases the side component of the wet return; check mono. Do not judge a large reverb only in solo.

DVerb / 50 factory presets

Init plus 49 profile variants: choose from the header browser or host program list. These are complete snapshots, including Mix and Output. Use lower monitoring while comparing. The JSON manifest contains all exact parameter values.

01 / Init / Factory Default
02 / Vocal Air / Focused
03 / Vocal Air / Soft
04 / Vocal Air / Open
05 / Vocal Air / Parallel
06 / Drum Room / Natural
07 / Drum Room / Focused
08 / Drum Room / Soft
09 / Drum Room / Open
10 / Drum Room / Parallel
11 / Snare Plate / Natural
12 / Snare Plate / Focused
13 / Snare Plate / Soft
14 / Snare Plate / Open
15 / Snare Plate / Parallel
16 / Piano Chamber / Natural
17 / Piano Chamber / Focused
18 / Piano Chamber / Soft
19 / Piano Chamber / Open
20 / Piano Chamber / Parallel
21 / Acoustic Space / Natural
22 / Acoustic Space / Focused
23 / Acoustic Space / Soft
24 / Acoustic Space / Open
25 / Acoustic Space / Parallel
26 / String Hall / Natural
27 / String Hall / Focused
28 / String Hall / Soft
29 / String Hall / Open
30 / String Hall / Parallel
31 / Synth Cloud / Natural
32 / Synth Cloud / Focused
33 / Synth Cloud / Soft
34 / Synth Cloud / Open
35 / Synth Cloud / Parallel
36 / Bright Shimmer / Natural
37 / Bright Shimmer / Focused
38 / Bright Shimmer / Soft
39 / Bright Shimmer / Open
40 / Bright Shimmer / Parallel
41 / Dark Cathedral / Natural
42 / Dark Cathedral / Focused
43 / Dark Cathedral / Soft
44 / Dark Cathedral / Open
45 / Dark Cathedral / Parallel
46 / Short Ambience / Natural
47 / Short Ambience / Focused
48 / Short Ambience / Soft
49 / Short Ambience / Open
50 / Short Ambience / Parallel

Loading a preset cancels pending learning/preview. A star marks subsequent edits; save the project to retain them. The factory catalog itself is read-only.

09 / D.A PLUGINS

DDelay — Stereo delay

DDelay offers FREE MS or host-tempo SYNC with 15 straight, dotted and triplet divisions. Free mode keeps the small stereo timing offset and modulation; Sync locks both taps to the same note length and disables modulation. Filter and wet Width shape the repeats.

Input > Stereo delay <-> Filtered feedback > Wet width > Mix > Output



Main controls — design study, not a native screenshot.



Advanced controls — design study, not a native screenshot.

Typical uses

Vocal and instrument repeats / Alternating stereo echoes / Subtle moving doubling textures

DDelay / Parameter reference

Ranges are manual limits; learning may propose a narrower interval. Defaults are source factory values, not the example image values. The learning badge identifies a strategy type, not guaranteed estimation accuracy.

Time

Range: 1 ms to 2000 ms | Default: 375 ms | ID: time

FREE MS delay time; the right tap has a 1.1% offset. Ignored and disabled while SYNC is enabled; the tempo label shows the resolved note time.

MANUAL ONLY: preserved by every Learn scope

Feedback

Range: 0 (0%) to 0.95 (95%) | Default: 0.35 (35%) | ID: feedback

Amount returned to the delay loop. 0 means no recursive repeats; 0.95 is 95%, not a guarantee of a particular repeat count.

MANUAL ONLY: preserved by every Learn scope

Filter

Range: 200 Hz to 18000 Hz | Default: 6000 Hz | ID: filter

Low-pass cutoff applied to delayed/feedback content. Lower values darken the repeats.

LEARN: audio-informed estimate

Ping-pong

Range: Stereo / Ping-pong | Default: Ping-pong | ID: pingpong

Stereo keeps feedback within each channel; Ping-pong cross-feeds the opposite channel. Both lines still receive input.

MANUAL ONLY: preserved by every Learn scope

Modulation

Range: 0% to 100% | Default: 10% | ID: modulation

Depth of slow time/pitch movement in FREE MS only. Disabled in SYNC to preserve exact grid timing.

MANUAL ONLY: preserved by every Learn scope

DDelay / Controls continued

Mix

Range: 0% to 100% | Default: 25% | ID: mix

Linear dry/wet blend before Output gain. At 0%, the wet return is inaudible but the delay memory is not reset.

MANUAL ONLY: preserved by every Learn scope

Width

Range: 0% to 200% | Default: 100% | ID: width

Side scaling of the wet echo only. Check the mono sum after widening.

LEARN: audio-informed estimate

Output

Range: -24 dB to 12 dB | Default: 0 dB | ID: output

Post-mix level in dB. Reduce it if input plus repeats increases peaks.

MANUAL ONLY: preserved by every Learn scope

Tempo sync

Range: FREE MS / SYNC | Default: FREE MS | ID: sync

FREE MS uses Time; SYNC follows host BPM and Division. Missing tempo holds the last valid value, or 120 BPM initially. This is manual-only.

MANUAL ONLY: preserved by every Learn scope

Note division

Range: 15 notes: 1/32 to 1/1; D / T | Default: 1/8 | ID: division

Note length for SYNC: D means dotted (×1.5), T means triplet (×2/3). Ordinary values span 1/32 to 1/1. The 15 exact choices are listed in the preset/tempo chapter.

MANUAL ONLY: preserved by every Learn scope

DDelay / In practice

Starting recipe — adjust by ear

1. Enable SYNC and choose 1/4 for quarter notes: at host 120 BPM the displayed time is 500 ms.

2. Choose 1/8 for 250 ms, 1/8 D for dotted 375 ms, or 1/8 T for triplet 166.7 ms at 120 BPM. Use FREE MS for manual timing.

3. Begin around 20–35% Feedback and 10–25% Mix on an insert.

4. Lower Filter for darker repeats and enable Ping-pong if alternating feedback supports the arrangement.

5. Keep Modulation small for stable pitch; allow the final repeat to decay before rendering the region end.

How learning behaves here

Only Filter and Width have Learn. Time, Sync, Division, Feedback, Modulation, routing, Mix and Output remain manual in every scope. Sync reads project BPM; learning does not infer tempo from audio.

> **Important implementation limit**
>
> SYNC needs host BPM (10–400). The UI shows HOST, HOLD for last valid tempo, or FALLBACK 120 BPM before any valid tempo. A whole note at 10 BPM lasts 24 s. Tempo/division changes can create pitch transitions. No tap tempo or audio BPM detection is provided.

Listening and workflow tip

Stereo keeps feedback in its own channel; Ping-pong crosses it. Both channels receive the input, so a centered mono source does not necessarily produce a hard left/right first-repeat pattern. Mix 0% silences the wet return, not its internal buffer.

DDelay / 50 factory presets

Init plus 49 profile variants: choose from the header browser or host program list. These are complete snapshots, including Mix and Output. Use lower monitoring while comparing. The JSON manifest contains all exact parameter values.

01 / Init / Factory Default
02 / Vocal Eighth / Focused
03 / Vocal Eighth / Soft
04 / Vocal Eighth / Open
05 / Vocal Eighth / Parallel
06 / Dotted Guitar / Natural
07 / Dotted Guitar / Focused
08 / Dotted Guitar / Soft
09 / Dotted Guitar / Open
10 / Dotted Guitar / Parallel
11 / Quarter Echo / Natural
12 / Quarter Echo / Focused
13 / Quarter Echo / Soft
14 / Quarter Echo / Open
15 / Quarter Echo / Parallel
16 / Triplet Motion / Natural
17 / Triplet Motion / Focused
18 / Triplet Motion / Soft
19 / Triplet Motion / Open
20 / Triplet Motion / Parallel
21 / Sixteenth Pulse / Natural
22 / Sixteenth Pulse / Focused
23 / Sixteenth Pulse / Soft
24 / Sixteenth Pulse / Open
25 / Sixteenth Pulse / Parallel
26 / Stereo Half / Natural
27 / Stereo Half / Focused
28 / Stereo Half / Soft
29 / Stereo Half / Open
30 / Stereo Half / Parallel
31 / Rock Slap / Natural
32 / Rock Slap / Focused
33 / Rock Slap / Soft
34 / Rock Slap / Open
35 / Rock Slap / Parallel
36 / Tape Shadow / Natural
37 / Tape Shadow / Focused
38 / Tape Shadow / Soft
39 / Tape Shadow / Open
40 / Tape Shadow / Parallel
41 / Wide Doubler / Natural
42 / Wide Doubler / Focused
43 / Wide Doubler / Soft
44 / Wide Doubler / Open
45 / Wide Doubler / Parallel
46 / Ambient Cascade / Natural
47 / Ambient Cascade / Focused
48 / Ambient Cascade / Soft
49 / Ambient Cascade / Open
50 / Ambient Cascade / Parallel

Loading a preset cancels pending learning/preview. A star marks subsequent edits; save the project to retain them. The factory catalog itself is read-only.

10 / D.A PLUGINS

DComp — Dynamics compressor

DComp reduces level above a threshold using peak-envelope detection, adjustable ratio, attack/release and a soft knee. Makeup acts inside the processed path; Output acts after parallel mixing. The detector is not a loudness meter and the processor is not a brick-wall limiter.

Input > Peak envelope / gain curve > Makeup > Parallel mix > Output



Main controls — design study, not a native screenshot.



Advanced controls — design study, not a native screenshot.

Typical uses

Smoothing vocal and instrument dynamics / Transient-preserving or tighter compression / Parallel compression on suitable material

DComp / Parameter reference

Ranges are manual limits; learning may propose a narrower interval. Defaults are source factory values, not the example image values. The learning badge identifies a strategy type, not guaranteed estimation accuracy.

Threshold

Range: -60 dB to 0 dB | Default: -18 dB | ID: threshold

Detector level where compression begins, modified by Knee. Lower settings generally produce more reduction.

LEARN: audio-informed estimate

Ratio

Range: 1:1 to 20:1 | Default: 4:1 | ID: ratio

Compression ratio above the knee. 4:1 means an additional 4 dB at the detector maps to approximately 1 dB after the static curve.

LEARN: audio-informed estimate

Attack

Range: 0.1 ms to 200 ms | Default: 15 ms | ID: attack

Envelope response time for rising level. Shorter values catch attacks more quickly; longer values can preserve initial impact.

LEARN: audio-informed estimate

Release

Range: 10 ms to 2000 ms | Default: 150 ms | ID: release

Envelope recovery time as level falls. Too-short recovery may pump; too-long recovery can suppress the following phrase.

LEARN: audio-informed estimate

Knee

Range: 0 dB to 24 dB | Default: 6 dB | ID: knee

Width of the transition around Threshold. 0 dB is a hard knee; larger values soften the onset.

MANUAL ONLY: preserved by every Learn scope

Makeup

Range: 0 dB to 24 dB | Default: 0 dB | ID: makeup

Gain applied to the compressed branch before Mix. It is manual, not an automatic loudness-compensation system.

LEARN: audio-informed estimate

Mix

Range: 0% to 100% | Default: 100% | ID: mix

Blends original and compressed-plus-makeup branches. It does not change the detector threshold.

MANUAL ONLY: preserved by every Learn scope

Output

Range: -24 dB to 12 dB | Default: 0 dB | ID: output

Final gain after parallel blending. Use for level matching and headroom.

MANUAL ONLY: preserved by every Learn scope

DComp / In practice

Starting recipe — adjust by ear

1. For a vocal starting point, set Ratio near 3:1, Attack around 15–25 ms and Release around 100–200 ms.
2. Lower Threshold until normal phrases receive a few dB of reduction; listen to quiet and loud sections.
3. Use a wider Knee for a softer transition into compression.
4. Raise Makeup only enough for a level-matched comparison. Use Mix for parallel blending.
5. If the result pumps, revisit Release and Threshold before increasing makeup or ratio.

How learning behaves here

Threshold, Ratio, Attack, Release and Makeup have Learn; Knee, Mix and Output remain manual. Level/crest features guide dynamics; smooth extends release. Makeup uses the target/input RMS difference, not measured processed gain reduction. No output optimization or automatic loudness matching is performed.

> **Important implementation limit**
>
> Left and right envelopes are independent; there is no stereo-link control. Unequal channel transients may shift the stereo image. The GR readout is an implementation reading, not a certified stereo-maximum reduction meter.

Listening and workflow tip

At 1:1, the compression curve is neutral, but Makeup, Mix and Output can still change level. Attack and Release are smoothing times, not look-ahead or hold controls. Compare at matched loudness instead of choosing the louder version.

DComp / 50 factory presets

Init plus 49 profile variants: choose from the header browser or host program list. These are complete snapshots, including Mix and Output. Use lower monitoring while comparing. The JSON manifest contains all exact parameter values.

01 / Init / Factory Default
02 / Vocal Level / Focused
03 / Vocal Level / Soft
04 / Vocal Level / Open
05 / Vocal Level / Parallel
06 / Drum Punch / Natural
07 / Drum Punch / Focused
08 / Drum Punch / Soft
09 / Drum Punch / Open
10 / Drum Punch / Parallel
11 / Bass Control / Natural
12 / Bass Control / Focused
13 / Bass Control / Soft
14 / Bass Control / Open
15 / Bass Control / Parallel
16 / Acoustic Even / Natural
17 / Acoustic Even / Focused
18 / Acoustic Even / Soft
19 / Acoustic Even / Open
20 / Acoustic Even / Parallel
21 / Piano Gentle / Natural
22 / Piano Gentle / Focused
23 / Piano Gentle / Soft
24 / Piano Gentle / Open
25 / Piano Gentle / Parallel
26 / Bus Glue / Natural
27 / Bus Glue / Focused
28 / Bus Glue / Soft
29 / Bus Glue / Open
30 / Bus Glue / Parallel
31 / Parallel Weight / Natural
32 / Parallel Weight / Focused
33 / Parallel Weight / Soft
34 / Parallel Weight / Open
35 / Parallel Weight / Parallel
36 / Transient Catch / Natural
37 / Transient Catch / Focused
38 / Transient Catch / Soft
39 / Transient Catch / Open
40 / Transient Catch / Parallel
41 / Soft Speech / Natural
42 / Soft Speech / Focused
43 / Soft Speech / Soft
44 / Soft Speech / Open
45 / Soft Speech / Parallel
46 / Sustain Hold / Natural
47 / Sustain Hold / Focused
48 / Sustain Hold / Soft
49 / Sustain Hold / Open
50 / Sustain Hold / Parallel

Loading a preset cancels pending learning/preview. A star marks subsequent edits; save the project to retain them. The factory catalog itself is read-only.

11 / D.A PLUGINS

DEQ — Four-band equalizer

DEQ provides four serial RBJ biquad bands. Each band has its own frequency, gain, Q and shape, and can be learned independently. The Low, Low Mid, Presence and Air panel names describe a working arrangement, not fixed frequency limits. Every band spans the declared frequency range.

Input > Band 1 > Band 2 > Band 3 > Band 4 > Output



Main controls — design study, not a native screenshot.



Advanced controls — design study, not a native screenshot.

Typical uses

Broad tonal shaping and modest correction / Independent bell and shelf bands / Reference-guided coarse tonal balance

DEQ / Parameter reference

Ranges are manual limits; learning may propose a narrower interval. Defaults are source factory values, not the example image values. The learning badge identifies a strategy type, not guaranteed estimation accuracy.

Band 1 / Frequency

Range: 20 Hz to 20000 Hz | Default: 100 Hz | ID: b1freq

Center frequency for Bell, transition frequency for a shelf. Each band can use the complete manual range; the panel name does not restrict it.

MANUAL ONLY: preserved by every Learn scope

Band 1 / Gain

Range: -18 dB to 18 dB | Default: 0 dB | ID: b1gain

Boost or cut for the selected shape. 0 dB is neutral. Learned gain is limited to ±6 dB, narrower than the manual range.

LEARN: audio-informed estimate

Band 1 / Q

Range: 0.2 to 8 | Default: 0.707 | ID: b1q

Bell bandwidth: larger Q is narrower. The current shelf implementation uses fixed slope and does not use this Q value.

MANUAL ONLY: preserved by every Learn scope

Band 1 / Bell/Low shelf/High shelf

Range: Bell / Low Shelf / High Shelf | Default: Bell | ID: b1shape

Bell, Low Shelf or High Shelf. Learning preserves this manual choice; L-SHELF/H-SHELF mean Low/High Shelf.

MANUAL ONLY: preserved by every Learn scope

Band 2 / Frequency

Range: 20 Hz to 20000 Hz | Default: 400 Hz | ID: b2freq

Center frequency for Bell, transition frequency for a shelf. Each band can use the complete manual range; the panel name does not restrict it.

MANUAL ONLY: preserved by every Learn scope

Band 2 / Gain

Range: -18 dB to 18 dB | Default: 0 dB | ID: b2gain

Boost or cut for the selected shape. 0 dB is neutral. Learned gain is limited to ±6 dB, narrower than the manual range.

LEARN: audio-informed estimate

Band 2 / Q

Range: 0.2 to 8 | Default: 0.707 | ID: b2q

Bell bandwidth: larger Q is narrower. The current shelf implementation uses fixed slope and does not use this Q value.

MANUAL ONLY: preserved by every Learn scope

Band 2 / Bell/Low shelf/High shelf

Range: Bell / Low Shelf / High Shelf | Default: Bell | ID: b2shape

Bell, Low Shelf or High Shelf. Learning preserves this manual choice; L-SHELF/H-SHELF mean Low/High Shelf.

MANUAL ONLY: preserved by every Learn scope

DEQ / Controls continued

Band 3 / Frequency

Range: 20 Hz to 20000 Hz | Default: 2500 Hz | ID: b3freq

Center frequency for Bell, transition frequency for a shelf. Each band can use the complete manual range; the panel name does not restrict it.

MANUAL ONLY: preserved by every Learn scope

Band 3 / Gain

Range: -18 dB to 18 dB | Default: 0 dB | ID: b3gain

Boost or cut for the selected shape. 0 dB is neutral. Learned gain is limited to ±6 dB, narrower than the manual range.

LEARN: audio-informed estimate

Band 3 / Q

Range: 0.2 to 8 | Default: 0.707 | ID: b3q

Bell bandwidth: larger Q is narrower. The current shelf implementation uses fixed slope and does not use this Q value.

MANUAL ONLY: preserved by every Learn scope

Band 3 / Bell/Low shelf/High shelf

Range: Bell / Low Shelf / High Shelf | Default: Bell | ID: b3shape

Bell, Low Shelf or High Shelf. Learning preserves this manual choice; L-SHELF/H-SHELF mean Low/High Shelf.

MANUAL ONLY: preserved by every Learn scope

Band 4 / Frequency

Range: 20 Hz to 20000 Hz | Default: 10000 Hz | ID: b4freq

Center frequency for Bell, transition frequency for a shelf. Each band can use the complete manual range; the panel name does not restrict it.

MANUAL ONLY: preserved by every Learn scope

Band 4 / Gain

Range: -18 dB to 18 dB | Default: 0 dB | ID: b4gain

Boost or cut for the selected shape. 0 dB is neutral. Learned gain is limited to ±6 dB, narrower than the manual range.

LEARN: audio-informed estimate

Band 4 / Q

Range: 0.2 to 8 | Default: 0.707 | ID: b4q

Bell bandwidth: larger Q is narrower. The current shelf implementation uses fixed slope and does not use this Q value.

MANUAL ONLY: preserved by every Learn scope

Band 4 / Bell/Low shelf/High shelf

Range: Bell / Low Shelf / High Shelf | Default: Bell | ID: b4shape

Bell, Low Shelf or High Shelf. Learning preserves this manual choice; L-SHELF/H-SHELF mean Low/High Shelf.

MANUAL ONLY: preserved by every Learn scope

DEQ / In practice

Starting recipe — adjust by ear

1. Start from all gains at 0 dB. Identify a tonal issue in the full mix before boosting.

2. Try a broad low-mid cut of 1–3 dB with Q around 0.7–1.2 if the source is muddy.

3. For a reference comparison, load comparable material and choose REFERENCE GUIDANCE.

4. Use LEARN BAND 2 or its GAIN Learn button to propose only Band 2 gain; both preserve its frequency, Q and shape.

5. Review the response and audition at matched level. Large boosts can overload later processors.

How learning behaves here

Only the four band gains have Learn, limited to ±6 dB. Normalized coarse band energy guides the gains. Band Learn changes that band's gain only; LEARN ALL covers all four gains. Frequency, Q and shape stay at your manual settings. Find them on ADVANCED; the main page holds the four gains.

> **Important implementation limit**
>
> The current learner uses four coarse source/target bands; it does not detect exact resonances, masking or an inverse room response. Frequency, Q and shape are manual-only and preserved by all learning scopes. Q affects Bell only; the shelf slope is fixed.

Listening and workflow tip

DEQ has no global Mix, Output or band bypass parameter in this build. Use 0 dB gain for a neutral band and host bypass for the whole instance. It is not linear-phase EQ; do not assume its dry and filtered phases match in parallel routing.

DEQ / 50 factory presets

Init plus 49 profile variants: choose from the header browser or host program list. These are complete snapshots, including Mix and Output. Use lower monitoring while comparing. The JSON manifest contains all exact parameter values.

01 / Init / Factory Default
02 / Vocal Clarity / Focused
03 / Vocal Clarity / Soft
04 / Vocal Clarity / Open
05 / Vocal Clarity / Parallel
06 / Warm Voice / Natural
07 / Warm Voice / Focused
08 / Warm Voice / Soft
09 / Warm Voice / Open
10 / Warm Voice / Parallel
11 / Drum Presence / Natural
12 / Drum Presence / Focused
13 / Drum Presence / Soft
14 / Drum Presence / Open
15 / Drum Presence / Parallel
16 / Bass Definition / Natural
17 / Bass Definition / Focused
18 / Bass Definition / Soft
19 / Bass Definition / Open
20 / Bass Definition / Parallel
21 / Acoustic Detail / Natural
22 / Acoustic Detail / Focused
23 / Acoustic Detail / Soft
24 / Acoustic Detail / Open
25 / Acoustic Detail / Parallel
26 / Piano Body / Natural
27 / Piano Body / Focused
28 / Piano Body / Soft
29 / Piano Body / Open
30 / Piano Body / Parallel
31 / String Silk / Natural
32 / String Silk / Focused
33 / String Silk / Soft
34 / String Silk / Open
35 / String Silk / Parallel
36 / Synth Depth / Natural
37 / Synth Depth / Focused
38 / Synth Depth / Soft
39 / Synth Depth / Open
40 / Synth Depth / Parallel
41 / Mix Polish / Natural
42 / Mix Polish / Focused
43 / Mix Polish / Soft
44 / Mix Polish / Open
45 / Mix Polish / Parallel
46 / Dark Texture / Natural
47 / Dark Texture / Focused
48 / Dark Texture / Soft
49 / Dark Texture / Open
50 / Dark Texture / Parallel

Loading a preset cancels pending learning/preview. A star marks subsequent edits; save the project to retain them. The factory catalog itself is read-only.

12 / D.A PLUGINS

DSat — Harmonic saturation

DSat applies one of three nonlinear transfer functions, then blends direct and low-pass-filtered nonlinear sound with Density. Drive changes the level entering the nonlinear stage; Tone and Density jointly determine its brightness. Output is a separate post-mix gain control.

Input > Drive / nonlinear character > Tone-density blend > Mix > Output



Main controls — design study, not a native screenshot.



Advanced controls — design study, not a native screenshot.

Typical uses

Subtle harmonic weight / Deliberate clipping and coloration / Parallel distortion textures

DSat / Parameter reference

Ranges are manual limits; learning may propose a narrower interval. Defaults are source factory values, not the example image values. The learning badge identifies a strategy type, not guaranteed estimation accuracy.

Drive

Range: 0 dB to 30 dB | Default: 6 dB | ID: drive

Gain into the nonlinear function. Increasing it changes both harmonics and level; it is not a transparent input trim.

LEARN: audio-informed estimate

Tone

Range: 500 Hz to 18000 Hz | Default: 10000 Hz | ID: tone

Low-pass cutoff for the filtered nonlinear branch. Its audibility depends on Density.

LEARN: audio-informed estimate

Soft/Hard/Asymmetric

Range: Soft / Hard / Asymmetric | Default: Soft | ID: mode

Soft uses tanh, Hard clips the driven waveform, and Asymmetric offsets a tanh curve with static offset compensation.

MANUAL ONLY: preserved by every Learn scope

Density

Range: 0% to 100% | Default: 50% | ID: density

Blend toward the tone-filtered nonlinear branch. This is not an independent harmonic-count or compression-density control.

MANUAL ONLY: preserved by every Learn scope

Mix

Range: 0% to 100% | Default: 50% | ID: mix

Parallel blend of original and nonlinear signal before Output.

MANUAL ONLY: preserved by every Learn scope

Output

Range: -24 dB to 12 dB | Default: 0 dB | ID: output

Post-mix gain; no automatic drive compensation is applied.

MANUAL ONLY: preserved by every Learn scope

DSat / In practice

Starting recipe — adjust by ear

1. Start with Soft, Drive around 3–6 dB and a moderate Mix.

2. Increase Drive while reducing Output to keep the comparison level consistent.

3. Use Tone with Density above 0% to darken the nonlinear component.

4. Switch to Hard only if the sharper texture supports the source; try Asymmetric for a different curve balance.

5. Recheck cymbals and upper harmonics, then use Mix for a restrained parallel result.

How learning behaves here

Only Drive and Tone have Learn: measured peak/crest and high-band energy inform their starting points. Mode, Density, Mix and Output stay manual. This is not a trained tape/tube classifier, harmonic reference match or automatic loudness match.

> **Important implementation limit**
>
> Oversampling is not implemented. Strong drive and bright/high-frequency sources can alias. The asymmetric curve subtracts a static offset; this is not a general-purpose DC-blocking filter. There is no automatic output-level compensation.

Listening and workflow tip

With Density at 0%, the tone-filtered branch is excluded, so Tone has little practical role. With Density at 100%, the wet nonlinear branch is fully low-pass filtered. Hard clipping is a sound-design option, not a mastering safety limiter.

DSat / 50 factory presets

Init plus 49 profile variants: choose from the header browser or host program list. These are complete snapshots, including Mix and Output. Use lower monitoring while comparing. The JSON manifest contains all exact parameter values.

01 / Init / Factory Default
02 / Vocal Warmth / Focused
03 / Vocal Warmth / Soft
04 / Vocal Warmth / Open
05 / Vocal Warmth / Parallel
06 / Drum Edge / Natural
07 / Drum Edge / Focused
08 / Drum Edge / Soft
09 / Drum Edge / Open
10 / Drum Edge / Parallel
11 / Bass Grit / Natural
12 / Bass Grit / Focused
13 / Bass Grit / Soft
14 / Bass Grit / Open
15 / Bass Grit / Parallel
16 / Acoustic Glow / Natural
17 / Acoustic Glow / Focused
18 / Acoustic Glow / Soft
19 / Acoustic Glow / Open
20 / Acoustic Glow / Parallel
21 / Piano Felt / Natural
22 / Piano Felt / Focused
23 / Piano Felt / Soft
24 / Piano Felt / Open
25 / Piano Felt / Parallel
26 / Bus Color / Natural
27 / Bus Color / Focused
28 / Bus Color / Soft
29 / Bus Color / Open
30 / Bus Color / Parallel
31 / Synth Asymmetry / Natural
32 / Synth Asymmetry / Focused
33 / Synth Asymmetry / Soft
34 / Synth Asymmetry / Open
35 / Synth Asymmetry / Parallel
36 / LoFi Shadow / Natural
37 / LoFi Shadow / Focused
38 / LoFi Shadow / Soft
39 / LoFi Shadow / Open
40 / LoFi Shadow / Parallel
41 / Parallel Crunch / Natural
42 / Parallel Crunch / Focused
43 / Parallel Crunch / Soft
44 / Parallel Crunch / Open
45 / Parallel Crunch / Parallel
46 / Smooth Harmonics / Natural
47 / Smooth Harmonics / Focused
48 / Smooth Harmonics / Soft
49 / Smooth Harmonics / Open
50 / Smooth Harmonics / Parallel


Loading a preset cancels pending learning/preview. A star marks subsequent edits; save the project to retain them. The factory catalog itself is read-only.

13 / D.A PLUGINS


DTrans — Transient designer

DTrans compares fast and slow amplitude envelopes to estimate onset strength. Attack and Sustain apply gain according to that estimate; Sensitivity and Shape change the separation. Unlike compressor attack, its Attack parameter is a gain in dB, not a duration in milliseconds.

Input > Fast / slow envelope comparison > Attack-sustain gain > Mix > Output

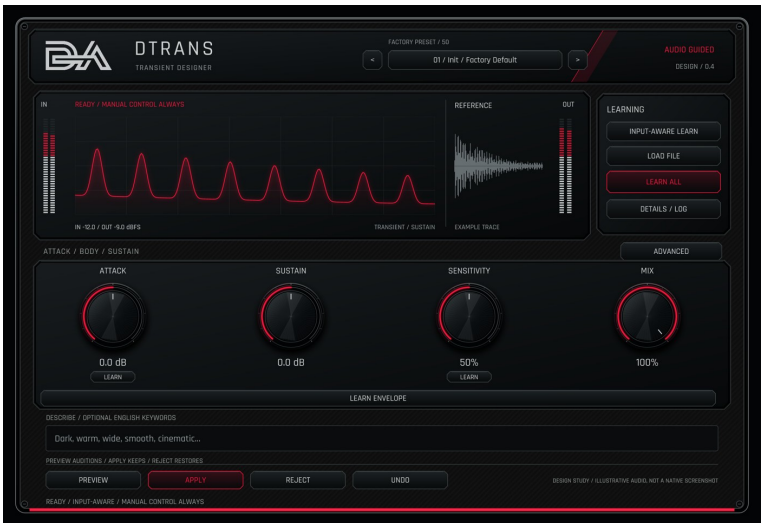

Main controls — design study, not a native screenshot.

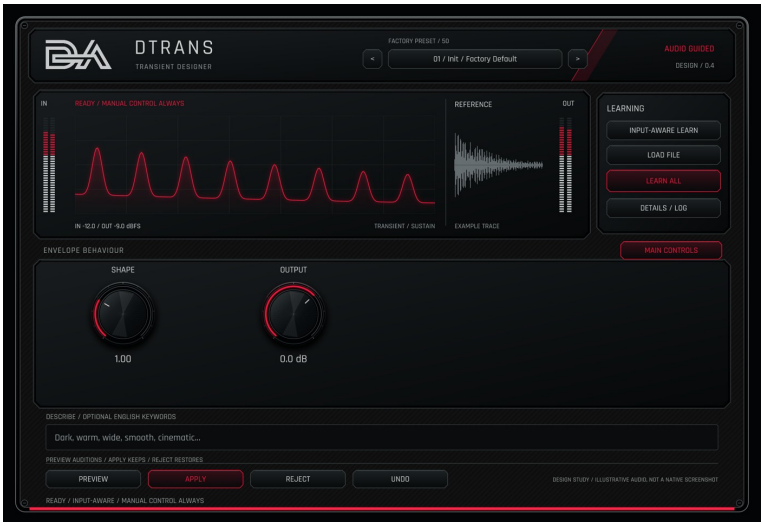

Advanced controls — design study, not a native screenshot.

Typical uses

More or less initial drum impact / Shaping the body or room sustain / Parallel envelope effects

DTrans / Parameter reference

Ranges are manual limits; learning may propose a narrower interval. Defaults are source factory values, not the example image values. The learning badge identifies a strategy type, not guaranteed estimation accuracy.

Attack

Range: -18 dB to 18 dB | Default: 0 dB | ID: attack

Gain applied where the onset estimate is strong. Positive values emphasize attacks; negative values soften them. Unit: dB.

LEARN: audio-informed estimate

Sustain

Range: -18 dB to 18 dB | Default: 0 dB | ID: sustain

Gain weighted toward the non-onset part of the signal. Positive settings can lift room and noise as well as musical sustain.

MANUAL ONLY: preserved by every Learn scope

Sensitivity

Range: 0% to 100% | Default: 50% | ID: sensitivity

Scales the normalized difference between fast and slow envelopes. It is not a dB threshold or a time control.

LEARN: audio-informed estimate

Shape

Range: 0.2 to 3 | Default: 1 | ID: shape

Exponent applied to the onset weight. Higher settings concentrate attack action on stronger detected onsets.

MANUAL ONLY: preserved by every Learn scope

Mix

Range: 0% to 100% | Default: 100% | ID: mix

Parallel blend of original and envelope-shaped signal.

MANUAL ONLY: preserved by every Learn scope

Output

Range: -24 dB to 12 dB | Default: 0 dB | ID: output

Final gain after the envelope effect and parallel blend.

MANUAL ONLY: preserved by every Learn scope

DTrans / In practice

Starting recipe — adjust by ear

1. For tighter drums, begin with Attack at +2 to +4 dB and Sustain at -2 to -4 dB.
2. Keep Sensitivity around the middle while comparing short and sustained hits.
3. Raise Shape if you need a more selective action on strongly detected onsets.
4. Reduce Mix if the processing sounds detached from the body of the instrument.
5. Check quiet hits and cymbal spill, then trim Output to protect downstream headroom.

How learning behaves here

Learn is available for Attack and Sensitivity using source crest factor. Sustain, Shape, Mix and Output stay manual. It is a conservative starting-point estimate, not a reconstructed reference envelope or trained drum classifier.

> **Important implementation limit**
>
> Sustain is an envelope-weighted gain, not a separate decay-time control or source separator. Strong positive settings can emphasize noise and room tone. Independent channel envelopes may affect stereo balance.

Listening and workflow tip

Start with small dB changes. On material without clear onsets, Sustain may dominate. The central envelope view reflects live signal magnitude; it is not a calibrated time-constant or transient-confidence graph.

DTrans / 50 factory presets

Init plus 49 profile variants: choose from the header browser or host program list. These are complete snapshots, including Mix and Output. Use lower monitoring while comparing. The JSON manifest contains all exact parameter values.

01 / Init / Factory Default
02 / Kick Punch / Focused
03 / Kick Punch / Soft
04 / Kick Punch / Open
05 / Kick Punch / Parallel
06 / Snare Snap / Natural
07 / Snare Snap / Focused
08 / Snare Snap / Soft
09 / Snare Snap / Open
10 / Snare Snap / Parallel
11 / Room Tamer / Natural
12 / Room Tamer / Focused
13 / Room Tamer / Soft
14 / Room Tamer / Open
15 / Room Tamer / Parallel
16 / Bass Pick / Natural
17 / Bass Pick / Focused
18 / Bass Pick / Soft
19 / Bass Pick / Open
20 / Bass Pick / Parallel
21 / Acoustic Pluck / Natural
22 / Acoustic Pluck / Focused
23 / Acoustic Pluck / Soft
24 / Acoustic Pluck / Open
25 / Acoustic Pluck / Parallel
26 / Soft Piano / Natural
27 / Soft Piano / Focused
28 / Soft Piano / Soft
29 / Soft Piano / Open
30 / Soft Piano / Parallel
31 / Percussion Tight / Natural
32 / Percussion Tight / Focused
33 / Percussion Tight / Soft
34 / Percussion Tight / Open
35 / Percussion Tight / Parallel
36 / Pad Bloom / Natural
37 / Pad Bloom / Focused
38 / Pad Bloom / Soft
39 / Pad Bloom / Open
40 / Pad Bloom / Parallel
41 / Drum Sustain / Natural
42 / Drum Sustain / Focused
43 / Drum Sustain / Soft
44 / Drum Sustain / Open
45 / Drum Sustain / Parallel
46 / Parallel Attack / Natural
47 / Parallel Attack / Focused
48 / Parallel Attack / Soft
49 / Parallel Attack / Open
50 / Parallel Attack / Parallel

Loading a preset cancels pending learning/preview. A star marks subsequent edits; save the project to retain them. The factory catalog itself is read-only.

14 / D.A PLUGINS

DStereo — Stereo designer

DStereo forms Mid = (L + R)/2 and Side = (L − R)/2, scales the two components and reconstructs stereo. Depth blends a low-passed side signal, changing side brightness rather than adding a distance or Haas delay. A vectorscope and correlation readout help inspect the result.

L/R > Mid/Side > Center / side / width / depth > Stereo or mono wet path > Mix > L/R output



Main controls — design study, not a native screenshot.



Advanced controls — design study, not a native screenshot.

Typical uses

Controlled widening or narrowing / Mid/side level balance / Inspecting phase and mono behavior

DStereo / Parameter reference

Ranges are manual limits; learning may propose a narrower interval. Defaults are source factory values, not the example image values. The learning badge identifies a strategy type, not guaranteed estimation accuracy.

Width

Range: 0% to 200% | Default: 100% | ID: width

Multiplies the wet Side component. 100% is unity before Side gain; 200% doubles Side amplitude.

LEARN: audio-informed estimate

Depth

Range: 0% to 100% | Default: 0% | ID: depth

Blends Side toward a smoothed low-pass version. Higher values darken side information rather than moving the source in a measured space.

MANUAL ONLY: preserved by every Learn scope

Center

Range: -18 dB to 6 dB | Default: 0 dB | ID: center

Gain of the Mid component. It is not a center-pan position or a center-extraction algorithm.

MANUAL ONLY: preserved by every Learn scope

Side

Range: -18 dB to 6 dB | Default: 0 dB | ID: side

Gain of the Side component, combined with Width. Both controls can increase side peaks.

LEARN: audio-informed estimate

Mix

Range: 0% to 100% | Default: 100% | ID: mix

Blends original stereo with the processed stereo/mono branch. Dry stereo remains below 100% even with Mono enabled.

MANUAL ONLY: preserved by every Learn scope

Mono monitor

Range: Stereo / Mono | Default: Stereo | ID: mono

Stereo retains the wet Side; Mono sets wet Side to zero. Set Mix to 100% for a complete in-plugin mono audition.

MANUAL ONLY: preserved by every Learn scope

DStereo / In practice

Starting recipe — adjust by ear

1. Begin at Width 100%, Center 0 dB, Side 0 dB and Depth 0%.

2. Try Width around 110–125% on an already-stereo source; listen to the center image.

3. Watch correlation and compare mono at Mix 100%. Negative correlation is a warning, not a complete quality score.

4. Use modest Depth if the side content feels too bright; restore Width if the mix loses focus.

5. Check on headphones and loudspeakers, and verify the host mono sum as a second check.

How learning behaves here

Only Width and Side have Learn. Side/RMS ratio and correlation guide Width; reference side ratio can set its target. Negative correlation narrows Width and reduces Side. Depth, Center, Mix and Mono remain manual. Processed-output mono compatibility must still be checked.

> **Important implementation limit**
>
> The Mono control sums the wet path only. For a fully mono audition inside this plugin, set Mix to 100%; at lower Mix, dry stereo remains. Identical L/R or mono input contains no side signal, so Width cannot create stereo detail from it.

Listening and workflow tip

Width 0% removes wet Side; Width 100% is nominal unity before the other controls; 200% doubles it. Center and Side gains can increase peaks. The vectorscope shows actual samples; a static display may simply mean there is no new audio.

DStereo / 50 factory presets

Init plus 49 profile variants: choose from the header browser or host program list. These are complete snapshots, including Mix and Output. Use lower monitoring while comparing. The JSON manifest contains all exact parameter values.

01 / Init / Factory Default
02 / Vocal Focus / Focused
03 / Vocal Focus / Soft
04 / Vocal Focus / Open
05 / Vocal Focus / Parallel
06 / Drum Stage / Natural
07 / Drum Stage / Focused
08 / Drum Stage / Soft
09 / Drum Stage / Open
10 / Drum Stage / Parallel
11 / Bass Center / Natural
12 / Bass Center / Focused
13 / Bass Center / Soft
14 / Bass Center / Open
15 / Bass Center / Parallel
16 / Acoustic Pair / Natural
17 / Acoustic Pair / Focused
18 / Acoustic Pair / Soft
19 / Acoustic Pair / Open
20 / Acoustic Pair / Parallel
21 / Piano Stage / Natural
22 / Piano Stage / Focused
23 / Piano Stage / Soft
24 / Piano Stage / Open
25 / Piano Stage / Parallel
26 / String Field / Natural
27 / String Field / Focused
28 / String Field / Soft
29 / String Field / Open
30 / String Field / Parallel
31 / Synth Spread / Natural
32 / Synth Spread / Focused
33 / Synth Spread / Soft
34 / Synth Spread / Open
35 / Synth Spread / Parallel
36 / Dark Sides / Natural
37 / Dark Sides / Focused
38 / Dark Sides / Soft
39 / Dark Sides / Open
40 / Dark Sides / Parallel
41 / Narrow Room / Natural
42 / Narrow Room / Focused
43 / Narrow Room / Soft
44 / Narrow Room / Open
45 / Narrow Room / Parallel
46 / Mix Perspective / Natural
47 / Mix Perspective / Focused
48 / Mix Perspective / Soft
49 / Mix Perspective / Open
50 / Mix Perspective / Parallel

Loading a preset cancels pending learning/preview. A star marks subsequent edits; save the project to retain them. The factory catalog itself is read-only.

15 / D.A PLUGINS

DSess — Frequency-dependent de-esser

DSess derives a high-frequency component from a low-pass split, detects its envelope and attenuates that component above Threshold. Range caps the computed reduction and Focus scales its contribution. It is not a trained speech recognizer or a surgical adjustable band-pass processor.

Input > High-frequency split / detector > Range-limited attenuation > Mix > Output



Main controls — design study, not a native screenshot.



Advanced controls — design study, not a native screenshot.

Typical uses

Reducing excessive vocal sibilance / Controlling some upper-frequency bursts / Gentle high-band dynamic control

DSess / Parameter reference

Ranges are manual limits; learning may propose a narrower interval. Defaults are source factory values, not the example image values. The learning badge identifies a strategy type, not guaranteed estimation accuracy.

Detection frequency

Range: 2000 Hz to 12000 Hz | Default: 6000 Hz | ID: frequency

Low-pass-split frequency used to derive the high-frequency detector and processed component. It is not a narrow band center.

LEARN: audio-informed estimate

Threshold

Range: -60 dB to 0 dB | Default: -24 dB | ID: threshold

High-component envelope level above which computed attenuation rises. This is not full-band input RMS.

LEARN: audio-informed estimate

Range

Range: 0 dB to 18 dB | Default: 6 dB | ID: range

Maximum computed high-band reduction before Focus and Mix scaling. 0 dB disables the reduction amount.

LEARN: audio-informed estimate

Attack

Range: 0.1 ms to 30 ms | Default: 1 ms | ID: attack

Detector envelope response to increasing high-frequency energy.

MANUAL ONLY: preserved by every Learn scope

Release

Range: 10 ms to 500 ms | Default: 80 ms | ID: release

Recovery of the high-frequency detector envelope after the burst.

LEARN: audio-informed estimate

Focus

Range: 20% to 100% | Default: 60% | ID: focus

Scales the high-frequency attenuation contribution. It is a strength control, not Q or detector bandwidth.

LEARN: audio-informed estimate

Mix

Range: 0% to 100% | Default: 100% | ID: mix

Blends dry signal with the frequency-reduced branch.

MANUAL ONLY: preserved by every Learn scope

Output

Range: -24 dB to 12 dB | Default: 0 dB | ID: output

Final gain after the de-essing blend.

MANUAL ONLY: preserved by every Learn scope

DSess / In practice

Starting recipe — adjust by ear

1. Loop a phrase with both vowels and problematic sibilants. Start near 5–7 kHz.
2. Use Range around 3–6 dB and lower Threshold until the strongest sibilants are controlled.
3. Start around 1 ms Attack and 60–120 ms Release; listen for dullness or lisping.
4. Reduce Focus or Mix if the whole phrase loses air rather than only the offending sounds.
5. Compare bypass at the same level, including quiet breaths and consonant endings.

How learning behaves here

Frequency, Threshold, Range, Release and Focus have Learn. Upper-band energies guide detection/reduction; crest guides release and smooth extends it. Attack, Mix and Output remain manual. Learning cannot reliably separate every bright non-vocal transient from sibilance and does not match a reference vocal.

> **Important implementation limit**
>
> Detection Frequency is a crossover-related control, not the center of a narrow isolated sibilance band. Cymbals, breath and bright instruments may trigger it. The GR number is not an exact full-band level loss because Focus and Mix also affect the result.

Listening and workflow tip

There is no detector-listen button or external sidechain in this build. Work in the mix after finding the issue in solo. Independent left/right detection requires care on stereo material.

DSess / 50 factory presets

Init plus 49 profile variants: choose from the header browser or host program list. These are complete snapshots, including Mix and Output. Use lower monitoring while comparing. The JSON manifest contains all exact parameter values.

01 / Init / Factory Default
02 / Vocal Sibilance / Focused
03 / Vocal Sibilance / Soft
04 / Vocal Sibilance / Open
05 / Vocal Sibilance / Parallel
06 / Bright Voice / Natural
07 / Bright Voice / Focused
08 / Bright Voice / Soft
09 / Bright Voice / Open
10 / Bright Voice / Parallel
11 / Low Voice / Natural
12 / Low Voice / Focused
13 / Low Voice / Soft
14 / Low Voice / Open
15 / Low Voice / Parallel
16 / Soft Speech / Natural
17 / Soft Speech / Focused
18 / Soft Speech / Soft
19 / Soft Speech / Open
20 / Soft Speech / Parallel
21 / Cymbal Restraint / Natural
22 / Cymbal Restraint / Focused
23 / Cymbal Restraint / Soft
24 / Cymbal Restraint / Open
25 / Cymbal Restraint / Parallel
26 / Acoustic Pick / Natural
27 / Acoustic Pick / Focused
28 / Acoustic Pick / Soft
29 / Acoustic Pick / Open
30 / Acoustic Pick / Parallel
31 / Air Retention / Natural
32 / Air Retention / Focused
33 / Air Retention / Soft
34 / Air Retention / Open
35 / Air Retention / Parallel
36 / Hard Consonants / Natural
37 / Hard Consonants / Focused
38 / Hard Consonants / Soft
39 / Hard Consonants / Open
40 / Hard Consonants / Parallel
41 / Bus High Tamer / Natural
42 / Bus High Tamer / Focused
43 / Bus High Tamer / Soft
44 / Bus High Tamer / Open
45 / Bus High Tamer / Parallel
46 / Parallel Silk / Natural
47 / Parallel Silk / Focused
48 / Parallel Silk / Soft
49 / Parallel Silk / Open
50 / Parallel Silk / Parallel

Loading a preset cancels pending learning/preview. A star marks subsequent edits; save the project to retain them. The factory catalog itself is read-only.

16 / D.A PLUGINS

DGate — Gate & level control

DGate opens above Threshold, holds open for a chosen time and closes smoothly toward a Range-limited floor. Hysteresis creates a lower closing threshold to reduce chatter. The current processor behaves as a gate; there is no variable expansion-ratio control.

Stereo-linked peak detection > Threshold / hysteresis / hold > Smoothed gate gain > Output



Main controls — design study, not a native screenshot.



Advanced controls — design study, not a native screenshot.

Typical uses

Reducing noise or spill between events / Tightening selected percussive sources / Creative gated effects

DGate / Parameter reference

Ranges are manual limits; learning may propose a narrower interval. Defaults are source factory values, not the example image values. The learning badge identifies a strategy type, not guaranteed estimation accuracy.

Threshold

Range: -80 dB to 0 dB | Default: -45 dB | ID: threshold

Opening threshold for the stereo-linked instantaneous magnitude detector. Raising it rejects more quiet material.

LEARN: audio-informed estimate

Attack

Range: 0.1 ms to 100 ms | Default: 2 ms | ID: attack

Smoothing time as gate gain moves toward open. Extremely short settings can sound abrupt.

LEARN: audio-informed estimate

Hold

Range: 0 ms to 500 ms | Default: 50 ms | ID: hold

Time retained open after level drops below the closing region. It helps avoid multiple closures inside one event.

MANUAL ONLY: preserved by every Learn scope

Release

Range: 5 ms to 2000 ms | Default: 150 ms | ID: release

Smoothing time as gain approaches the closed floor. Longer settings preserve more of a tail.

LEARN: audio-informed estimate

Range

Range: 0 dB to 90 dB | Default: 60 dB | ID: range

Closed-state attenuation. 0 dB means no attenuation; large values strongly suppress but do not classify wanted sound.

MANUAL ONLY: preserved by every Learn scope

Hysteresis

Range: 0 dB to 18 dB | Default: 6 dB | ID: hysteresis

Difference between opening and closing thresholds. Closing threshold = Threshold - Hysteresis.

MANUAL ONLY: preserved by every Learn scope

Output

Range: -24 dB to 12 dB | Default: 0 dB | ID: output

Gain after the gate, including when the gate is open.

MANUAL ONLY: preserved by every Learn scope

DGate / In practice

Starting recipe — adjust by ear

1. Start with a moderate Range, such as 12–24 dB, instead of maximum attenuation.
2. Set Threshold just below the quietest wanted events and above the spill you intend to suppress.
3. Try 1–5 ms Attack for percussion, then adjust Hold so one event does not reopen repeatedly.
4. Increase Release until the tail fades naturally; add Hysteresis if the gate chatters.
5. Check every quiet passage. For very exposed vocals, manual editing may be safer than aggressive gating.

How learning behaves here

Threshold, Attack and Release have Learn. Threshold uses input RMS minus 18 dB, not a measured noise floor; timing uses crest factor and smooth extends release. Range, Hold, Hysteresis and Output stay manual. Verify quiet desired sounds and tails before using the result.

> **Important implementation limit**
>
> A gate cannot remove noise under wanted audio. The learner does not measure a separate noise-floor distribution. Quiet words, ghost notes and tails may be cut; audition the quietest intended material before applying a suggestion.

Listening and workflow tip

The detector follows the larger left/right instantaneous magnitude, so either channel can open the gate. A large Range is not the same as digital silence. There is no external sidechain, key filter or look-ahead control.

DGate / 50 factory presets

Init plus 49 profile variants: choose from the header browser or host program list. These are complete snapshots, including Mix and Output. Use lower monitoring while comparing. The JSON manifest contains all exact parameter values.

01 / Init / Factory Default
02 / Vocal Cleanup / Focused
03 / Vocal Cleanup / Soft
04 / Vocal Cleanup / Open
05 / Vocal Cleanup / Parallel
06 / Kick Isolation / Natural
07 / Kick Isolation / Focused
08 / Kick Isolation / Soft
09 / Kick Isolation / Open
10 / Kick Isolation / Parallel
11 / Snare Isolation / Natural
12 / Snare Isolation / Focused
13 / Snare Isolation / Soft
14 / Snare Isolation / Open
15 / Snare Isolation / Parallel
16 / Tom Decay / Natural
17 / Tom Decay / Focused
18 / Tom Decay / Soft
19 / Tom Decay / Open
20 / Tom Decay / Parallel
21 / Guitar Noise / Natural
22 / Guitar Noise / Focused
23 / Guitar Noise / Soft
24 / Guitar Noise / Open
25 / Guitar Noise / Parallel
26 / Bass Tail / Natural
27 / Bass Tail / Focused
28 / Bass Tail / Soft
29 / Bass Tail / Open
30 / Bass Tail / Parallel
31 / Speech Pause / Natural
32 / Speech Pause / Focused
33 / Speech Pause / Soft
34 / Speech Pause / Open
35 / Speech Pause / Parallel
36 / Percussion Tight / Natural
37 / Percussion Tight / Focused
38 / Percussion Tight / Soft
39 / Percussion Tight / Open
40 / Percussion Tight / Parallel
41 / Room Reduction / Natural
42 / Room Reduction / Focused
43 / Room Reduction / Soft
44 / Room Reduction / Open
45 / Room Reduction / Parallel
46 / Gentle Floor / Natural
47 / Gentle Floor / Focused
48 / Gentle Floor / Soft
49 / Gentle Floor / Open
50 / Gentle Floor / Parallel

Loading a preset cancels pending learning/preview. A star marks subsequent edits; save the project to retain them. The factory catalog itself is read-only.

17 / D.A PLUGINS

DFX — Modular multi-effects

DFX connects saturation, low-pass filtering, delay and an independent ambience network in a fixed order. Each module has its own enable control; only Saturation, Filter and Ambience have learning scopes. Delay Mix and Space Mix set local blends; the master Mix blends the whole processed chain with the original input.

Input > Saturation > Filter > Delay > Ambience > Master mix > Output



Main controls — design study, not a native screenshot.



Advanced controls — design study, not a native screenshot.

Typical uses

Combined instrument and sound-design textures / A compact fixed-order creative chain / Learning and auditioning individual modules

DFX / Parameter reference

Ranges are manual limits; learning may propose a narrower interval. Defaults are source factory values, not the example image values. The learning badge identifies a strategy type, not guaranteed estimation accuracy.

Enable saturation

Range: Off / On | Default: On | ID: driveOn

Includes or bypasses the tanh saturation stage. This is manual-only; learning never changes enable decisions.

MANUAL ONLY: preserved by every Learn scope

Drive

Range: 0 dB to 24 dB | Default: 3 dB | ID: drive

Gain into the saturation stage when enabled. This module has no separate character or oversampling selector.

LEARN: audio-informed estimate

Enable filter

Range: Off / On | Default: On | ID: filterOn

Enables the input low-pass stage. Disabling it does not remove the separate delay feedback filtering.

MANUAL ONLY: preserved by every Learn scope

Low pass

Range: 200 Hz to 18000 Hz | Default: 12000 Hz | ID: filter

Low-pass cutoff used by the filter module and delay feedback path.

LEARN: audio-informed estimate

Enable delay

Range: Off / On | Default: On | ID: delayOn

Includes the local echo blend. Delay memory can continue running while its contribution is bypassed.

MANUAL ONLY: preserved by every Learn scope

Time

Range: 1 ms to 2000 ms | Default: 250 ms | ID: time

Nominal delay in milliseconds; no host-BPM sync is provided.

MANUAL ONLY: preserved by every Learn scope

Feedback

Range: 0 (0%) to 0.9 (90%) | Default: 0.3 (30%) | ID: feedback

Recirculation amount, limited to 0.90. High settings can sustain a loud tail.

MANUAL ONLY: preserved by every Learn scope

DFX / Controls continued

Delay mix

Range: 0% to 100% | Default: 20% | ID: delayMix

Blend between the incoming module signal and delayed signal, before ambience.

MANUAL ONLY: preserved by every Learn scope

Enable ambience

Range: Off / On | Default: On | ID: reverbOn

Includes the independent ambience contribution. It is not a master bypass.

MANUAL ONLY: preserved by every Learn scope

Decay

Range: 0.1 s to 8 s | Default: 1.5 s | ID: decay

Feedback-decay design for the fixed-character ambience tank. Other reverb controls are not exposed in DFX.

LEARN: audio-informed estimate

Ambience mix

Range: 0% to 100% | Default: 20% | ID: reverbMix

Local dry/ambience blend following delay. The dry side here is the signal reaching the ambience module, not necessarily the original input.

MANUAL ONLY: preserved by every Learn scope

Mix

Range: 0% to 100% | Default: 50% | ID: mix

Global blend between original input and the complete effects chain, before Output.

MANUAL ONLY: preserved by every Learn scope

Output

Range: -24 dB to 12 dB | Default: 0 dB | ID: output

Final gain applied after the global blend, even at Mix 0%.

MANUAL ONLY: preserved by every Learn scope

DFX / In practice

Starting recipe — adjust by ear

1. Start with low master Mix and modest Drive; keep Output near unity while establishing the tone.
2. Enable Filter and choose a cutoff that leaves the source intelligible.
3. Set Time manually; keep Feedback and Delay Mix moderate before adding ambience.
4. Enable Ambience and use a short Decay first. Increase Space Mix only as needed.
5. Use a module Learn action for focused changes, then level-match the full chain and check its tail.

How learning behaves here

Only Drive, Filter and Decay have Learn, grouped as Saturation, Filter and Ambience. The Delay module is manual-only. Enable switches, Time, Feedback, local/global mixes and Output are preserved by every learning scope. LEARN ALL is not joint chain, loudness or reference-error optimization.

> **Important implementation limit**
>
> Routing cannot be reordered in this build. Enabling/bypassing a module does not necessarily clear its internal buffers. The Filter frequency also participates in the delay feedback filtering, even when the separate input-filter module is disabled. There is no additional modulation module.

Listening and workflow tip

At master Mix 0%, the original input remains subject to Output gain. At 100%, the result can still contain dry components from the local delay/reverb blends. Use the host bypass when you need to remove the entire instance.

DFX / 50 factory presets

Init plus 49 profile variants: choose from the header browser or host program list. These are complete snapshots, including Mix and Output. Use lower monitoring while comparing. The JSON manifest contains all exact parameter values.

01 / Init / Factory Default
02 / Vocal Halo / Focused
03 / Vocal Halo / Soft
04 / Vocal Halo / Open
05 / Vocal Halo / Parallel
06 / Drum Space / Natural
07 / Drum Space / Focused
08 / Drum Space / Soft
09 / Drum Space / Open
10 / Drum Space / Parallel
11 / Guitar Trail / Natural
12 / Guitar Trail / Focused
13 / Guitar Trail / Soft
14 / Guitar Trail / Open
15 / Guitar Trail / Parallel
16 / Piano Cloud / Natural
17 / Piano Cloud / Focused
18 / Piano Cloud / Soft
19 / Piano Cloud / Open
20 / Piano Cloud / Parallel
21 / Bass Texture / Natural
22 / Bass Texture / Focused
23 / Bass Texture / Soft
24 / Bass Texture / Open
25 / Bass Texture / Parallel
26 / Synth Orbit / Natural
27 / Synth Orbit / Focused
28 / Synth Orbit / Soft
29 / Synth Orbit / Open
30 / Synth Orbit / Parallel
31 / LoFi Room / Natural
32 / LoFi Room / Focused
33 / LoFi Room / Soft
34 / LoFi Room / Open
35 / LoFi Room / Parallel
36 / Dark Cinematic / Natural
37 / Dark Cinematic / Focused
38 / Dark Cinematic / Soft
39 / Dark Cinematic / Open
40 / Dark Cinematic / Parallel
41 / Percussion Spark / Natural
42 / Percussion Spark / Focused
43 / Percussion Spark / Soft
44 / Percussion Spark / Open
45 / Percussion Spark / Parallel
46 / Ambient Wash / Natural
47 / Ambient Wash / Focused
48 / Ambient Wash / Soft
49 / Ambient Wash / Open
50 / Ambient Wash / Parallel

Loading a preset cancels pending learning/preview. A star marks subsequent edits; save the project to retain them. The factory catalog itself is read-only.

18 / D.A PLUGINS

Sessions, automation & recall

What is stored

The processor serializes parameter state through JUCE APVTS/XML for host recall. Save your DAW project after accepting settings. Roundtrip and legacy-state migration still require host validation; keep the previous binary when archiving a project. Each plugin now has 50 factory programs and a header browser; a star marks edits and host state retains actual modified settings. A/B slots and proprietary preset-file import/export are not provided. Loading a program cancels pending learning and preview.

Reference audio, descriptions, proposal lists and one-level learning undo are not embedded in the processor state. Reopen the reference after closing the editor or reloading the project. Keep an authorized copy in your project asset folder if needed; a filename shown in the UI is not proof that the file was saved with the session.

Automation discipline

Parameters are exposed to the host with stable IDs listed in the control reference. Host automation is separate from proposal undo. Learned changes notify the host, so host write/read modes can affect the outcome. Stop automation writing before learning and test the result on a duplicate session. Discrete modes should be changed with care, not swept as continuous values.

Freeze and export

Allow reverb and delay tails at the end of an offline render. The processor reports a 30-second tail for DVerb, DDelay and DFX; this is a host hint, not a measured guarantee for every setting. Verify fades and boundaries. No extra host-compensation latency is explicitly declared; audible pre-delay/echo timing is intentional, not the same as plugin delay compensation.

19 / D.A PLUGINS

Troubleshooting & frequently asked questions

Plugin missing from the host

Check OS/CPU architecture, format and scan folder. Confirm that a real plugin binary—not the design ZIP or source folder—was installed. Rescan with the host closed/reopened as its manual recommends. AAX-only hosts need a supported AAX product, not these VST3/AU targets. Do not rename a bundle's internal executable.

No signal or no learning result

Check routing, track mute, host bypass, device selection, output gain and whether playback actually reaches the instance. Reduce gate threshold/range if wanted audio is being closed. For Learn, keep playback running through capture, avoid silence and choose a valid mode/reference. A label change alone is not a valid proposal.

Reference rejected or lost

Try a readable local PCM WAV or supported AIFF/FLAC, a valid sample rate and a non-silent beginning. Convert only from audio you are authorized to use. The reader analyzes the first 30 seconds, not a selected later region. Reloading is required after editor/project recall because references are not serialized.

Troubleshooting / continued

Suggestion disappeared or cannot be applied

Manual/host edits can invalidate proposals. Restart learning after finishing those edits. Avoid overlapping analysis requests; a busy or timed-out capture may need audio playback to clear. UNDO affects one applied learning operation and does not recover an entire host edit history.

Clicks, overload or unstable loudness

Lower monitoring and output gain. Check Drive, EQ boosts, makeup and feedback. Compare matched levels, leave headroom and use a separate safety limiter when appropriate. Increase the host buffer if overloaded; reduce unnecessary high sample rates or effect instances. Continuous parameter smoothing does not guarantee artifact-free mode switches or extreme automation.

Why does mono still sound stereo?

In DStereo, Mono affects the processed branch. Set Mix to 100% or use the host mono monitor for a complete check. Width cannot synthesize Side from identical channels. Negative correlation calls for listening and diagnosis, not simply increasing Center or trusting a number.

Does “AI” mean a trained model?

Not in this implementation. The shipped path uses deterministic feature analysis and heuristic objectives. No model weights, remote inference or neural matching service is enabled. An abstract future model interface is not a trained product feature. Read the proposal explanation and the limitation notes for the specific parameter.

20 / D.A PLUGINS

Technical reference & known limits

Audio architecture

The JUCE AudioBuffer path processes float samples, with double-state EQ biquads. Layouts are matching mono or stereo; MIDI input/output and external sidechain buses are not implemented. The core clamps its preparation sample rate to 8–384 kHz; this implementation bound is not a complete tested host-rate certification. Some filter cutoffs are limited below Nyquist internally, so a high displayed setting is not always the effective cutoff at a low rate. Choose the rate appropriate to your project.

Continuous values are smoothed with approximately 20 ms coefficient smoothing in the core; discrete choices are immediate. Delay/FDN buffers are allocated during preparation. Analysis and reference decoding are worker tasks, not work intentionally placed in the audio callback. Visualization uses a bounded single-producer/single-consumer queue and may drop display frames without dropping audio by design.

Practical limitations

No oversampling, look-ahead, true-peak limiter, audio tempo detection, arbitrary convolution, general language interpretation or iterative output-reference optimizer is provided. DEQ is not linear phase; DSess is not a full parametric dynamic EQ; DGate has no expansion ratio; DFX order is fixed. DSP quality and automation must still be auditioned on real material.

CPU and memory depend on sample rate, platform, instance count and settings. No measured minimum RAM/CPU or certified buffer-size guarantee is published. Internal finite-value safeguards and output bounding are not transparent overload prevention. Use host meters and sensible input levels.

Verification status

Portable DSP/learning tests and layout/FIFO checks exist; they are not listening tests or blanket DAW certification. A previous checkpoint passed Linux/Windows/macOS CI builds; the current UI has its own pending native snapshot/host validation. Consult the repository checks and STATUS.md for evidence tied to the exact commit. This manual does not turn development code into a release certification.

21 / D.A PLUGINS

Glossary & parameter locator

Attack

Envelope rise response; in DTrans, attack gain rather than time.

Auxiliary / send

A parallel host bus receiving a chosen amount of signal.

Crest factor

Ratio of peak to RMS, commonly expressed in dB.

dBFS

Digital level relative to nominal full scale; not a loudness unit.

Dry / wet

Original signal versus the processed branch.

Feedback

Returning part of a delayed or reverberant signal to its input path.

FDN

Interconnected feedback delay lines used for algorithmic ambience.

Gain reduction / GR

Attenuation computed by a dynamics process.

Headroom

Margin between current peaks and an intended overload boundary.

Hysteresis

Different opening and closing thresholds to reduce rapid switching.

Knee

Transition region between uncompressed and compressed behavior.

Mid / Side

Sum and difference components of a stereo signal.

Mono compatibility

How the signal behaves when channels are summed.

PDC

Host compensation for reported processing latency.

Pre-delay

Gap before the onset of a time-effect return.

Q

Bell-filter selectivity; higher Q means narrower bandwidth.

Release

Recovery or closing smoothing after a level event.

RMS

A signal-energy amplitude measure, not LUFS loudness.

RT60

A measured 60 dB decay time; not a certified DVerb readout.

Sibilance

Strong high-frequency speech energy such as s/sh sounds.

Stereo correlation

Relationship between channel waveforms; negative values merit mono checks.

True peak

Estimate of reconstructed peaks between samples; not measured by these meters.

Find a parameter quickly

All 92 parameter IDs are documented in the control pages. The links below open each product's reference. Searchable IDs also identify host automation parameters; the displayed host name can include its module prefix.

DVerb / 12 parameters / Page 13

predelay · size · decay · tone · mix · width · density · diffusion · modulation · lowcut · midcut · mode

DDelay / 10 parameters / Page 18

time · feedback · filter · pingpong · modulation · mix · width · output · sync · division

DComp / 8 parameters / Page 23

threshold · ratio · attack · release · knee · makeup · mix · output

DEQ / 16 parameters / Page 27

b1freq · b1gain · b1q · b1shape · b2freq · b2gain · b2q · b2shape · b3freq · b3gain · b3q · b3shape · b4freq · b4gain · b4q · b4shape

DSat / 6 parameters / Page 32

drive · tone · mode · density · mix · output

DTrans / 6 parameters / Page 36

attack · sustain · sensitivity · shape · mix · output

DStereo / 6 parameters / Page 40

width · depth · center · side · mix · mono

DSess / 8 parameters / Page 44

frequency · threshold · range · attack · release · focus · mix · output

DGate / 7 parameters / Page 48

threshold · attack · hold · release · range · hysteresis · output

DFX / 13 parameters / Page 52

driveOn · drive · filterOn · filter · delayOn · time · feedback · delayMix · reverbOn · decay · reverbMix · mix · output

22 / D.A PLUGINS

Support, privacy & legal notices

Report a reproducible problem

Use the repository issue tracker or the support channel supplied with your build. Include plugin name, build/commit, format, OS/CPU, DAW version, sample rate, buffer size, mono/stereo layout, steps, expected/actual behavior and whether host bypass changes it. Include crash logs only after checking them for private paths or identifiers.

Do not publish private sessions, licensed reference music, credentials or personal data. Prefer a short, authorized synthetic or anonymized test file and a minimal project. An issue tracker is not a published service-level agreement, response-time promise or warranty.

Local processing and rights

The described code decodes references and analyzes input locally; no remote learning/inference upload path is implemented. This statement is not an independent privacy/security audit or a policy for your DAW, OS, cloud backup or third-party plugins. Respect source/reference licensing and do not assume reference analysis grants copying or distribution rights.

Licensing and document scope

The repository notice identifies prototype source for evaluation and further development. This guide does not replace a software license, provide commercial distribution rights or invent a refund/warranty policy. Review JUCE licensing separately before distribution. Bundled fonts carry their own SIL Open Font License notices.

D.A Plugins branding and supplied artwork identify this project. Product/host names mentioned for compatibility remain the names of their respective owners; no third-party endorsement is implied. This is original documentation, not a copy of another manufacturer's manual. English and Persian editions describe the same development feature set.

Project resources

Repository / https://github.com/drdrillcontacts-svg/D.APlugins
Issue tracker / https://github.com/drdrillcontacts-svg/D.APlugins/issues
Source snapshot / https://github.com/drdrillcontacts-svg/D.APlugins/tree/1aaf67d9d271

Document maintenance: update the parameter registry, the behavioral notes and both language editions together when a feature changes. This edition intentionally distinguishes implemented controls, heuristic policies, planned work and verification limits.

LEARN THE SOUND. RECREATE THE FEEL.

D.A PLUGINS

راهنمای کاربر

راهنمای کامل باندل ده‌پلاگینی



۹۲ پارامتر / ۳۳ کنترل با Learn / گزارش اختیاری

DVerb / DDelay / DComp / DEQ / DSat
DTrans / DStereo / DSess / DGate / DFX

نسخهٔ توسعه‌ای محصول ۰٫۴ — ویرایش راهنما ۱٫۲

2026-10-23 / PERSIAN

پیش از استفاده بخوانید

نسخهٔ توسعه‌ای؛ نه گواهی انتشار

این راهنما پیاده‌سازی فعلی سورس را شرح می‌دهد. معیار پذیرش کامل باندل هنوز برآورده نشده است. ظاهر حرفه‌ای یا واژهٔ AI را مدرک مدل آموزش‌دیده، تطبیق تأییدشدهٔ مرجع، نصب‌کنندهٔ امضاشده یا عملکرد معتبر در همهٔ DAWها ندانید.

نسخهٔ محصول

0.4

ویرایش راهنما

1.2 / Rack Collection 02 / Development

تاریخ سند

2026-10-23

مبنای سورس

1aaf67d9d271

زبان

Persian / فارسی

پوشش پارامتر

92 parameters / 10 plugins

تصاویر و تنظیمات نمونه

تصاویر سخت‌افزاری، طرح گرافیکی‌اند نه اسکرین‌شات پلاگین اجراشده. نمودار و متر نمونه در آن‌ها نمایشی است. همهٔ دستورهای عددی، نقطهٔ شروع پیشنهادی‌اند؛ پریست همراه، اندازه‌گیری، تضمین یا تنظیم مناسب همهٔ منابع نیستند.

در PDF ترکیبی ابتدا انگلیسی و سپس فارسی آمده و شمارهٔ چاپی صفحات در هر نسخه از نو آغاز می‌شود.

نام انگلیسی رابط در نسخهٔ فارسی حفظ شده تا کنترل دقیق را پیدا کنید. PDF فهرست پیونددار و نشانک دارد. دامنه و پیش‌فرض پارامترها از رجیستری سورس تولید شده‌اند، نه از روی تصویر.

فهرست مطالب

یک فصل را انتخاب یا از نشانک PDF استفاده کنید. شماره‌ها به همین نسخهٔ زبانی ارجاع می‌دهند.

01	خوش‌آمد و معرفی باندل	4
02	نصب، سازگاری و به‌روزرسانی	5
03	شروع سریع و مسیر امن سیگنال	7
04	رابط، کنترل‌ها و مترها	8
05	حالت‌ها، دامنه‌ها و تأیید یادگیری	9
06	فایل مرجع و روند دریافت صوت	10
07	پریست کارخانه و تمپوی پروژه	11
08	DVerb — ریورب و طراحی فضا	12
09	DDelay — دیلی استریو	17
10	DComp — کمپرسور داینامیک	22
11	DEQ — اکولایزر چهار باند	26
12	DSat — سچوریشن هارمونیک	31
13	DTrans — طراح ترنزینت	35
14	DStereo — طراح تصویر استریو	39
15	DSess — دی‌اسر وابسته به فرکانس	43
16	DGate — گیت و کنترل سطح	47
17	DFX — مولتی‌افکت ماژولار	51
18	جلسه، اتومیشن و بازخوانی	56
19	عیب‌یابی و پرسش‌های رایج	57
20	مرجع فنی و محدودیت‌های شناخته‌شده	59
21	واژه‌نامه و راهنمای یافتن پارامتر	60
22	پشتیبانی، حریم خصوصی و ملاحظات حقوقی	63

برای کنترل خاص، نام انگلیسی یا شناسهٔ آن را در PDF جست‌وجو کنید.

01 / D.A PLUGINS

خوش‌آمد و معرفی باندل

این باندل چه می‌کند

D.A Plugins مجموعه‌ای ده‌افکتی برای فضا، داینامیک، رنگ، هارمونیک و استریو است. روند یادگیری، صوت را تحلیل و پیش از تأیید، پیشنهاد پارامتر ارائه می‌کند. کار دستی همواره ممکن است. این دفترچه، پیاده‌سازی توسعه‌ای فعلی را توضیح می‌دهد، نه یک انتشار تجاری نهایی.

ابتدا شروع سریع و سپس فصل پلاگین موردنظر را بخوانید. مرجع کنترل‌ها شامل شناسهٔ واقعی، دامنهٔ دستی، مقدار پیش‌فرض و توضیح است. تنظیمات نمونه نقطهٔ شروع‌اند؛ پریست کارخانه‌ای یا راه‌حل تضمینی نیستند.

پیش از شنیدن

پیش از تغییر حالت، بازخورد، Drive یا گین زیاد، صدای مانیتور را کم کنید. در میزبان هدروم نگه دارید و هم‌سطح مقایسه کنید. این مجموعه محافظ شنوایی، لیمیتر True Peak یا جایگزین لیمیتر ایمنی مستقل نیست. برای بیلد توسعه‌ای از نسخهٔ آزمایشی پروژه و پشتیبان استفاده کنید.

روش خواندن راهنما

برچسب انگلیسی پارامتر با رابط فعلی مطابقت دارد. درصد، نسبت دامنه یا کنترل است و الزاماً نسبت بلندی ادراکی نیست. بعضی کنترل‌های نرمال‌شده مانند Feedback ممکن است اعشاری نمایش داده شوند؛ ۰٫۳۵ یعنی ۳۵٪. دامنهٔ ماژول همیشه با پنل ظاهری یکسان نیست.

انتخاب ابزار

DVerb — ریورب و طراحی فضا

DDelay — دیلی استریو

DComp — کمپرسور داینامیک

DEQ — اکولایزر چهار باند

DSat — سچوریشن هارمونیک

DTrans — طراح ترنزینت

DStereo — طراح تصویر استریو

DSess — دی‌اسر وابسته به فرکانس

DGate — گیت و کنترل سطح

DFX — مولتی‌افکت ماژولار

02 / D.A PLUGINS

نصب، سازگاری و به‌روزرسانی

دریافت بیلد مناسب

آرتیفکت قابل‌اعتماد متناسب با سیستم‌عامل و معماری پردازنده دریافت کنید. فایل ZIP طراحی رابط، نصب‌کنندهٔ پلاگین نیست. مخزن فعلاً نصب‌کنندهٔ تجاری امضاشده، مدیر فعال‌سازی یا انتشار نوتاریزه ندارد. خروجی CI تضمین کلی سازگاری با همهٔ DAWها نیست.

VST3 و Standalone هدف بیلد ویندوز، مک و لینوکس‌اند؛ AU فقط برای مک است. AAX، VST2 و CLAP ارائه نمی‌شوند. میزبان نیازمند AAX این مجموعه را به‌صورت بومی AAX بارگذاری نمی‌کند. ماتریس کامل تأیید نسخه‌های میزبان منتشر نشده است.

نصب دستی

DAW را ببندید. بسته‌های مناسب پلاگین را بدون تغییر ساختار داخلی استخراج و VST3 را در مسیر استاندارد موردقبول میزبان کپی کنید؛ مسیرهای رایج در ادامه آمده‌اند. در مک برای AU بستهٔ .component را کپی کنید. سپس میزبان را باز و فهرست پلاگین‌ها را دوباره اسکن کنید.

اگر سیستم بیلد بدون امضا را رد کرد، امنیت سیستم را سراسری غیرفعال یا فایل نامطمئن اجرا نکنید. فقط پس از بررسی منشأ، از روش رسمی تأیید همان فایل استفاده کنید یا بیلد امضاشده بخواهید.

تنظیم میزبان و اجرای مستقل

افکت را روی ترک صوتی یا باس برگشت قرار دهید. ورودی و خروجی باید هر دو مونو یا هر دو استریو باشند. این‌ها ساز مجازی، افکت MIDI، پردازندهٔ فراگیر یا تبدیل‌کنندهٔ چیدمان مونو به استریو نیستند. ترک ساکت دادهٔ قابل‌استفاده‌ای برای Learn نمی‌دهد.

هدف Standalone از پوستهٔ JUCE به‌جای جلسهٔ DAW استفاده می‌کند. اگر پوسته تنظیمات دستگاه دارد، ورودی، خروجی و دستگاه مناسب انتخاب کنید و از برگشت صدای اسپیکر به میکروفن جلوگیری کنید. برای مسیریابی، اتومیشن و بازخوانی، DAW محیط پیشنهادی است.

به‌روزرسانی یا حذف

پیش از جایگزینی، جلسه را پشتیبان بگیرید و بیلد قبلی را نگه دارید. میزبان را ببندید، بستهٔ متناظر را جایگزین، اسکن و نسخهٔ کپی جلسه را آزمایش کنید. مهاجرت وضعیت نمونهٔ اولیهٔ چهارپارامتری تضمین نیست. برای حذف، فقط بسته‌های نصب‌شدهٔ مربوط را بردارید، نه پوشه‌های مشترک میزبان.

مسیرهای نصب و نکات بیلد

این‌ها مسیرهای رایج‌اند و اسکن خودکار همهٔ میزبان‌ها را تضمین نمی‌کنند. ساختار هر بستهٔ .vst3 یا .component را حفظ و دستور اسکن میزبان را دنبال کنید. پوشهٔ مشترک سیستم ممکن است دسترسی مدیر بخواهد.

Windows / VST3

C:\Program Files\Common Files\VST3

macOS / VST3

/Library/Audio/Plug-Ins/VST3
~/Library/Audio/Plug-Ins/VST3

macOS / Audio Unit (AU)

/Library/Audio/Plug-Ins/Components
~/Library/Audio/Plug-Ins/Components

Linux / VST3

~/.vst3
/usr/lib/vst3 or /usr/local/lib/vst3 (host dependent)

اگر از سورس بیلد می‌کنید

کاربر پیشرفته به CMake نسخهٔ ۳٫۲۲ به بالا، کامپایلر C++17 و وابستگی‌های پلتفرم JUCE نیاز دارد. JUCE نسخهٔ ۸٫۰٫۶ از آرشیو ثابت و بررسی‌شده دریافت می‌شود. جزئیات در README.md است. بیلد، نصب، امضا، نوتاریز یا فعال‌سازی انجام نمی‌دهد.

```
cmake -S . -B build -DCMAKE_BUILD_TYPE=Release
cmake --build build --config Release --parallel 2
ctest --test-dir build -C Release --output-on-failure
```

محصول بیلد در مسیر زیر است. فقط فرمت و پلتفرمی را استفاده کنید که بیلد و بررسی میزبانِ همان ویرایش واقعاً پاس شده باشد.

build/<Plugin>_artefacts/Release/

03 / D.A PLUGINS

شروع سریع و مسیر امن سیگنال

شنیدن اولیه در شش گام

۱. نسخه‌ای از جلسه ذخیره و مانیتور را کم کنید. پلاگینی انتخاب کنید که یک مسئلهٔ مشخص را حل کند. ۲. بخش نمایندهٔ اجرا را به آن برسانید و فعالیت ورودی و خروجی را ببینید. ۳. با تغییرات دستی کوچک و هدروم کافی شروع کنید.

۴. یکی از حالت‌های REFERENCE GUIDANCE، INPUT-AWARE LEARN یا DESCRIPTION GUIDANCE را انتخاب کنید. ۵. هنگام پخش، Learn پارامتر، باند/ماژول یا LEARN ALL را بزنید. ۶. با PREVIEW آزمایش و سپس APPLY یا REJECT کنید؛ فقط در صورت نیاز DETAILS / LOG را باز کنید. هم‌سطح مقایسه و پس از تصمیم ذخیره کنید.

Insert در برابر برگشت کمکی

در Insert، Mix نسبت خشک و پردازش‌شده را پیش از Output تعیین می‌کند. روی برگشت ریورب یا دیلی، Mix را صددرصد و شدت افکت را با Send/Return میزبان تنظیم کنید. DEQ و DGate کنترل Mix کلی ندارند. DFX ترکیب محلی و اصلی دارد.

رابط فعلی کلید Power عمومی ندارد؛ برای مقایسهٔ کل نمونه از بای‌پس میزبان استفاده کنید. Mix صفر الزاماً بای‌پس نیست: Output می‌تواند فعال بماند و بافر افکت زمانی کار کند. OFF ماژول در DFX تضمین پاک‌شدن بافر نیست.

نمونهٔ ترتیب پردازش

یک زنجیرهٔ شروع عملی: ویرایش، DGate در صورت نیاز، DEQ اصلاحی، DSess، DComp در صورت نیاز، DSat ملایم و فضا روی Send. این پیشنهاد تولید است، نه ترتیب داخلی ثابت باندل. جای مراحل را بر حسب منبع عوض و از روی‌هم‌گذاشتن تقویت‌ها بدون کنترل قله پرهیز کنید.

04 / D.A PLUGINS

رابط، کنترل‌ها و مترها

ناب‌ها و انتخاب‌ها

برای تنظیم ناب، آن را بکشید و برای پیش‌فرض اعلام‌شده دوبار کلیک کنید. در کادر مقدار، عدد پشتیبانی‌شده وارد کنید؛ مقادیر به دامنه محدود می‌شوند. ورود فرکانس از Hz و kHz پشتیبانی می‌کند، ولی قالب نوشتاری فهرست اتومیشن میزبان ممکن است متفاوت باشد.

حالت ریورب، شکل فیلتر، کاراکتر سچوریشن، Stereo/Mono و OFF/ON ماژول‌های DFX انتخاب گسسته‌اند و به پارامتر میزبان متصل‌اند، نه دکمهٔ تزئینی. تغییر حالت الزاماً کراس‌فید بدون کلیک ندارد؛ سطح را کم و گذار را آزمایش کنید.

پنل یادگیری و میز کار

منوی حالت، روش ساخت هدف را تعیین می‌کند. LOAD FILE مرجع محلی را انتخاب و DESCRIBE THE SOUND واژه‌های انگلیسی پشتیبانی‌شده را می‌گیرد. DETAILS / LOG گزارش اختیاری را باز می‌کند و پس از Learn خودکار باز نمی‌شود؛ BACK TO CONTROLS آن را می‌بندد. ADVANCED و MAIN CONTROLS صفحهٔ کنترل را بدون تغییر مقدار عوض می‌کنند. REJECT، APPLY، PREVIEW و UNDO چرخهٔ پیشنهاد را کنترل می‌کنند، نه تاریخچهٔ کامل جلسه.

معنای نمایشگرها

شکل‌موج مرجع و نماهای تحلیل در رابط بومی از دادهٔ واقعی موجود استفاده می‌کنند. نمایش فرکانسی پنجرهٔ ۲۰۴۸ نمونه‌ای و ۱۲۸ نقطه دارد. تاریخچهٔ طیفی DVerb توالی طیف‌هاست، نه نمودار زمان میرایی اندازه‌گیری‌شده. بردارسنج DStereo نمونه‌های واقعی دو کانال را رسم می‌کند. نبود صوت می‌تواند نمایش را خالی یا بی‌حرکت کند.

DEQ پاسخ حاصل از پارامترهای فیلتر را رسم می‌کند. DGate، DComp و DSat منحنی انتقال توضیحی دارند؛ این رسم اندازه‌گیری کالیبرهٔ همهٔ حالت‌های پویا نیست. خوانش ورودی و خروجی، قلهٔ نمونه‌ای به سبک dBFS است، نه LUFS، لادنس RMS یا True Peak بین‌نمونه‌ای. GR نیز بالستیک تأییدشدهٔ متر ندارد.

پنجره و تصاویر

رابط سخت‌افزاری با حفظ نسبت ابعاد بزرگ و کوچک می‌شود. راهنمای شناور، بسیاری از کنترل‌ها را معرفی می‌کند. تصاویر این دفترچه طرح گرافیکی‌اند، نه اسکرین‌شات بومی؛ نمودار و متر نمونهٔ آن‌ها نتیجهٔ تحلیل یا ادعای عملکرد نیست.

05 / D.A PLUGINS

حالت‌ها، دامنه‌ها و تأیید یادگیری

یادگیری آگاه از ورودی

موتور، سطح، ضریب قله، انرژی باندهای کلی و ویژگی استریو را اندازه و مقدار محدودشده پیشنهاد می‌کند. فقط ۳۳ کنترل صوت‌محور Learn دارند؛ ۵۹ کنترل دیگر شامل Mix، تریم خروجی، انتخاب زمان و مسیر و فرکانس/Q/شکل EQ دستی می‌مانند. LEARN ALL و یادگیری باند یا ماژول نیز این ۵۹ کنترل را حفظ می‌کنند. شبکهٔ عصبی آموزش‌دیده یا استنتاج مدل ارائه نشده است. داشتن Learn به معنی استخراج یکتای پارامتر از هر صوت نیست.

هدایت با مرجع

موفقیت حالت مرجع به مرجع معتبر نیاز دارد. در این نسخه، مرجع بر گین نرمال‌شدهٔ باندهای DEQ، پارامتر Width در DVerb و DDelay و DStereo و سطح Makeup در DComp اثر دارد. سایر پیشنهادها همچنان سیاست منبع یا هدف هستند. حلقهٔ مقایسهٔ خروجی رندرشده یا بازسازی مرجع دلخواه وجود ندارد.

هدایت با توصیف

واژه‌های انگلیسی smooth، wide، warm، dark و cinematic را وارد کنید. این‌ها هدف رنگ، استریو، پوش یا فضا می‌دهند و همچنان ورودی صوتی لازم است. تحلیلگر فعلی نثر فارسی را تفسیر نمی‌کند. متن کاملاً ناشناخته خطا می‌دهد و در متن ترکیبی ممکن است فقط واژهٔ شناخته‌شده استفاده شود.

واژه‌های رایج نفی رد می‌شوند؛ not dark خطا می‌دهد و dark را فعال نمی‌کند. فقط واژهٔ کامل تطبیق دارد؛ darkness و smoothie به dark و smooth تبدیل نمی‌شوند. از دستور پیچیده، وعدهٔ شبیه‌سازی دقیق و صفت پشتیبانی‌نشده پرهیز کنید. عبارت dark, warm, wide, smooth, cinematic معتبر است، ولی نتیجه تخمین قابل‌شنیدن است، نه تضمین.

کوچک‌ترین دامنهٔ مفید را انتخاب کنید

LEARN زیر یک پارامتر فقط همان شناسه را پیشنهاد می‌دهد. عمل باند یا ماژول، بخش اعلام‌شده را پوشش می‌دهد. عمل مستقل هر باند EQ فقط گین همان باند را یاد می‌گیرد و فرکانس، Q و شکل دستی می‌مانند. LEARN ALL فقط کنترل‌های واجد شرایط را جمع می‌کند؛ بهینه‌ساز مشترک نیست و پیشنهاد مستقل مجوز تغییر پنهان بخش دیگر نیست.

پیش‌شنوی، اعمال، رد و بازگردانی

پیشنهاد تا عمل صریح پارامترها را عوض نمی‌کند. PREVIEW موقتاً مقدارها را برای شنیدن می‌نویسد؛ APPLY نگه می‌دارد و REJECT مقادیر پیش از پیش‌شنوی را بازمی‌گرداند. UNDO یک عمل یادگیریِ اعمال‌شده را تا پیش از ویرایش دستی/میزبان برمی‌گرداند؛ ویرایش جدید این بازگردانی را منقضی می‌کند و تاریخچهٔ چندسطحی وجود ندارد. بستن رابط در پیاده‌سازی فعلی پیش‌شنوی تأییدنشده را بازمی‌گرداند.

ویرایش دستی یا میزبان، پیشنهاد قبلی و Undo یادگیری را منقضی می‌کند؛ هنگام Preview، کنترل‌های دست‌نخورده بازمی‌گردند و ویرایش واقعی حفظ می‌شود. تا اعتبارسنجی کامل این تعامل، هنگام تحلیل پارامترها را اتومیشن یا ویرایش نکنید. پس از تغییر منبع دوباره Learn کنید. اطمینان، نمرهٔ ابتکاری است؛ احتمال کالیبره یا درصد کیفیت صوت نیست.

06 / D.A PLUGINS

فایل مرجع و روند دریافت صوت

بارگذاری و اعتبارسنجی

LOAD FILE و یک WAV، AIFF/AIF یا FLAC قابل‌خواندن با رمزگشاهای پایهٔ JUCE را انتخاب کنید. انتخابگر همین پسوندها را فیلتر می‌کند؛ همهٔ گونه‌های کدک تضمین نیستند. رمزگشایی محلی و در Worker است. فقط ۳۰ ثانیهٔ نخست تحلیل می‌شود؛ بخش مرتبط مرجع را در ابتدای فایل بگذارید.

خواننده نرخ ۸ تا ۳۸۴ کیلوهرتز و حداقل ۱۰۲۴ نمونه می‌پذیرد. ویژگی ساکت یا نامعتبر رد می‌شود. مرجع مونو برای بافر تحلیل استریو تکرار می‌شود. نگاشت ویژهٔ فراگیر و داون‌میکس ادراکی ارائه نشده است.

دریافت منبع

هنگام درخواست دامنه، میزبان باید صوت غیرساکت عبور دهد. دریافت ۶۵,۵۳۶ نمونهٔ ورودی است: حدود ۱٫۴۹ ثانیه در ۴۴٫۱، ۱٫۳۷ ثانیه در ۴۸ و ۰٫۶۸ ثانیه در ۹۶ کیلوهرتز؛ نه کل آهنگ. با توقف پخش یا تعلیق ترک، ممکن است پس از ۱۵ ثانیه زمان تمام شود.

عبارتی نماینده با ترنزینت و کشش انتخاب کنید، نه فیداین یا قلهٔ غیرعادیِ منفرد. تحلیل از ورودی است، نه خروجی پردازش‌شده. پیشنهاد تازه مقدار را جایگزین می‌کند و الزاماً اصلاح افزایشی صدای فعلی شما نیست.

لغو و خطا

REJECT یا لغو نتیجهٔ معلق را نامعتبر می‌کند؛ Worker محدود ممکن است در پس‌زمینه تمام شود. نتیجهٔ قدیمی را تأیید تازه فرض نکنید. اگر Capture busy پس از توقف باقی ماند، صوت را پخش کنید تا دریافت قبلی تمام و کنار گذاشته شود؛ سپس تحلیل تازه بخواهید.

Ready یعنی آماده، Analyzing یعنی دریافت یا تحلیل، Ready to audition یعنی وجود پیشنهاد، Previewing یعنی شنیدن موقت، Applied یعنی نگه‌داشتن و Cancelled یعنی کنارگذاری یا بازگردانی. Failed یا Reference unavailable موفقیت نیست. از تصویر سخت‌افزاری، نصب مدل عصبی را نتیجه نگیرید.

07 / D.A PLUGINS

پریست کارخانه و تمپوی پروژه

۵۰ برنامه برای هر پلاگین

هر محصول Init و ۴۹ گونهٔ پروفایل موسیقایی دارد؛ مجموعاً ۵۰۰ وضعیت کامل. از مرورگر بالای رابط، پیکان‌ها یا فهرست برنامهٔ میزبان انتخاب کنید. بارگذاری همهٔ تنظیم‌ها از جمله Mix و Output را تغییر می‌دهد؛ ابتدا مانیتور را کم کنید. ضبط، تحلیل معلق، پیش‌شنوی و بازگردانی یادگیری قبلی لغو می‌شوند؛ تنظیم قدیمی روی صدای تازه بازنمی‌گردد.

ستاره، تغییر نسبت به وضعیت کارخانه را نشان می‌دهد. برای حفظ مقدار ویرایش‌شده و شمارهٔ انتخاب، پروژهٔ DAW را ذخیره کنید. نام کارخانه فقط خواندنی است. فهرست هر محصول همهٔ نام‌ها و فایل Design/Presets/FactoryPresets.json مقدار همهٔ پارامترها را دارد. دستورهای عملیِ سایر صفحات صرفاً پیشنهادند، نه برنامهٔ نصب‌شدهٔ اضافه.

Sync دیلی و تقسیم نت

SYNC را فعال و Division را انتخاب کنید. زمان میلی‌ثانیهٔ نت سیاه برابر ۶۰٬۰۰۰ تقسیم بر BPM میزبان است. D نت را ۱٫۵ برابر و T دوسوم می‌کند. انتخاب‌ها: 1/32، 1/32 D، 1/32 T، 1/16، 1/16 D، 1/16 T، 1/8، 1/8 D، 1/8 T، 1/4، 1/4 D، 1/4 T، 1/2، 1/2 D، 1/2 T، و 1/1.

HOST یعنی تمپوی معتبر میزبان؛ HOLD در نبود آن آخرین BPM معتبر را نگه می‌دارد و FALLBACK پیش از دریافت تمپوی معتبر از ۱۲۰ استفاده می‌کند. بازهٔ پشتیبانی ۱۰ تا ۴۰۰ است. Standalone تمپوی پروژه ندارد. Sync زمان آزاد، مدولاسیون و اختلاف استریو را غیرفعال می‌کند. تشخیص تمپو از صوت، Tap Tempo یا شروع مجدد بر اساس موقعیت آهنگ وجود ندارد.

سازگاری و شنیدن

وضعیت قدیمی DDelay بدون شناسه‌های جدید از FREE MS شروع می‌کند. DVerb و DFX اکنون پخش آل‌پسِ ورودی، شکل‌دهی بم و میانی فقط در ورودی و شبکهٔ متعامد بدون اشباع دائمی دارند. مقدارهای ذخیره‌شده حفظ می‌شوند، ولی الگوریتم جدید صدا را تغییر می‌دهد؛ برای بازخوانی دقیق پروژهٔ قدیمی باینری قبلی را نگه دارید. نمونهٔ شنیداری، سیگنال مصنوعیِ اصلی است و تأیید کیفیت موسیقایی محسوب نمی‌شود.

08 / D.A PLUGINS


DVerb — ریورب و طراحی فضا

DVerb با یک شبکهٔ الگوریتمی هشت‌خطی، به صدا فضا می‌دهد. پیش‌تأخیر، شروع ریورب را از صدای مستقیم جدا می‌کند و میرایی، پخش‌شدگی و مدولاسیون، برگشت افکت را شکل می‌دهند. این پلاگین ابزار طراحی فضاست؛ پخش‌کنندهٔ پاسخ ضربه یا بازسازی دقیق یک اتاق نمونه‌برداری‌شده نیست.

Input > Pre-delay > Damped / diffused FDN > Stereo width > Dry/wet mix



کنترل‌های اصلی — طرح گرافیکی، نه اسکرین‌شات اجرای بومی.

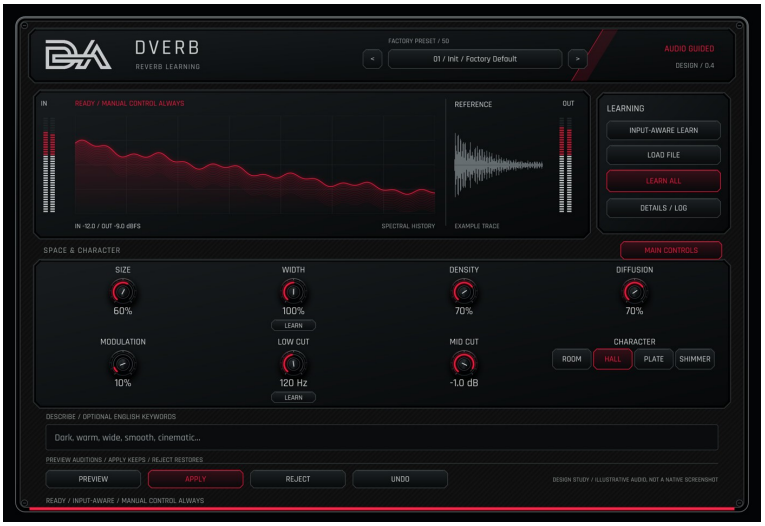

کنترل‌های تکمیلی — طرح گرافیکی، نه اسکرین‌شات اجرای بومی.

کاربردهای معمول

فضای کوتاه برای درام و سازها / فضای بلندتر برای وکال، پد و طراحی صدا / بافت‌های فضایی با بازخورد شیمِرِ یک اکتاو بالاتر

DVerb / مرجع پارامترها

دامنه‌ها حد دستی‌اند و پیشنهاد یادگیری ممکن است محدودتر باشد. پیش‌فرض از سورس است، نه عدد تصویر نمونه. برچسب یادگیری نوع راهبرد را نشان می‌دهد، نه دقت تضمینی.

پیش‌تأخیر / Pre-delay

Range: 0 ms to 200 ms | Default: 20 ms | ID: predelay

زمان پیش از تحریک ریورب است. برای جداکردن حملهٔ خشک از فضا افزایش دهید؛ مسیر خشک تأخیر نمی‌گیرد.

یادگیری: برآورد با کمک ویژگی صوتی

اندازهٔ فضا / Size

Range: 0% to 100% | Default: 60% | ID: size

طول تأخیرهای شبکه را تغییر می‌دهد. مقدار بیشتر، فاصلهٔ بازتاب‌ها و مقیاس ادراکی را عوض می‌کند؛ واحد آن متر نیست.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

میرایی / Decay

Range: 0.1 s to 12 s | Default: 2 s | ID: decay

طرح میرایی بازخورد را کنترل می‌کند. مقدار بیشتر فضا را می‌کشد، ولی میرایی واقعی به میرایی طیفی، پخش‌شدگی، اندازه و حالت هم وابسته است.

یادگیری: برآورد با کمک ویژگی صوتی

رنگ طیفی / Tone

Range: 500 Hz to 18000 Hz | Default: 10000 Hz | ID: tone

فرکانس قطع میرایی پایین‌گذر شبکه است. مقدار کمتر، برگشت را تیره‌تر می‌کند؛ این کنترل فرکانسی است، نه شیب دسی‌بلی رنگ.

یادگیری: برآورد با کمک ویژگی صوتی

ترکیب خشک و افکت / Mix

Range: 0% to 100% | Default: 25% | ID: mix

ترکیب خطی صدای اصلی و ریورب است. برای برگشت کمکی کاملاً افکتی، صددرصد انتخاب کنید.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

پهنای افکت / Width

Range: 0% to 200% | Default: 100% | ID: width

مؤلفهٔ جانبی ریورب Wet را تغییر می‌دهد: صفر مونو، صددرصد عادی و دویست‌درصد دو برابر Side؛ بخش خشک را باز نمی‌کند.

یادگیری: برآورد با کمک ویژگی صوتی

DVerb / ادامهٔ کنترل‌ها

تراکم / Density

Range: 0% to 100% | Default: 70% | ID: density

تحریک خطوط اضافهٔ شبکه را تغییر می‌دهد. مقدار کمتر مسیرهای اولیهٔ کمتری و مقدار بیشتر شبکهٔ اولیهٔ متراکم‌تری را تغذیه می‌کند.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

پخش‌شدگی / Diffusion

Range: 0% to 100% | Default: 70% | ID: diffusion

ضریب بازخورد چهار آل‌پسِ سری ورودی را کنترل می‌کند. مقدار بیشتر، حمله را پیش از شبکهٔ همواره متعامد پخش می‌کند؛ دیگر ماتریس شبکه را با مسیر مستقیم ترکیب نمی‌کند.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

مدولاسیون / Modulation

Range: 0% to 100% | Default: 10% | ID: modulation

عمق حرکت آهستهٔ طول تأخیرهاست. حرکت و بافت زیر و بمی می‌دهد؛ کنترل مستقل نرخ وجود ندارد.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

برش پایین / Low cut

Range: 20 Hz to 1000 Hz | Default: 120 Hz | ID: lowcut

بالاگذرِ تحریک پیش از شبکه است، نه فیلتری تکرارشونده در هر گردش. برای کاهش انباشت بم افزایش دهید.

یادگیری: برآورد با کمک ویژگی صوتی

کاهش میانی / Mid cut

Range: -12 dB to 0 dB | Default: -1 dB | ID: midcut

کاهش پهن و ثابت میانی، یک‌بار بر تحریک اعمال می‌شود؛ دنباله را در هر گردش توخالی نمی‌کند و باند پارامتریک با فرکانس آزاد نیست.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

حالت ریورب / Room/Hall/Plate/Shimmer

Range: Room / Hall / Plate / Shimmer | Default: Hall | ID: mode

Room، Hall و Plate مقیاس تأخیر متفاوت دارند؛ Shimmer بازخورد گرِینی یک اکتاو بالاتر می‌افزاید. این یک انتخاب حالت است، نه شدت افکت.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

DVerb / استفادهٔ عملی

دستور شروع — با گوش اصلاح کنید

1. برای ارسال وکال، از Hall، پیش‌تأخیر ۲۰ تا ۴۰ میلی‌ثانیه و Decay حدود ۱٫۵ تا ۲٫۵ ثانیه شروع کنید.
2. در مسیر برگشت کمکی، Mix را روی ۱۰۰٪ بگذارید و شدت افکت را با سطح Send میزبان تنظیم کنید.
3. Low Cut حدود ۱۲۰ تا ۲۰۰ هرتز را امتحان کنید؛ اگر افکت وضوح حروف یا سنج را می‌پوشاند، Tone را کاهش دهید.
4. برای شکل‌دادن به انباشت فضا، Density و Diffusion را تنظیم کنید. پیش از شیمِر، مقدار کمی Modulation را امتحان کنید.
5. پس از قطع منبع، دنباله را بشنوید؛ اگر جمله‌ها روی هم محو می‌شوند، Decay یا سطح ارسال را کم کنید.

رفتار یادگیری در این پلاگین

Learn فقط برای Width، Tone، Decay، Pre-delay و Low Cut موجود است. ضریب قله و طیف کلی نقطهٔ شروع می‌دهند و Width می‌تواند از مرجع کمک بگیرد. Mix، Size، حالت، Modulation، Diffusion، Density و Mid Cut دستی می‌مانند. RT60 مرجع یا پاسخ ضربهٔ اتاق استخراج نمی‌شود.

محدودیت مهم پیاده‌سازی

Decay یک کنترل طراحی است، نه اندازه‌گیری کالیبرهٔ RT60. حالت‌های Hall، Room و Plate زمان‌بندی شبکه را تغییر می‌دهند و نمایندهٔ یک سالن یا سخت‌افزار مشخص نیستند. شیمِر از بازخورد تغییر زیر و بمی دوگرِینی استفاده می‌کند؛ آرتیفکت‌های آن را با گوش بررسی کنید.

نکتهٔ شنیداری و روند کار

برای تغییر محدودتر، از دامنهٔ Space یا Colour استفاده کنید. Width بیش از ۱۰۰٪ مؤلفهٔ جانبی برگشت افکت را افزایش می‌دهد؛ مونو را کنترل کنید و ریورب بزرگ را فقط در حالت سولو قضاوت نکنید.

DVerb / ۵۰ پریست کارخانه

Init و ۴۹ گونهٔ پروفایل از مرورگر بالای رابط یا فهرست برنامهٔ میزبان انتخاب می‌شوند. هرکدام وضعیت کامل از جمله Mix و Output هستند. هنگام مقایسه مانیتور را کم کنید. مقدار دقیق همهٔ پارامترها در مانیفست JSON آمده است.

01 / Init / Factory Default
02 / Vocal Air / Focused
03 / Vocal Air / Soft
04 / Vocal Air / Open
05 / Vocal Air / Parallel
06 / Drum Room / Natural
07 / Drum Room / Focused
08 / Drum Room / Soft
09 / Drum Room / Open
10 / Drum Room / Parallel
11 / Snare Plate / Natural
12 / Snare Plate / Focused
13 / Snare Plate / Soft
14 / Snare Plate / Open
15 / Snare Plate / Parallel
16 / Piano Chamber / Natural
17 / Piano Chamber / Focused
18 / Piano Chamber / Soft
19 / Piano Chamber / Open
20 / Piano Chamber / Parallel
21 / Acoustic Space / Natural
22 / Acoustic Space / Focused
23 / Acoustic Space / Soft
24 / Acoustic Space / Open
25 / Acoustic Space / Parallel
26 / String Hall / Natural
27 / String Hall / Focused
28 / String Hall / Soft
29 / String Hall / Open
30 / String Hall / Parallel
31 / Synth Cloud / Natural
32 / Synth Cloud / Focused
33 / Synth Cloud / Soft
34 / Synth Cloud / Open
35 / Synth Cloud / Parallel
36 / Bright Shimmer / Natural
37 / Bright Shimmer / Focused
38 / Bright Shimmer / Soft
39 / Bright Shimmer / Open
40 / Bright Shimmer / Parallel
41 / Dark Cathedral / Natural
42 / Dark Cathedral / Focused
43 / Dark Cathedral / Soft
44 / Dark Cathedral / Open
45 / Dark Cathedral / Parallel
46 / Short Ambience / Natural
47 / Short Ambience / Focused
48 / Short Ambience / Soft
49 / Short Ambience / Open
50 / Short Ambience / Parallel

بارگذاری پریست، یادگیری و پیش‌شنوی معلق را لغو می‌کند. ستاره، ویرایش بعدی را مشخص می‌کند؛ برای حفظ آن پروژه را ذخیره کنید. فهرست کارخانه فقط خواندنی است.

09 / D.A PLUGINS

DDelay – دیلی استریو

DDelay حالت FREE MS و حالت SYNC با ۱۵ تقسیم نت معمولی، نقطه‌دار و تریوله دارد. حالت آزاد، اختلاف کوچک زمان استریو و مدولاسیون را حفظ می‌کند؛ در Sync هر دو خط، طول نت یکسان دارند و مدولاسیون غیرفعال است. Filter و Width رنگ و پهنای تکرار را شکل می‌دهند.

Input > Stereo delay <-> Filtered feedback > Wet width > Mix > Output



کنترل‌های اصلی – طرح گرافیکی، نه اسکرین‌شات اجرای بومی.



کنترل‌های تکمیلی – طرح گرافیکی، نه اسکرین‌شات اجرای بومی.

کاربردهای معمول

تکرار برای وکال و ساز / اکوهای متناوب استریو / بافت‌های دابلینگ با حرکت ملایم

DDelay / مرجع پارامترها

دامنه‌ها حد دستی‌اند و پیشنهاد یادگیری ممکن است محدودتر باشد. پیش‌فرض از سورس است، نه عدد تصویر نمونه. برچسب یادگیری نوع راهبرد را نشان می‌دهد، نه دقت تضمینی.

زمان آزاد / Time

Range: 1 ms to 2000 ms | Default: 375 ms | ID: time

زمان تأخیر در FREE MS است و خط راست ۱٫۱٪ اختلاف دارد. در SYNC نادیده و غیرفعال می‌شود؛ برچسب تمپو زمان واقعی نت را نشان می‌دهد.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

بازخورد / Feedback

Range: 0 (0%) to 0.95 (95%) | Default: 0.35 (35%) | ID: feedback

سهم برگشتی به حلقه است. صفر تکرار بازگشتی ندارد و ۰٫۹۵ یعنی ۹۵٪؛ تعداد معین تکرار را تضمین نمی‌کند.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

فیلتر تکرار / Filter

Range: 200 Hz to 18000 Hz | Default: 6000 Hz | ID: filter

فرکانس قطع پایین‌گذرِ محتوای تأخیری و بازخورد است؛ مقدار کمتر تکرارها را تیره‌تر می‌کند.

یادگیری: برآورد با کمک ویژگی صوتی

مسیر استریو / Ping-pong

Range: Stereo / Ping-pong | Default: Ping-pong | ID: pingpong

Stereo بازخورد را در همان کانال نگه می‌دارد؛ Ping-pong آن را به کانال مقابل می‌فرستد. ورودی همچنان به هر دو خط می‌رسد.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

عمق مدولاسیون / Modulation

Range: 0% to 100% | Default: 10% | ID: modulation

عمق حرکت آهستهٔ زمان و زیر و بمی فقط در FREE MS است. برای حفظ زمان دقیق شبکه، در SYNC غیرفعال است.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

DDelay / ادامهٔ کنترل‌ها

ترکیب / Mix

Range: 0% to 100% | Default: 25% | ID: mix

ترکیب خطی خشک و Wet پیش از گین Output است. در صفر افکت شنیده نمی‌شود، ولی حافظهٔ دیلی پاک نمی‌شود.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

پهنا / Width

Range: 0% to 200% | Default: 100% | ID: width

مقیاس مؤلفهٔ جانبی اکوی Wet است. پس از بازکردن، جمع مونو را بررسی کنید.

یادگیری: برآورد با کمک ویژگی صوتی

سطح خروجی / Output

Range: -24 dB to 12 dB | Default: 0 dB | ID: output

سطح دسی‌بلی پس از Mix است. اگر مجموع ورودی و تکرارها قله را بالا برد، کاهش دهید.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

همگام‌سازی / Tempo sync

Range: FREE MS / SYNC | Default: FREE MS | ID: sync

FREE MS از Time و SYNC از BPM میزبان و Division استفاده می‌کند. با نبود تمپو، مقدار معتبر قبلی یا در ابتدا ۱۲۰ نگه داشته می‌شود. این انتخاب فقط دستی است.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

تقسیم نت / Note division

Range: 15 notes: 1/32 to 1/1; D / T | Default: 1/8 | ID: division

طول نت در SYNC است: D نقطه‌دار با ضریب ۱٫۵ و T تریوله با ضریب دوسوم است. نت‌های معمولی از 1/32 تا 1/1 هستند؛ ۱۵ انتخاب در فصل پریست و تمپو آمده‌اند.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

DDelay / استفادهٔ عملی

دستور شروع — با گوش اصلاح کنید

1. SYNC را فعال و برای نت سیاه 1/4 را انتخاب کنید؛ در تمپوی ۱۲۰ میزبان، زمان نمایش‌داده‌شده ۵۰۰ میلی‌ثانیه است.

2. در تمپوی ۱۲۰، گزینهٔ 1/8 برابر ۲۵۰، D 1/8 نقطه‌دار برابر ۳۷۵ و T 1/8 تریوله حدود ۱۶۶٫۷ میلی‌ثانیه است. برای زمان دستی از FREE MS استفاده کنید.

3. در مسیر Insert، از Feedback حدود ۲۰ تا ۳۵٪ و Mix حدود ۱۰ تا ۲۵٪ شروع کنید. در رابط فعلی، Feedback ممکن است به شکل ضریب اعشاری نمایش داده شود.

4. برای تکرار تیره‌تر، Filter را پایین بیاورید؛ اگر با تنظیم سازگار است، Ping-pong را برای بازخورد متناوب فعال کنید.

5. برای زیر و بمی پایدار، Modulation را کم نگه دارید و پیش از پایان محدودهٔ رندر، برای محوشدن تکرار آخر زمان بگذارید.

رفتار یادگیری در این پلاگین

فقط Filter و Width دارای Learn هستند. Modulation، Feedback، Division، Sync، Time، مسیر، Mix و Output در همهٔ دامنه‌ها دستی می‌مانند. Sync تمپوی پروژه را می‌خواند؛ یادگیری از صوت تمپو استخراج نمی‌کند.

محدودیت مهم پیاده‌سازی

SYNC از BPM میزبان در بازهٔ ۱۰ تا ۴۰۰ استفاده می‌کند. رابط HOST، نگه‌داری آخرین تمپو با HOLD یا پیش‌فرض ۱۲۰ با FALLBACK را نشان می‌دهد. نت گرد در تمپوی ۱۰، برابر ۲۴ ثانیه است. تغییر تمپو یا تقسیم نت می‌تواند گذار زیر و بمی بسازد. Tap Tempo یا تشخیص BPM صوت وجود ندارد.

نکتهٔ شنیداری و روند کار

Stereo بازخورد را در همان کانال نگه می‌دارد و Ping-pong آن را متقاطع می‌کند. ورودی وارد هر دو کانال می‌شود؛ پس منبع مونو الزاماً نخستین تکرار کاملاً چپ یا راست ندارد. Mix صفر فقط برگشت افکت را حذف می‌کند، نه محتوای بافر را.

DDelay / ۵۰ پریست کارخانه

Init و ۴۹ گونهٔ پروفایل از مرورگر بالای رابط یا فهرست برنامهٔ میزبان انتخاب می‌شوند. هرکدام وضعیت کامل از جمله Mix و Output هستند. هنگام مقایسه مانیتور را کم کنید. مقدار دقیق همهٔ پارامترها در مانیفست JSON آمده است.

01 / Init / Factory Default
02 / Vocal Eighth / Focused
03 / Vocal Eighth / Soft
04 / Vocal Eighth / Open
05 / Vocal Eighth / Parallel
06 / Dotted Guitar / Natural
07 / Dotted Guitar / Focused
08 / Dotted Guitar / Soft
09 / Dotted Guitar / Open
10 / Dotted Guitar / Parallel
11 / Quarter Echo / Natural
12 / Quarter Echo / Focused
13 / Quarter Echo / Soft
14 / Quarter Echo / Open
15 / Quarter Echo / Parallel
16 / Triplet Motion / Natural
17 / Triplet Motion / Focused
18 / Triplet Motion / Soft
19 / Triplet Motion / Open
20 / Triplet Motion / Parallel
21 / Sixteenth Pulse / Natural
22 / Sixteenth Pulse / Focused
23 / Sixteenth Pulse / Soft
24 / Sixteenth Pulse / Open
25 / Sixteenth Pulse / Parallel
26 / Stereo Half / Natural
27 / Stereo Half / Focused
28 / Stereo Half / Soft
29 / Stereo Half / Open
30 / Stereo Half / Parallel
31 / Rock Slap / Natural
32 / Rock Slap / Focused
33 / Rock Slap / Soft
34 / Rock Slap / Open
35 / Rock Slap / Parallel
36 / Tape Shadow / Natural
37 / Tape Shadow / Focused
38 / Tape Shadow / Soft
39 / Tape Shadow / Open
40 / Tape Shadow / Parallel
41 / Wide Doubler / Natural
42 / Wide Doubler / Focused
43 / Wide Doubler / Soft
44 / Wide Doubler / Open
45 / Wide Doubler / Parallel
46 / Ambient Cascade / Natural
47 / Ambient Cascade / Focused
48 / Ambient Cascade / Soft
49 / Ambient Cascade / Open
50 / Ambient Cascade / Parallel

بارگذاری پریست، یادگیری و پیش‌شنوی معلق را لغو می‌کند. ستاره، ویرایش بعدی را مشخص می‌کند؛ برای حفظ آن پروژه را ذخیره کنید. فهرست کارخانه فقط خواندنی است.

10 / D.A PLUGINS

DComp — کمپرسور داینامیک

DComp با آشکارسازی پوش قله، نسبت، حمله، رهایی و زانوی نرم، سطح بالاتر از آستانه را کاهش می‌دهد. Makeup داخل مسیر پردازش‌شده و Output پس از ترکیب موازی عمل می‌کند. آشکارساز، متر لادنس نیست و این پردازنده لیمیتر دیوارآجری محسوب نمی‌شود.

Input > Peak envelope / gain curve > Makeup > Parallel mix > Output



کنترل‌های اصلی — طرح گرافیکی، نه اسکرین‌شات اجرای بومی.



کنترل‌های تکمیلی — طرح گرافیکی، نه اسکرین‌شات اجرای بومی.

کاربردهای معمول

هموارکردن داینامیک وکال و ساز / کمپرس با حفظ ترنزینت یا کنترل محکم‌تر / کمپرس موازی روی منابع مناسب

DComp / مرجع پارامترها

دامنه‌ها حد دستی‌اند و پیشنهاد یادگیری ممکن است محدودتر باشد. پیش‌فرض از سورس است، نه عدد تصویر نمونه. برچسب یادگیری نوع راهبرد را نشان می‌دهد، نه دقت تضمینی.

آستانه / Threshold

Range: -60 dB to 0 dB | Default: -18 dB | ID: threshold

سطح آشکارساز برای آغاز کمپرس است که Knee آن را تعدیل می‌کند. مقدار پایین‌تر معمولاً کاهش بیشتری می‌دهد.

یادگیری: برآورد با کمک ویژگی صوتی

نسبت / Ratio

Range: 1:1 to 20:1 | Default: 4:1 | ID: ratio

نسبت کمپرس بالای زانوست. در منحنی ثابتِ ۴ به ۱، افزایش ۴ دسی‌بلی آشکارساز تقریباً به ۱ دسی‌بل تبدیل می‌شود.

یادگیری: برآورد با کمک ویژگی صوتی

حمله / Attack

Range: 0.1 ms to 200 ms | Default: 15 ms | ID: attack

زمان پاسخ پوش به افزایش سطح است. کوتاه‌تر حمله را سریع‌تر می‌گیرد و بلندتر می‌تواند ضربهٔ اولیه را حفظ کند.

یادگیری: برآورد با کمک ویژگی صوتی

رهایی / Release

Range: 10 ms to 2000 ms | Default: 150 ms | ID: release

زمان بازیابی پوش با افت سطح است. خیلی کوتاه ممکن است پمپاژ و خیلی بلند سرکوب جملهٔ بعدی ایجاد کند.

یادگیری: برآورد با کمک ویژگی صوتی

زانوی منحنی / Knee

Range: 0 dB to 24 dB | Default: 6 dB | ID: knee

پهنای گذار پیرامون آستانه است. صفر زانوی سخت و مقدار بزرگ‌تر شروع نرم‌تر می‌دهد.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

گین جبرانی / Makeup

Range: 0 dB to 24 dB | Default: 0 dB | ID: makeup

گین شاخهٔ کمپرس‌شده پیش از Mix است. دستی است و سامانهٔ جبران خودکار لادنس نیست.

یادگیری: برآورد با کمک ویژگی صوتی

ترکیب موازی / Mix

Range: 0% to 100% | Default: 100% | ID: mix

شاخهٔ اصلی را با شاخهٔ کمپرس و Makeup ترکیب می‌کند و آستانهٔ آشکارساز را تغییر نمی‌دهد.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

خروجی / Output

Range: -24 dB to 12 dB | Default: 0 dB | ID: output

گین نهایی پس از ترکیب موازی است؛ برای هم‌سطح‌سازی و هدروم استفاده کنید.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

DComp / استفادهٔ عملی

دستور شروع — با گوش اصلاح کنید

1. برای نقطهٔ شروع وکال، Ratio را حدود ۳ به ۱، Attack را ۱۵ تا ۲۵ و Release را ۱۰۰ تا ۲۰۰ میلی‌ثانیه انتخاب کنید.
2. Threshold را پایین بیاورید تا جمله‌های عادی چند دسی‌بل کاهش بگیرند؛ بخش‌های آرام و بلند را بررسی کنید.
3. برای ورود نرم‌تر به کمپرس، Knee بزرگ‌تری انتخاب کنید.
4. Makeup را فقط برای مقایسهٔ هم‌سطح بالا ببرید و برای ترکیب موازی از Mix استفاده کنید.
5. اگر صدا پمپاژ می‌کند، پیش از افزایش نسبت یا Release، Makeup و Threshold را بازبینی کنید.

رفتار یادگیری در این پلاگین

Release، Attack، Ratio، Threshold و Makeup دارای Learn هستند و Knee، Mix و Output دستی می‌مانند. سطح و ضریب قله داینامیک را هدایت و smooth زمان رهایی را بلندتر می‌کند. Makeup اختلاف RMS هدف و ورودی است، نه جبران اندازه‌گیری‌شدهٔ کاهش گین پردازش‌شده. بهینه‌سازی خروجی یا تطبیق خودکار لادنس وجود ندارد.

> **محدودیت مهم پیاده‌سازی**
>
> پوش‌های چپ و راست مستقل‌اند و کنترل Stereo Link وجود ندارد؛ ترنزینت‌های متفاوت ممکن است تصویر استریو را جابه‌جا کنند. خوانش GR، مقدار محاسباتی پیاده‌سازی است، نه متر تأییدشدهٔ بیشینهٔ کاهش استریو.

نکتهٔ شنیداری و روند کار

در نسبت ۱ به ۱ منحنی کمپرس خنثی است، ولی Mix، Makeup و Output همچنان می‌توانند سطح را تغییر دهند. Attack و Release زمان هموارسازی‌اند، نه Look-ahead یا Hold. نسخهٔ بلندتر را بدون هم‌سطح‌کردن بهتر فرض نکنید.

DComp / ۵۰ پریست کارخانه

Init و ۴۹ گونهٔ پروفایل از مرورگر بالای رابط یا فهرست برنامهٔ میزبان انتخاب می‌شوند. هرکدام وضعیت کامل از جمله Mix و Output هستند. هنگام مقایسه مانیتور را کم کنید. مقدار دقیق همهٔ پارامترها در مانیفست JSON آمده است.

01 / Init / Factory Default
02 / Vocal Level / Focused
03 / Vocal Level / Soft
04 / Vocal Level / Open
05 / Vocal Level / Parallel
06 / Drum Punch / Natural
07 / Drum Punch / Focused
08 / Drum Punch / Soft
09 / Drum Punch / Open
10 / Drum Punch / Parallel
11 / Bass Control / Natural
12 / Bass Control / Focused
13 / Bass Control / Soft
14 / Bass Control / Open
15 / Bass Control / Parallel
16 / Acoustic Even / Natural
17 / Acoustic Even / Focused
18 / Acoustic Even / Soft
19 / Acoustic Even / Open
20 / Acoustic Even / Parallel
21 / Piano Gentle / Natural
22 / Piano Gentle / Focused
23 / Piano Gentle / Soft
24 / Piano Gentle / Open
25 / Piano Gentle / Parallel
26 / Bus Glue / Natural
27 / Bus Glue / Focused
28 / Bus Glue / Soft
29 / Bus Glue / Open
30 / Bus Glue / Parallel
31 / Parallel Weight / Natural
32 / Parallel Weight / Focused
33 / Parallel Weight / Soft
34 / Parallel Weight / Open
35 / Parallel Weight / Parallel
36 / Transient Catch / Natural
37 / Transient Catch / Focused
38 / Transient Catch / Soft
39 / Transient Catch / Open
40 / Transient Catch / Parallel
41 / Soft Speech / Natural
42 / Soft Speech / Focused
43 / Soft Speech / Soft
44 / Soft Speech / Open
45 / Soft Speech / Parallel
46 / Sustain Hold / Natural
47 / Sustain Hold / Focused
48 / Sustain Hold / Soft
49 / Sustain Hold / Open
50 / Sustain Hold / Parallel

بارگذاری پریست، یادگیری و پیش‌شنوی معلق را لغو می‌کند. ستاره، ویرایش بعدی را مشخص می‌کند؛ برای حفظ آن پروژه را ذخیره کنید. فهرست کارخانه فقط خواندنی است.

11 / D.A PLUGINS

DEQ — اکولایزر چهار باند

DEQ چهار باند فیلتر RBJ پشت‌سرهم دارد. فرکانس، گین، Q و شکل هر باند مستقل است و همان باند جداگانه Learn می‌شود. نام‌های Low، Low Mid، Presence و Air فقط چیدمان پیشنهادی‌اند؛ محدودیت ثابت فرکانسی نیستند و هر باند کل بازهٔ اعلام‌شده را پوشش می‌دهد.

Input > Band 1 > Band 2 > Band 3 > Band 4 > Output



کنترل‌های اصلی — طرح گرافیکی، نه اسکرین‌شات اجرای بومی.



کنترل‌های تکمیلی — طرح گرافیکی، نه اسکرین‌شات اجرای بومی.

کاربردهای معمول

شکل‌دهی کلی رنگ و اصلاح ملایم / باندهای مستقل زنگوله‌ای و شلف / توازن طیفی کلی با هدایت مرجع

DEQ / مرجع پارامترها

دامنه‌ها حد دستی‌اند و پیشنهاد یادگیری ممکن است محدودتر باشد. پیش‌فرض از سورس است، نه عدد تصویر نمونه. برچسب یادگیری نوع راهبرد را نشان می‌دهد، نه دقت تضمینی.

باند ۱ — فرکانس / Band 1 Frequency

Range: 20 Hz to 20000 Hz | Default: 100 Hz | ID: b1freq

فرکانس مرکزی Bell یا فرکانس گذار شلف است. هر باند کل دامنهٔ دستی را دارد و نام پنل محدودش نمی‌کند.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

باند ۱ — گین / Band 1 Gain

Range: -18 dB to 18 dB | Default: 0 dB | ID: b1gain

تقویت یا کاهشِ شکل انتخاب‌شده است. صفر خنثی است. پیشنهاد Learn به مثبت یا منفی ۶ دسی‌بل محدودتر از دامنهٔ دستی است.

یادگیری: برآورد با کمک ویژگی صوتی

باند ۱ — ضریب کیفیت Q / Band 1 Q

Range: 0.2 to 8 | Default: 0.707 | ID: b1q

پهنای Bell است؛ Q بزرگ‌تر باریک‌تر است. شلف فعلی شیب ثابت دارد و از این مقدار Q استفاده نمی‌کند.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

باند ۱ — شکل فیلتر / Band 1 Bell/Low shelf/High shelf

Range: Bell / Low Shelf / High Shelf | Default: Bell | ID: b1shape

Bell، Low Shelf یا High Shelf است. یادگیری این انتخاب دستی را حفظ می‌کند؛ L-SHELF و H-SHELF به معنای شلف پایین و بالا هستند.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

باند ۲ — فرکانس / Band 2 Frequency

Range: 20 Hz to 20000 Hz | Default: 400 Hz | ID: b2freq

فرکانس مرکزی Bell یا فرکانس گذار شلف است. هر باند کل دامنهٔ دستی را دارد و نام پنل محدودش نمی‌کند.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

باند ۲ — گین / Band 2 Gain

Range: -18 dB to 18 dB | Default: 0 dB | ID: b2gain

تقویت یا کاهشِ شکل انتخاب‌شده است. صفر خنثی است. پیشنهاد Learn به مثبت یا منفی ۶ دسی‌بل محدودتر از دامنهٔ دستی است.

یادگیری: برآورد با کمک ویژگی صوتی

باند ۲ — ضریب کیفیت Q / Band 2 Q

Range: 0.2 to 8 | Default: 0.707 | ID: b2q

پهنای Bell است؛ Q بزرگ‌تر باریک‌تر است. شلف فعلی شیب ثابت دارد و از این مقدار Q استفاده نمی‌کند.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

باند ۲ — شکل فیلتر / Band 2 Bell/Low shelf/High shelf

Range: Bell / Low Shelf / High Shelf | Default: Bell | ID: b2shape

Bell، Low Shelf یا High Shelf است. یادگیری این انتخاب دستی را حفظ می‌کند؛ L-SHELF و H-SHELF به معنای شلف پایین و بالا هستند.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

DEQ / ادامهٔ کنترل‌ها

باند ۳ — فرکانس / Band 3 Frequency

Range: 20 Hz to 20000 Hz | Default: 2500 Hz | ID: b3freq

فرکانس مرکزی Bell یا فرکانس گذار شلف است. هر باند کل دامنهٔ دستی را دارد و نام پنل محدودش نمی‌کند.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

باند ۳ — گین / Band 3 Gain

Range: -18 dB to 18 dB | Default: 0 dB | ID: b3gain

تقویت یا کاهشِ شکل انتخاب‌شده است. صفر خنثی است. پیشنهاد Learn به مثبت یا منفی ۶ دسی‌بل محدودتر از دامنهٔ دستی است.

یادگیری: برآورد با کمک ویژگی صوتی

باند ۳ — ضریب کیفیت Q / Band 3 Q

Range: 0.2 to 8 | Default: 0.707 | ID: b3q

پهنای Bell است؛ Q بزرگ‌تر باریک‌تر است. شلف فعلی شیب ثابت دارد و از این مقدار Q استفاده نمی‌کند.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

باند ۳ — شکل فیلتر / Band 3 Bell/Low shelf/High shelf

Range: Bell / Low Shelf / High Shelf | Default: Bell | ID: b3shape

Bell، Low Shelf یا High Shelf است. یادگیری این انتخاب دستی را حفظ می‌کند؛ L-SHELF و H-SHELF به معنای شلف پایین و بالا هستند.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

باند ۴ — فرکانس / Band 4 Frequency

Range: 20 Hz to 20000 Hz | Default: 10000 Hz | ID: b4freq

فرکانس مرکزی Bell یا فرکانس گذار شلف است. هر باند کل دامنهٔ دستی را دارد و نام پنل محدودش نمی‌کند.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

باند ۴ — گین / Band 4 Gain

Range: -18 dB to 18 dB | Default: 0 dB | ID: b4gain

تقویت یا کاهشِ شکل انتخاب‌شده است. صفر خنثی است. پیشنهاد Learn به مثبت یا منفی ۶ دسی‌بل محدودتر از دامنهٔ دستی است.

یادگیری: برآورد با کمک ویژگی صوتی

باند ۴ — ضریب کیفیت Q / Band 4 Q

Range: 0.2 to 8 | Default: 0.707 | ID: b4q

پهنای Bell است؛ Q بزرگ‌تر باریک‌تر است. شلف فعلی شیب ثابت دارد و از این مقدار Q استفاده نمی‌کند.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

باند ۴ — شکل فیلتر / Band 4 Bell/Low shelf/High shelf

Range: Bell / Low Shelf / High Shelf | Default: Bell | ID: b4shape

Bell، Low Shelf یا High Shelf است. یادگیری این انتخاب دستی را حفظ می‌کند؛ L-SHELF و H-SHELF به معنای شلف پایین و بالا هستند.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

DEQ / استفادهٔ عملی

دستور شروع — با گوش اصلاح کنید

1. از گین صفر همهٔ باندها شروع کنید و پیش از تقویت، مسئلهٔ طیفی را در میکس کامل پیدا کنید.
2. اگر صدا گِلی است، کاهش پهنِ ۱ تا ۳ دسی‌بل در لومید با Q حدود ۰٫۷ تا ۱٫۲ را امتحان کنید.
3. برای مقایسه با مرجع، محتوای قابل‌مقایسه بارگذاری و حالت REFERENCE GUIDANCE را انتخاب کنید.
4. با LEARN BAND 2 یا Learn مربوط به GAIN فقط گین باند دوم پیشنهاد می‌گیرد؛ هر دو، فرکانس و Q و شکل را حفظ می‌کنند.
5. پاسخ را بررسی و با سطح برابر مقایسه کنید؛ تقویت زیاد ممکن است پردازندهٔ بعدی را اورلود کند.

رفتار یادگیری در این پلاگین

فقط گین چهار باند Learn دارد و پیشنهاد به مثبت یا منفی ۶ دسی‌بل محدود است. انرژی نرمال‌شدهٔ باندهای کلی گین را هدایت می‌کند. Learn باند فقط گین همان باند و LEARN ALL هر چهار گین را پوشش می‌دهد. فرکانس، Q و شکل در تنظیم دستی شما می‌مانند و در ADVANCED هستند؛ صفحهٔ اصلی چهار گین دارد.

> **محدودیت مهم پیاده‌سازی**
>
> یادگیرنده از چهار باند کلی منبع و هدف استفاده می‌کند و رزونانس دقیق، ماسکینگ یا پاسخ معکوس اتاق را تشخیص نمی‌دهد. فرکانس، Q و شکل دستی‌اند و تمام دامنه‌های یادگیری آن‌ها را حفظ می‌کنند. Q فقط روی Bell اثر دارد و شیب شلف ثابت است.

نکتهٔ شنیداری و روند کار

در این بیلد، DEQ پارامتر Mix، Output یا بای‌پس مستقل باند ندارد. گین صفر، باند را خنثی می‌کند و برای کل نمونه از بای‌پس میزبان استفاده کنید. EQ از نوع فاز خطی نیست؛ در مسیر موازی، یکسان‌بودن فاز خشک و فیلترشده را فرض نکنید.

DEQ / ۵۰ پریست کارخانه

Init و ۴۹ گونهٔ پروفایل از مرورگر بالای رابط یا فهرست برنامهٔ میزبان انتخاب می‌شوند. هرکدام وضعیت کامل از جمله Mix و Output هستند. هنگام مقایسه مانیتور را کم کنید. مقدار دقیق همهٔ پارامترها در مانیفست JSON آمده است.

01 / Init / Factory Default
02 / Vocal Clarity / Focused
03 / Vocal Clarity / Soft
04 / Vocal Clarity / Open
05 / Vocal Clarity / Parallel
06 / Warm Voice / Natural
07 / Warm Voice / Focused
08 / Warm Voice / Soft
09 / Warm Voice / Open
10 / Warm Voice / Parallel
11 / Drum Presence / Natural
12 / Drum Presence / Focused
13 / Drum Presence / Soft
14 / Drum Presence / Open
15 / Drum Presence / Parallel
16 / Bass Definition / Natural
17 / Bass Definition / Focused
18 / Bass Definition / Soft
19 / Bass Definition / Open
20 / Bass Definition / Parallel
21 / Acoustic Detail / Natural
22 / Acoustic Detail / Focused
23 / Acoustic Detail / Soft
24 / Acoustic Detail / Open
25 / Acoustic Detail / Parallel
26 / Piano Body / Natural
27 / Piano Body / Focused
28 / Piano Body / Soft
29 / Piano Body / Open
30 / Piano Body / Parallel
31 / String Silk / Natural
32 / String Silk / Focused
33 / String Silk / Soft
34 / String Silk / Open
35 / String Silk / Parallel
36 / Synth Depth / Natural
37 / Synth Depth / Focused
38 / Synth Depth / Soft
39 / Synth Depth / Open
40 / Synth Depth / Parallel
41 / Mix Polish / Natural
42 / Mix Polish / Focused
43 / Mix Polish / Soft
44 / Mix Polish / Open
45 / Mix Polish / Parallel
46 / Dark Texture / Natural
47 / Dark Texture / Focused
48 / Dark Texture / Soft
49 / Dark Texture / Open
50 / Dark Texture / Parallel

بارگذاری پریست، یادگیری و پیش‌شنوی معلق را لغو می‌کند. ستاره، ویرایش بعدی را مشخص می‌کند؛ برای حفظ آن پروژه را ذخیره کنید. فهرست کارخانه فقط خواندنی است.

12 / D.A PLUGINS

DSat — سچوریشن هارمونیک

DSat یکی از سه تابع غیرخطی را اعمال می‌کند و با Density، صدای غیرخطی مستقیم را با نسخهٔ پایین‌گذرشدهٔ آن ترکیب می‌کند. Drive سطح ورودی طبقهٔ غیرخطی را تغییر می‌دهد؛ Tone و Density با هم روشنایی را تعیین می‌کنند. Output کنترل گین مستقل پس از Mix است.

Input > Drive / nonlinear character > Tone-density blend > Mix > Output



کنترل‌های اصلی — طرح گرافیکی، نه اسکرین‌شات اجرای بومی.



کنترل‌های تکمیلی — طرح گرافیکی، نه اسکرین‌شات اجرای بومی.

کاربردهای معمول

وزن هارمونیک ملایم / کلیپ و رنگ‌دهی عمدی / بافت دیستورشن موازی

DSat / مرجع پارامترها

دامنه‌ها حد دستی‌اند و پیشنهاد یادگیری ممکن است محدودتر باشد. پیش‌فرض از سورس است، نه عدد تصویر نمونه. برچسب یادگیری نوع راهبرد را نشان می‌دهد، نه دقت تضمینی.

درایو / Drive

Range: 0 dB to 30 dB | Default: 6 dB | ID: drive

گین ورودی تابع غیرخطی است. افزایش آن هارمونیک و سطح را با هم تغییر می‌دهد؛ تریم شفاف ورودی نیست.

یادگیری: برآورد با کمک ویژگی صوتی

رنگ / Tone

Range: 500 Hz to 18000 Hz | Default: 10000 Hz | ID: tone

فرکانس قطع پایین‌گذر شاخهٔ غیرخطی فیلترشده است. شنیده‌شدن اثر آن به Density وابسته است.

یادگیری: برآورد با کمک ویژگی صوتی

کاراکتر / Soft/Hard/Asymmetric

Range: Soft / Hard / Asymmetric | Default: Soft | ID: mode

Soft از tanh، Hard از کلیپ موج درایوشده و Asymmetric از tanh جابه‌جاشده با جبران آفست ثابت استفاده می‌کند.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

تراکم رنگ / Density

Range: 0% to 100% | Default: 50% | ID: density

ترکیب به سمت شاخهٔ غیرخطی فیلترشده با Tone است؛ کنترل مستقل تعداد هارمونیک یا تراکم کمپرس نیست.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

ترکیب / Mix

Range: 0% to 100% | Default: 50% | ID: mix

ترکیب موازی سیگنال اصلی و غیرخطی، پیش از Output است.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

خروجی / Output

Range: -24 dB to 12 dB | Default: 0 dB | ID: output

گین پس از Mix است؛ جبران خودکار افزایش Drive اعمال نمی‌شود.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

DSat / استفادهٔ عملی

دستور شروع — با گوش اصلاح کنید

1. از Soft، Drive حدود ۳ تا ۶ دسی‌بل و Mix متوسط شروع کنید.
2. Drive را به‌تدریج بالا ببرید و هم‌زمان Output را برای مقایسهٔ منصفانه کاهش دهید.
3. برای تیره‌کردن جزء غیرخطی، Tone را همراه Density بیشتر از صفر به کار ببرید.
4. اگر بافت تیزتر به منبع کمک می‌کند، Hard را امتحان کنید؛ Asymmetric توازن متفاوتی در منحنی می‌دهد.
5. سنج‌ها و هارمونیک‌های بالا را دوباره بشنوید و برای نتیجهٔ کنترل‌شده‌تر از Mix استفاده کنید.

رفتار یادگیری در این پلاگین

فقط Drive و Tone دارای Learn هستند و از قله، ضریب قله و انرژی باند بالا کمک می‌گیرند. حالت، Mix، Density و Output دستی می‌مانند. این سیستم تشخیص آموزش‌دیدهٔ تیپ/لامپ، تطبیق هارمونیک مرجع یا تطبیق خودکار لادنس نیست.

محدودیت مهم پیاده‌سازی

اورسمپلینگ پیاده‌سازی نشده است؛ Drive زیاد و منابع روشن می‌توانند علیاس ایجاد کنند. منحنی نامتقارن یک آفست ثابت را کم می‌کند، اما فیلتر عمومی حذف DC ندارد. جبران خودکار سطح خروجی نیز وجود ندارد.

نکتهٔ شنیداری و روند کار

در Density صفر، شاخهٔ فیلترشده حذف می‌شود؛ بنابراین Tone نقش عملی چندانی ندارد. در Density صددرصد، شاخهٔ غیرخطی Wet کاملاً پایین‌گذر می‌شود. کلیپ سخت، گزینهٔ طراحی صداست و لیمیتر ایمنی مسترینگ نیست.

DSat / ۵۰ پریست کارخانه

Init و ۴۹ گونهٔ پروفایل از مرورگر بالای رابط یا فهرست برنامهٔ میزبان انتخاب می‌شوند. هرکدام وضعیت کامل از جمله Mix و Output هستند. هنگام مقایسه مانیتور را کم کنید. مقدار دقیق همهٔ پارامترها در مانیفست JSON آمده است.

01 / Init / Factory Default
02 / Vocal Warmth / Focused
03 / Vocal Warmth / Soft
04 / Vocal Warmth / Open
05 / Vocal Warmth / Parallel
06 / Drum Edge / Natural
07 / Drum Edge / Focused
08 / Drum Edge / Soft
09 / Drum Edge / Open
10 / Drum Edge / Parallel
11 / Bass Grit / Natural
12 / Bass Grit / Focused
13 / Bass Grit / Soft
14 / Bass Grit / Open
15 / Bass Grit / Parallel
16 / Acoustic Glow / Natural
17 / Acoustic Glow / Focused
18 / Acoustic Glow / Soft
19 / Acoustic Glow / Open
20 / Acoustic Glow / Parallel
21 / Piano Felt / Natural
22 / Piano Felt / Focused
23 / Piano Felt / Soft
24 / Piano Felt / Open
25 / Piano Felt / Parallel
26 / Bus Color / Natural
27 / Bus Color / Focused
28 / Bus Color / Soft
29 / Bus Color / Open
30 / Bus Color / Parallel
31 / Synth Asymmetry / Natural
32 / Synth Asymmetry / Focused
33 / Synth Asymmetry / Soft
34 / Synth Asymmetry / Open
35 / Synth Asymmetry / Parallel
36 / LoFi Shadow / Natural
37 / LoFi Shadow / Focused
38 / LoFi Shadow / Soft
39 / LoFi Shadow / Open
40 / LoFi Shadow / Parallel
41 / Parallel Crunch / Natural
42 / Parallel Crunch / Focused
43 / Parallel Crunch / Soft
44 / Parallel Crunch / Open
45 / Parallel Crunch / Parallel
46 / Smooth Harmonics / Natural
47 / Smooth Harmonics / Focused
48 / Smooth Harmonics / Soft
49 / Smooth Harmonics / Open
50 / Smooth Harmonics / Parallel


بارگذاری پریست، یادگیری و پیش‌شنوی معلق را لغو می‌کند. ستاره، ویرایش بعدی را مشخص می‌کند؛ برای حفظ آن پروژه را ذخیره کنید. فهرست کارخانه فقط خواندنی است.

13 / D.A PLUGINS


DTrans — طراح ترنزینت

DTrans پوش‌های دامنهٔ سریع و آهسته را مقایسه می‌کند تا شدت شروع ضربه را تخمین بزند. Attack و Sustain بر اساس آن گین اعمال می‌کنند و Sensitivity و Shape جداسازی را تغییر می‌دهند. برخلاف Attack کمپرسور، Attack این پلاگین گینِ دسی‌بلی است، نه زمان میلی‌ثانیه‌ای.

Input > Fast / slow envelope comparison > Attack-sustain gain > Mix > Output

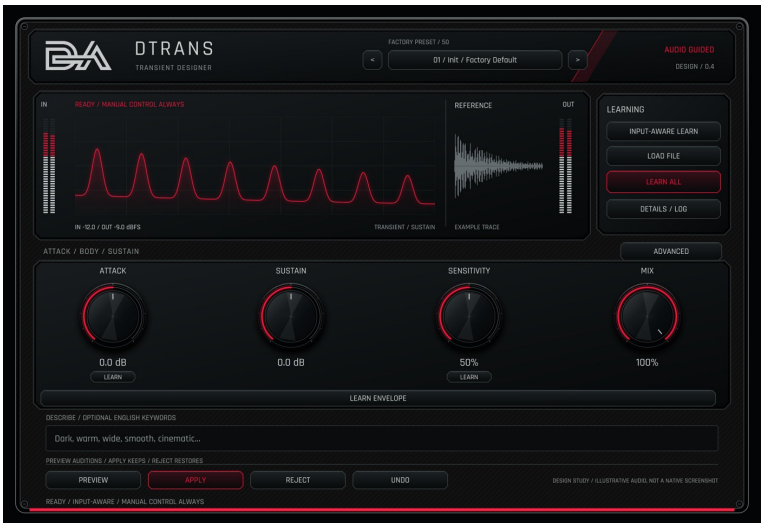

کنترل‌های اصلی — طرح گرافیکی، نه اسکرین‌شات اجرای بومی.

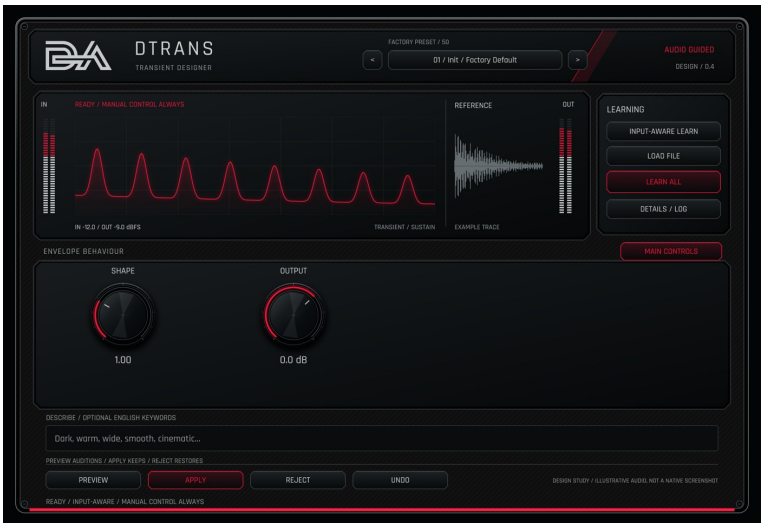

کنترل‌های تکمیلی — طرح گرافیکی، نه اسکرین‌شات اجرای بومی.

کاربردهای معمول

افزایش یا کاهش ضربهٔ آغاز درام / شکل‌دهی بدنه یا کشش فضا / افکت‌های پوش دامنه در مسیر موازی

DTrans / مرجع پارامترها

دامنه‌ها حد دستی‌اند و پیشنهاد یادگیری ممکن است محدودتر باشد. پیش‌فرض از سورس است، نه عدد تصویر نمونه. برچسب یادگیری نوع راهبرد را نشان می‌دهد، نه دقت تضمینی.

گین حمله / Attack

Range: -18 dB to 18 dB | Default: 0 dB | ID: attack

گینِ بخش‌های با شروع قوی است. مثبت حمله را برجسته و منفی آن را نرم می‌کند. واحد: دسی‌بل.

یادگیری: برآورد با کمک ویژگی صوتی

گین کشش / Sustain

Range: -18 dB to 18 dB | Default: 0 dB | ID: sustain

گین با وزن بیشتر روی بخش غیرآغاز سیگنال است. مقدار مثبت علاوه بر کشش موسیقایی، اتاق و نویز را هم بالا می‌آورد.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

حساسیت / Sensitivity

Range: 0% to 100% | Default: 50% | ID: sensitivity

اختلاف نرمال‌شدهٔ پوش سریع و آهسته را مقیاس می‌کند؛ آستانهٔ دسی‌بلی یا کنترل زمان نیست.

یادگیری: برآورد با کمک ویژگی صوتی

شکل پاسخ / Shape

Range: 0.2 to 3 | Default: 1 | ID: shape

توانِ وزن آغاز ضربه است. مقدار بالاتر اثر Attack را بیشتر روی شروع‌های قوی متمرکز می‌کند.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

ترکیب / Mix

Range: 0% to 100% | Default: 100% | ID: mix

ترکیب موازی سیگنال اصلی و شکل‌داده‌شده با پوش است.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

خروجی / Output

Range: -24 dB to 12 dB | Default: 0 dB | ID: output

گین نهایی پس از افکت پوش و ترکیب موازی است.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

DTrans / استفادهٔ عملی

دستور شروع — با گوش اصلاح کنید

1. برای درام جمع‌وجورتر، Attack مثبت ۲ تا ۴ و Sustain منفی ۲ تا ۴ دسی‌بل را امتحان کنید.
2. هنگام مقایسهٔ ضربه‌های کوتاه و کشیده، Sensitivity را نزدیک میانه نگه دارید.
3. اگر اثر انتخابی‌تری روی شروع‌های قوی می‌خواهید، Shape را افزایش دهید.
4. اگر پردازش از بدنهٔ ساز جدا به گوش می‌رسد، Mix را کم کنید.
5. ضربه‌های آرام و نشت سنج را بررسی و سپس Output را برای حفظ هدروم بعدی تنظیم کنید.

رفتار یادگیری در این پلاگین

Learn با کمک ضریب قله فقط برای Attack و Sensitivity موجود است. Mix، Shape، Sustain و Output دستی می‌مانند. نتیجه برآورد نقطهٔ شروع محافظه‌کارانه است، نه بازسازی پوش مرجع یا تشخیص آموزش‌دیدهٔ نوع درام.

> **محدودیت مهم پیاده‌سازی**
>
> Sustain گینِ وزن‌دهی‌شده با پوش است؛ کنترل مستقل زمان میرایی یا جداساز منبع نیست. مقادیر مثبت زیاد می‌توانند نویز و صدای اتاق را برجسته کنند. پوش مستقل کانال‌ها ممکن است توازن استریو را تغییر دهد.

نکتهٔ شنیداری و روند کار

با تغییرات کوچک دسی‌بلی شروع کنید. روی منبع بدون شروع‌های مشخص، Sustain ممکن است غالب شود. نمایش پوش مرکزی، دامنهٔ سیگنال زنده را نشان می‌دهد و نمودار کالیبرهٔ ثابت زمانی یا اطمینان تشخیص ترنزینت نیست.

DTrans / ۵۰ پریست کارخانه

Init و ۴۹ گونهٔ پروفایل از مرورگر بالای رابط یا فهرست برنامهٔ میزبان انتخاب می‌شوند. هرکدام وضعیت کامل از جمله Mix و Output هستند. هنگام مقایسه مانیتور را کم کنید. مقدار دقیق همهٔ پارامترها در مانیفست JSON آمده است.

01 / Init / Factory Default
02 / Kick Punch / Focused
03 / Kick Punch / Soft
04 / Kick Punch / Open
05 / Kick Punch / Parallel
06 / Snare Snap / Natural
07 / Snare Snap / Focused
08 / Snare Snap / Soft
09 / Snare Snap / Open
10 / Snare Snap / Parallel
11 / Room Tamer / Natural
12 / Room Tamer / Focused
13 / Room Tamer / Soft
14 / Room Tamer / Open
15 / Room Tamer / Parallel
16 / Bass Pick / Natural
17 / Bass Pick / Focused
18 / Bass Pick / Soft
19 / Bass Pick / Open
20 / Bass Pick / Parallel
21 / Acoustic Pluck / Natural
22 / Acoustic Pluck / Focused
23 / Acoustic Pluck / Soft
24 / Acoustic Pluck / Open
25 / Acoustic Pluck / Parallel
26 / Soft Piano / Natural
27 / Soft Piano / Focused
28 / Soft Piano / Soft
29 / Soft Piano / Open
30 / Soft Piano / Parallel
31 / Percussion Tight / Natural
32 / Percussion Tight / Focused
33 / Percussion Tight / Soft
34 / Percussion Tight / Open
35 / Percussion Tight / Parallel
36 / Pad Bloom / Natural
37 / Pad Bloom / Focused
38 / Pad Bloom / Soft
39 / Pad Bloom / Open
40 / Pad Bloom / Parallel
41 / Drum Sustain / Natural
42 / Drum Sustain / Focused
43 / Drum Sustain / Soft
44 / Drum Sustain / Open
45 / Drum Sustain / Parallel
46 / Parallel Attack / Natural
47 / Parallel Attack / Focused
48 / Parallel Attack / Soft
49 / Parallel Attack / Open
50 / Parallel Attack / Parallel

بارگذاری پریست، یادگیری و پیش‌شنوی معلق را لغو می‌کند. ستاره، ویرایش بعدی را مشخص می‌کند؛ برای حفظ آن پروژه را ذخیره کنید. فهرست کارخانه فقط خواندنی است.

14 / D.A PLUGINS

DStereo — طراح تصویر استریو

DStereo مؤلفه‌های میانی و جانبی را از مجموع و تفاضل دو کانال می‌سازد، سطح آن‌ها را تغییر می‌دهد و استریو را بازسازی می‌کند. Depth نسخهٔ پایین‌گذرِ Side را ترکیب می‌کند؛ بنابراین روشنایی کناره‌ها را تغییر می‌دهد، نه فاصلهٔ فیزیکی یا تأخیر هاس را. بردارسنج و همبستگی به بررسی نتیجه کمک می‌کنند.

L/R > Mid/Side > Center / side / width / depth > Stereo or mono wet path > Mix > L/R output



کنترل‌های اصلی — طرح گرافیکی، نه اسکرین‌شات اجرای بومی.



کنترل‌های تکمیلی — طرح گرافیکی، نه اسکرین‌شات اجرای بومی.

کاربردهای معمول

باز یا بسته‌کردن کنترل‌شدهٔ استریو / توازن سطح مرکز و کناره‌ها / بررسی رفتار فاز و مونو

DStereo / مرجع پارامترها

دامنه‌ها حد دستی‌اند و پیشنهاد یادگیری ممکن است محدودتر باشد. پیش‌فرض از سورس است، نه عدد تصویر نمونه. برچسب یادگیری نوع راهبرد را نشان می‌دهد، نه دقت تضمینی.

پهنا / Width

Range: 0% to 200% | Default: 100% | ID: width

مؤلفهٔ Side مسیر Wet را ضرب می‌کند. صددرصد پیش از گین Side بهرهٔ واحد و دویست‌درصد دو برابر دامنهٔ Side است.

یادگیری: برآورد با کمک ویژگی صوتی

عمق رنگ جانبی / Depth

Range: 0% to 100% | Default: 0% | ID: depth

Side را به نسخهٔ پایین‌گذرشده نزدیک می‌کند. مقدار بیشتر کناره‌ها را تیره می‌کند، نه اینکه منبع را در فضای اندازه‌گیری‌شده جابه‌جا کند.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

مرکز / Center

Range: -18 dB to 6 dB | Default: 0 dB | ID: center

گین مؤلفهٔ Mid است؛ موقعیت پن یا الگوریتم استخراج مرکز نیست.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

کناره‌ها / Side

Range: -18 dB to 6 dB | Default: 0 dB | ID: side

گین مؤلفهٔ Side در کنار Width است. هر دو می‌توانند قله‌های جانبی را افزایش دهند.

یادگیری: برآورد با کمک ویژگی صوتی

ترکیب / Mix

Range: 0% to 100% | Default: 100% | ID: mix

استریوی اصلی را با شاخهٔ پردازش‌شدهٔ استریو یا مونو ترکیب می‌کند. زیر صددرصد، حتی با Mono روشن، استریوی خشک باقی می‌ماند.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

مانیتور مونو / Mono monitor

Range: Stereo / Mono | Default: Stereo | ID: mono

Stereo بخش Side مسیر Wet را نگه می‌دارد و Mono آن را صفر می‌کند. برای شنیدن کاملاً مونو، Mix را صددرصد کنید.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

DStereo / استفادهٔ عملی

دستور شروع — با گوش اصلاح کنید

1. از Width صددرصد، Center و Side صفر دسی‌بل و Depth صفر شروع کنید.
2. روی منبعی که از قبل استریو است، Width حدود ۱۱۰ تا ۱۲۵٪ را امتحان کنید و مرکز تصویر را بشنوید.
3. همبستگی را ببینید و در Mix صددرصد مونو را مقایسه کنید. همبستگی منفی هشدار است، نه امتیاز کامل کیفیت.
4. اگر کناره‌ها بیش از حد روشن‌اند، Depth ملایم به کار ببرید؛ اگر تمرکز از بین رفت، Width را بازگردانید.
5. با هدفون و اسپیکر بررسی کنید و جمع مونو در میزبان را هم به‌عنوان کنترل دوم بشنوید.

رفتار یادگیری در این پلاگین

فقط Width و Side دارای Learn هستند. نسبت جانبی به RMS و همبستگی، Width را هدایت و نسبت مرجع می‌تواند هدف آن را تعیین کند. همبستگی منفی Width را باریک و Side را کم می‌کند. Mix، Center، Depth و Mono دستی می‌مانند و سازگاری مونو خروجی باید جدا بررسی شود.

> **محدودیت مهم پیاده‌سازی**
>
> کنترل Mono فقط مسیر Wet را مونو می‌کند. برای شنیدن کاملاً مونو در خود پلاگین، Mix را صددرصد کنید؛ در مقادیر کمتر، استریوی خشک باقی می‌ماند. ورودی مونو یا دو کانال یکسان مؤلفهٔ Side ندارد؛ Width نمی‌تواند از آن جزئیات استریو بسازد.

نکتهٔ شنیداری و روند کار

Width صفر، Side مسیر Wet را حذف می‌کند؛ صددرصد پیش از کنترل‌های دیگر بهرهٔ واحد است و دویست‌درصد آن را دو برابر می‌کند. گین Center و Side می‌توانند قله‌ها را بالا ببرند. بردارسنج نمونه‌های واقعی را نمایش می‌دهد؛ سکون آن ممکن است فقط نبود صوت تازه باشد.

DStereo / ۵۰ پریست کارخانه

Init و ۴۹ گونهٔ پروفایل از مرورگر بالای رابط یا فهرست برنامهٔ میزبان انتخاب می‌شوند. هرکدام وضعیت کامل از جمله Mix و Output هستند. هنگام مقایسه مانیتور را کم کنید. مقدار دقیق همهٔ پارامترها در مانیفست JSON آمده است.

01 / Init / Factory Default
02 / Vocal Focus / Focused
03 / Vocal Focus / Soft
04 / Vocal Focus / Open
05 / Vocal Focus / Parallel
06 / Drum Stage / Natural
07 / Drum Stage / Focused
08 / Drum Stage / Soft
09 / Drum Stage / Open
10 / Drum Stage / Parallel
11 / Bass Center / Natural
12 / Bass Center / Focused
13 / Bass Center / Soft
14 / Bass Center / Open
15 / Bass Center / Parallel
16 / Acoustic Pair / Natural
17 / Acoustic Pair / Focused
18 / Acoustic Pair / Soft
19 / Acoustic Pair / Open
20 / Acoustic Pair / Parallel
21 / Piano Stage / Natural
22 / Piano Stage / Focused
23 / Piano Stage / Soft
24 / Piano Stage / Open
25 / Piano Stage / Parallel
26 / String Field / Natural
27 / String Field / Focused
28 / String Field / Soft
29 / String Field / Open
30 / String Field / Parallel
31 / Synth Spread / Natural
32 / Synth Spread / Focused
33 / Synth Spread / Soft
34 / Synth Spread / Open
35 / Synth Spread / Parallel
36 / Dark Sides / Natural
37 / Dark Sides / Focused
38 / Dark Sides / Soft
39 / Dark Sides / Open
40 / Dark Sides / Parallel
41 / Narrow Room / Natural
42 / Narrow Room / Focused
43 / Narrow Room / Soft
44 / Narrow Room / Open
45 / Narrow Room / Parallel
46 / Mix Perspective / Natural
47 / Mix Perspective / Focused
48 / Mix Perspective / Soft
49 / Mix Perspective / Open
50 / Mix Perspective / Parallel

بارگذاری پریست، یادگیری و پیش‌شنوی معلق را لغو می‌کند. ستاره، ویرایش بعدی را مشخص می‌کند؛ برای حفظ آن پروژه را ذخیره کنید. فهرست کارخانه فقط خواندنی است.

15 / D.A PLUGINS

DSess — دی‌اسر وابسته به فرکانس

DSess یک مؤلفهٔ فرکانس بالا را از تفکیک پایین‌گذر می‌سازد، پوش آن را آشکار می‌کند و بالاتر از Threshold تضعیفش می‌کند. Range کاهش محاسباتی را محدود و Focus سهم آن را تنظیم می‌کند. این ابزار تشخیص گفتار آموزش‌دیده یا پردازندهٔ باندگذر جراحی با پهنای قابل‌تنظیم نیست.

Input > High-frequency split / detector > Range-limited attenuation > Mix > Output



کنترل‌های اصلی — طرح گرافیکی، نه اسکرین‌شات اجرای بومی.



کنترل‌های تکمیلی — طرح گرافیکی، نه اسکرین‌شات اجرای بومی.

کاربردهای معمول

کاهش سیبیلانس بیش از حد وکال / کنترل برخی جهش‌های فرکانس بالا / کنترل داینامیک ملایم باند بالا

DSess / مرجع پارامترها

دامنه‌ها حد دستی‌اند و پیشنهاد یادگیری ممکن است محدودتر باشد. پیش‌فرض از سورس است، نه عدد تصویر نمونه. برچسب یادگیری نوع راهبرد را نشان می‌دهد، نه دقت تضمینی.

فرکانس تشخیص / Detection frequency

Range: 2000 Hz to 12000 Hz | Default: 6000 Hz | ID: frequency

فرکانس تفکیک پایین‌گذر برای ساخت مؤلفهٔ بالا و آشکارساز است؛ مرکز یک باند باریک نیست.

یادگیری: برآورد با کمک ویژگی صوتی

آستانه / Threshold

Range: -60 dB to 0 dB | Default: -24 dB | ID: threshold

سطح پوش مؤلفهٔ بالا که پس از آن تضعیف محاسباتی بیشتر می‌شود؛ RMS کل ورودی نیست.

یادگیری: برآورد با کمک ویژگی صوتی

سقف کاهش / Range

Range: 0 dB to 18 dB | Default: 6 dB | ID: range

بیشینهٔ کاهش محاسباتی باند بالا پیش از مقیاس Focus و Mix است. صفر مقدار کاهش را غیرفعال می‌کند.

یادگیری: برآورد با کمک ویژگی صوتی

حمله / Attack

Range: 0.1 ms to 30 ms | Default: 1 ms | ID: attack

پاسخ زمانی پوش آشکارساز به افزایش انرژی بالا است.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

رهایی / Release

Range: 10 ms to 500 ms | Default: 80 ms | ID: release

بازیابی پوش آشکارساز پس از جهش فرکانس بالا است.

یادگیری: برآورد با کمک ویژگی صوتی

شدت تمرکز / Focus

Range: 20% to 100% | Default: 60% | ID: focus

سهم تضعیف فرکانس بالا را مقیاس می‌کند. کنترل شدت است، نه Q یا پهنای آشکارساز.

یادگیری: برآورد با کمک ویژگی صوتی

ترکیب / Mix

Range: 0% to 100% | Default: 100% | ID: mix

صدای خشک را با شاخهٔ دارای کاهش فرکانسی ترکیب می‌کند.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

خروجی / Output

Range: -24 dB to 12 dB | Default: 0 dB | ID: output

گین نهایی پس از ترکیب دی‌اسینگ است.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

DSess / استفادهٔ عملی

دستور شروع — با گوش اصلاح کنید

1. جمله‌ای شامل مصوت و صامت سیبیلانس‌دار را لوپ کنید و از حدود ۵ تا ۷ کیلوهرتز شروع کنید.
2. Range حدود ۳ تا ۶ دسی‌بل انتخاب و Threshold را تا کنترل صامت‌های قوی پایین بیاورید.
3. از Attack حدود ۱ و Release حدود ۶۰ تا ۱۲۰ میلی‌ثانیه شروع کنید و کدری یا حالت نوک‌زبانی را بشنوید.
4. اگر کل جمله به‌جای صداهای مسئله‌دار هوا و شفافیتش را از دست می‌دهد، Focus یا Mix را کاهش دهید.
5. بای‌پس را هم‌سطح مقایسه کنید و نفس‌های آرام و پایان حروف را هم بشنوید.

رفتار یادگیری در این پلاگین

Release، Range، Threshold، Frequency و Focus دارای Learn هستند. انرژی باند بالا تشخیص و کاهش را هدایت، ضریب قله رهایی را برآورد و smooth آن را بلندتر می‌کند. Mix، Attack و Output دستی می‌مانند. تشخیص قطعی سیبیلانس از هر ترنزینت روشن غیرآوازی یا تطبیق وکال مرجع انجام نمی‌شود.

> **محدودیت مهم پیاده‌سازی**
>
> Detection Frequency به نقطهٔ تفکیک مربوط است، نه مرکز یک باند باریک و منزوی سیبیلانس. سنج، نفس و ساز روشن هم می‌توانند آن را تحریک کنند. عدد GR افت دقیق کل سیگنال نیست، چون Focus و Mix نیز نتیجه را تغییر می‌دهند.

نکتهٔ شنیداری و روند کار

در این بیلد دکمهٔ شنیدن Detector یا سایدچین خارجی وجود ندارد. پس از پیدا کردن مسئله در سولو، درون میکس تنظیم کنید. روی منبع استریو، به آشکارسازی مستقل دو کانال توجه کنید.

DSess / ۵۰ پریست کارخانه

Init و ۴۹ گونهٔ پروفایل از مرورگر بالای رابط یا فهرست برنامهٔ میزبان انتخاب می‌شوند. هرکدام وضعیت کامل از جمله Mix و Output هستند. هنگام مقایسه مانیتور را کم کنید. مقدار دقیق همهٔ پارامترها در مانیفست JSON آمده است.

01 / Init / Factory Default
02 / Vocal Sibilance / Focused
03 / Vocal Sibilance / Soft
04 / Vocal Sibilance / Open
05 / Vocal Sibilance / Parallel
06 / Bright Voice / Natural
07 / Bright Voice / Focused
08 / Bright Voice / Soft
09 / Bright Voice / Open
10 / Bright Voice / Parallel
11 / Low Voice / Natural
12 / Low Voice / Focused
13 / Low Voice / Soft
14 / Low Voice / Open
15 / Low Voice / Parallel
16 / Soft Speech / Natural
17 / Soft Speech / Focused
18 / Soft Speech / Soft
19 / Soft Speech / Open
20 / Soft Speech / Parallel
21 / Cymbal Restraint / Natural
22 / Cymbal Restraint / Focused
23 / Cymbal Restraint / Soft
24 / Cymbal Restraint / Open
25 / Cymbal Restraint / Parallel
26 / Acoustic Pick / Natural
27 / Acoustic Pick / Focused
28 / Acoustic Pick / Soft
29 / Acoustic Pick / Open
30 / Acoustic Pick / Parallel
31 / Air Retention / Natural
32 / Air Retention / Focused
33 / Air Retention / Soft
34 / Air Retention / Open
35 / Air Retention / Parallel
36 / Hard Consonants / Natural
37 / Hard Consonants / Focused
38 / Hard Consonants / Soft
39 / Hard Consonants / Open
40 / Hard Consonants / Parallel
41 / Bus High Tamer / Natural
42 / Bus High Tamer / Focused
43 / Bus High Tamer / Soft
44 / Bus High Tamer / Open
45 / Bus High Tamer / Parallel
46 / Parallel Silk / Natural
47 / Parallel Silk / Focused
48 / Parallel Silk / Soft
49 / Parallel Silk / Open
50 / Parallel Silk / Parallel

بارگذاری پریست، یادگیری و پیش‌شنوی معلق را لغو می‌کند. ستاره، ویرایش بعدی را مشخص می‌کند؛ برای حفظ آن پروژه را ذخیره کنید. فهرست کارخانه فقط خواندنی است.

16 / D.A PLUGINS

DGate — گیت و کنترل سطح

DGate بالاتر از Threshold باز می‌شود، به مدت تعیین‌شده باز می‌ماند و سپس نرم به کف محدودشده با Range می‌بندد. Hysteresis آستانهٔ بستن را پایین‌تر می‌گذارد تا تق‌تق کاهش یابد. پردازندهٔ فعلی گیت است و نسبت متغیر اکسپنشن ندارد.

Stereo-linked peak detection > Threshold / hysteresis / hold > Smoothed gate gain > Output



کنترل‌های اصلی — طرح گرافیکی، نه اسکرین‌شات اجرای بومی.



کنترل‌های تکمیلی — طرح گرافیکی، نه اسکرین‌شات اجرای بومی.

کاربردهای معمول

کاهش نویز یا نشت میان رویدادها / جمع‌کردن منابع کوبه‌ای منتخب / افکت‌های خلاقانهٔ گیت‌شده

DGate / مرجع پارامترها

دامنه‌ها حد دستی‌اند و پیشنهاد یادگیری ممکن است محدودتر باشد. پیش‌فرض از سورس است، نه عدد تصویر نمونه. برچسب یادگیری نوع راهبرد را نشان می‌دهد، نه دقت تضمینی.

آستانهٔ بازشدن / Threshold

Range: -80 dB to 0 dB | Default: -45 dB | ID: threshold

آستانهٔ بازشدنِ آشکارساز دامنهٔ لحظه‌ای با پیوند استریو است. افزایش آن صدای آرام بیشتری را رد می‌کند.

یادگیری: برآورد با کمک ویژگی صوتی

حمله / Attack

Range: 0.1 ms to 100 ms | Default: 2 ms | ID: attack

زمان هموارسازی هنگام حرکت گین به وضعیت باز است. مقدار بسیار کوتاه ممکن است ناگهانی شنیده شود.

یادگیری: برآورد با کمک ویژگی صوتی

نگه‌داری / Hold

Range: 0 ms to 500 ms | Default: 50 ms | ID: hold

مدت بازماندن پس از افت سطح زیر ناحیهٔ بستن است و به جلوگیری از بسته‌شدن چندباره در یک رویداد کمک می‌کند.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

رهایی / Release

Range: 5 ms to 2000 ms | Default: 150 ms | ID: release

زمان هموارسازی حرکت به کف بسته است. مقدار بلندتر بخش بیشتری از دنباله را حفظ می‌کند.

یادگیری: برآورد با کمک ویژگی صوتی

عمق تضعیف / Range

Range: 0 dB to 90 dB | Default: 60 dB | ID: range

تضعیف وضعیت بسته است. صفر تضعیفی ندارد؛ مقدار بزرگ صدا را شدید کم می‌کند، اما مطلوب‌بودن آن را تشخیص نمی‌دهد.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

هیسترزیس / Hysteresis

Range: 0 dB to 18 dB | Default: 6 dB | ID: hysteresis

اختلاف آستانهٔ باز و بسته است. آستانهٔ بستن برابر Threshold منهای Hysteresis خواهد بود.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

خروجی / Output

Range: -24 dB to 12 dB | Default: 0 dB | ID: output

گین پس از گیت است و در وضعیت باز هم اعمال می‌شود.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

DGate / استفادهٔ عملی

دستور شروع — با گوش اصلاح کنید

1. به‌جای تضعیف بیشینه، از Range متوسط مانند ۱۲ تا ۲۴ دسی‌بل شروع کنید.
2. Threshold را کمی پایین‌تر از آرام‌ترین رویداد مطلوب و بالاتر از نشت ناخواسته تنظیم کنید.
3. برای ساز کوبه‌ای Attack حدود ۱ تا ۵ میلی‌ثانیه را امتحان و Hold را طوری تنظیم کنید که یک ضربه چند بار باز نشود.
4. Release را تا محوشدن طبیعی دنباله بیشتر کنید؛ اگر گیت تق‌تق می‌کند، Hysteresis اضافه کنید.
5. همهٔ بخش‌های آرام را بررسی کنید؛ برای وکال بسیار عریان، ویرایش دستی ممکن است از گیت شدید امن‌تر باشد.

رفتار یادگیری در این پلاگین

Attack، Threshold و Release دارای Learn هستند. آستانه از RMS ورودی منهای ۱۸ دسی‌بل می‌آید، نه کف نویز اندازه‌گیری‌شده؛ زمان‌ها از ضریب قله کمک می‌گیرند و smooth رهایی را بلندتر می‌کند. Hysteresis، Hold، Range و Output دستی می‌مانند. صداهای آرام مطلوب و دنباله‌ها را بررسی کنید.

محدودیت مهم پیاده‌سازی

گیت نمی‌تواند نویز زیر صدای مطلوب را جدا کند. یادگیرنده توزیع مستقل کف نویز را اندازه نمی‌گیرد. واژه‌های آرام، ضربه‌های ظریف و دنباله‌ها ممکن است قطع شوند؛ پیش از پذیرش پیشنهاد، آرام‌ترین بخش مطلوب را بشنوید.

نکتهٔ شنیداری و روند کار

آشکارساز مقدار لحظه‌ای بزرگ‌ترِ چپ یا راست را دنبال می‌کند؛ بنابراین هر کانال می‌تواند گیت را باز کند. Range بزرگ الزاماً سکوت دیجیتال نیست. سایدچین خارجی، فیلتر Key یا کنترل Look-ahead وجود ندارد.

DGate / ۵۰ پریست کارخانه

Init و ۴۹ گونهٔ پروفایل از مرورگر بالای رابط یا فهرست برنامهٔ میزبان انتخاب می‌شوند. هرکدام وضعیت کامل از جمله Mix و Output هستند. هنگام مقایسه مانیتور را کم کنید. مقدار دقیق همهٔ پارامترها در مانیفست JSON آمده است.

01 / Init / Factory Default
02 / Vocal Cleanup / Focused
03 / Vocal Cleanup / Soft
04 / Vocal Cleanup / Open
05 / Vocal Cleanup / Parallel
06 / Kick Isolation / Natural
07 / Kick Isolation / Focused
08 / Kick Isolation / Soft
09 / Kick Isolation / Open
10 / Kick Isolation / Parallel
11 / Snare Isolation / Natural
12 / Snare Isolation / Focused
13 / Snare Isolation / Soft
14 / Snare Isolation / Open
15 / Snare Isolation / Parallel
16 / Tom Decay / Natural
17 / Tom Decay / Focused
18 / Tom Decay / Soft
19 / Tom Decay / Open
20 / Tom Decay / Parallel
21 / Guitar Noise / Natural
22 / Guitar Noise / Focused
23 / Guitar Noise / Soft
24 / Guitar Noise / Open
25 / Guitar Noise / Parallel
26 / Bass Tail / Natural
27 / Bass Tail / Focused
28 / Bass Tail / Soft
29 / Bass Tail / Open
30 / Bass Tail / Parallel
31 / Speech Pause / Natural
32 / Speech Pause / Focused
33 / Speech Pause / Soft
34 / Speech Pause / Open
35 / Speech Pause / Parallel
36 / Percussion Tight / Natural
37 / Percussion Tight / Focused
38 / Percussion Tight / Soft
39 / Percussion Tight / Open
40 / Percussion Tight / Parallel
41 / Room Reduction / Natural
42 / Room Reduction / Focused
43 / Room Reduction / Soft
44 / Room Reduction / Open
45 / Room Reduction / Parallel
46 / Gentle Floor / Natural
47 / Gentle Floor / Focused
48 / Gentle Floor / Soft
49 / Gentle Floor / Open
50 / Gentle Floor / Parallel

بارگذاری پریست، یادگیری و پیش‌شنوی معلق را لغو می‌کند. ستاره، ویرایش بعدی را مشخص می‌کند؛ برای حفظ آن پروژه را ذخیره کنید. فهرست کارخانه فقط خواندنی است.

17 / D.A PLUGINS

DFX — مولتی‌افکت ماژولار

DFX سچوریشن، فیلتر پایین‌گذر، دیلی و شبکهٔ فضای مستقل را با ترتیب ثابت به هم وصل می‌کند. هر ماژول فعال‌سازی مستقل دارد؛ فقط Filter، Saturation و Ambience دارای دامنهٔ Learn هستند. Delay Mix و Space Mix ترکیب محلی و Mix اصلی ترکیب کل زنجیره با ورودی اولیه را تعیین می‌کنند.

Input > Saturation > Filter > Delay > Ambience > Master mix > Output



کنترل‌های اصلی — طرح گرافیکی، نه اسکرین‌شات اجرای بومی.



کنترل‌های تکمیلی — طرح گرافیکی، نه اسکرین‌شات اجرای بومی.

کاربردهای معمول

بافت ترکیبی برای ساز و طراحی صدا / زنجیرهٔ خلاقانهٔ فشرده با ترتیب ثابت / یادگیری و شنیدن مستقل ماژول‌ها

DFX / مرجع پارامترها

دامنه‌ها حد دستی‌اند و پیشنهاد یادگیری ممکن است محدودتر باشد. پیش‌فرض از سورس است، نه عدد تصویر نمونه. برچسب یادگیری نوع راهبرد را نشان می‌دهد، نه دقت تضمینی.

فعال‌سازی سچوریشن / Enable saturation

Range: Off / On | Default: On | ID: driveOn

طبقهٔ سچوریشن tanh را وارد یا بای‌پس می‌کند. این کنترل دستی است؛ یادگیری وضعیت فعال‌سازی را تغییر نمی‌دهد.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

درایو ماژول / Drive

Range: 0 dB to 24 dB | Default: 3 dB | ID: drive

گین ورودی سچوریشن در حالت فعال است. انتخاب مستقل کاراکتر یا اورسمپلینگ ندارد.

یادگیری: برآورد با کمک ویژگی صوتی

فعال‌سازی فیلتر / Enable filter

Range: Off / On | Default: On | ID: filterOn

طبقهٔ پایین‌گذر ورودی را فعال می‌کند. خاموش‌کردن آن فیلتر بازخورد دیلی را حذف نمی‌کند.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

فرکانس فیلتر / Low pass

Range: 200 Hz to 18000 Hz | Default: 12000 Hz | ID: filter

فرکانس قطع پایین‌گذر برای ماژول فیلتر و مسیر بازخورد دیلی است.

یادگیری: برآورد با کمک ویژگی صوتی

فعال‌سازی دیلی / Enable delay

Range: Off / On | Default: On | ID: delayOn

ترکیب محلی اکو را وارد می‌کند. هنگام بای‌پس سهم خروجی، حافظهٔ دیلی ممکن است همچنان کار کند.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

زمان دیلی / Time

Range: 1 ms to 2000 ms | Default: 250 ms | ID: time

زمان اسمی دیلی بر حسب میلی‌ثانیه است؛ همگام‌سازی BPM میزبان وجود ندارد.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

بازخورد دیلی / Feedback

Range: 0 (0%) to 0.9 (90%) | Default: 0.3 (30%) | ID: feedback

مقدار بازگردش با سقف ۰٫۹۰ است. مقدار زیاد می‌تواند دنبالهٔ بلند و پرسطح بسازد.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

DFX / ادامهٔ کنترل‌ها

ترکیب محلی دیلی / Delay mix

Range: 0% to 100% | Default: 20% | ID: delayMix

ترکیب ورودی ماژول با سیگنال تأخیری، پیش از Ambience است.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

فعال‌سازی فضا / Enable ambience

Range: Off / On | Default: On | ID: reverbOn

سهم فضای مستقل را وارد می‌کند و بای‌پس اصلی نیست.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

میرایی فضا / Decay

Range: 0.1 s to 8 s | Default: 1.5 s | ID: decay

طرح میرایی بازخوردِ شبکهٔ فضای با کاراکتر ثابت است. دیگر کنترل‌های ریورب در DFX در دسترس نیستند.

یادگیری: برآورد با کمک ویژگی صوتی

ترکیب محلی فضا / Ambience mix

Range: 0% to 100% | Default: 20% | ID: reverbMix

ترکیب محلی خشک و فضا پس از دیلی است. «خشک» در این نقطه ورودی ماژول فضاست، نه الزاماً ورودی اولیهٔ پلاگین.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

ترکیب اصلی / Mix

Range: 0% to 100% | Default: 50% | ID: mix

ترکیب کلی ورودی اولیه با زنجیرهٔ کامل افکت، پیش از Output است.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

خروجی اصلی / Output

Range: -24 dB to 12 dB | Default: 0 dB | ID: output

گین نهایی پس از ترکیب اصلی است و حتی در Mix صفر هم اعمال می‌شود.

فقط دستی: در تمام دامنه‌های Learn حفظ می‌شود

DFX / استفادهٔ عملی

دستور شروع — با گوش اصلاح کنید

1. از Mix اصلی کم و Drive ملایم شروع کنید و هنگام شکل‌دادن به رنگ، Output را نزدیک بهرهٔ واحد نگه دارید.
2. Filter را فعال و فرکانسی انتخاب کنید که وضوح منبع حفظ شود.
3. Time را دستی تنظیم و پیش از افزودن فضا، Feedback و Delay Mix را متوسط نگه دارید.
4. Ambience را با Decay کوتاه فعال کنید و Space Mix را فقط به اندازهٔ لازم بالا ببرید.
5. برای تغییر متمرکز از Learn ماژول استفاده کنید؛ سپس سطح کل زنجیره را برابر و دنباله را بررسی کنید.

رفتار یادگیری در این پلاگین

فقط Drive، Filter و Decay در گروه‌های Saturation، Filter و Ambience دارای Learn هستند. ماژول Delay کاملاً دستی است. کلیدهای فعال‌سازی، Feedback، Time، ترکیب‌های محلی و اصلی و Output در تمام دامنه‌های یادگیری حفظ می‌شوند. LEARN ALL بهینه‌ساز مشترک زنجیره، لادنس یا خطای مرجع نیست.

محدودیت مهم پیاده‌سازی

در این بیلد ترتیب مسیر عوض نمی‌شود. خاموش‌کردن ماژول الزاماً بافر آن را پاک نمی‌کند. فرکانس Filter حتی وقتی ماژول فیلتر ورودی خاموش است، در فیلتر بازخورد دیلی هم نقش دارد. ماژول مدولاسیون مستقل اضافه وجود ندارد.

نکتهٔ شنیداری و روند کار

در Mix اصلی صفر، ورودی اولیه همچنان از گین Output عبور می‌کند. در صددرصد هم ممکن است به‌علت ترکیب محلی دیلی و ریورب، مؤلفهٔ خشک وجود داشته باشد. برای حذف کامل نمونه از بای‌پس میزبان استفاده کنید.

DFX / ۵۰ پریست کارخانه

Init و ۴۹ گونهٔ پروفایل از مرورگر بالای رابط یا فهرست برنامهٔ میزبان انتخاب می‌شوند. هرکدام وضعیت کامل از جمله Mix و Output هستند. هنگام مقایسه مانیتور را کم کنید. مقدار دقیق همهٔ پارامترها در مانیفست JSON آمده است.

01 / Init / Factory Default
02 / Vocal Halo / Focused
03 / Vocal Halo / Soft
04 / Vocal Halo / Open
05 / Vocal Halo / Parallel
06 / Drum Space / Natural
07 / Drum Space / Focused
08 / Drum Space / Soft
09 / Drum Space / Open
10 / Drum Space / Parallel
11 / Guitar Trail / Natural
12 / Guitar Trail / Focused
13 / Guitar Trail / Soft
14 / Guitar Trail / Open
15 / Guitar Trail / Parallel
16 / Piano Cloud / Natural
17 / Piano Cloud / Focused
18 / Piano Cloud / Soft
19 / Piano Cloud / Open
20 / Piano Cloud / Parallel
21 / Bass Texture / Natural
22 / Bass Texture / Focused
23 / Bass Texture / Soft
24 / Bass Texture / Open
25 / Bass Texture / Parallel
26 / Synth Orbit / Natural
27 / Synth Orbit / Focused
28 / Synth Orbit / Soft
29 / Synth Orbit / Open
30 / Synth Orbit / Parallel
31 / LoFi Room / Natural
32 / LoFi Room / Focused
33 / LoFi Room / Soft
34 / LoFi Room / Open
35 / LoFi Room / Parallel
36 / Dark Cinematic / Natural
37 / Dark Cinematic / Focused
38 / Dark Cinematic / Soft
39 / Dark Cinematic / Open
40 / Dark Cinematic / Parallel
41 / Percussion Spark / Natural
42 / Percussion Spark / Focused
43 / Percussion Spark / Soft
44 / Percussion Spark / Open
45 / Percussion Spark / Parallel
46 / Ambient Wash / Natural
47 / Ambient Wash / Focused
48 / Ambient Wash / Soft
49 / Ambient Wash / Open
50 / Ambient Wash / Parallel

بارگذاری پریست، یادگیری و پیش‌شنوی معلق را لغو می‌کند. ستاره، ویرایش بعدی را مشخص می‌کند؛ برای حفظ آن پروژه را ذخیره کنید. فهرست کارخانه فقط خواندنی است.

18 / D.A PLUGINS

جلسه، اتومیشن و بازخوانی

چه چیزی ذخیره می‌شود

پردازنده برای بازخوانی میزبان، وضعیت پارامتر را با APVTS/XML ذخیره می‌کند. پس از پذیرش تنظیم، پروژه را ذخیره کنید. بازخوانی و مهاجرت وضعیت قدیمی هنوز نیازمند اعتبارسنجی میزبان است؛ باینری قبلی را با آرشیو نگه دارید. هر پلاگین ۵۰ برنامهٔ کارخانه و مرورگر بالای رابط دارد؛ ستاره ویرایش را نشان می‌دهد و وضعیت میزبان مقدار واقعی را نگه می‌دارد. حافظهٔ A/B و ورود و خروج فایل پریست اختصاصی وجود ندارد. بارگذاری برنامه، یادگیری و پیش‌شنوی معلق را لغو می‌کند.

صوت مرجع، توصیف، فهرست پیشنهاد و Undo یک‌سطحی در وضعیت پردازنده جاسازی نمی‌شوند. پس از بستن رابط یا بازکردن پروژه، مرجع را دوباره بارگذاری کنید. در صورت مجازبودن نسخه‌ای در دارایی پروژه نگه دارید؛ نمایش نام فایل به معنی ذخیره‌شدن آن در جلسه نیست.

روش امن اتومیشن

پارامترها با شناسه‌های ثابت مرجع کنترل به میزبان معرفی می‌شوند. اتومیشن میزبان با Undo پیشنهاد جداست. تغییر Learn به میزبان خبر داده می‌شود، پس حالت خواندن یا نوشتن میزبان می‌تواند اثر بگذارد. پیش از Learn نوشتن اتومیشن را متوقف و نتیجه را روی کپی آزمایش کنید. حالت‌های گسسته را مانند مقدار پیوسته جاروب نکنید.

فریز و خروجی‌گیری

در رندر آفلاین برای دنبالهٔ ریورب و دیلی زمان بگذارید. پردازنده برای DDelay، DVerb و DFX دنبالهٔ ۳۰ثانیه‌ای به میزبان اعلام می‌کند؛ این راهنماست، نه تضمین اندازه‌گیری‌شدهٔ هر تنظیم. مرز و فید را کنترل کنید. تأخیر جبرانی اضافه صریحاً اعلام نشده؛ پیش‌تأخیر و اکوی شنیدنی عمدی است و با PDC یکی نیست.

19 / D.A PLUGINS

عیب‌یابی و پرسش‌های رایج

پلاگین در میزبان دیده نمی‌شود

سیستم‌عامل، معماری، فرمت و مسیر اسکن را بررسی کنید. مطمئن شوید باینری واقعی نصب شده، نه ZIP طراحی یا پوشهٔ سورس. طبق راهنمای میزبان دوباره اسکن و بازگشایی کنید. میزبان صرفاً AAX به محصول AAX نیاز دارد، نه این اهداف VST3/AU. فایل اجرایی داخل بسته را تغییر نام ندهید.

صوت یا نتیجهٔ یادگیری ندارم

مسیر، Mute ترک، بای‌پس میزبان، دستگاه، گین خروجی و رسیدن پخش به نمونه را بررسی کنید. اگر گیت صدای مطلوب را می‌بندد، Threshold یا Range را کم کنید. برای Learn پخش را طی دریافت ادامه دهید، از سکوت دوری و حالت یا مرجع معتبر انتخاب کنید. عوض‌شدن برچسب به‌تنهایی پیشنهاد معتبر نیست.

مرجع رد شده یا از دست رفته است

یک WAV محلی PCM قابل‌خواندن یا AIFF/FLAC پشتیبانی‌شده، نرخ معتبر و ابتدای غیرساکت امتحان کنید. فقط صوت مجاز را تبدیل کنید. خواننده ۳۰ ثانیهٔ نخست را تحلیل می‌کند، نه بخش انتخابیِ بعدتر. پس از بازخوانی رابط یا پروژه بارگذاری دوباره لازم است، چون مرجع ذخیره نمی‌شود.

ادامهٔ عیب‌یابی

پیشنهاد ناپدید شده یا اعمال نمی‌شود

ویرایش دستی یا میزبان می‌تواند پیشنهاد را نامعتبر کند. پس از پایان ویرایش دوباره Learn کنید. تحلیل‌های هم‌پوشان نخواهید؛ دریافت مشغول یا زمان‌تمام‌شده شاید برای پاک‌شدن به پخش نیاز داشته باشد. UNDO فقط یک عمل یادگیری اعمال‌شده را برمی‌گرداند، نه کل تاریخچهٔ میزبان.

کلیک، اورلود یا نوسان بلندی

مانیتور و گین خروجی را کم کنید. Drive، تقویت Makeup، EQ و بازخورد را بررسی کنید. هم‌سطح مقایسه، هدروم حفظ و در صورت نیاز لیمیتر ایمنی مستقل استفاده کنید. هنگام فشار پردازشی بافر میزبان را بیشتر و نرخ یا تعداد نمونهٔ غیرضروری را کم کنید. هموارسازی پارامتر، بی‌آرتیفکت‌بودن تغییر حالت یا اتومیشن شدید را تضمین نمی‌کند.

چرا با Mono هنوز استریو می‌شنوم؟

در Mono، DStereo بر شاخهٔ پردازش‌شده اثر دارد. برای بررسی کامل Mix را صددرصد یا مانیتور مونو میزبان را فعال کنید. Width از کانال‌های یکسان Side نمی‌سازد. همبستگی منفی به شنیدن و تشخیص نیاز دارد، نه فقط افزایش Center یا اعتماد به عدد.

آیا AI به معنی مدل آموزش‌دیده است؟

در این پیاده‌سازی نه. مسیر موجود از تحلیل قطعی ویژگی و هدف‌های ابتکاری استفاده می‌کند. وزن مدل، استنتاج راه‌دور یا سرویس تطبیق عصبی فعال نیست. رابط انتزاعی مدل آینده، قابلیت محصول آموزش‌دیده نیست. توضیح پیشنهاد و محدودیت پارامتر را بخوانید.

20 / D.A PLUGINS

مرجع فنی و محدودیت‌های شناخته‌شده

معماری صوتی

مسیر AudioBuffer در JUCE نمونه‌های float را با وضعیت داخلی دوبرابر برای بای‌کواد EQ پردازش می‌کند. چیدمان مونو یا استریوی همسان است؛ MIDI و باس سایدچین خارجی پیاده‌سازی نشده‌اند. هسته نرخ آماده‌سازی را به ۸ تا ۳۸۴ کیلوهرتز محدود می‌کند؛ این حد پیاده‌سازی است، نه تأیید کامل نرخ‌های میزبان. برخی فرکانس‌های قطع در داخل زیر نایکوئیست محدود می‌شوند؛ پس عدد بالای نمایشگر در نرخ پایین الزاماً فرکانس مؤثر نیست.

مقادیر پیوسته در هسته با ضریب حدود ۲۰ میلی‌ثانیه هموار و انتخاب گسسته فوری عوض می‌شود. بافر دیلی و FDN در آماده‌سازی تخصیص می‌یابد. تحلیل و رمزگشایی وظیفهٔ Worker است و عمداً در Callback صوتی قرار ندارد. نمایش از صف محدود تک‌تولیدکننده و تک‌مصرف‌کننده استفاده می‌کند و می‌تواند فریم نمایشی را کنار بگذارد.

محدودیت عملی

اورسمپلینگ، Look-ahead، لیمیتر True Peak، تشخیص تمپو از صوت، کانولوشن دلخواه، فهم عمومی زبان یا بهینه‌ساز تکراری خروجی و مرجع وجود ندارد. DEQ فاز خطی، DSess اکولایزر داینامیک پارامتریک کامل و DGate دارای نسبت اکسپنشن نیست. ترتیب DFX ثابت است. کیفیت و اتومیشن باید با منابع واقعی شنیده شوند.

مصرف پردازنده و حافظه به نرخ، پلتفرم، تعداد نمونه و تنظیمات وابسته است. حداقل اندازه‌گیری‌شدهٔ RAM/CPU یا تضمین بافر منتشر نشده است. محافظت مقدار متناهی و محدودسازی داخلی خروجی، جلوگیری شفاف از اورلود نیست. از متر میزبان و سطح ورودی معقول استفاده کنید.

وضعیت اعتبارسنجی

تست‌های قابل‌حمل DSP و یادگیری و کنترل چیدمان و صف وجود دارند؛ این‌ها تست شنیداری یا تأیید همهٔ DAWها نیستند. چک‌پوینت قبلی بیلد CI سه پلتفرم را پاس کرده؛ رابط جدید اعتبارسنجی بومی و میزبان جدا دارد. شواهد همان کامیت را در Checks و STATUS.md ببینید. دفترچه گواهی انتشار نیست.

21 / D.A PLUGINS

واژه‌نامه و راهنمای یافتن پارامتر

حمله / Attack

پاسخ افزایش پوش؛ در DTrans گین حمله است، نه زمان.

مسیر کمکی / ارسال / Auxiliary / send

باس موازی میزبان که مقدار معینی از سیگنال را می‌گیرد.

ضریب قله / Crest factor

نسبت قله به RMS که معمولاً دسی‌بلی بیان می‌شود.

دسی‌بل تمام‌مقیاس / dBFS

سطح نسبت به تمام‌مقیاس دیجیتال؛ واحد لادنس نیست.

خشک / افکتی / Dry / wet

سیگنال اصلی در برابر شاخهٔ پردازش‌شده.

بازخورد / Feedback

بازگرداندن بخشی از سیگنال تأخیری یا فضایی به مسیر ورودی‌اش.

شبکهٔ تأخیر بازخوردی / FDN

خطوط تأخیر بازخوردی متصل برای ساخت فضای الگوریتمی.

کاهش گین / Gain reduction / GR

تضعیف محاسبه‌شده در پردازش داینامیک.

هدروم / Headroom

فاصلهٔ قلهٔ فعلی تا مرز اورلود موردنظر.

هیسترزیس / Hysteresis

آستانه‌های متفاوت باز و بسته برای کاهش قطع و وصل سریع.

زانو / Knee

ناحیهٔ گذار میان رفتار بدون کمپرس و کمپرس.

میانی / جانبی / Mid / Side

مؤلفه‌های مجموع و تفاضل سیگنال استریو.

سازگاری مونو / Mono compatibility

رفتار سیگنال هنگام جمع کانال‌ها.

جبران تأخیر پلاگین / PDC

جبران میزبان برای تأخیر پردازشی اعلام‌شده.

پیش‌تأخیر / Pre-delay

فاصله تا شروع برگشت یک افکت زمانی.

ضریب کیفیت / Q

گزینش‌پذیری فیلتر Bell؛ Q بالاتر یعنی پهنای باریک‌تر.

رهایی / Release

هموارسازی بازیابی یا بستن پس از رویداد سطح.

ریشهٔ میانگین مربعات / RMS

اندازهٔ دامنه بر پایهٔ انرژی؛ نه لادنس LUFS.

زمان افت ۶۰ دسی‌بل / RT60

زمان افت اندازه‌گیری‌شدهٔ ۶۰ دسی‌بل؛ خوانش تأییدشدهٔ DVerb نیست.

سیبیلانس / Sibilance

انرژی بالای قوی گفتار مانند صداهای س و ش.

همبستگی استریو / Stereo correlation

رابطهٔ موج کانال‌ها؛ مقدار منفی نیازمند بررسی مونو است.

قلهٔ بین‌نمونه‌ای / True peak

برآورد قلهٔ بازسازی‌شده میان نمونه‌ها؛ مترهای فعلی آن را نمی‌سنجند.

یافتن سریع پارامتر

هر ۹۲ شناسه در صفحات کنترل توضیح داده شده‌اند. پیوندهای زیر مرجع هر محصول را باز می‌کنند. شناسهٔ قابل‌جست‌وجو پارامتر اتومیشن را هم معرفی می‌کند؛ نام میزبان ممکن است پیشوند ماژول داشته باشد.

DVerb / 12 parameters / Page 13

predelay · size · decay · tone · mix · width · density · diffusion · modulation · lowcut · midcut · mode

DDelay / 10 parameters / Page 18

time · feedback · filter · pingpong · modulation · mix · width · output · sync · division

DComp / 8 parameters / Page 23

threshold · ratio · attack · release · knee · makeup · mix · output

DEQ / 16 parameters / Page 27

b1freq · b1gain · b1q · b1shape · b2freq · b2gain · b2q · b2shape · b3freq · b3gain · b3q · b3shape · b4freq · b4gain · b4q · b4shape

DSat / 6 parameters / Page 32

drive · tone · mode · density · mix · output

DTrans / 6 parameters / Page 36

attack · sustain · sensitivity · shape · mix · output

DStereo / 6 parameters / Page 40

width · depth · center · side · mix · mono

DSess / 8 parameters / Page 44

frequency · threshold · range · attack · release · focus · mix · output

DGate / 7 parameters / Page 48

threshold · attack · hold · release · range · hysteresis · output

DFX / 13 parameters / Page 52

driveOn · drive · filterOn · filter · delayOn · time · feedback · delayMix · reverbOn · decay · reverbMix · mix · output

22 / D.A PLUGINS

پشتیبانی، حریم خصوصی و ملاحظات حقوقی

گزارش قابل‌بازتولید

از Issue مخزن یا کانال همراه بیلد استفاده کنید. نام پلاگین، بیلد یا کامیت، فرمت، سیستم و پردازنده، نسخهٔ DAW، نرخ، بافر، چیدمان، مراحل، انتظار و نتیجه و اثر بای‌پس را ذکر کنید. لاگ کرش را پس از بررسی مسیر و شناسهٔ خصوصی بفرستید.

جلسهٔ خصوصی، موسیقی مرجع دارای حق، اطلاعات ورود یا دادهٔ شخصی منتشر نکنید. فایل کوتاه مجازِ مصنوعی یا ناشناس و پروژهٔ حداقلی بهتر است. Issue Tracker قرارداد سطح خدمت، وعدهٔ زمان پاسخ یا ضمانت نیست.

پردازش محلی و حقوق استفاده

کد توصیف‌شده مرجع را محلی رمزگشایی و ورودی را تحلیل می‌کند؛ مسیر بارگذاری برای یادگیری یا استنتاج راه‌دور پیاده‌سازی نشده است. این گفته ممیزی مستقل امنیت یا سیاست DAW، سیستم، پشتیبان ابری و ابزار ثالث نیست. حقوق منبع و مرجع را رعایت کنید؛ تحلیل مجوز تکثیر یا توزیع نمی‌دهد.

مجوز و دامنهٔ سند

اعلان مخزن، سورس نمونهٔ اولیه را برای ارزیابی و توسعه معرفی می‌کند. این راهنما جایگزین مجوز نرم‌افزار نیست، حق توزیع تجاری نمی‌دهد و سیاست بازپرداخت یا ضمانت نمی‌سازد. پیش از توزیع، مجوز JUCE را جدا بررسی کنید. فونت‌های همراه اعلان SIL Open Font License خود را دارند.

نام و آثار D.A Plugins این پروژه را معرفی می‌کنند. نام محصولات یا میزبان‌های مربوط به سازگاری متعلق به صاحبانشان است و تأیید ثالث را القا نمی‌کند. این متن اصیل است و از دفترچهٔ سازندهٔ دیگر کپی نشده. نسخهٔ انگلیسی و فارسی همان مجموعهٔ قابلیت توسعه‌ای را توضیح می‌دهند.

منابع پروژه

Repository / https://github.com/drdrillcontacts-svg/D.APlugins
Issue tracker / https://github.com/drdrillcontacts-svg/D.APlugins/issues
Source snapshot / https://github.com/drdrillcontacts-svg/D.APlugins/tree/1aaf67d9d271

نگه‌داری سند: هنگام تغییر قابلیت، رجیستری پارامتر، توضیح رفتار و هر دو زبان را هم‌زمان به‌روز کنید. این ویرایش عمداً کنترل پیاده‌شده، سیاست ابتکاری، کار آینده و محدودیت اعتبارسنجی را جدا می‌کند.