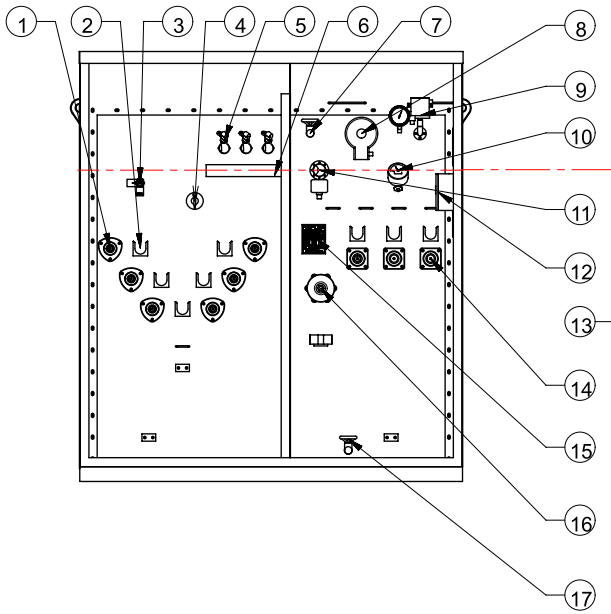


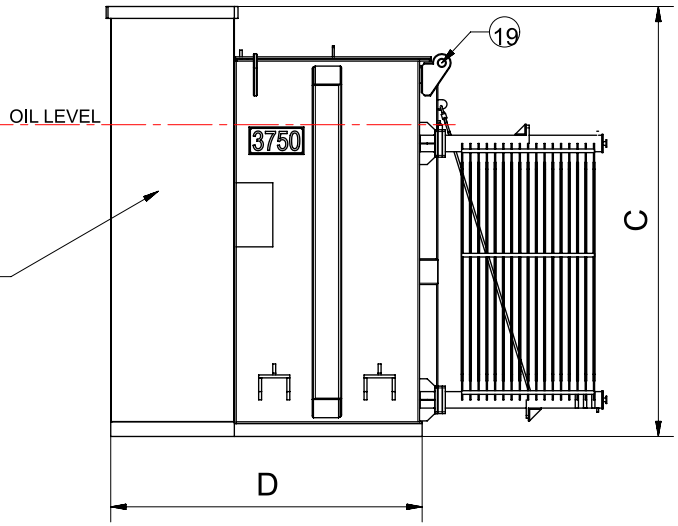


| |
|---|
| 1.HV bushing |
| 2.HV parking stand |
| 3.Load break switch |
| 4.Tap changer |
| 5.Bay-O-net fuse |
| 6.Oil drip shield |
| 7.Oil upper filling valve |
| 8.Pressure relief device with contact |
| 9.Vacuum pressure gauge with contact |
| 10.Oil temperature indicator with contact |
| 11.Oil level indicator with contact |
| 12.Terminal box |
| 13.LV-HV compartment |
| 14.LV bushing intergrated |
| 15.Name plate |
| 16.Neutral bushing |
| 17.Lower filtering valve with sampler |
| 18.Radiator |
| 19.Lifting lugs |

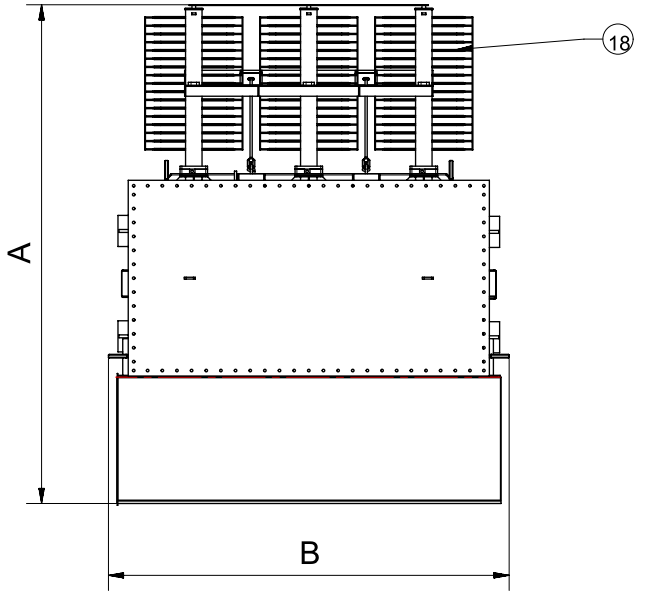


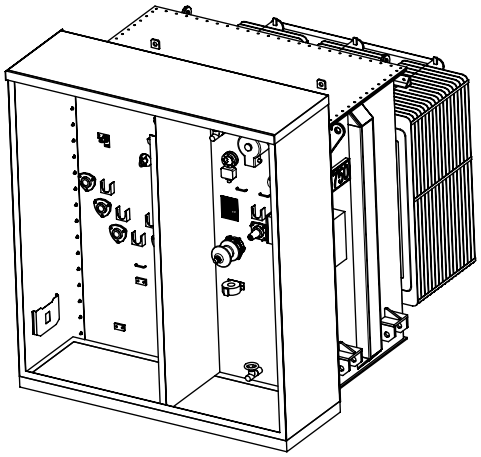

| DIMENSIONS (mm) | | | | WEIGHTS (kg) | | |
|---|---|---|---|---|---|---|
| A | B | C | D | OIL | CORE&FOIL | TOTAL |
| 2730 | 2200 | 2350 | 1700 | 3000 | 3740 | 8200 |
| ± 2% | | | | ± 2% | | |




Grounding pad




Neutral bushing

| TECHNICAL DATE | | | |
|---|---|---|---|
| WINDING MATERIAL | AL | NOMINAL POWER [KVA] | 3750 |
| PREQUENCY (Hz) | 60 | PRIMARY VOLTAGE [KV] | 24.9±2.5% DELTA |
| NO LOAD LOSSES (W) | | SECONDARY VOLTAGE [KV] | 4.16 GRDY/2.4 |
| LOAD LOSSES 85°C(W) | | VECTOR GROUP | Dyn1 |
| SHORT CIRCUI IPM [%] | 5.3 | FINAL COLOUR | Ral 7045 |
| ALTITUDE [m] | ≥1000 | LIQUID | Mineral oil |

| | | | |
|---|---|---|---|
| Cad: | N.H.Hoang | | |
| Check: | V.T.Binh | | |
| Approve: | M.N.Trinh | | |

HAVEC

VIETNAM ELECTRICAL EQUIPMENT MANUFACTURING J.S.C

Product: 3750kVA PAD_MOUNTED TRANSFORMER 24.9/4.16

Tên bản vẽ/Description :

OUTLINE

Số bản vẽ/Draw no:

Tỷ lệ/Scale:

Số lượng(Quantily):

Note: