Vision

Depth 1096 mm

Cabinet Vision F60 -6°+35°C RH 40÷95% 1 door

Code: **AF60/1M**
Model: **A646008001**

Constructional data

Functions::
• Retarder prover, Storage, Chocolate, Thawing
Exterior/interior finishing:
• Stainless steel AISI 304 18/10
• Back in galvanised steel
Insulation:
• 75 mm thickness - CFC/HCFC free
Cover evaporator:
• Removable in stainless steel AISI 304 Cr-Ni 18/10
Internal racks and slides:
• Stainless steel AISI 304 18/10
Inner corners:
• Rounded cornes ensuring maximum hygiene
Feet:
• Stainless steel AISI 304 adjustable 100-150 mm
Door:
• Self-closing ins. 80mm thickness - with 105° dwell
Door handle:
• Stainless steel AISI 304 Cr-Ni 18/10
Door gasket:
• Magnetic, easy to replace

Features

• Dimensions	810×1096×2215 mm
• Packing dimensions	830×1130×2250 mm
• Net weight	205 Kg
• Maximum capacity	30 pair of slides (60 Trays 60×40)
• Pitch slides	43 mm
• Temperature range	-6°+35°C
• Cooling capacity	668 W*
• Standard connection	230 V - 50 Hz
• Total rate	653 W - 3,6 A
• Cooling gas	R404a
• Standard equipment	N. 20 pair of slides type L - 755 mm
	LED lighting
	Drain plug

Accessories

Aluminium coated baking-pan 600×400 H. 20 mm
Code O282400600

Plastic coated shelf EN 600×400 mm
Code O222400600

Pair of slides type L - 755 mm
Code O121275520

Portable printer My Printer BT black
Code O860000020

Bluetooth USB flash drive 2.0
Cod. O881000020

Kit of 4 swivel and brake castors in stainless steel AISI 304
Code O444000020

In order to constantly offer the best possible products, we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.

Vision

Depth 1096 mm

Cabinet Vision F60 -6°+35°C RH 40÷95% 1 door

Coldline made major investments in design research, becoming a leader in technology and innovation. Each cabinet marked with the FSSsymbol is equipped with a refrigeration system independent of the structure, which provides improved flexibility and service.

FSS • Fast Service System

FSS • FAST SERVICE SYSTEM

- You can change the intended use of an appliance, a freezer into a chiller - and the other way around - even after years of installation.
- You can extend the life of a refrigeration cabinet by replacing its old refrigeration system with a new one.
- Maintenance and service are simple, quick and do not require specialised personnel.

Focus

NO-COMPROMISE QUALITY STEEL

AISI 304 18/10 is a high quality steel. Its stability guarantees good-looking and durable products, ensuring maximum hygiene and corrosion resistance over time.

INSULATION THICKNESS

The 75 mm thick insulation ensures lower heat loss, reduced work of the compressor, therefore lower energy consumption.

INTELLIGENT DEFROST

Intelligent defrost changes according to the actual presence of frost. The system runs for the minimum time required.

EVAPORATION SYSTEM

The automatic evaporation of condensing water is activated only in the presence of water produced as a result of a defrost cycle.

CONSTANT TEMPERATURE

The fans stop when the door is opened to reduce temperature changes and consequently reduce the work of the compressor.

ASPERA COMPRESSORS

Aspera compressors reduce energy consumption by 15% and acoustic impact by 5 dBA.

Technical drawing

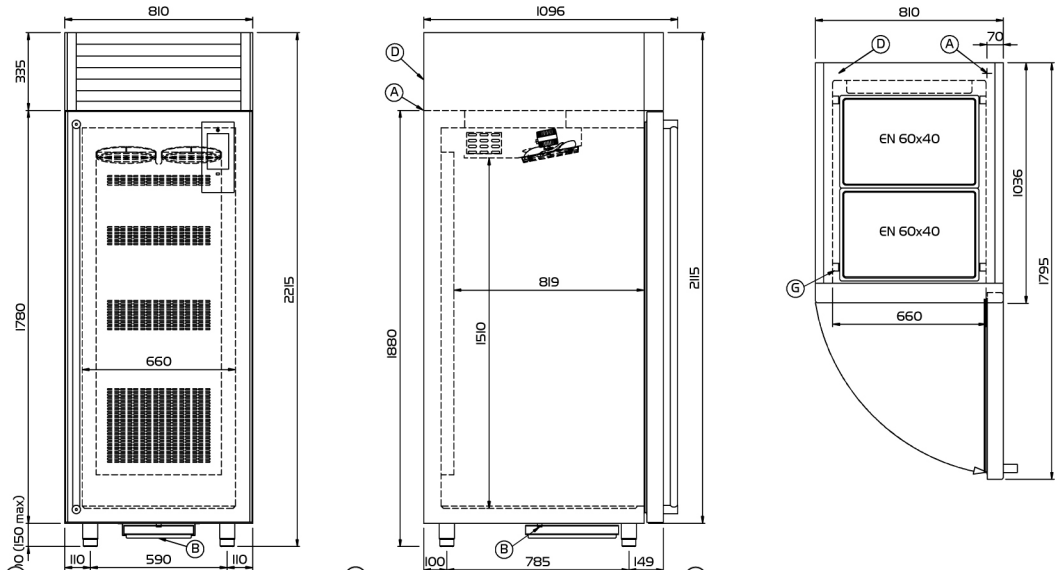

Ⓐ POWER SUPPLY CABLE OUTLET

Ⓑ CONDENSATION WATER DRAIN WITH REMOVABLE BASIN

✱ CAPACITY 60 EN 60×40

Ⓖ RACKS PITCH

Ⓓ WATERNET CONNECTION

In order to constantly offer the best possible products, we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.