

TEGO 3 FRD

IP65 Fire Rated Downlight



PRODUCT DATASHEET [PRELIMINARY]



PRODUCT FEATURES

- Selectable lumen output, 4W / 7.5
- 4 CCT selectable 2800K / 3000K / 4000K / 6500K for various application
- High efficiency up to 115lm/w
- Fire-rated, achieved BS 476-20:1987+AC:2014 - Part 20 and BS 476-21:1987+AC:2014 - Part 20 Part 21, ≥30mins, ≥60mins, ≥90mins.
- Triac Dimming (U-Dim) with smooth performance
- IP65 rated perfect to use in moisture area, e.g. bathroom
- Ultra slim design, <40mm room
- Equipped with MEGAquick™ quick fit connector., tool-less wiring.
- Compatible with insulation material without any guard
- 5 front covers (White, Black, Gold, Chrome & Brushed Nickel) available & can be interchanged.
- Long lifetime 50,000hrs L80B10
- Tool-less wiring installation with loop in/loop out function.



APPLICATIONS

- Kitchens
- Bathroom
- Offices
- Retail
- Hotels
- Restaurants

TEGO 3 FRD

IP65 Fire Wasted Downlight

MEGAMAN®

PRODUCT DATASHEET [PRELIMINARY]

GENERAL INFORMATION

Input Voltage / Frequency	220-240 VAC / 50-60Hz
Power Factor	> 0.9
Power Supply Unit	Integrated
Dimmability	U-Dim
CRI	≥ 80
Colour Consistency	SDCM ≤ 6
Lifetime	50,000hrs L80 B10 at 25°C
Number of Switching Cycles	> 100 000
IP	65 (Room Side) / 20
IK	03
Protection Class	I
Glow Wire	850°C
Photobiological Safety Group	RG 0
Flicker Percentage	≤ 3% at 100Hz
Working Temperature	-30°C to +40°C
Material & Colour	Metal Housing, Polycarbonate Optics, WH26
Installation	Recessed Mount , compatible with thermal material
Approvals	EN60598-1, EN60598-2-1, EN62493, EN62471, EN55015; EN61547, EN61000-3-2, EN61000-3-3

PRODUCT INFORMATION

Model No.	MM Code	Power W	Luminous Flux @4000K Lm	Efficacy @4000K lm/W	Color Temp. K	Beam Angle °	Remarks
FDS74600v0-dm/ds/sc	712212	4 / 7.5	400 / 750	100 / 100	2700 /	60	Without Bezel
			410 / 780	103 / 104	3000 /		
			460 / 830	115 / 111	4000 /		
			430 / 800	108 / 107	6500		

BEZEL ACCESSORIES

Model No.	MM Code	Description
LA8175/WH	712213	Tego 3 FRD Bezel - Matt White Bezel
LA8175/BK	712214	Tego 3 FRD Bezel - Matt Black Bezel
LA8175/CH	712215	Tego 3 FRD Bezel - Chrome
LA8175/NI	712216	Tego 3 FRD Bezel - Brushed Nickel
LA8175/AB	712217	Tego 3 FRD Bezel - Antique Brass




TEGO 3 FRD

IP65 Fire Wasted Downlight



PRODUCT DATASHEE [PRELIMINARY]


WIRING DIAGRAM

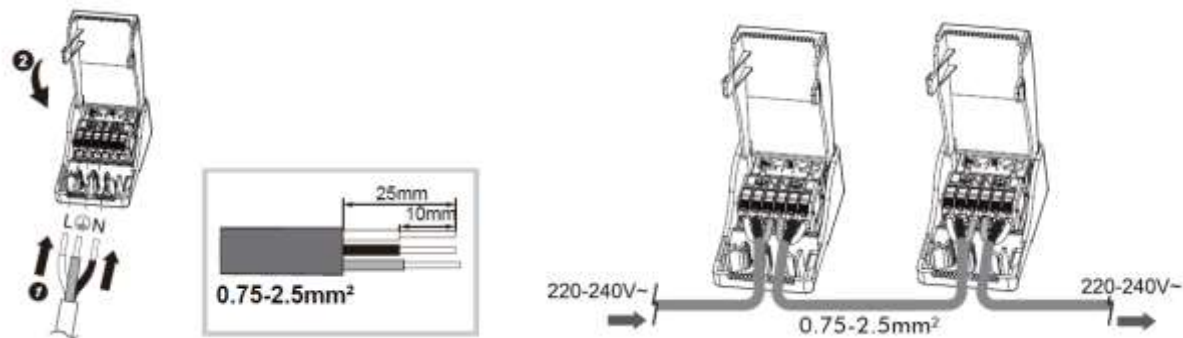

Looping in and out

DIMENSIONS & WEIGHT

Model No.	Cutout (C) mm	Diameter (D) mm	Height (H) mm	Weight g
FDS72400v0-dm/db/sc	68	85	43	-

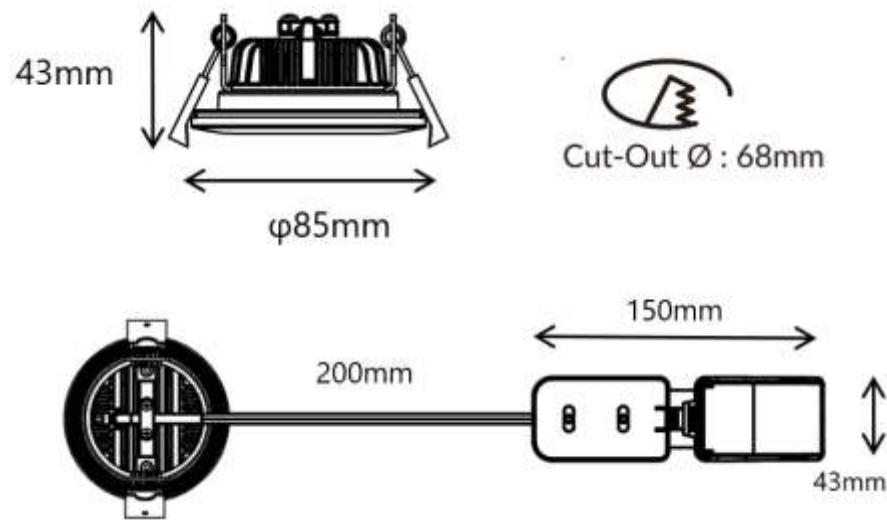

PHOTOMETRIC DIAGRAM

60° photometric for reference only

