

WANG MODEL 711 INPUT/OUTPUT WRITER



INTRODUCTION

The Model 711 is an input/output writer compatible with all 700 Series calculators. In addition to typing output, it serves as an on-line keyboard for directly entering alpha-numeric printing codes into any 700 Series calculator. This is highly advantageous when writing programs which use alpha-numeric constants for headings and messages. It also opens up new applications in areas such as information retrieval where records are sometimes indexed alphabetically (e.g., stock prices indexed by the company's NYSE ticker abbreviation).

Using a modified IBM Selectric® typewriter mechanism, the Model 711 has a total of 88 different alpha and numeric characters (44 uppercase and 44 lowercase). The printing rate is approximately 15.5 characters per second. Control may be done either manually or under program control. Other features include: wide-carriage pin-feed platen* for handling forms requiring full alpha/numeric capabilities. When not being used as part of the system it retains all conventional typewriter features.


Alpha characters can be "learned" into the 700 via the 711 keyboard. This type of feature is advantageous in giving the operator a chance to physically see his layout as it is being generated.

The Wang solenoid undercarriage and interfacing electronic circuitry are added to the typewriter for automatic operation.

Wang's design concepts are such that a system can be expanded to meet future needs with such

items as Dual Tape Cassettes, Extended Memory Modules, etc. The overall programming flexibility enhances the calculating capability of the system to meet almost any application encountered.


INSTALLATION

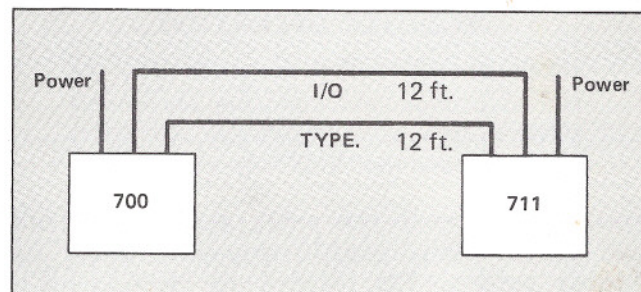

The Model 711 is connected to the 700 Series calculator by two cables. Connectors enable quick and easy installation without any modifications to the calculator.

KEYS ON THE 711 I/O WRITER

To the right of the conventional typewriter keyboard are several special keys and indicator lights. These keys, positioned for operator convenience, control the input/output operations of the system.

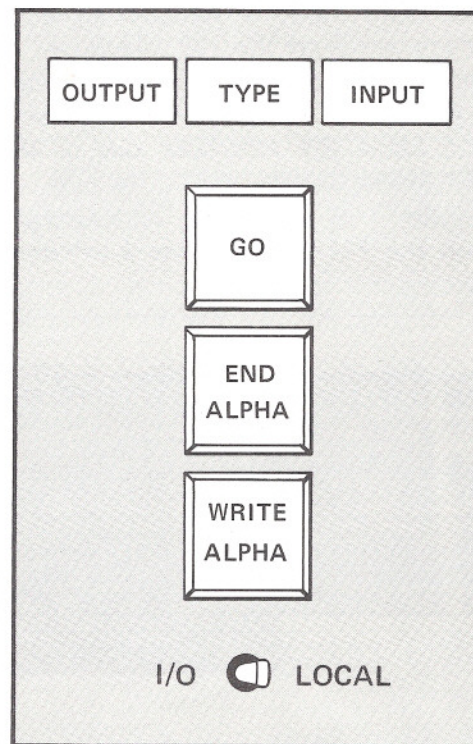

® IBM Registered Trademark

*option

WANG

LABORATORIES, INC.

836 NORTH STREET, TEWKSBURY, MASSACHUSETTS 01876, TEL. (617) 851-7311, TWX 710 343-6769, TELEX 94-7421

WANG MODEL 711 INPUT/OUTPUT WRITER

I/O LOCAL SWITCH

Local — Setting the I/O Local switch to local allows the user to utilize the 711 as a conventional typewriter, independent of the 700 calculator.

I/O — Setting the I/O Local switch to I/O allows the user to utilize the 711 as an input/output writer in conjunction with the 700 calculator.

MODES OF OPERATION

When the I/O switch is set to I/O, the calculator will function in one of three modes as indicated by the lights located above the "GO" key.

Output Mode — In this mode, the 700 calculator can output alpha/numeric characters under full format control. The number of decimal places before and after the decimal point, as well as the manual typewriter operations, may be designated.

Output is selected by a two-step WRITE command which prints the contents of the display in pre-designated format, or prints a character string preceded by a WRITE ALPHA command, terminated by an END ALPHA command.

Input Mode — In this mode, all alpha/numeric keystrokes of the typewriter, as well as SPACE, CR/LF, INDEX, SET TAB, TAB, CLEAR TAB, may be learned into the 700 calculator. The WRITE ALPHA and END ALPHA may also be "learned." This mode is actuated by a two-step Group command from the 700 calculator.

To send control back to the 700 calculator keyboard, the "GO" key must be depressed. This operation takes the calculator out of the learn mode and passes control back to the 700.

Type Mode — In this mode, all keystroke operations on the 711 will generate a printed record;

however, none of the keystroke operations will be "learned" into the 700 memory. This mode is actuated by a two-step Group command from the 700 calculator.

To send control back to the 700 calculator keyboard, the "GO" key must be depressed.

SOFTWARE CAPABILITY

An extensive library of programs is available to further enhance the user's programming capabilities.

SYSTEM GROWTH

Wang's modularity concept allows users to update their systems easily, efficiently and inexpensively on location.

WARRANTY

The typewriter mechanism of the 711 is covered by IBM warranty. Full warranty of 90 days for Wang solenoids and interfacing electronics on the 711.

SPECIFICATIONS

Paper Capacity:	15 ½ inches
Writing Line:	13 inches
Characters per Inch	12
Characters per Line	156
No. of Lines per Inch	6
Type Face	Prestige Elite 72 (IBM Code 012)
Max. Printing Speed	15 Char/Sec. (approx.)
Tab and Return (CR & LF) Time	.15 sec. + 15 in. per second (avg. while in motion).
Shift Time	150 ms. (approx.)
Space/Backspace Time	70 ms. (approx.)
INDEX (LF) Time	150 ms. (approx.)
Set/Clear Tab Time	.3 seconds
Weight:	Net 90 pounds Gross 140 pounds
Power Requirements:	115 vac ± 10%, 60 Hz, 150W, 2 Amp. (230 vac, 50 Hz, 150W, 1 Amp. on special order, no charge.)
Connector Cables:	one power cord and two inter-connecting cables.



711 KEYBOARD

WANG

LABORATORIES, INC.

836 NORTH STREET, TEWKSBURY, MASSACHUSETTS 01876, TEL. (617) 851-7311, TWX 710 343-6769, TELEX 94-7421

Printed in U.S.A.
700-0498A
12-71-10M