
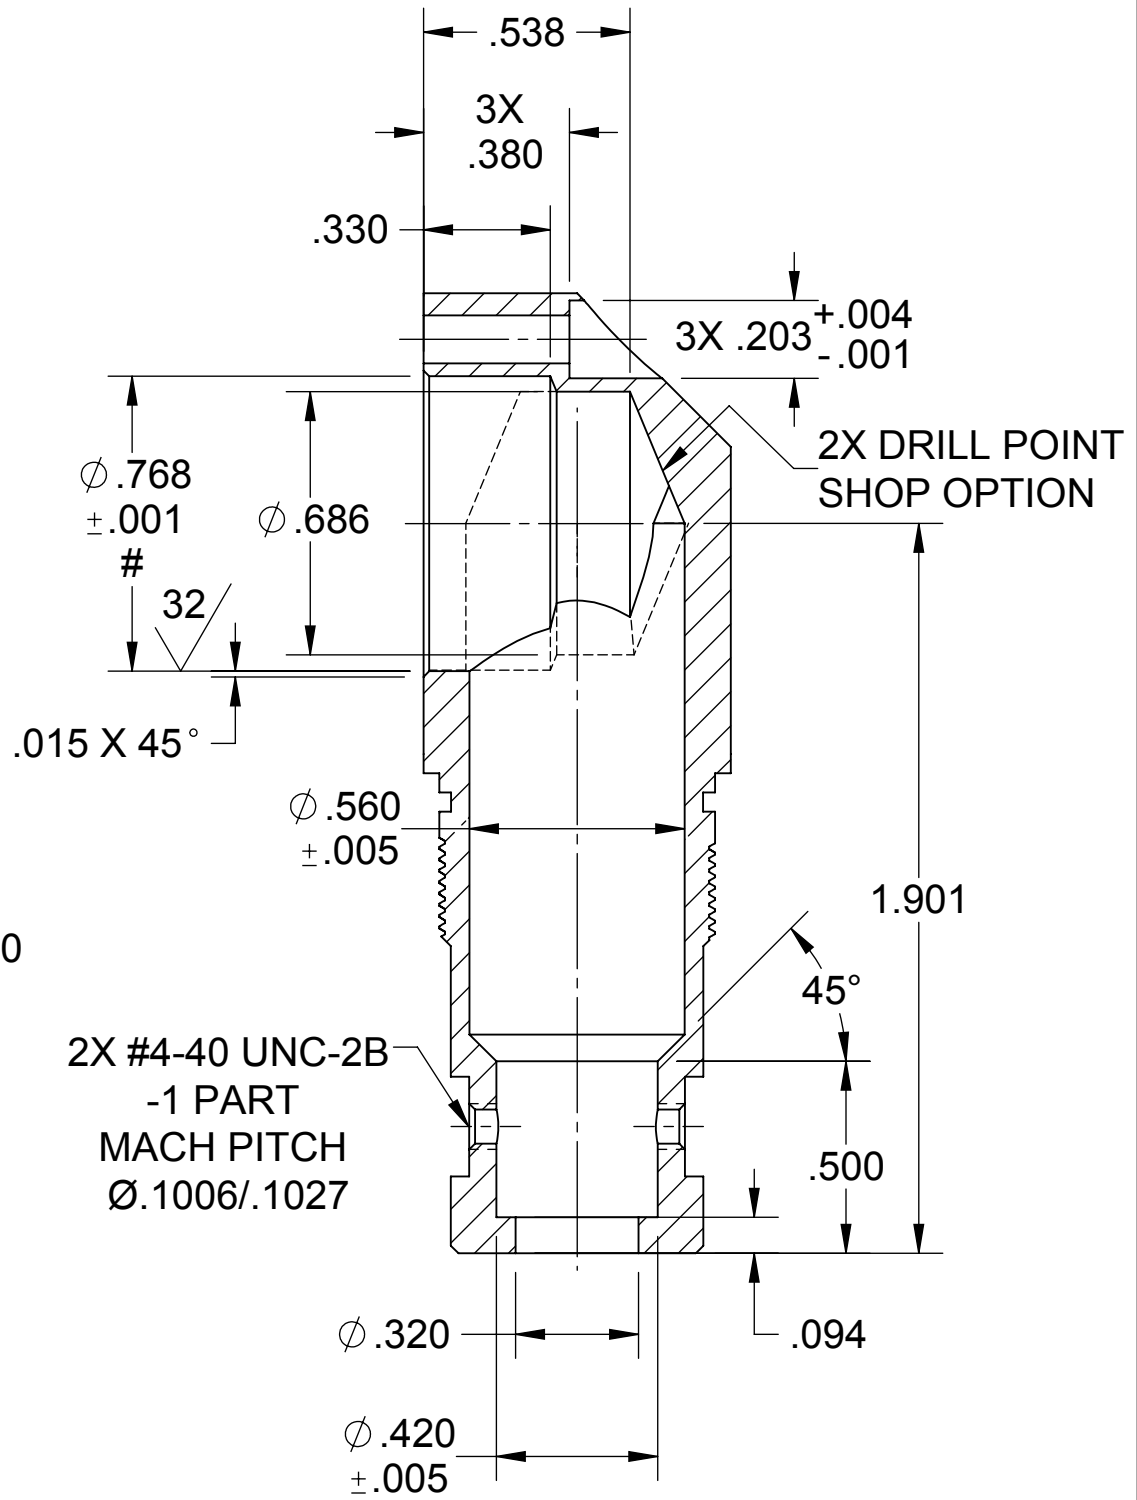
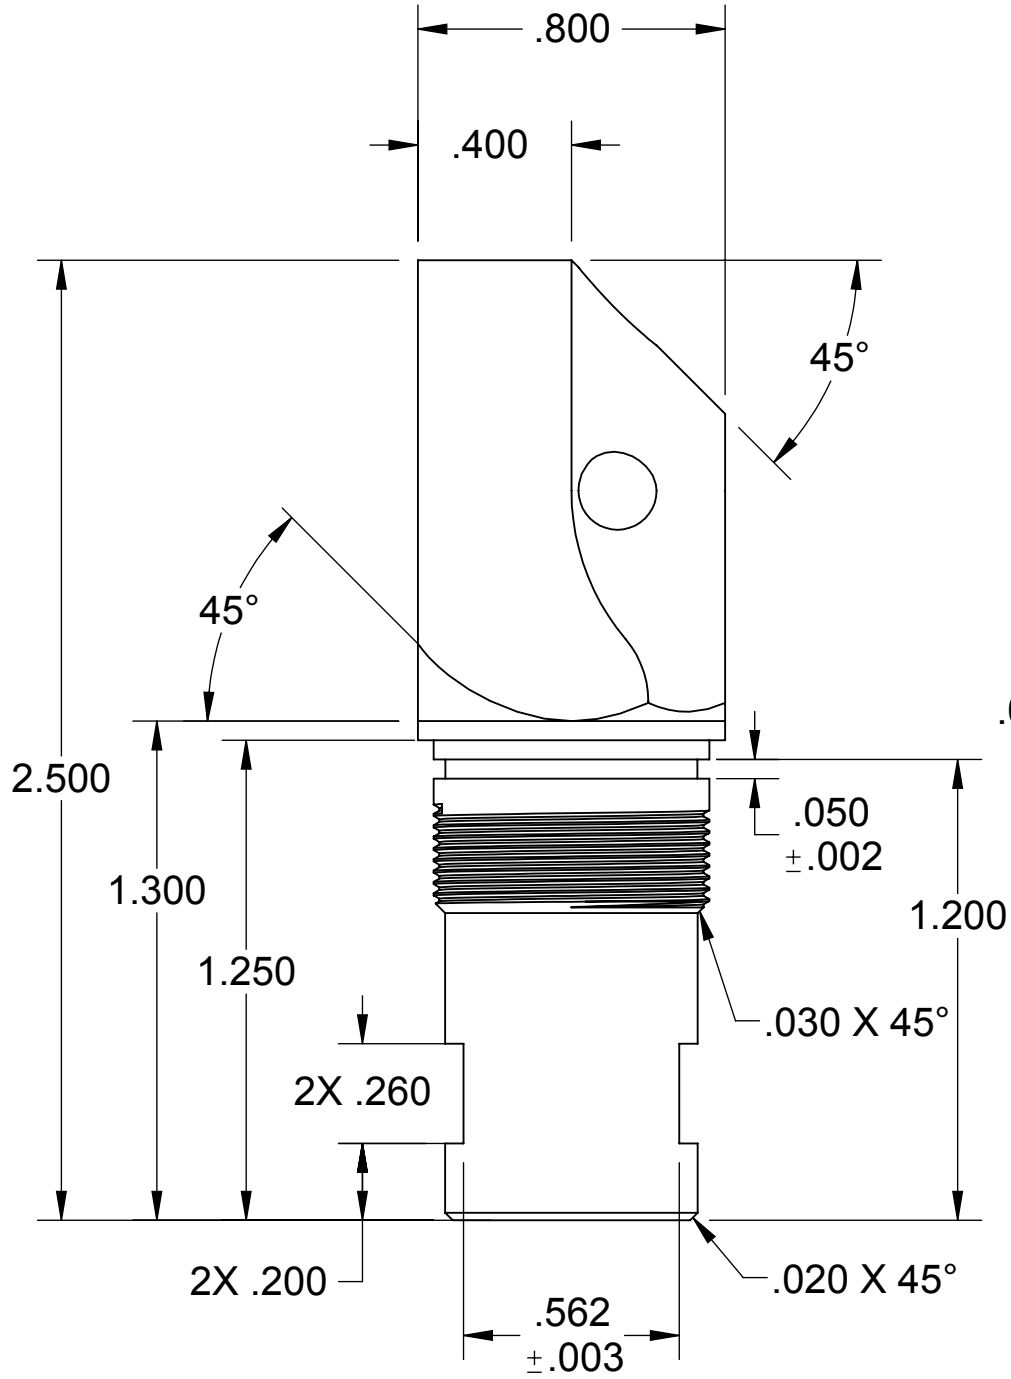


NOTES: UNLESS OTHERWISE SPECIFIED

1. REMOVE ALL BURRS AND BREAK SHARP EDGES .010 MAX
2. INSIDE CORNER RADII .010 MAX
3. ALL SURFACES TO BE 64 MICROFINISH OR BETTER
4. DIMENSIONAL LIMITS APPLY AFTER FINISH
111-292-1 REQUIRES ALLOWANCE FOR .0009" TO .0012" FINISH THICKNESS PER SURFACE
111-292-3 & -4 DO NOT REQUIRE ANY FINISH ALLOWANCE; MACHINE TO DIMENSIONS SHOWN
111-292-5 & -7 DO NOT REQUIRE ALLOWANCE EXCEPT THE THREAD DIMENSIONS INDICATED

REVISION HISTORY - ALL SHEETS ARE THE SAME REVISION

REV	DESCRIPTION	DATE	APPROVED
A	CN200521-1555 BC, B1 FROM Ø.310±.003 TO Ø.320	5/21/2020	BCull

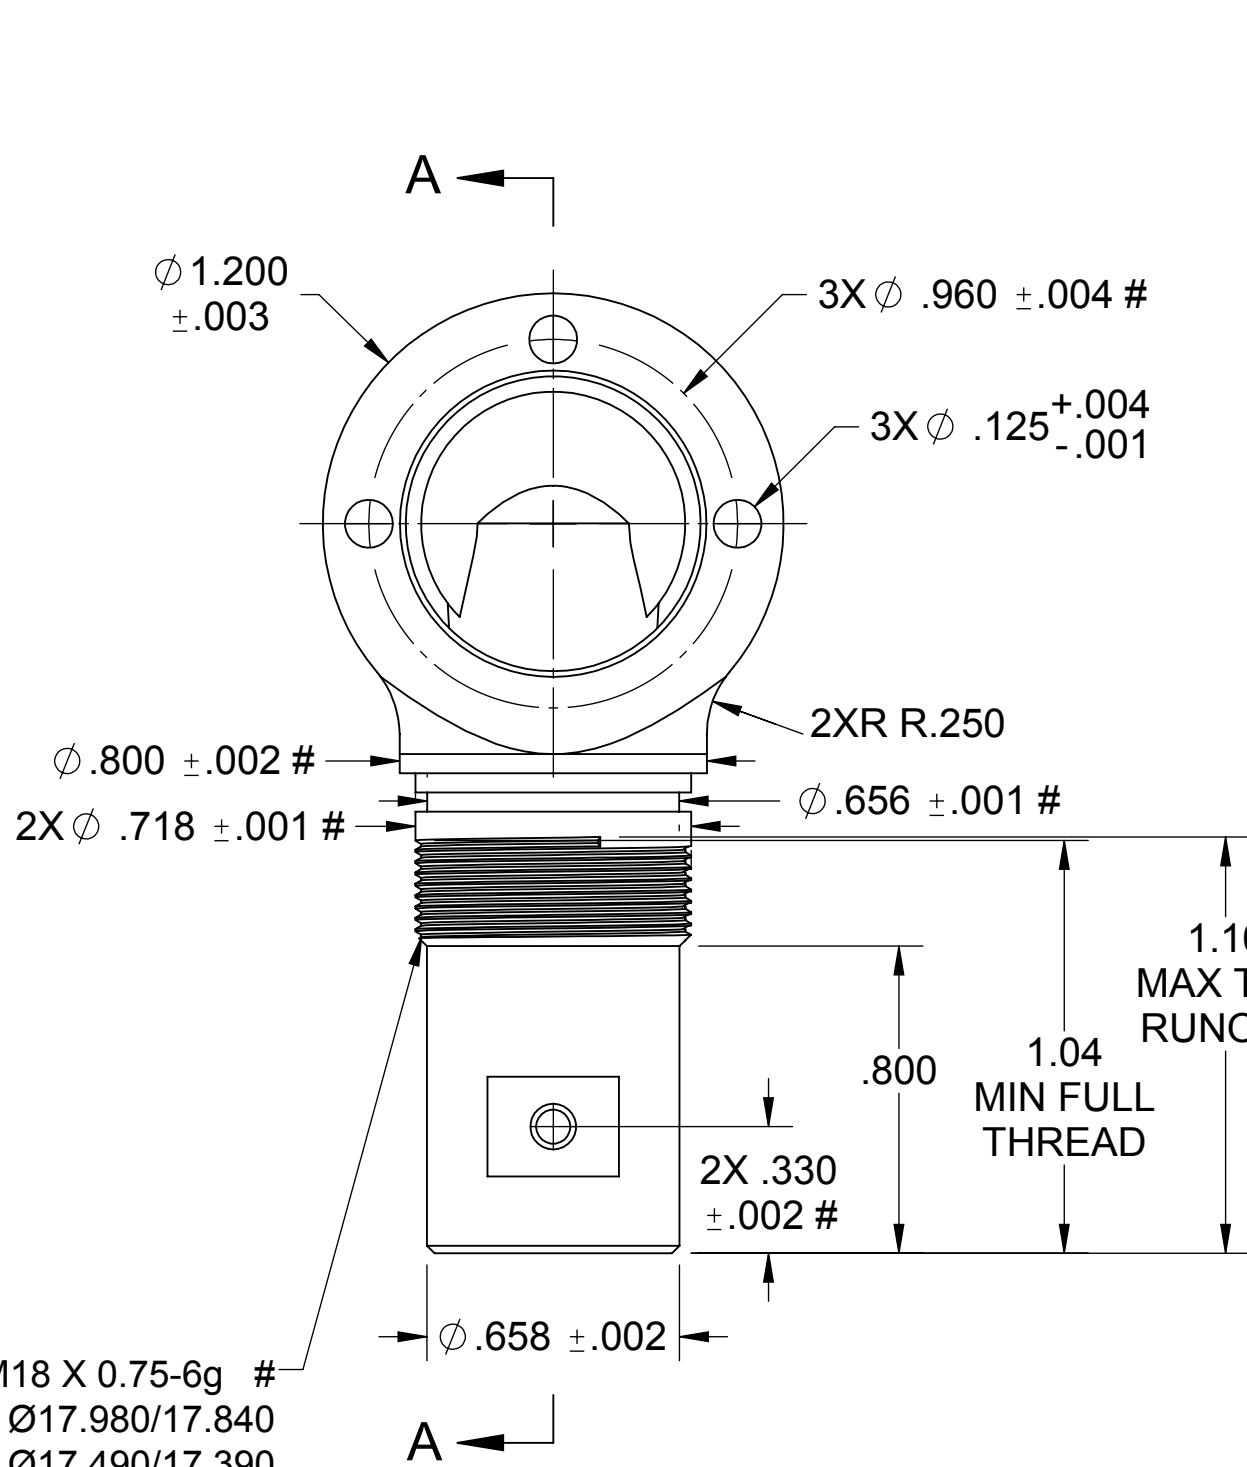

SECTION A-A

- 1 ONLY { MACHINED MAJOR Ø17.919/17.794 (.7055"/.7006")
MACHINED PITCH Ø17.368/17.299 (.6838"/.6810")
MACHINED MINOR Ø17.105/16.877 (.6738"/.6645")
- 5 & -7 ONLY { MACHINED MAJOR Ø17.944/17.825 (.7065"/.7018")
MACHINED PITCH Ø17.419/17.360 (.6858"/.6834")
MACHINED MINOR Ø17.130/16.908 (.6744"/.6657")

3. APPLY DRY FILM LUBETO M18 THREAD PER FSP-1034, TYPE I OR II, THK: .0003" TO .0007"
2. PASSIVATE PER ASTM A-967, RoHS COMPLIANT
1. HARD ANODIZE PER MIL-A-8625, TYPE III, CLASS 2, COLOR: BLACK, THK: .0018" TO .0024" (.0009" TO .0012" BUILD UP)

PROCESSES:

111-349-8	APPLY PROCESSES 2 & 3 TO -7 PART	316 STAINLESS
111-349-7	THIS DRAWING WITHOUT PROCESSES	303 STAINLESS
111-349-6	APPLY PROCESSES 2 & 3 TO -5 PART	C36000 BRASS 1/2 HARD
111-349-5	THIS DRAWING WITHOUT PROCESSES	C63000 MARINE BRONZE
111-349-4	THIS DRAWING WITHOUT PROCESSES	6061-T6 ALUMINUM
111-349-3	THIS DRAWING WITHOUT PROCESSES	
111-349-2	APPLY PROCESS 1 TO -1 PART	
111-349-1	THIS DRAWING WITHOUT PROCESSES	

PART NO	DESCRIPTION	MATERIAL
SEE TABLE	DFT BCull 2020/02/04 CHK JC 2020/02/07 MFG - ENG BCull 2020/02/04 APP JW 2020/02/07	316 STAINLESS
DRILLED HOLE DIAMETER TOLERANCE	DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED DIM ARE IN INCHES TOL ON ANGLES ±3° 1 PL ±.1 2 PL ±.02 3 PL ±.010 INTERPRET DIM AND TOL PER ASME Y14.5-1994	Copyright © 2018 Amphenol Fiber Systems International. Nonpublished work. All rights reserved.
111-344	TACBeam	111-349
NEXT ASSY	USED ON	111-349
APPLICATION		111-349

AmphenolFSI

BACKSHELL, 90° PLUG

SIZE	CAGE CODE	DWG NO	REV
C	ØYPM2	111-349	A
SCALE	2:1	SHEET	1 OF 1