
# GuitarTap

Tap Tone Analysis Report

Jul 29, 2026, 1:24 PM

| | |
|---|---|
| **Measurement Name:** | Brace UMIK-1 3 Tap Swift iPad |
| **Type:** | Material (Brace) |
| **Frequency Range:** | 30.0 Hz – 1.0 kHz |
| **Microphone:** | Umik-1  Gain: 18dB · calibrated (7108913) |

## Frequency Spectrum

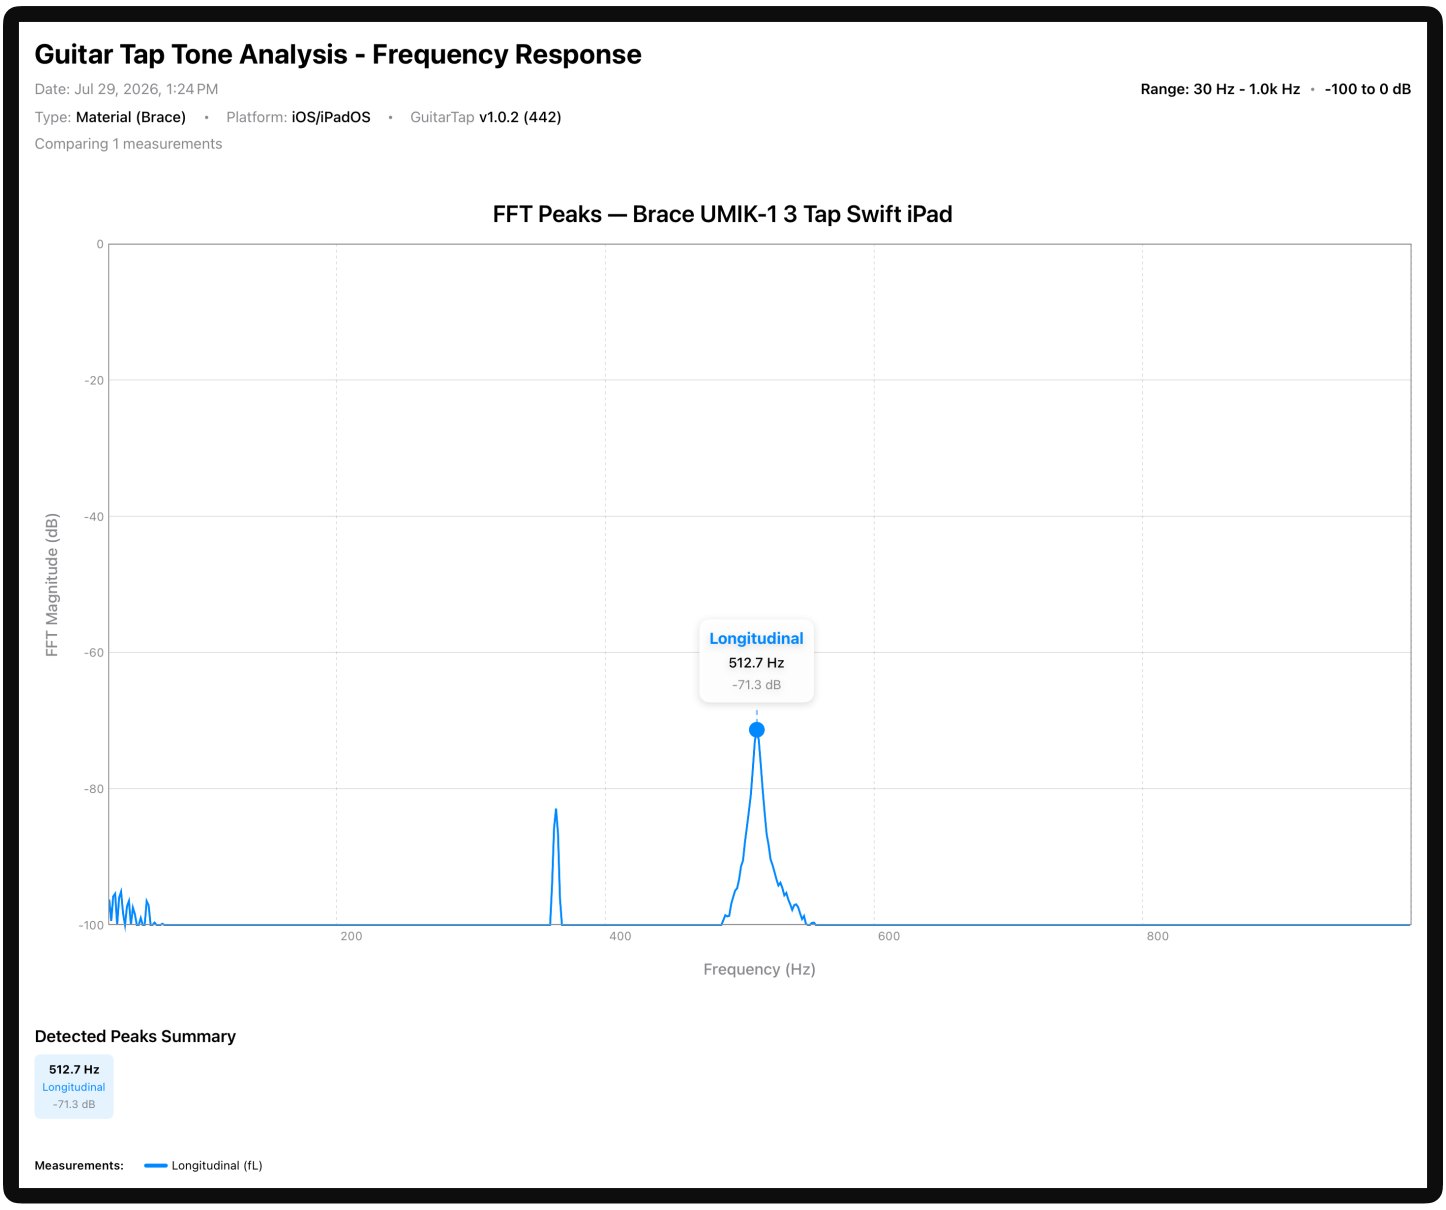


## Detected Peaks

| Frequency | Magnitude | Note | Q Factor | Role |
|---|---|---|---|---|
| 512.7 Hz | -71.3 dB | C5 | 87.5 | Longitudinal (fL) |

**Sample Dimensions**

Length: **556.00 mm** Width: **20.38 mm** Thickness: **29.35 mm**

Mass: **128.0 g** Density: **0.385 g/cm³**

## Brace Properties

Speed of Sound: **5254 m/s**

Specific Modulus: **27.6** (Excellent)

Young's Modulus (E): **10.62 GPa**

Radiation Ratio: **13.7**

**Overall Quality: Excellent**

**Single-Tap Measurement (fL only):**

- **1. Longitudinal (fL) Tap**
  Hold brace at 22% from one end along the length. Tap center.

*The strongest peak is auto-selected.*