
# GuitarTap

Tap Tone Analysis Report

Jul 19, 2026, 3:12 PM

| | |
|---|---|
| **Measurement Name:** | Brace UMIK-1 3 Tap Swift iPhone |
| **Type:** | Material (Brace) |
| **Frequency Range:** | 30.0 Hz – 1.0 kHz |
| **Microphone:** | Umik-1  Gain: 18dB · uncalibrated |

## Frequency Spectrum

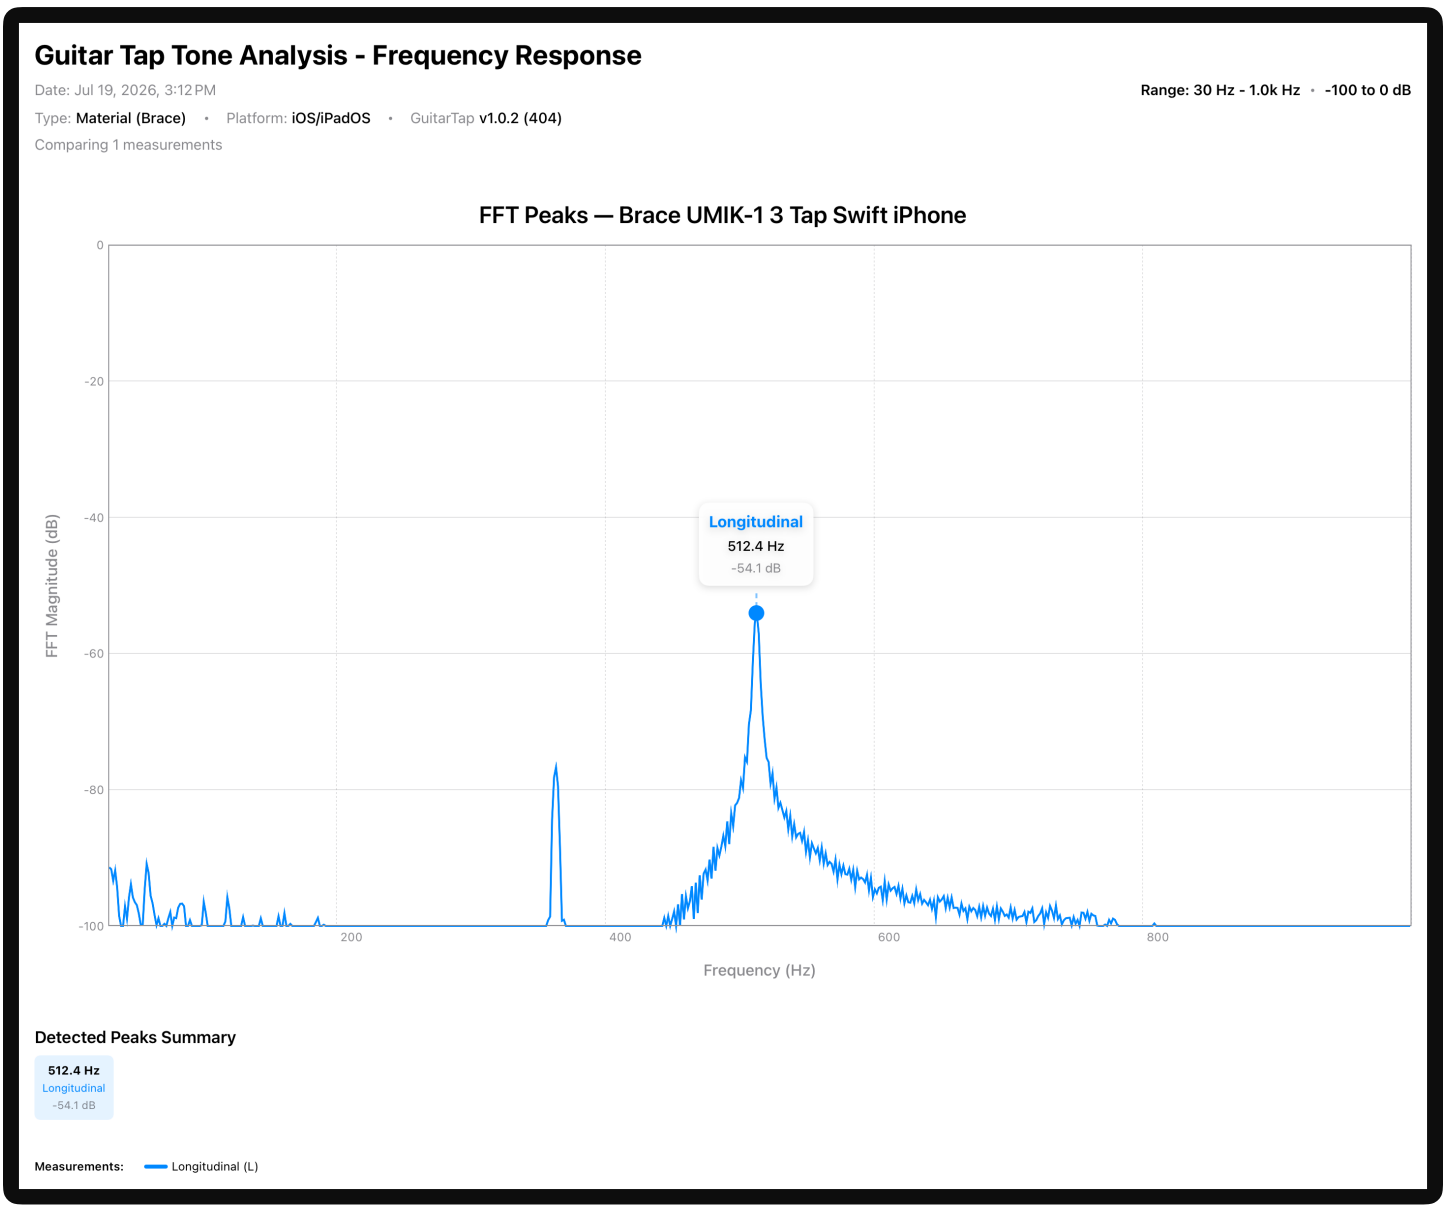


## Detected Peaks

| Frequency | Magnitude | Note | Q Factor | Role |
|---|---|---|---|---|
| 512.4 Hz | -54.1 dB | C5 | 116.7 | fL (Longitudinal) |

## Brace Properties

**Sample Dimensions**

Length: **556.0 mm** Width: **20.4 mm** Thickness: **29.35 mm**

Mass: **128.0 g** Density: **0.385 g/cm³**

fL: **512.4 Hz**

Speed of Sound: **5251 m/s** Specific Modulus: **27.6** (Excellent)

Young's Modulus (E): **10.61 GPa** Radiation Ratio: **13.6**

**Overall Quality: Excellent**

**Single-Tap Measurement (fL only):**

- **1. Longitudinal (fL) Tap**
  Hold brace at 22% from one end along the length. Tap center.

*The strongest peak is auto-selected.*