
1.MECHANICAL DIMENSION:(UNIT:mm)

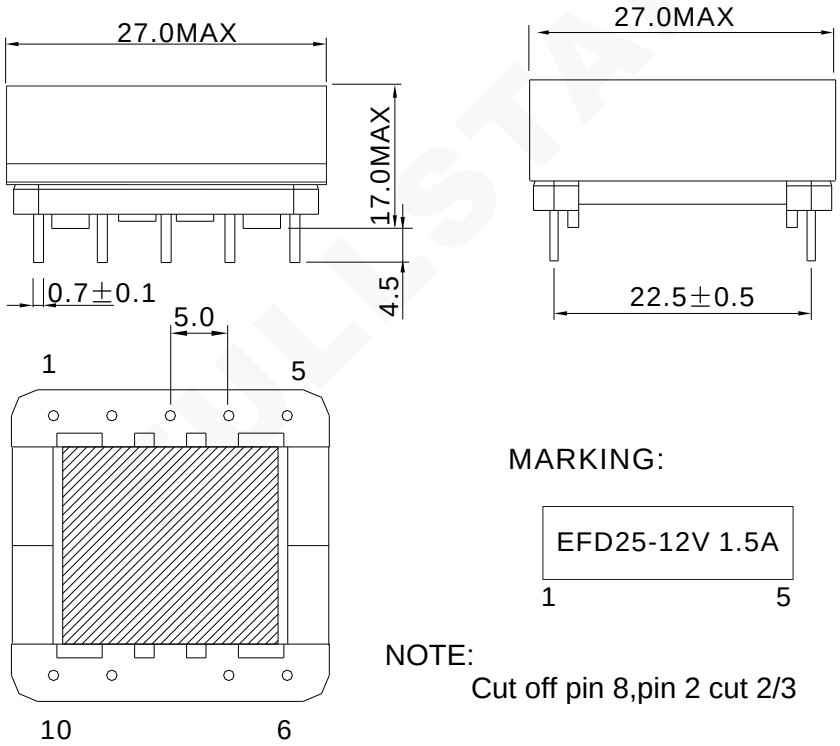

MARKING:


EFD25-12V 1.5A

1 5

NOTE:

Cut off pin 8,pin 2 cut 2/3

2.SCHEMATIC

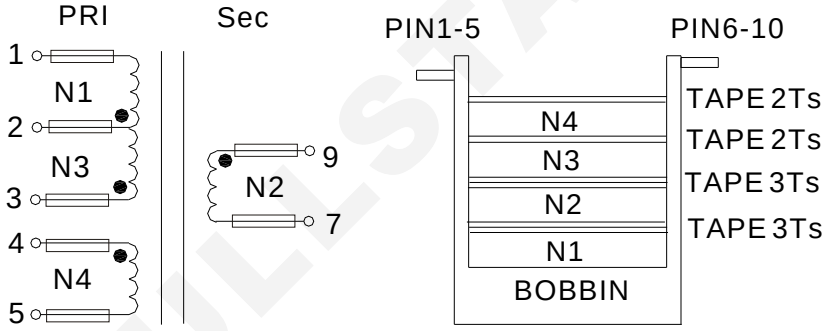

3.WINDING

WDG	TERMINAL	WIRE SIZE	TURNS	TAPE
N1	3-2	2UEW Φ0.35mm*1P	36Ts	3Ts
N2	9-7	TIW-M Φ0.50mm*2P	7Ts	3Ts
N3	2-1	2UEW Φ0.35mm*1P	36Ts	2Ts
N4	4-5	2UEW Φ0.25mm*1P	9Ts	2Ts

4.TECHNICAL PARAMETER

NO.	ITEM	MEASURED POINT	TECHNICAL DATA	TEST CONDITION & INSTRUMENT
1	Inductance	L(3-1)	1.5mH±10%	100KHz 0.1V
2	Le	Le(3-1)	14uH Max Short(4+5,7+9)	100KHz 0.1V
3	HI-POT	PRI TO SEC	AC4000V ,5mA,1MIN	epe 7112
		PPI TO CORE	AC2500V ,5mA,1MIN	

5.MATERIAL LIST

NO.	ITEM	MATERIALS	RATING	FILE NO	SUPPLIERS
1	BOBBIN	PHENOLIC T375J UL RATING:94V-0	130℃	E59481(S)	CHANGCHUN PLASTICS CO.,LTD
2	CORE	TP4A	---	---	TDG
	EFD25	Pc44	---	---	TDK OR EQ.
3	WIRE	Enamelled wire	155℃	E84081	PACIFIC ELECTRIC WIRE&CABLE CO.LTD
4	TAPE	PZ-280	130℃	E165111	JINGJIANG YAHUA PRESSURE SENSITIVE GLUE CO., LTD.
5	VARNISH	T4260A	130℃	E228349	WU JIANG TAIHU INSULATING MATERIAL CO., LTD
6	INS.WIRE	TIW-M	130℃	E356355	XINGTON CO., LTD
7	TUBE	PTFE CB-TTL	200℃	E180908	CHANGYUAN CO., LTD

NOTES:

Temp 20℃ 48%RH

RoHS Compliant

NAME	Transformer		
CUSTOMER P/N	12V/1.5A transformer	Date	2025-03-03
FULLSTAR P/N	FTEFD25-037	Rev. A1	Page 1/2
Drawn. by :MingYue Ma	Checked. by :Zhi Xin Pu	Approve. by :Jie Sun	

Drawing changes	Rev.
	Rev.

SHAANXI FULLSTAR ELECTRONICS CO.,LTD

www.xfullstartechscom Tel:86-029-86676405 Fax:86-029-86676405

TEST REPORT

ITEM	L	HI-POT	HI-POT	Le
Test Conditions	65KHz 0.1V	5mA/1MIN	5mA/1MIN	65KHz 0.1V
SPEC	L1-3	P---S	P---C	Le1-3 (Short N2,N4)
	1.0mH+/-10%	2500Vac	1000Vac	25uH MAX
1	1.03mH	OK	OK	10.3
2	1.06mH	OK	OK	11.0
3	0.986mH	OK	OK	10.5
4	0.996mH	OK	OK	11.5
5	1.04mH	OK	OK	10.2
Test Instrumemt:	L:TH2810 HI-POT: EPE7112 RDC:HM2540			

NOTES:
Temp 20℃ 48%RH
RoHS Compliant

NAME	Transformer				
CUSTOMER P/N	12V/1.5A transformer		Date	2025-03-03	
FULLSTAR P/N	FTEFD25-037		Rev. A1	Page 2/2	
Drawn. by :MingYue Ma	Checked. by :Zhi Xin Pu	Approve. by :Jie Sun			

Drawing changes		
Rev.		
Rev.		

SHAANXI FULLSTAR ELECTRONICS CO.,LTD
www.xfullstartechscom Tel:86-029-86676405 Fax:86-029-86676405

FULLSTAR