
Layer	Name	Material	Thickness	Constant	Board Layer Stack
	Top Overlay				
	Top Solder	Solder Resist	3.00mil	3.5	
1	Top Layer		10.00mil		
	Dielectric 1	FR-4	37.00mil	4.8	
2	Bottom Layer		10.00mil		
	Bottom Solder	Solder Resist	3.00mil	3.5	
	Bottom Overlay				

Note:
J1 is the header placed for FS10000A Transmitter Module and it should be mounted on PCB with an offset of atleast 3mm from the surface of PCB.



Layer	Name	Material	Thickness	Constant	Board Layer Stack
	Top Overlay				
	Top Solder	Solder Resist	3.00mil	3.5	
1	Top Layer		10.00mil		
	Dielectric 1	FR-4	37.00mil	4.8	
2	Bottom Layer		10.00mil		
	Bottom Solder	Solder Resist	3.00mil	3.5	
	Bottom Overlay				

Note:
J1 is the header placed for FS10000A Transmitter Module and it should be mounted on PCB with an offset of atleast 3mm from the surface of PCB.

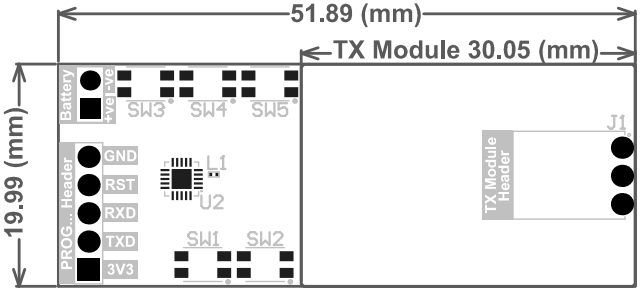