

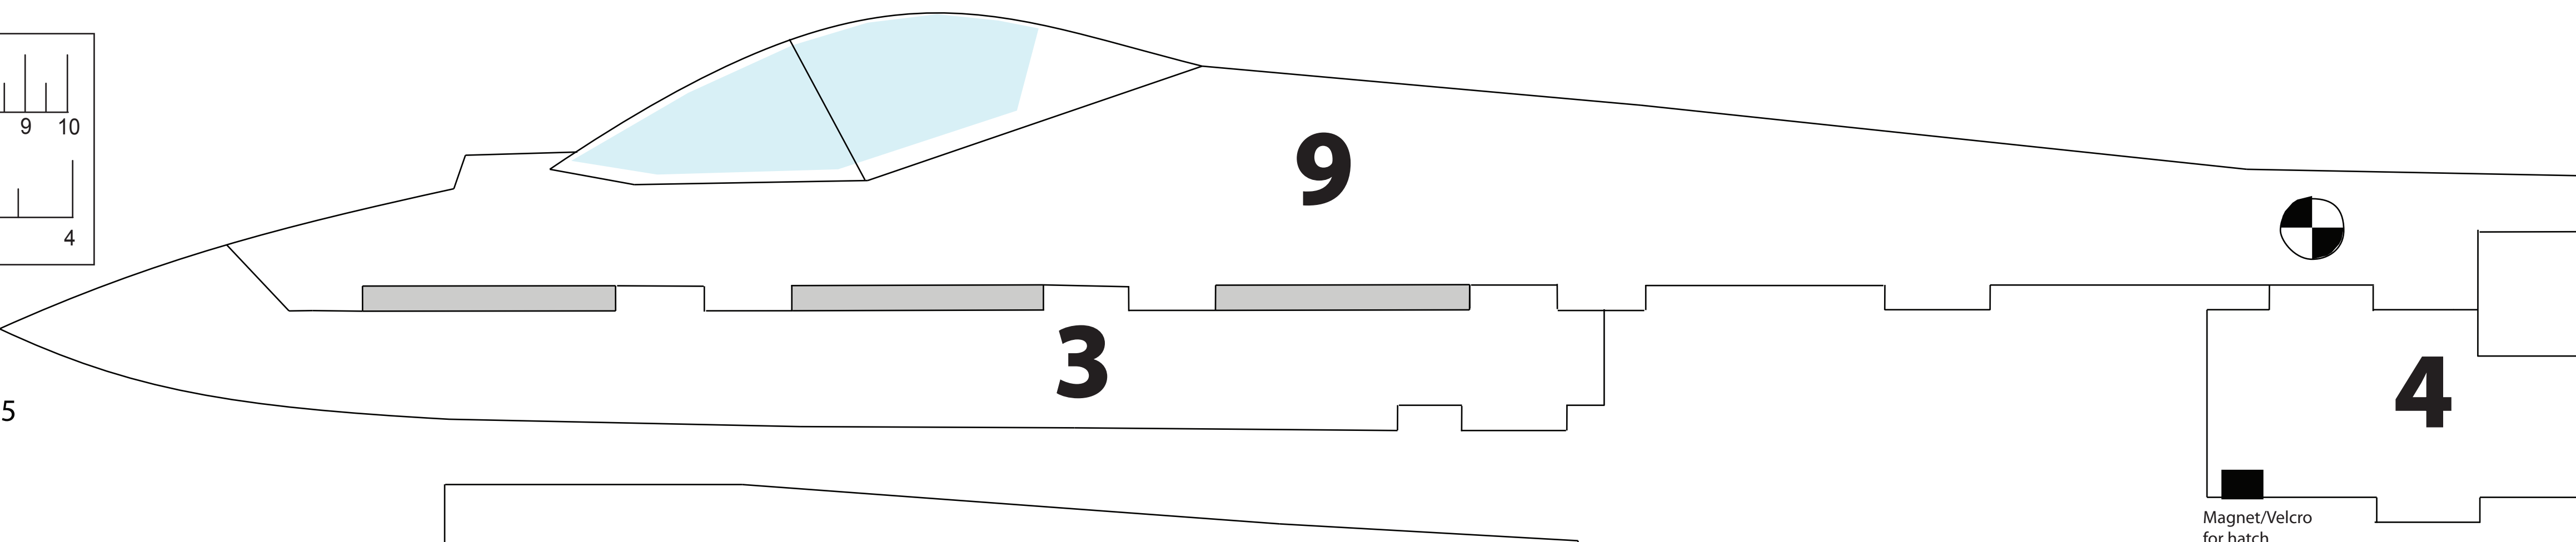


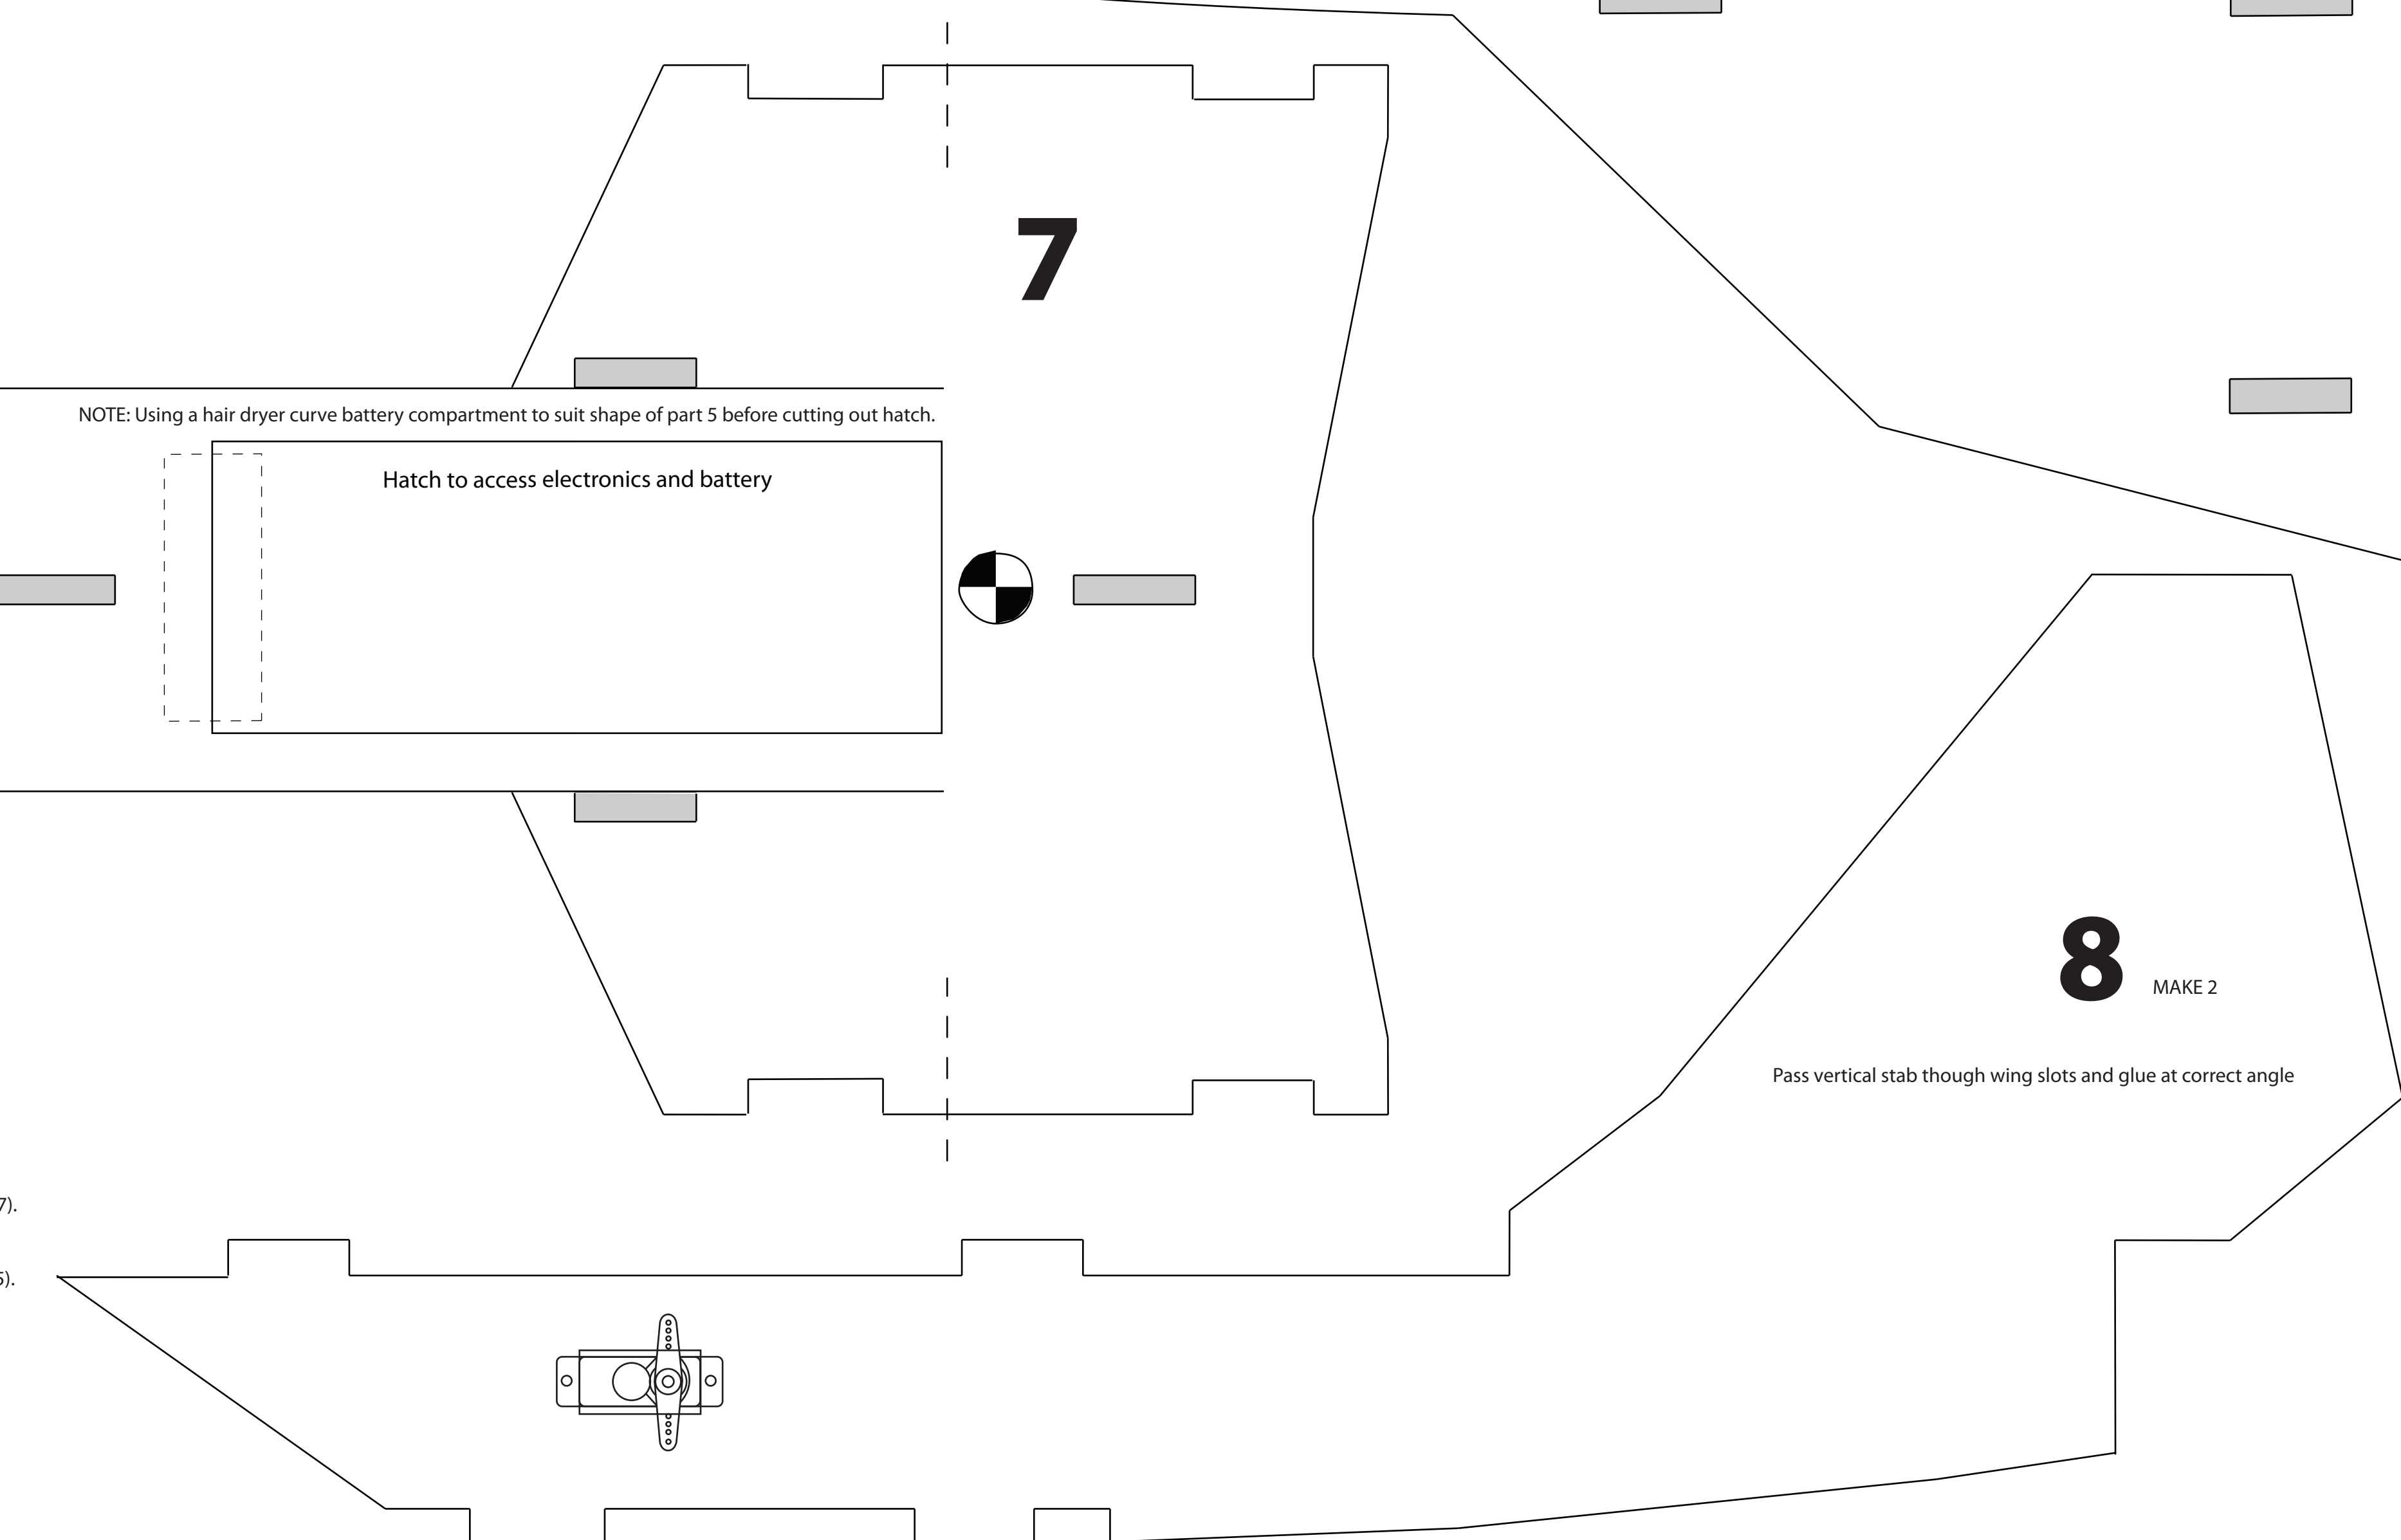

Depron = 6mm
Wing span = 72cm (~28")
Length = 100cm (~39")

Weight = 300g to 350g
Weight (with battery) = 430g to 480g
Static thrust = 650g
Prop = 6x4 (up to 8 inch possible)
Motor = 2000kv
ESC = 25A minimum
Battery = 1250 to 1500 3s Li-Po
Radio = 3CH
Elevon throw = +/- 20 degrees
Expo = 40%
COG = 6cm from wing break

Assemble plane parts in numbered order.
Some parts may be fitted at angles, so some tabs need trimming.
Bevel or curve all leading edges.
Use Hot Glue for all parts except carbon rods.
Protect lower edges with packing tape.
Connect both Ailerons and Elevons to a single pair of servos.
Mount electronics and battery using Velcro.
Balance the plane at COG mark by moving the battery position.

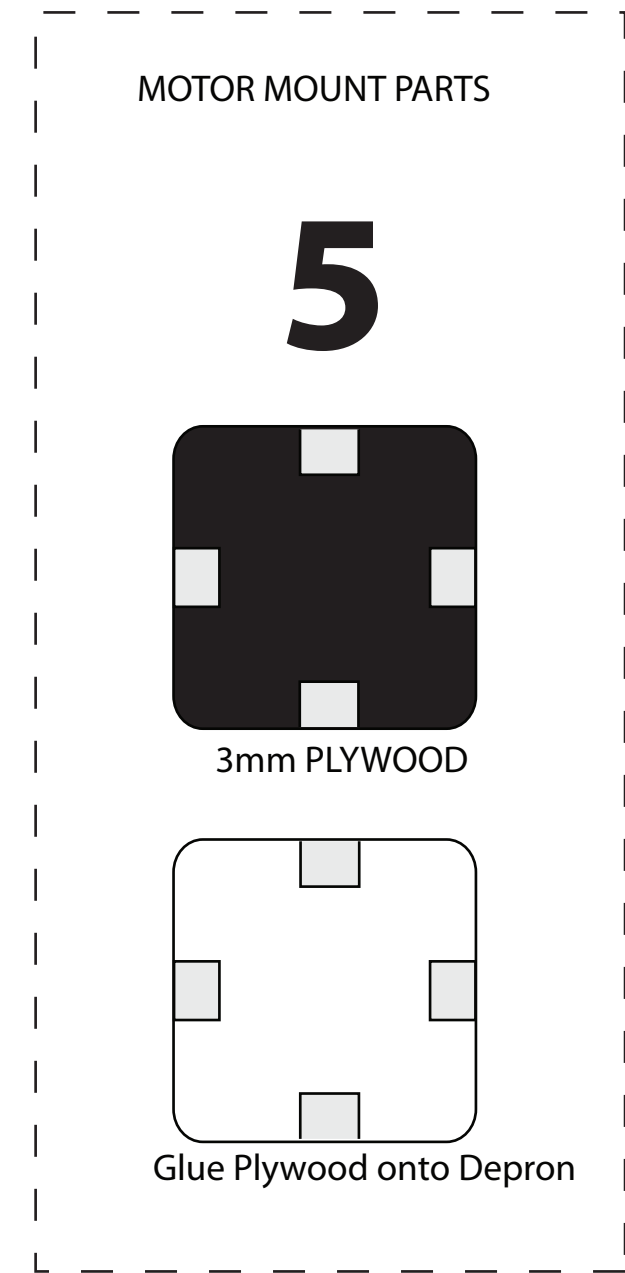

- V1.01
- Fixed tab on part 5 (now 6).
- Increased height of part 9 (now 8).
- V1.02
- Increased length of battery compartment on part 8 (now 7).
- Adjusted part 3 for better fit of part 8 (now 7).
- V1.03
- Change part numbers 4 to 4a (now 4), and 10 to 4b (now 5).
- Added note about curving battery compartment.
- Lowered part 5 (now 6) by 6mm.
- V1.04
- Renumbers parts.
- Extended part 4 to allow for magnet/velcro to hold hatch.
- Add option note regarding stop slot.
- V1.05
- Elevates trim in the centre to stop them from rubbing.
- Move motor & battery forward.

