



Forward. For all.

Attributes invalid for templates

Stephan Haas

2026-04-29



Decision Criteria

- The workgroup decided on a simple set of criteria to evaluate which attributes are eligible for a connection template and which are not. (13.05.2026 Economidis, Franke, Haas, Hirel)
 - 1. A valid attribute should be generally applicable and not refer to the individual positioning of a single occurrence of this type of connection
 - 2. A valid attribute should not be dependent on certain material data of the connected entities since these materials might vary per occurrence of this type of connection.
 - 3. A valid attribute should not depend on an invalid attribute to be applicable

Invalid Attributes


- <normal_direction/>
- Usually describes perpendicular direction to connected sheets
- Found in:
 - <spotweld/>, <robscan/>, <rivet/>, <threaded_connection/>, <gumdrop/>, <clinch/>, <heat_stake/>, <clip/>, <nail/>, <rotation_joint/>
- Decision Workgroup Meeting 29.04.2026: Not valid for connection template since it refers to individual positioning. May be it's own direction template at a later date

Invalid Attributes

- <tangential_direction/>
- Usually secondary direction perpendicular to the <normal_direction/> to define a local coordinate system for asymmetrical connections
- Found in: <spotweld/>, <robscan/>, <rivet/>, <threaded_connection/>, <gumdrop/>, <clinch/>, <heat_stake/>, <clip/>, <nail/>
- Decision Workgroup Meeting 29.04.2026: Not valid for connection template since it refers to individual positioning. May be it's own direction template at a later date


Invalid Attributes

- <mirrored/> and <orientation_angle/>
- Defines the orientation angle and if the pattern is mirrored for robscans
- Found in: <robscan/>
- Decision Workgroup Meeting 13.05.2026:
 - <orientation_angle/> depends on <tangential_direction/> so not valid for connection template
 - <mirrored/> not valid for connection template

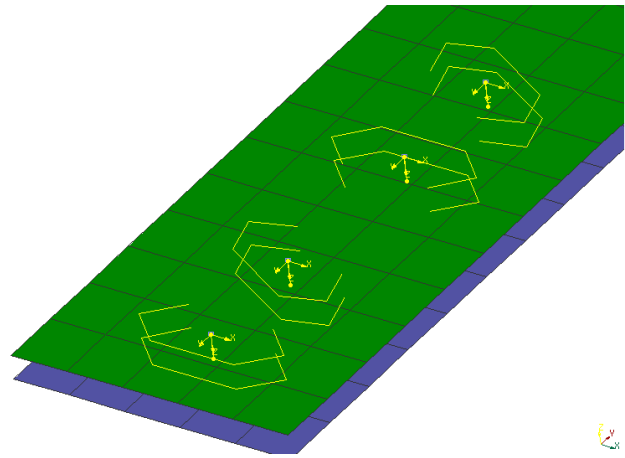

Invalid Attributes

- <press_in_force/>
- Force with which the stud is pressed into the sheet
- Found in: <clinch_rivet_stud/>
- Decision Workgroup Meeting 13.05.2026 : Depends on the material of the connected sheet
so not valid for connection template

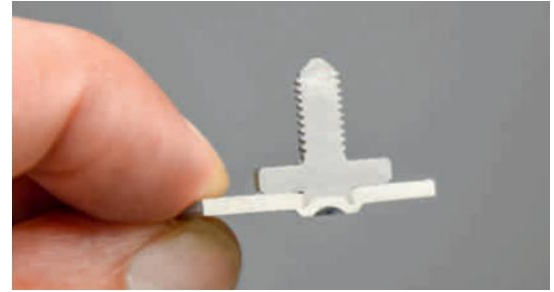


Invalid Attributes

- <static_friction/>, <kinetic_friction/>, <thread_static_friction/>, <thread_kinetic_friction/>
- Friction of the element in which it is defined to the next element in the stack. E.g. defined inside a <screw/> it is the friction between screw and washer If defined in the <washer/> it is the friction between washer and sheet.
- Found in: <threaded_connection/>, <washer/>, <nut/>
- Decision Workgroup Meeting 13.05.2026 : Depends on the material of the connected sheet so not valid for connection template

Invalid Attributes

- <rotational_speed/> and <compression_force/>
- Rotational speed and the used force for a ROTAV
- Found in: <rotav/>
- Decision Workgroup Meeting 13.05.2026 : Depends on the materials of the connected sheets so not valid for connection template

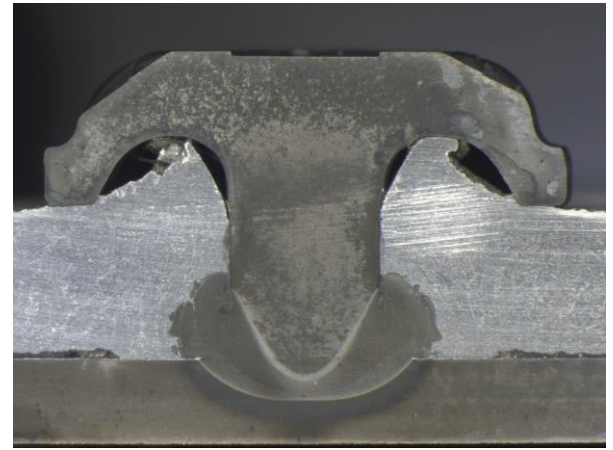

Invalid Attributes

- <stacking/>
- Order of parts in the connection. Parts may be present more than once.
- Found in: <connection_0d/>
- Decision Workgroup Meeting 29.04.2026: **Not valid for connection template since connection_0d is no longer inside the desired scope of the connection template**



Forward.
For all.