

---

# **Virtel Connectivity Guide**

***Release 4.57***

**Syspertec Communications**

**Apr 25, 2018**



## TABLE OF CONTENTS:

<b>1</b>	<b>Configuring Virtel</b>	<b>3</b>
1.1	Accessing the configuration manager . . . . .	3
1.1.1	Virtel 3270 Application . . . . .	3
1.1.2	THe Web Portal (3270) . . . . .	5
1.1.3	The Web Portal (GUI) . . . . .	6
1.2	Configurable Elements . . . . .	7
1.2.1	Unloading Configurable Elements . . . . .	9
1.2.2	Line Element . . . . .	10
1.2.3	Entry Point Element . . . . .	11
1.2.4	Transaction Element . . . . .	12
1.2.5	Terminal Elements . . . . .	13
1.2.6	Adding new configurable elements . . . . .	17
1.3	Administration . . . . .	21
1.3.1	Configuration Menu . . . . .	22
1.3.2	Sub-Application Menu . . . . .	23
1.3.3	Screen Navigation . . . . .	23
<b>2</b>	<b>Lines</b>	<b>25</b>
2.1	Introduction . . . . .	25
2.2	Line Management Sub-Applications . . . . .	25
2.2.1	Security . . . . .	25
2.2.2	Summary Display . . . . .	25
2.2.3	Detail Display . . . . .	27
2.2.4	Parameters . . . . .	27
2.3	Line Overview Sub-Application . . . . .	32
2.4	HTTP Inbound line . . . . .	33
2.4.1	Terminal Definitions . . . . .	34
2.4.2	VTAM Terminal Definitions . . . . .	37
2.4.3	CICS Definitions . . . . .	37
2.5	HTTP Outbound line . . . . .	38
2.5.1	Parameters . . . . .	39
2.6	HTTP Outbound SMTP line . . . . .	39
2.6.1	Parameters . . . . .	40
2.6.2	Terminal Definitions . . . . .	41
2.6.3	VTAM Terminal Definitions . . . . .	42
2.6.4	CICS Definitions . . . . .	42
2.7	IMS Connect line . . . . .	43
2.7.1	Parameters . . . . .	43
2.7.2	Terminals Definitions . . . . .	44
2.7.3	Entry Point . . . . .	44

2.7.4	Transactions . . . . .	45
2.7.5	Scenarios . . . . .	46
2.7.6	Message format . . . . .	47
2.8	MQ line . . . . .	48
2.8.1	Parameters . . . . .	48
2.8.2	Terminal Parameters . . . . .	49
2.9	Batch line . . . . .	51
2.9.1	Parameters . . . . .	51
2.9.2	Terminal Definitions . . . . .	52
2.10	Native TCP/IP Gateway line . . . . .	53
2.10.1	Parameters . . . . .	53
2.10.2	Line Terminals . . . . .	54
2.10.3	Terminal Parameters . . . . .	54
2.10.4	Relay Pool . . . . .	55
2.10.5	VTAM terminals definitions . . . . .	55
2.10.6	CICS Definitions . . . . .	55
2.10.7	Message format . . . . .	56
2.11	VIRPASS TCP line (VIRKIX) . . . . .	57
2.11.1	Parameters . . . . .	57
2.11.2	Terminal Definitions . . . . .	58
2.12	VIRPASS TCP line (VIRNT) . . . . .	59
2.12.1	Parameters . . . . .	59
2.12.2	Terminal Definitions . . . . .	60
2.13	VIRPASS XM line (VIRKIX) . . . . .	62
2.13.1	Parameters . . . . .	62
2.13.2	Terminal Definitions . . . . .	63
2.14	X25 XOT line . . . . .	65
2.14.1	Parameters . . . . .	65
2.14.2	Terminal Definitions . . . . .	66
2.14.3	VTAM Terminal Definition . . . . .	67
2.15	X25 VIRPESIT line . . . . .	68
2.15.1	Parameters . . . . .	68
2.15.2	Terminal Definitions . . . . .	69
2.16	X25 VIRNEOX line . . . . .	70
2.16.1	Parameters . . . . .	70
2.16.2	Terminal Definitions . . . . .	71
2.17	X25 GATE Non Fast-Connect (NFC) line . . . . .	72
2.17.1	Parameters . . . . .	72
2.17.2	Terminal Definitions . . . . .	73
2.17.3	VTAM Terminal Definitions . . . . .	73
2.17.4	NCP Parameters . . . . .	74
2.17.5	NPSI Parameters . . . . .	74
2.17.6	Routing on incoming calls . . . . .	75
2.18	X25 GATE Fast-Connect (FastC) line . . . . .	77
2.18.1	Parameters . . . . .	77
2.18.2	Terminal Definitions . . . . .	78
2.18.3	VTAM Terminal Definitions . . . . .	78
2.18.4	NCP/NPSI Definitions . . . . .	79
2.18.5	Sharing of FastC lines . . . . .	79
2.19	X25 AntiGATE line . . . . .	81
2.19.1	Parameters . . . . .	81
2.19.2	Terminal Definitions . . . . .	82
2.19.3	VTAM Terminal Definitions . . . . .	82
2.20	X25 Anti Fast Connect (FastC) line . . . . .	84

2.20.1	Parameters . . . . .	84
2.20.2	Terminal Definitions . . . . .	85
2.20.3	VTAM Terminal Definitions . . . . .	85
2.21	X25 AntiPCNE line . . . . .	86
2.21.1	Parameters . . . . .	86
2.21.2	Terminal Definitions . . . . .	87
2.21.3	VTAM Terminal Definitions . . . . .	91
2.21.4	Add or changing AntiPCNE LU names . . . . .	91
2.21.5	Support of X25 non GATE terminals . . . . .	92
2.21.6	VTAM definitions for X25 non GATE terminals . . . . .	92
2.21.7	NCP/NPSI parameters for X25 non GATE terminals . . . . .	93
<b>3</b>	<b>Virtel Rules</b>	<b>95</b>
3.1	Introduction . . . . .	95
3.1.1	Summary Display . . . . .	95
3.1.2	Detail Display . . . . .	96
3.1.3	Parameters . . . . .	97
<b>4</b>	<b>Terminals</b>	<b>101</b>
4.1	Introduction . . . . .	101
4.1.1	Terminal Management Sub-Application . . . . .	101
4.1.2	Security . . . . .	101
4.1.3	Summary Display . . . . .	101
4.1.4	Detail Display . . . . .	103
4.1.5	Parameters . . . . .	103
<b>5</b>	<b>Entry Points</b>	<b>107</b>
5.1	Introduction . . . . .	107
5.1.1	Entry Point Management Sub-Application . . . . .	107
5.1.2	Security . . . . .	107
5.1.3	Selecting an Entry Point . . . . .	107
5.1.4	Summary Display . . . . .	108
5.1.5	Transaction Display . . . . .	109
5.1.6	Detail Display . . . . .	110
5.1.7	Parameters . . . . .	110
5.1.8	Signon Programs . . . . .	112
5.1.9	Menu Programs . . . . .	112
<b>6</b>	<b>Transactions</b>	<b>115</b>
6.1	Introduction . . . . .	115
6.1.1	Summary Display . . . . .	115
6.1.2	Detail Display . . . . .	116
6.1.3	Parameters . . . . .	117
<b>7</b>	<b>Connection / Disconnection Scripts</b>	<b>123</b>
7.1	Script Programming Language . . . . .	123
7.1.1	Transmission and filter commands . . . . .	123
7.1.2	System variables . . . . .	124
7.1.3	Orders . . . . .	124
7.1.4	Method of operation . . . . .	125
7.2	Script Examples . . . . .	126
7.2.1	Connect to CICS (no sign-on) with automatic start of a transaction . . . . .	126
7.2.2	Connect to CICS and start transaction CESN with transmission of credentials . . . . .	127
7.2.3	Connect to CICS VSE with ICCF sign-on and start transaction CEMT . . . . .	127
7.2.4	Connect to TSO with USER and PASSWORD and await start of ISPF . . . . .	128

7.2.5	Connect to CICS and navigate a user application . . . . .	128
7.2.6	Service Transaction . . . . .	128
<b>8</b>	<b>External Servers</b>	<b>131</b>
8.1	Introduction . . . . .	131
8.1.1	External Server Management Sub-Application . . . . .	131
8.1.2	Security . . . . .	131
8.1.3	Summary Display . . . . .	131
8.1.4	Detail Display . . . . .	133
8.1.5	Parameters . . . . .	133
<b>9</b>	<b>Connection Modes</b>	<b>137</b>
9.1	WELCOME mode . . . . .	137
9.2	RELAY mode . . . . .	137
9.3	Terminal Connection Types . . . . .	137
9.3.1	Explicit fixed entries . . . . .	138
9.3.2	Physical Terminal Pools . . . . .	139
9.3.3	Dynamic Terminal Pools . . . . .	139
9.3.4	Non-Dynamic Terminal Pools . . . . .	140
9.3.5	Terminal Pool Definition Examples . . . . .	140
9.3.6	Terminal Pool Selection . . . . .	141
9.4	Terminal Connection Examples . . . . .	143
9.4.1	3270 terminal in WELCOME mode . . . . .	143
9.4.2	3270 terminal in RELAY mode . . . . .	143
9.4.3	Asynchronous terminal on an X25 or XOT line . . . . .	144
9.4.4	Logical terminals . . . . .	144
<b>10</b>	<b>Controlling LUNAMES</b>	<b>147</b>
10.1	Introduction . . . . .	147
10.2	LU Nailing By URL . . . . .	147
10.2.1	UserData example using a work station name . . . . .	148
10.2.2	UserData example using a LU Name . . . . .	150
10.2.3	ForceLUNAME Example . . . . .	151
10.3	LU Nailing by cookie . . . . .	154
10.4	LU Nailing by IP address . . . . .	155
10.5	Comparison Table . . . . .	157
<b>11</b>	<b>AT-TLS Secure Session</b>	<b>159</b>
11.1	Introduction . . . . .	159
11.2	Installation . . . . .	159
11.2.1	Install Policy Agent procedure . . . . .	159
11.2.2	Create the Policy Agent configuration file . . . . .	159
11.2.3	Allow the Policy Agent to run during TCP/IP initialization . . . . .	160
11.2.4	Create the server certificate . . . . .	160
11.2.5	Add the certificate to the keyring . . . . .	160
11.2.6	Allow VIRTEL to access its own certificate . . . . .	160
11.2.7	Activate AT-TLS . . . . .	160
11.3	Operations . . . . .	161
11.3.1	Starting the Policy Agent . . . . .	161
11.3.2	Altering the Policy Agent configuration . . . . .	161
11.3.3	Logon to VIRTEL using secure session . . . . .	161
11.4	Problem determination . . . . .	162
11.4.1	Policy Agent log file . . . . .	162
11.4.2	Common error messages . . . . .	162
11.4.3	Verifying AT-TLS is active . . . . .	163

11.5	The Cipher suites . . . . .	164
11.6	Client certificates . . . . .	164
11.7	Resources . . . . .	165
11.7.1	IBM Manuals . . . . .	165
11.7.2	Virtel Material . . . . .	165
<b>12</b>	<b>SSO, PassTickets and Proxy Servers</b>	<b>167</b>
12.1	Introduction . . . . .	167
12.2	Adding headers to the HTTP request . . . . .	169
12.3	RACF Passtickets . . . . .	171
12.3.1	Define Pass Ticket RACF profiles . . . . .	171
12.3.2	RACF Profiles related to Virtel and Pass Tickets . . . . .	172
12.4	Virtel Requirements . . . . .	175
12.4.1	Transaction requirements . . . . .	175
12.4.2	Identification Scenario . . . . .	176
12.4.3	TCT Considerations . . . . .	177
12.4.4	Line Rules . . . . .	178
12.5	Common Errors . . . . .	181
12.6	Related material . . . . .	182
<b>13</b>	<b>Running multiple instances of Virtel</b>	<b>183</b>
13.1	Introduction . . . . .	183
13.1.1	VIRTEL TCT Settings . . . . .	184
13.1.2	SYSPLEX definitions . . . . .	184
13.1.3	Workload balancing in a SYSPLEX environment . . . . .	186
13.1.4	Sharing the ARBO and other VSAM files . . . . .	187
13.1.5	READ ONLY Restrictions . . . . .	187
13.1.6	Virtel naming conventions . . . . .	188
13.1.7	TCT definition . . . . .	188
13.2	Using a Distributed VIPA to load balance . . . . .	191
13.2.1	Session Affinity . . . . .	191
13.3	Using an Apache Proxy to load balance . . . . .	192
<b>14</b>	<b>Protecting business assets with Virtel Rules</b>	<b>195</b>
14.1	Introduction . . . . .	195
14.2	Virtel Setup . . . . .	197
14.2.1	Virtel Rules . . . . .	197
14.2.2	Default Rule Template . . . . .	198
<b>15</b>	<b>Appendix</b>	<b>201</b>
15.1	Trademarks . . . . .	201





## VIRTEL Connectivity Reference

**Warning:** This book is currently under construction. This is a draft version!

Version : 4.57

Release Date : 01 Jul 2017 Publication Date : 01/07/2017

Syspertec Communication

196, Bureaux de la Colline 92213 Saint-Cloud Cedex Tél. : +33 (0) 1 46 02 60 42

[www.syspertec.com](http://www.syspertec.com)

---

**Note:** Reproduction, transfer, distribution, or storage, in any form, of all or any part of the contents of this document, except by prior authorization of SysperTec Communication, is prohibited.

Every possible effort has been made by SysperTec Communication to ensure that this document is complete and relevant. In no case can SysperTec Communication be held responsible for any damages, direct or indirect, caused by errors or omissions in this document.

As SysperTec Communication uses a continuous development methodology; the information contained in this document may be subject to change without notice. Nothing in this document should be construed in any manner as conferring a right to use, in whole or in part, the products or trademarks quoted herein.

“SysperTec Communication” and “VIRTEL” are registered trademarks. Names of other products and companies mentioned in this document may be trademarks or registered trademarks of their respective owners.

---



## CONFIGURING VIRTEL

### 1.1 Accessing the configuration manager


The configuration manager can be access in one of three ways.

#### 1.1.1 Virtel 3270 Application

1. By logging onto the Virtel application as defined by the APPLNAME in the TCT or at start up in the Virtel JCL parameters.

```
LOGON APPLID=VIRTEL
```

The following main menu will appear:-

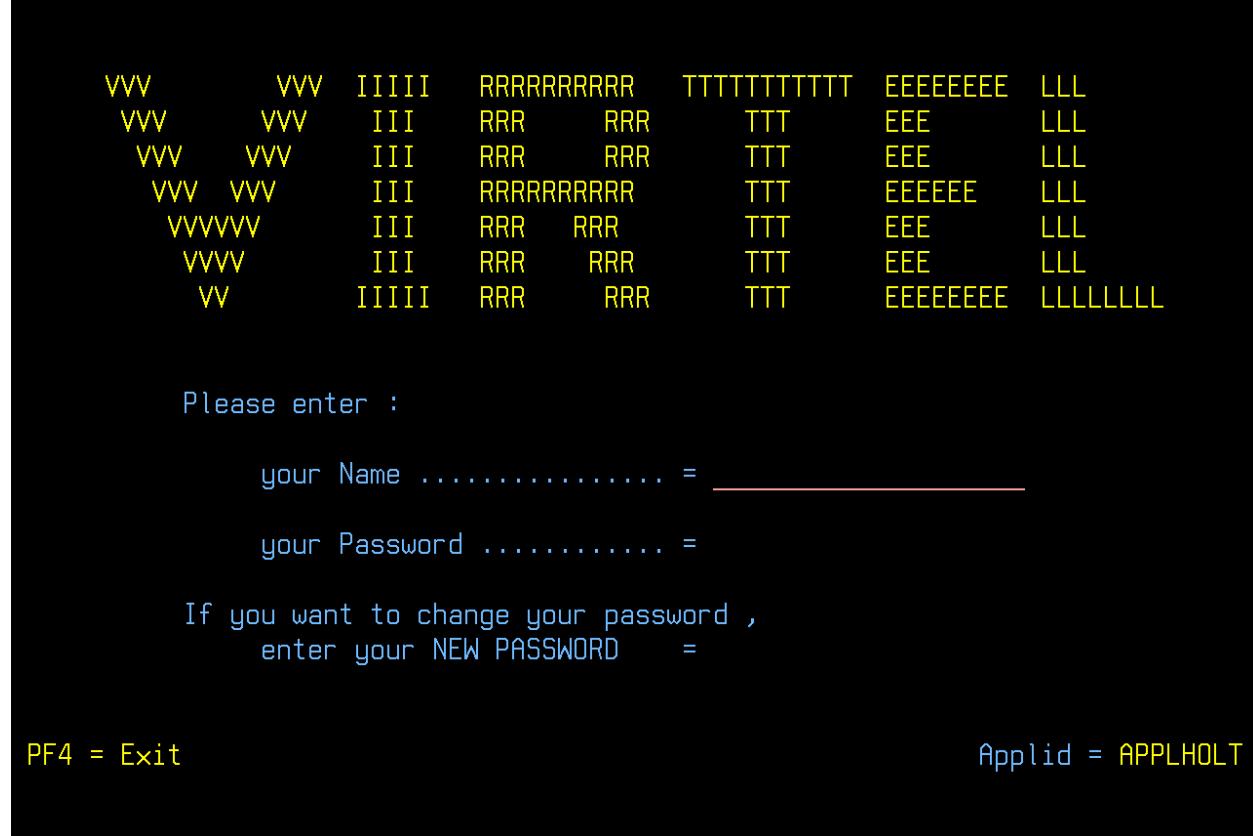

Enter your security credentials and the primary menu will appear.

```
PC          S Y S P E R T E C   C O M M U N I C A T I O N      15:51:24
SPTHOLT    V I R T E L           SC0TCP26

F1 Admin     Sub-application management
F2 Lines     Line management
F3 Entry     Entry point management
F4 Servers   External server management
F5 Status    CVC status display
F6 Logoff    Disconnect from Virtel

ENTER = Next session      PA1 = Sign on      PA2 = Sub-menu
P24 = Return to this menu from a session  VIRTEL 4.57 Applid = APPLHOLT
===>
```

Enter F1 to enter the configuration menu of the configuration manager.

```
Configuration Menu ----- Applid: APPLHOLT 15:52:38

F1 Lines
F2 Terminals
F3 Entry Points
F4 Security
F5 Correspondents
F6 Directories
F7 External servers
F8 Lines Overview
F9 Lines Status

PA2 More sub-applications
CLEAR Return
```

### 1.1.2 THe Web Portal (3270)

2. By accessing Virtel through the administration port 41001.

```
http://192.168.170.33:41001/
```

The following page will be displayed:-

Click the Admin (3270) link and the configuration menu will appear.

F1	Lines
F2	Terminals
F3	Entry Points
F4	Security
F5	Correspondents
F6	Directories
F7	External servers
F8	Lines Overview
F9	Lines Status
PA2	More sub-applications
CLEAR	Return

### **1.1.3 The Web Portal (GUI)**


3. Accessing Virtel as in the Web Portal (3270) but instead of clicking Admin (3270) click Admin (GUI). You will be presented with a GUI view of the 3270 configuration screens.



## 1.2 Configurable Elements

The VIRTEL configuration is stored in a VSAM file called the “ARBO file” (VIRARBO). The ARBO file contains various types of elements, which are described in this chapter:

- Lines, which represent connections between VIRTEL and other network entities
- Rules, which are applied to incoming calls in order to establish the appropriate entry point for the call
- Terminals, which represent the virtual circuits through which calls flow between VIRTEL and its partners
- Entry points, which define how the call is processed by VIRTEL and contain a list of transactions available to the incoming call
- Transactions, which define VTAM applications or external servers which process incoming calls
- External servers, which define the connection parameters used by VIRTEL to connect outgoing calls to other network entities

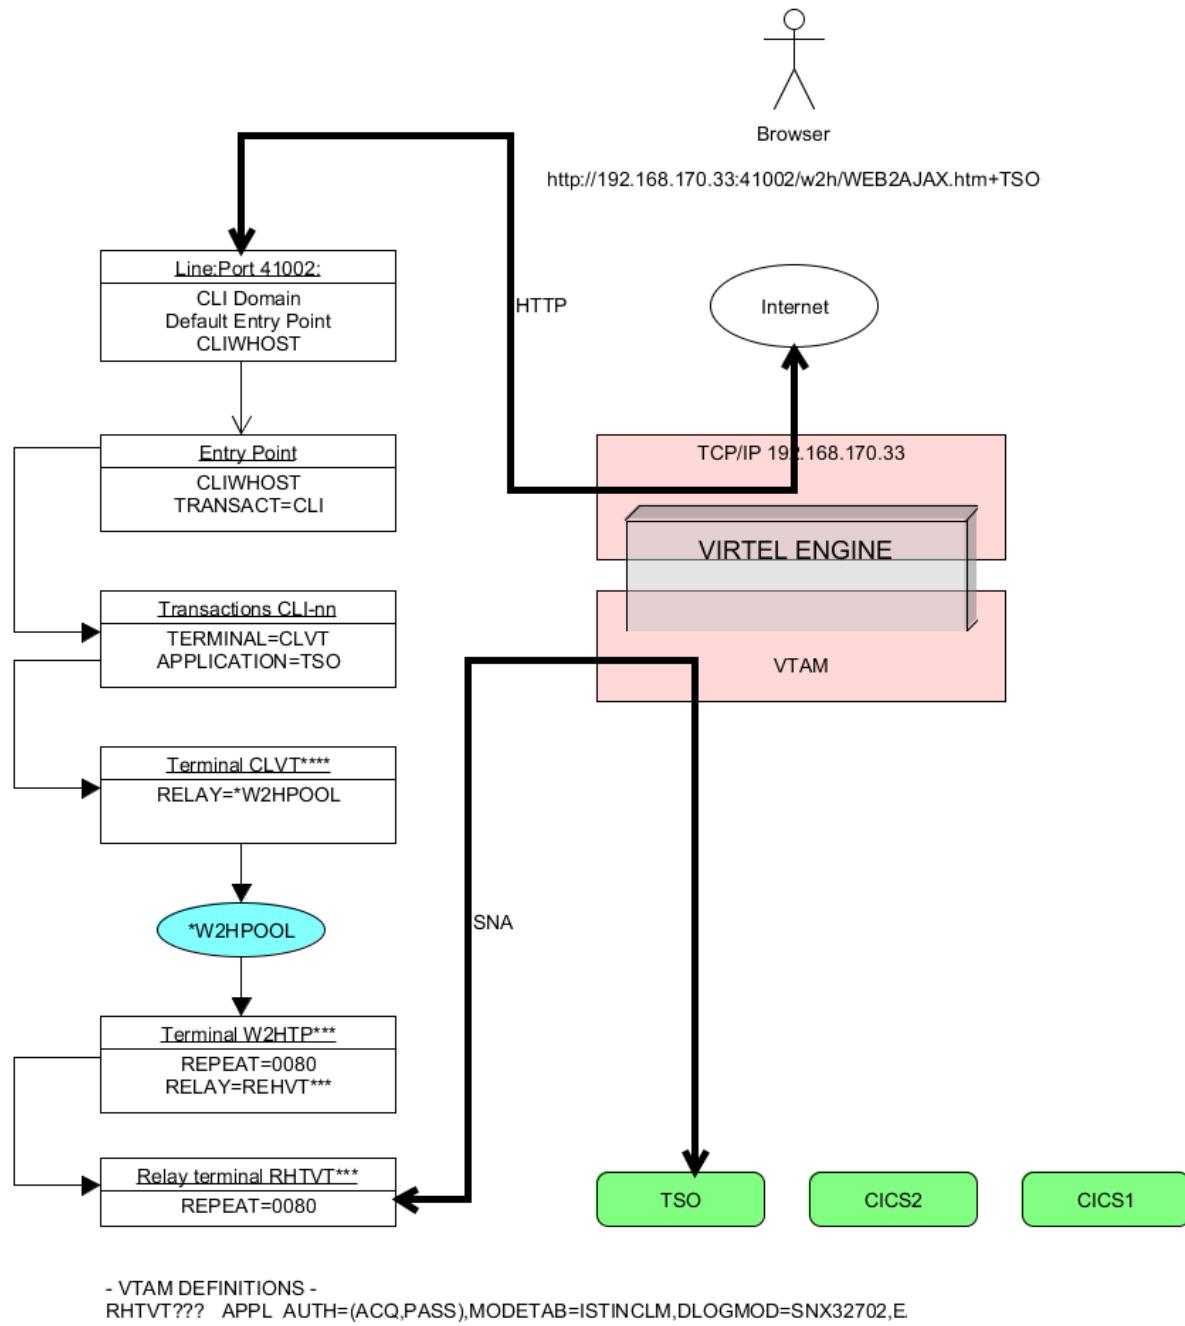

#### Configurable elements of Virtel

The diagram above describes the data flow between a TSO user accessing TSO on the mainframe. To support this session various Virtel configurable elements, which are maintained in the ARBO file, are used. The Virtel line definition represents an open port in TCP/IP which is the target of the browser's URL. The Virtel line is associated with a Virtel Entry point which in turn is associated with a list of Virtel transactions. One of these transactions is a VTAM application definition representing TSO. The incoming URL determines the transaction to associate with this session call. In this example the transaction TSO has been identified in the URL string as a HTTP parameter. When the Virtel engine processes the incoming call it will establish a SNA session with the TSO VTAM application. From the TSO VTAM application perspective it will be as

if a user had connected using a standard LU2 type terminal (3270). Virtel will convert datastreams between 3270 and HTML in support of the underlying session between the browser and TSO. This conversion process will use several Virtel terminal definitions; 1 or more to represent the browser and another to represent the VTAM interface with TSO. By convention “LOC” terminals reflect units of work in supporting the browser and “VTA” terminals represent the interface to the VTAM applications. Virtel terminal definitions are associated with a Virtel line.

### 1.2.1 Unloading Configurable Elements

The Virtel program VIRCONF can be used to LOAD or UNLOAD the ARBO VSAM file which contains the configurable elements. The default statements that are used to build the initial ARBO VSAM file are contained in the CNTL library as member ARBOLOAD. This member contains every statement that could potentially be used when defining the Virtel ARBO VSAM file, including optional statements which may not be applicable. To unload the default ARBO VSAM file run the following JCL:-

```
//VIRARBOU JOB 1,ARBOUNLD,CLASS=A,MSGCLASS=X,NOTIFY=&SYSUID
//*
//** THIS JOB UNLOADS AN ARBO FILE
//*
// SET LOAD=yourqual.VIRTnnn.LOADLIB
// SET ARBO=yourqual.VIRTnnn.ARBO
//*
//UNLOAD EXEC PGM=VIRCONF,PARM=UNLOAD
//STEPLIB DD DSN=&LOAD,DISP=SHR
//SYSPRINT DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//VIRARBO DD DSN=&ARBO,DISP=SHR,AMP='RMODE31=NONE'
//SYSPUNCH DD DSN=&SYSUID..VIRCONF.SYSIN,DISP=(,CATLG),
//           UNIT=SYSDA,VOL=SER=??????,SPACE=(TRK,(5,1)),
//           DCB=(RECFM=FB,LRECL=80,BLKSIZE=6080)
```

#### *The ARBO UNLOAD Job*

The output file contains all the default definitions that make up the configurable Virtel elements. These definitions can be used as a template for building new configurable elements such as lines, entry points, transactions, etc. See the VIRCONF utility section in the **Virtel Installation Guide** for further information on the VIRCONF utility and maintaining the VSAM ARBO file.

## 1.2.2 Line Element

The Line element is the main control element in the definition hierarchy. When Virtel receives a call in from a user, via their browser, it is targeted towards a particular port which is associated with a Line element. The Line element points to the default entry point and also identifies the listening port. By default, Virtel delivers two HTTP line elements in its default configuration. Line W-HTTP associated with port 41001 and Line C-HTTP associated with port 41002. Line W-HTTP(41001) is usually associated with administration functions and should be secured for administration use only. Line C-HTTP(41002) is an example of a line for client applications. It is not advisable to use 41001 as your client port. Use 41002 or set-up another line using 41002 as a template, for example 41003.

```

LINE DETAIL DEFINITION ----- Applid: APPLHOLT 10:51:51

Internal name ===> C-HTTP           1st character is line code
External name ===> HTTP-CLI          External entity name
Remote ident ===>                   Remote VTAM LU or TCP/IP address
Local ident ===> :41002              Local VTAM LU or TCP/IP address
Description ===> HTTP line (entry point CLIHOST)
Prefix ===> CL                      Prefix for terminals
Pool ===>                         Pool for terminals
Entry Point ===> CLIHOST            Default Entry Point on this line
Rule Set ===> C-HTTP                Rules to choose an entry point
Line type ===> TCP1                 eg: TCP1 MQ1 XM1 BATCH1 APPC2 ...
Possible calls      ===> 1          0=None 1=Inbound 2=Outbound 3=I & O
Startup prerequisite ===>
Protocol program   ===> VIRHTTP   Dialog manager
Security program   ===>           Non standard security
Time out    ===> 0000             Action ===> 0     Action if t/o: 0=none 1=keepalive
Window      ===> 0000             Packet ===> 0000  eventual protocol parameters
Pad          ===>                 Tran    ===>       PAD=INTEG/TRANSP/NO, TRAN=EVEN/ODD/NO
Retries      ===> 0010             Delay   ===>       Retries for linked to terminals

P1=Update          P3=Return          P4=Terminals
Enter=Add          P5=Rules

```

3,21

### Line Detail Definition

It is also defined in the Arbo Configuration statements:-

```

LINE ID=C-HTTP,
NAME=HTTP-CLI,
LOCADDR=:41002,
DESC='HTTP line (entry point CLIHOST)',
TERMINAL=CL,
ENTRY=CLIHOST,
TYPE=TCP1,
INOUT=1,
PROTOCOL=VIRHTTP,
TIMEOUT=0000,
ACTION=0,
WINSZ=0000,
PKTSZ=0000,
RETRY=0010

```

The same information is reflected in both. The ARBO definitions are used to build the ARBO VSAM file which the Virtel Sub Applications access to display, modify and delete configuration elements. Another key item in the line definition is the TERMINAL prefix. This prefix is used to associate a line with the terminal definitions. In the example above the prefix of CL means that this line will only use terminal beginning

“CL”.

### 1.2.3 Entry Point Element

The Entry point element is associated with a group of transactions. Transactions are the interface to external components like VTAM applications (CICS, TSO, IMS etc.) or external servers. Transactions are also used to define internal Virtel tasks and configuration elements like directory entries, upload programs, menu programs, signon programs. A line can be associated with any entry point defined within the configuration. Every line must have a default entry point. Virtel Rule definitions can be used to assign a different Entry point to a call in request based upon a range of criteria - incoming IP Address, Work Station Name, Userid etc.

```

ENTRY POINT DETAIL DEFINITION ----- Applid: APPLHOLT 11:48:41
Name      ==> CLIWHOST          Name this ENTRY POINT (LOGON DATA)
Description ==> HTTP entry point (CLIENT application)
Transactions ==> CLI           Prefix for associated transactions
Last page   ===>
Transparency ===>
Time out    ===> 0720      minutes   Displayed at end of session
Do if timeout ===> 0           Server types NOT to emulate
Emulation    ===> HTML         Maximum inactive time
HOST4WEB     : program driven  0=logoff  1=bip+logoff  2=anti pad
SCENARIO     : script driven  Type of terminal:
              If scenarios in VSAM, not LOADLIB
Directory for scenarios ===> If scenarios in VSAM, not LOADLIB
Signon program ==> VIR0020H   Controls user name and password
Menu program   ==> VIR0021A   List of transactions
Identification scenario ==> SCENLOGM eg XML identification
Type 3 compression ===>
Mandatory identification ===> Discover typical screens (Virtel/PC)
3270 swap key    ===>        (PC or minitel)
Extended colors   ===> E      eg P24
                           E: extended X: extended + DBCS

P1=Update          P3=Return          P4=Transactions
Enter=Add

```

3,21

#### *Entry Point Definition*

It can also be defined with the Arbo Configuration statements:-

```

ENTRY ID=CLIHOST,
DESC='HTTP entry point (CLIENT application)',
TRANSACT=CLI,
TIMEOUT=0720,
ACTION=0,
EMUL=HTML,
SIGNON=VIR0020H,
MENU=VIR0021A,
IDENT=SCENLOGM,
EXTCOLOR=E

```

The salient point in the Entry Point element is the TRANSACT prefix. This associates transactions with a particular Entry point. In the sample above transactions that begin with CLI will be associated with entry point CLIHOST which is the default entry point for line C-HTTP(41002). An example of using an Entry point is that you might want to associate production users with line 41004 and other users with line 41005. In this example you would define two new lines, set default entry points PRODHOST and USERHOST. In those entry point definitions the prefix for production transactions would PRD and for user transactions


USR.

### 1.2.4 Transaction Element

Transactions define the programs that Virtel will run in order to support a session requirement. Transactions are normally identified within the incoming URL. For example the following URL requests that Virtel starts a Virtel transaction called CICS:-

```
http://192.168.170.33:41002/w2h/WEB2AJAX.htm+Cics
```

When the Virtel Engine receives this call-in it directs to line C-HTTP(41002) and established a session with the user's browser. Session initiation begins with the downloading of various Virtel web elements such as templates, JavaScript and CSS pages. The line will invoke a transaction called CICS which will be associated with the entry point defined for this call-in. This normally would be a transaction associated with the default entry point CLIHOST. However, Virtel Rules may well associate a different entry point depending on call-in criteria. The transaction CICS is an external name, the Virtel Internal name for this transaction is CLI-10. It is the internal name that is related to the transaction prefix defined in the Entry Point.

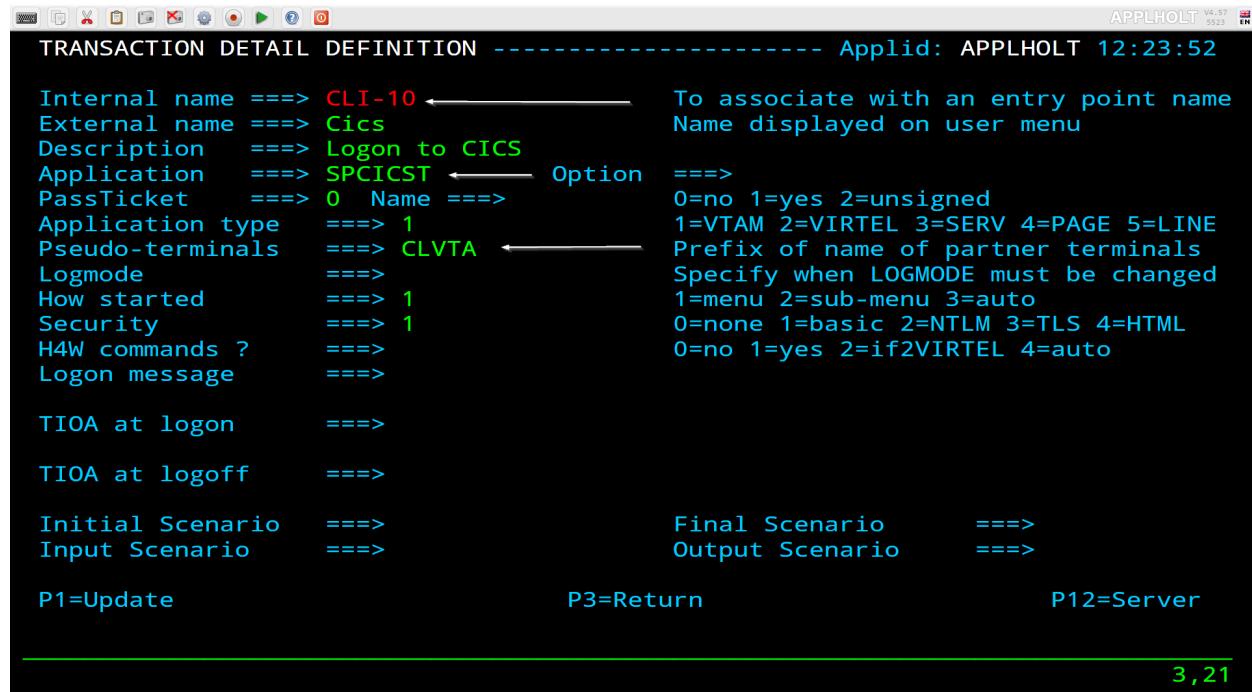

The screenshot shows the 'TRANSACTION DETAIL DEFINITION' screen for transaction 'CLI-10'. The screen includes fields for Internal name (CLI-10), External name (Cics), Description (Logon to CICS), Application (SPCICST), PassTicket (0), Application type (1), Pseudo-terminals (CLVTA), Logmode (empty), How started (1), Security (1), H4W commands (empty), Logon message (empty), TIOA at logon (empty), TIOA at logoff (empty), Initial Scenario (empty), Input Scenario (empty), Final Scenario (empty), Output Scenario (empty), and a footer with P1=Update, P3=Return, and P12=Server. The status bar at the bottom right shows 'APPLHOLT V4.57 5.5.2.1' and the time '12:23:52'.

TRANSACTION DETAIL DEFINITION -----		Applid: APPLHOLT 12:23:52	
Internal name ===>	CLI-10	To associate with an entry point name Name displayed on user menu	
External name ===>	Cics		
Description ===>	Logon to CICS		
Application ===>	SPCICST	Option ===> 0=no 1=yes 2=unsigned 1=VTAM 2=VIRTEL 3=SERV 4=PAGE 5=LINE	
PassTicket ===>	0	Name ===>	
Application type ===>	1	Pseudo-terminals ===> CLVTA	Prefix of name of partner terminals Specify when LOGMODE must be changed
Pseudo-terminals ===>		Logmode	1=menu 2=sub-menu 3=auto
Logmode		How started	0=none 1=basic 2=NTLM 3=TLS 4=HTML
How started		Security	0=no 1=yes 2;if2VIRTEL 4=auto
Security		H4W commands ?	
H4W commands ?		Logon message	
Logon message		TIOA at logon	
TIOA at logon		TIOA at logoff	
TIOA at logoff		Initial Scenario	Final Scenario
Initial Scenario		Input Scenario	Output Scenario
P1=Update		P3=Return	
		P12=Server	

#### *Transaction Definition*

It can also be defined with the Arbo Configuration statements:-


```
TRANSACT ID=CLI-10,  
NAME='Cics',  
DESC='Logon to CICS',  
APPL=SPCICST,  
TYPE=1,  
TERMINAL=CLVTA,  
STARTUP=1,  
SECURITY=1
```

The salient points here are the internal name or ID, CLI-10 which ties up with the Entry Point transaction

prefix of transactions beginning “CLI”, the external name, “CICS” relates to the transaction name identified in the call-in URL. The APPL keyword identifies a name that will be used depending on the transaction type. The transaction type for this particular transaction definition is a VTAM transaction, TYPE=1. Virtel will attempt to logon to VTAM application identified by the VTAM APPL name SPCICST. The final point is the terminal prefix which identifies what Virtel terminals should be used to support this connection. In this instance the terminals must be prefixed with the characters “CLVTA”.

### 1.2.5 Terminal Elements

Terminal elements are used to support units of work within Virtel such as running a program, transmitting data to a browser, representing a VTAM LU to a VTAM APPLICATION. These are just a few examples. Terminal elements are defined to Virtel as either dynamic, static or pool. The following Summary Display lists the terminals delivered in the default installation.

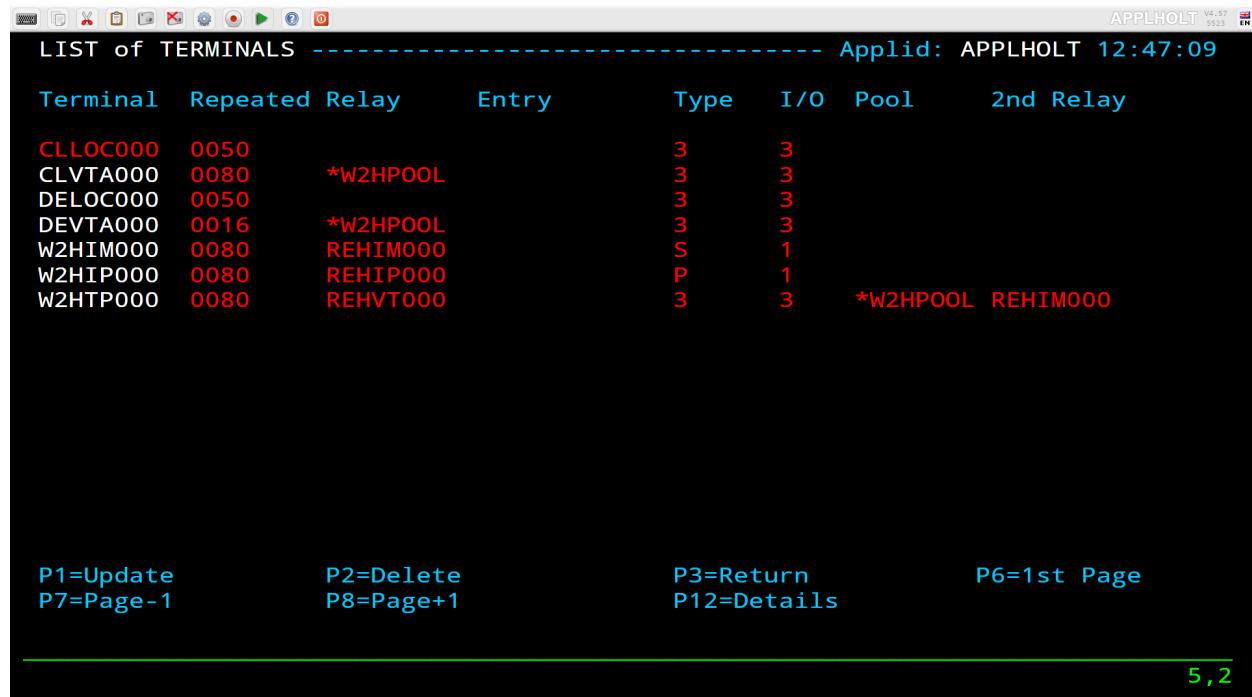


Terminal	Repeated Relay	Entry	Type	I/O	Pool	2nd Relay
CLLOC000	0050		3	3		
CLVTA000	0080	*W2HPOOL	3	3		
DELOC000	0050		3	3		
DEVTA000	0016	*W2HPOOL	3	3		
W2HIM000	0080	REHIM000	S	1		
W2HIP000	0080	REHIP000	P	1		
W2HTP000	0080	REHVT000	3	3	*W2HPOOL REHIM000	

P1=Update  
 P7=Page-1      P2=Delete  
 P8=Page+1      P3=Return  
 P12=Details      P6=1st Page  
 5,2

#### Terminal Definitions

The terminal name is used to associate terminals with lines and transactions. In the example for the line C-HTTP(41002) we had a terminal prefix of CL. So terminals CLLOC000-CLLOC079 and CLVTA000-CLVTA079 will be associated with this line. Our Transaction CLI-10 requires a terminal whose prefix is CLVTA. CL terminals are allocated top down, meaning that the terminal allocated to the transaction will be the highest CLVTA079. The display shows that CLLOC000-CLLOC079 are static terminal entries. CLVTA000-CLVTA079 are dynamic entries and point to a pool called \*W2HPOOL. Whenever a terminal is required from a pool the terminal name returned will be the first free terminal within the pool. Defining pool terminals is through the use of the Pool name in the terminal definition. So in the pool \*W2HPOOL terminals whose name begin with W2HTP000-WH2HTP079 have been defined. So, when the TSO transaction is kicked off Virtel will request a terminal whose name begins CLVTA, CLVTA079 will be assigned. This will grab the first available terminal in the \*W2HPOOL as that is where CLVTA points to. The first available terminal in the pool will be W2HTP000. Virtel always works from the lowest free name entry when returning pool entries.

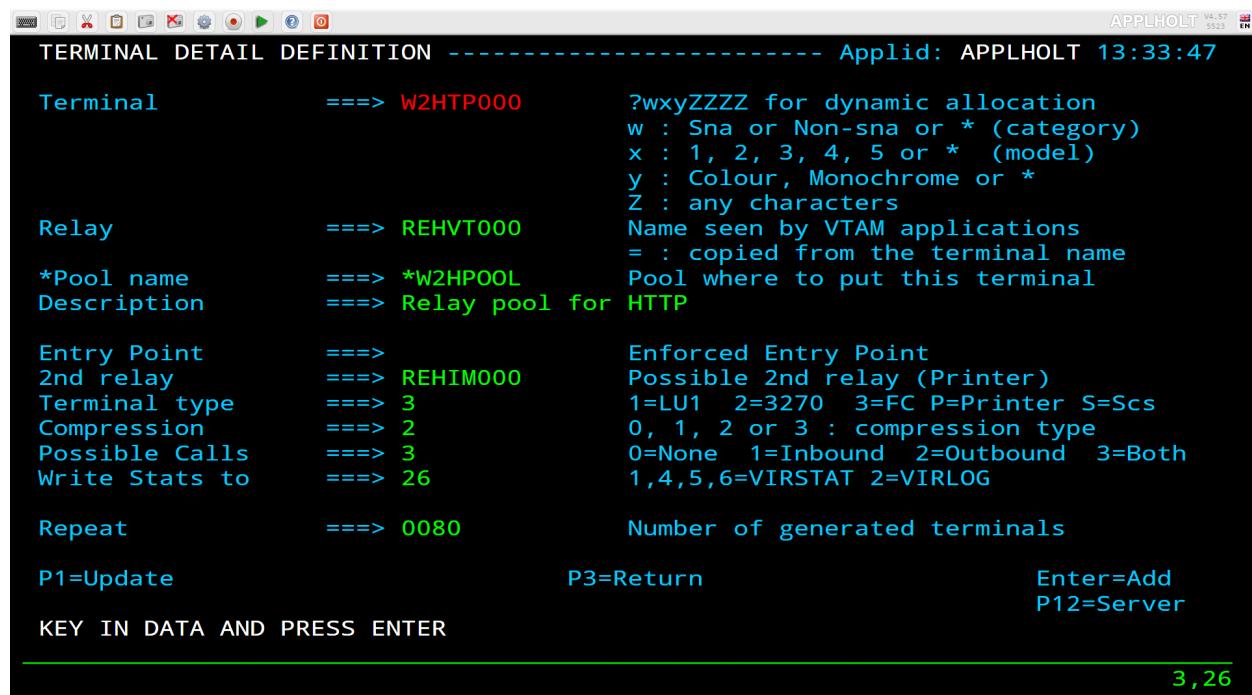

TERMINAL DETAIL DEFINITION ----- Applid: APPLHOLT 13:33:47

Terminal	====> W2HTP000	?wxyZZZZ for dynamic allocation w : Sna or Non-sna or * (category) x : 1, 2, 3, 4, 5 or * (model) y : Colour, Monochrome or * Z : any characters
Relay	====> REHVT000	Name seen by VTAM applications = : copied from the terminal name
*Pool name	====> *W2HPOOL	Pool where to put this terminal
Description	====> Relay pool for HTTP	
Entry Point	====>	Enforced Entry Point
2nd relay	====> REHIM000	Possible 2nd relay (Printer)
Terminal type	====> 3	1=LU1 2=3270 3=FC P=Printer S=Scs
Compression	====> 2	0, 1, 2 or 3 : compression type
Possible Calls	====> 3	0=None 1=Inbound 2=Outbound 3=Both
Write Stats to	====> 26	1,4,5,6=VIRSTAT 2=VIRLOG
Repeat	====> 0080	Number of generated terminals
P1=Update	P3=Return	Enter=Add P12=Server

KEY IN DATA AND PRESS ENTER

3,26

*Terminal Pool definition*

Terminal Definitions defined with Arbo configuration statements:-

```

TERMINAL ID=CLLOC000,                                     Static Definition
DESC='HTTP terminals (no relay)',                         |
TYPE=3,                                                 |
COMPRESS=2,                                              |
INOUT=3,                                                 |
STATS=26,                                                |
REPEAT=0050

TERMINAL ID=CLVTA000,                                     Dynamic Definition
RELAY=\*W2HPOOL,                                         <---- Use this pool
DESC='HTTP terminals (with relay)',                       |
TYPE=3,                                                 |
COMPRESS=2,                                              |
INOUT=3,                                                 |
STATS=26,                                                |
REPEAT=0080

TERMINAL ID=W2HTP000,                                     Pool definition
RELAY=REHVT000,                                         |
POOL=\*W2HPOOL,                                         <---- Defines which pool
DESC='Relay pool for HTTP',                            |
RELAY2=REHIM000,                                         |
TYPE=3,                                                 |
COMPRESS=2,                                              |
INOUT=3,                                                 |
STATS=26,                                                |
REPEAT=0080

```


In the case of logging onto CICS, the Virtel transaction will request a CLVTA terminal(CLVTA079) and terminal WH2TP000 will be returned from \*W2HPOOL. This terminal has an association with a relay name represented by a VTAM terminal definition - in this case REHVT000. This relay name should be defined

to VTAM. Also, this terminal definition has a 2nd relay called REHIM000. Again, this is a VTAM APPL definition which represents a SNA printer associated with the screen LU REHVT000. This name must also be defined to VTAM. REHIM000 is a relay name associated with the static terminal definitions beginning W2HIM000. In the logon to CICS we have three terminal names associated with the VTAM interface - CLVTA079, W2HTP000(REHVT000) and W2HIM000(REHIM000).

Here are the VTAM definitions:-

```
VIRTAPPL VBUILD TYPE=APPL
* -----
* Product      : VIRTEL
* Description  : Main ACB for VIRTEL application
* -----
APPLHOLT APPL EAS=160,AUTH=(ACQ,BLOCK,PASS,SPO),ACBNAME=APPLHOLT           <----
↳VIRTEL ACB
* -----
* REHVTxxx    : VTAM application relays for VIRTEL Web Access
* -----
REHVT??? APPL AUTH=(ACQ,PASS),MODETAB=ISTINCLM,DLOGMOD=SNX32702,EAS=1       <----
↳Terminal Relay definitions
* -----
* REHIMxxx    : Printer relays for VIRTEL Web Access terminals
* -----
REHIM??? APPL AUTH=(ACQ,PASS),MODETAB=ISTINCLM,DLOGMOD=SCS,EAS=1           <----
↳Printer definitions SCS
REHIP??? APPL AUTH=(ACQ,PASS),MODETAB=ISTINCLM,DLOGMOD=DSILGMOD,EAS=1        <----
↳Printer definitions 3270
```

Example of configurable Elements

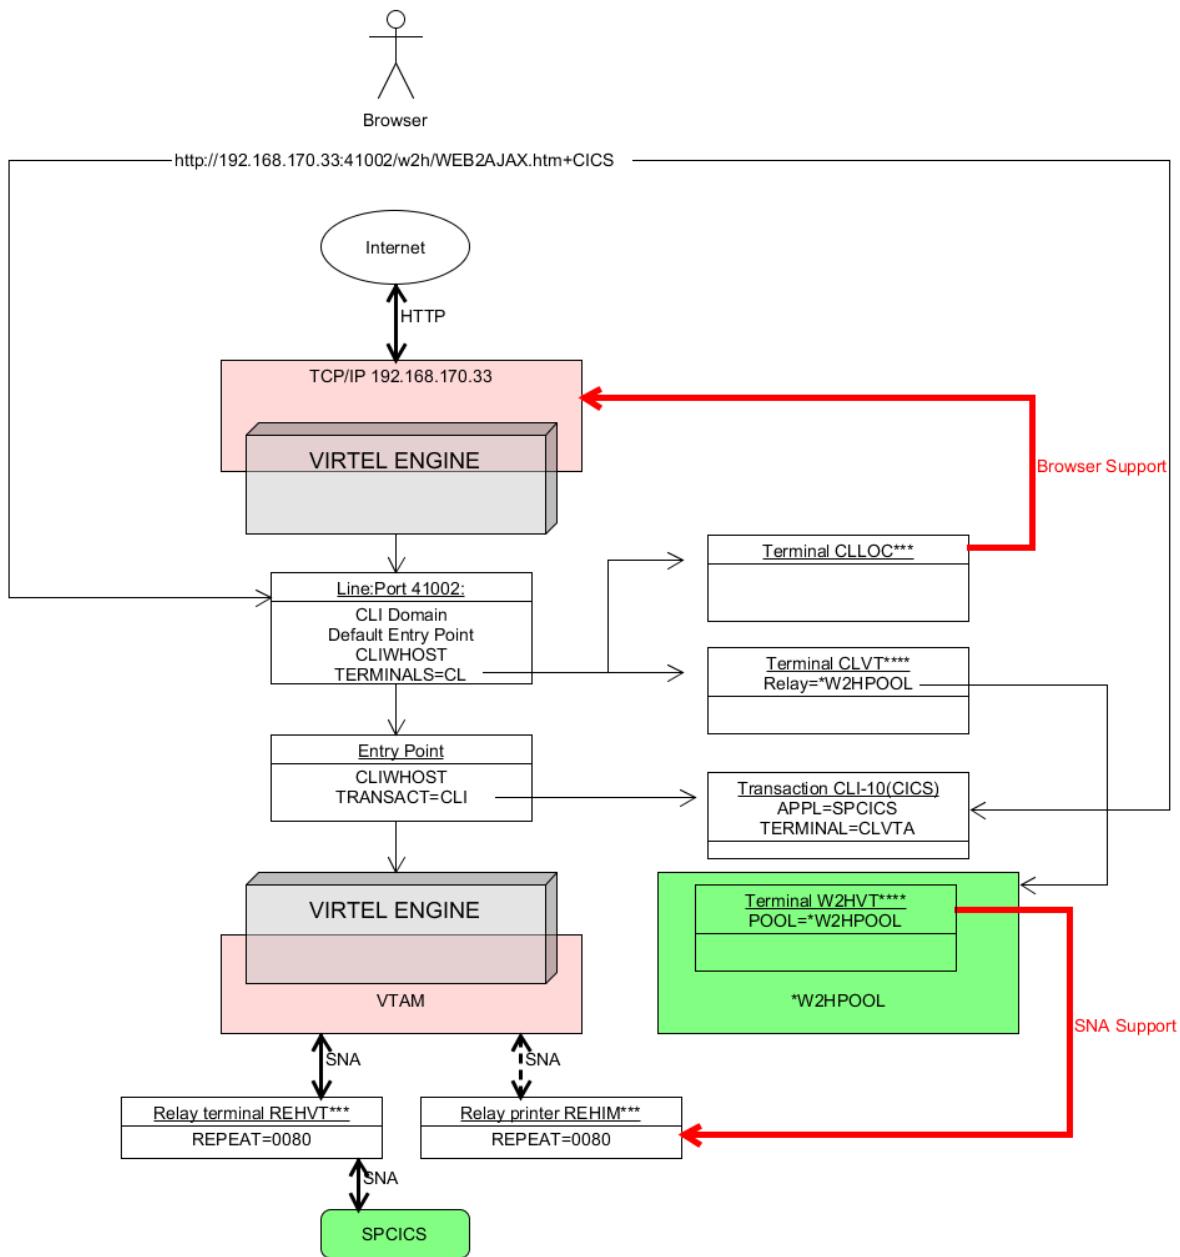

## 1.2.6 Adding new configurable elements

Adding new configurable elements can be online, through the Virtel Portal (Port 41001), or via batch using the VIRCONF util. The following is an example of adding a new interface to Virtel. The interface is line E-HTTP(41003) which uses entry point EDHOST. Entry point EDHOST has the following transactions:-

**EDS-00** Transaction to support the Entry Point. Must have an external name the same as the Entry Point. In this case EDHOST. Identifies the default transaction. That being what transaction should be initiated is none is specified in the URL.

**EDS-03W** Point to the w2h directory where all the Virtel web artifacts are maintained. In this case the W2H directory.

**EDS-03X** Point to the directory that is associated with this line. This would contain customized web elements such as a company image or logo. The directory is EDS-DIR which has a pathname of /eds.

**EDS-04** Vtam transaction identifying SPCICST

**EDS-90** Application menu transaction used as the default transaction and identified in the TIOA string in transaction EDS-00

**W2H-80S** A transaction added to the W2H Entry point to support uploading web artifacts to the EDS-DIR. When adding a new directory to Virtel you must also add a new upload transaction to the W2H transaction group. The external name and logmsg of the transaction should identify the directory. For example in this case name = upleds and logmsg = EDS-DIR. If you do not specify this “upload” transaction the new directory will not appear in the administration portal display of in the directory summary display.

Apart from the LINE, Entry Point and Transaction there is one other configurable element which must also be added to support a new interface. This is the SUBDIR element. The SUBDIR element identifies a new directory.

```
//SPTHOLTV JOB 1,ARBOLOAD,CLASS=A,MSGCLASS=X,NOTIFY=&SYSUID
//-----*
//*
//** ARBO MIGRATION. UPDATE ARBO TO ADD NEW ELEMENTS
//**
//** Change      Description          Release   *
//**           Create directory for poc test    V457    *
//**
//-----*
//*
// SET LOAD=SPTHOLT.VIRT457.LOADLIB
// SET ARBO=SPTHOLT.VIRT457.ARBO
//*
//CONFIG EXEC PGM=VIRCONF,PARM='LOAD,NOREPL',REGION=2M
//STEPLIB  DD  DSN=&LOAD,DISP=SHR
//SYSPRINT DD  SYSOUT=*
//SYSUDUMP DD  SYSOUT=*
//VIRARBO  DD  DSN=&ARBO,DISP=SHR
//SYSIN    DD  *
      TERMINAL ID=EHLOC000,
              DESC='Psuedo Terminals',
              TYPE=3,
              COMPRESS=2,
              INOUT=3,
              REPEAT=0016
      TERMINAL ID=EHVTA000,
              RELAY=*W2HPOOL,
              DESC='HTTP terminals (with relay)',
              TYPE=3,
              COMPRESS=2,
              INOUT=3,
              STATS=26,
              REPEAT=0016
      SUBDIR  ID=EDS-DIR,
              DESC='EDS directory',
              DDNAME=HTMLTRSF,
              KEY=EDS-KEY,
              NAMELEN=0064,
              AUTHUP=X,
              AUTHDOWN=X,
              AUTHDEL=X
      ENTRY   ID=EDSHOST,
              DESC='HTTP entry point (EDS application)',
              TRANSACT=EDS,
              TIMEOUT=0720,
              ACTION=0,
              EMUL=HTML,
              SIGNON=VIR0020H,
              MENU=VIR0021A,
              IDENT=SCENLOGM,
              SCENDIR=SCE-DIR,
              EXTCOLOR=E
      TRANSACT ID=EDS-00,
              NAME=EDSHOST,
              DESC='Default Directory',
              APPL=EDS-DIR,
              TYPE=4,
              TERMINAL=EHLOC,
```

```

        STARTUP=2,
        SECURITY=0,
        TIOASTA='/w2h/appmenu.htm+applist'
TRANSACT ID=EDS-03W,
        NAME='w2h',
        DESC='W2H toolkit directory (/w2h)',
        APPL=W2H-DIR,
        TYPE=4,
        STARTUP=2,
        SECURITY=0
TRANSACT ID=EDS-03X,
        NAME='eds',
        DESC='EDS directory (/eds)',
        APPL=EDS-DIR,
        TYPE=4,
        STARTUP=2,
        SECURITY=0
TRANSACT ID=EDS-04,
        NAME='CICS',
        DESC='CICS',
        APPL=SPCICST,
        TYPE=1,
        TERMINAL=EHVTA,
        STARTUP=1,
        SECURITY=0
TRANSACT ID=EDS-90,
        NAME='applist',
        DESC='List of applications for appmenu.htm',
        APPL=VIR0021S,
        TYPE=2,
        TERMINAL=EHLOC,
        STARTUP=2,
        SECURITY=1
TRANSACT ID=W2H-80S,
        NAME='upleds',
        DESC='Upload macros (EDS-DIR directory)',
        APPL=VIR0041C,
        TYPE=2,
        TERMINAL=DELOC,
        STARTUP=2,
        SECURITY=1,
        LOGMSG=EDS-DIR
LINE      ID=E-HTTP,
        NAME=HTTP-EDS,
        LOCADDR=:41003,
        DESC='HTTP line (entry point EDHOST)',
        TERMINAL=EH,
        ENTRY=EDHOST,
        TYPE=TCP1,
        INOUT=1,
        PROTOCOL=VIRHTTP,
        TIMEOUT=0000,
        ACTION=0,
        WINSZ=0000,
        PKTSZ=0000,
        RETRY=0010

```

*Configuration statements to add a new interface*


After running the VIRCONF utility check to make sure that the condition code is zero and that all elements have been added.

## 1.3 Administration

The VIRTEL system administrator uses a set of programs called sub-applications to display and update the various elements in the VIRTEL configuration. The sub-applications are invoked via the Configuration Menu or the Sub- Application Menu. The Configuration Menu, introduced in VIRTEL version 4.27, provides access to the most commonly- used sub-applications required for VIRTEL Web Access and XOT. It is invoked from the VIRTEL Multi-Session menu via a transaction which calls module VIR0022. The Sub-Application Menu, invoked from the Configuration Menu, gives access to all of the sub-applications, including those rarely used today.

If you log on to VIRTEL in 3270 mode using the default entry point (“PC”), the VIRTEL Multi-Session menu offers the choice F1 – Admin to invoke the Configuration Menu.

The first screen you will see is the Multi-Session menu:

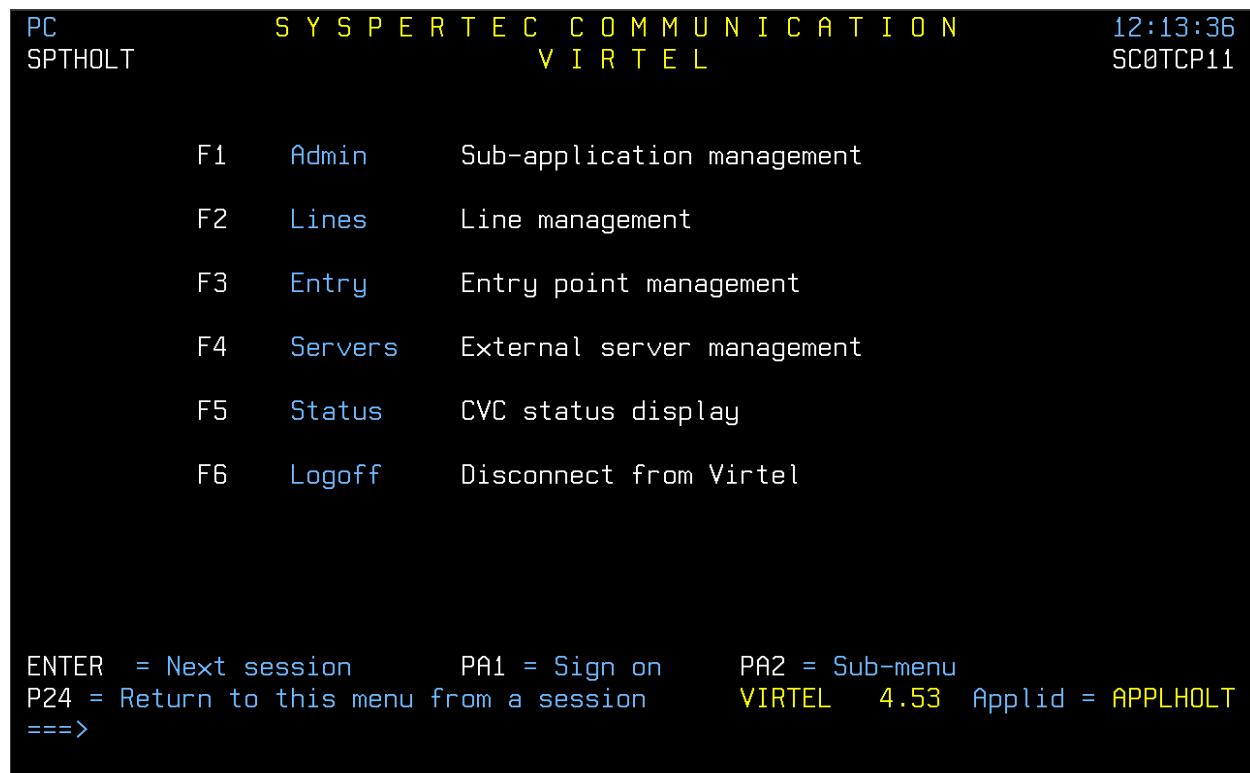


*The VIRTEL Multi-Session menu*

Press [F1] to display the Configuration Menu:

### **1.3.1 Configuration Menu**

The configuration Menu presents a list of sub applications which can be invoked to manage various Virtel entities such as lines, terminals, entry points etc.

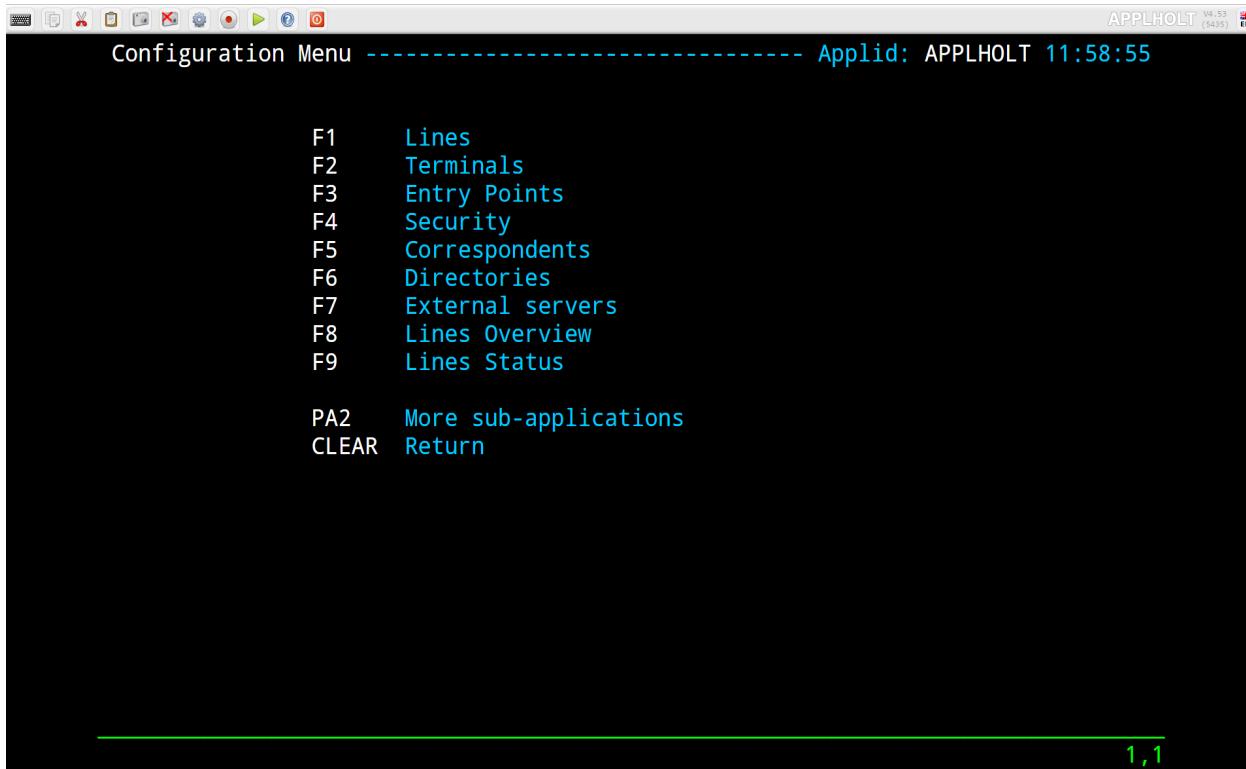


#### *Configuration Menu*

To invoke a sub-application, press one of the function keys shown in the menu (for example, F1 – Lines). To exit from the Configuration Menu and return to the Multi-Session menu, press CLEAR.

From within the configuration Menu a further set of sub-applications can be accessible by pressing [PA2]

### 1.3.2 Sub-Application Menu

This menu presents a menu of additional sub-applications that can be used to manage Virtel.

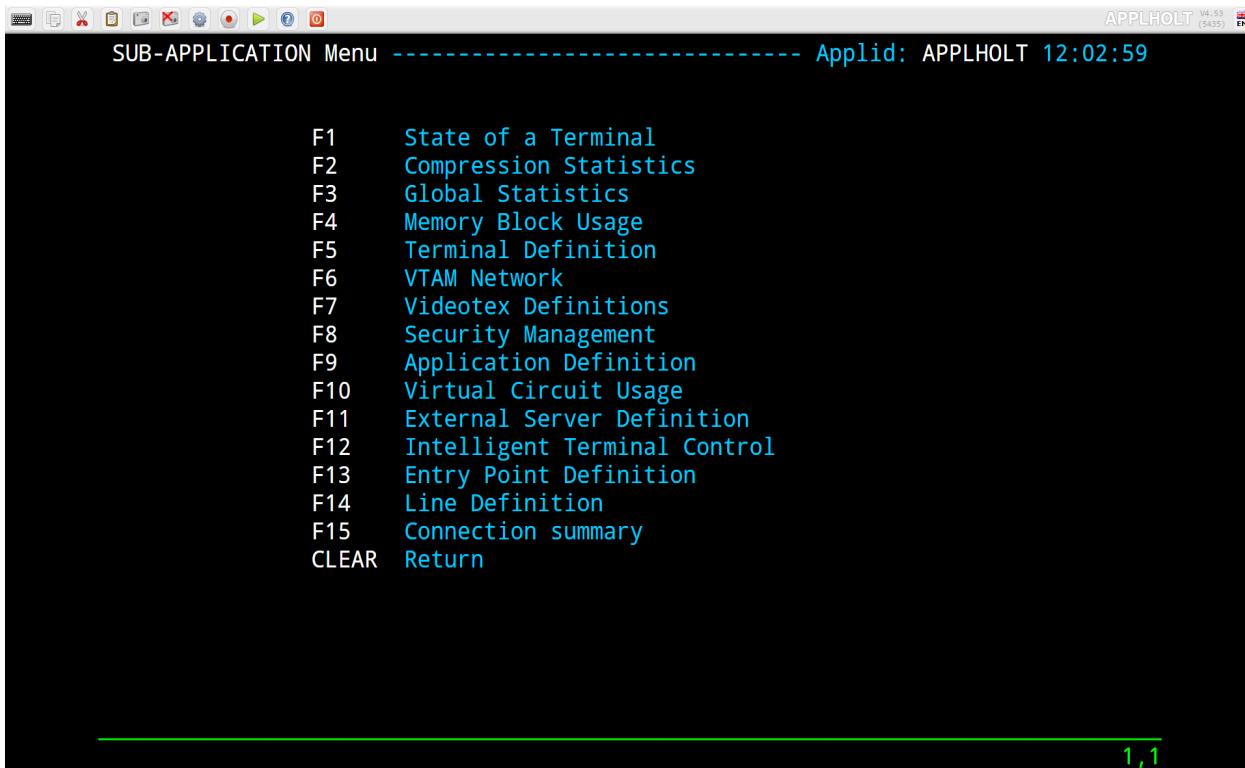

#### *Sub-Application Menu*

To invoke a sub-application from this menu, press one of the function keys shown in the menu (for example, F7 – Videotex Definitions). To exit from the Sub-Application Menu and return to the Configuration Menu, press CLEAR or PA2.

### 1.3.3 Screen Navigation

The sub-applications have certain common operational characteristics:

- Most of the sub-applications start by displaying a list of the elements currently defined in the configuration file.
- To scroll up or down the list, press [F7] or [F8].
- To find an element in the list, overtype the name of the first element displayed with the first few characters of the element name you are looking for, then press [ENTER].
- To display the detail screen for a particular element, place the cursor on the element name in the list and press [F12].
- To alter the definition of an element, type the desired changes into the appropriate fields in the list and press [F1]. VIRTEL recognizes the changes only when you press [F1]. If you change a transaction you must also press [F1] on the entry point that the transaction belongs to.
- To delete an element, place the cursor on the element name in the list and press [F2]. Then press [F2] again to confirm the deletion.

- To create a new element, place the cursor on a part of the screen outside the list, and press [F12]. A detail screen will be displayed with all fields blank. Fill in the fields and press [ENTER].
- To copy an existing element, first press [F12] to display the detail screen for the existing element, then overtype the element name with the desired name of the new element, and press [ENTER].
- To rename an element, first copy it to a new element as above, then delete the old element.
- To exit a sub-application, return to the previous menu, press [PF3]. To return to the Configuration Menu, press [Clear].

## **2.1 Introduction**

The “Line” is one of the basic elements of the VIRTEL configuration. A line represents a connection between VIRTEL and another network element: an NPSI MCH, an X25 router, an X25 application (GATE, PCNE), a CICS system, a VIRNT server, an SMTP server; alternatively, a line can represent a VIRTEL server (HTTP, SMTP) listening on a TCP/IP port. VIRTEL call routing is performed by sets of interrelated definitions. A call arriving on a line is processed by a set of rules which assign an entry point. The entry point contains a set of transactions which indicate the application or external server which will process the call. An external server refers to one or more lines on which the call may exit from VIRTEL. Each type of entity (lines, terminals, entry points, external servers) is defined by a separate sub-application but it is often useful to have an overall view of all the related definitions.

This chapter describes all the functions associated with the definition of lines using the Line Management sub-application. A detailed example will be presented later in this chapter for each type of line.

## **2.2 Line Management Sub-Applications**

This sub-application facilitates the definition of X25 and Reverse X25 lines, APPC connections, and TCP/IP lines. When the sub-application is started, it first displays a summary of existing definitions in alphanumeric order. The Line Management sub-application is invoked by pressing [PF1] in the Configuration Menu, by pressing [PF14] in the Sub-Application Menu, or via the Multi-Session Menu using a transaction which calls module VIR0046. This sub-application allows the management of all the line parameters under VIRTEL control.

### **2.2.1 Security**

When the security subsystem is active, access to Line Management sub-application from the Configuration Menu or the Sub-Application Menu is controlled by the resource \$\$LINE\$\$. When accessed by a transaction, normal transaction security rules will apply. Security management and securing access to sub-applications is described in the VIRTEL Installation Guide.

### **2.2.2 Summary Display**

The first screen shows a summary of existing line definitions in alphanumeric order:

LIST of SYSTEM LINES -----				Applid: SPVIREH	9:49:18
Internal Name	External Description	Rules	Prefix	Type	
C-HTTP	HTTP-CLI HTTP line (entry point CLIWHOST)	C-HTTP	CL	TCP1	
E-HTTP	HTTP-EDS HTTP line (entry point EDSHOST)	E-HTTP	EH	TCP1	
F-HTTP	HTTP-FOR HTTP line (Forced LU Names)	F-HTTP	FH	TCP1	
I-CONN	Connection to IMS Connect	I-CONN	ICAL	TCP1	
LM01TX1	XOT Test Line	LM01TX1	I01TX1	/FASTC	
O-HTTP	HTTP-OUT Outbound HTTP line for Web Service	O-HTTP		TCP1	
P-PCLPDF	PCL2PDF Connexions en mode HTTP vers serve	P-PCLPDF		TCP1	
V-HTTP	HTTP-VSR HTTP line (entry point VSRWHOST)	V-HTTP	VS	TCP1	
W-HTTP	HTTP-W2H HTTP line (entry point WEB2HOST)	W-HTTP	DE	TCP1	
9-XMPASS	VIRTELXM Virpass XM / VJRS connection	9-XMPASS	CA40XM	XM2	
9-XMVT	QLNKHOLT Quicklink line for VTA	9-XMVT		XM1	

P1=Update      P2=Delete      P3=Return      P4=Terminals  
 P6=First page    P7=Previous    P8=Next      P12>Edit

*Line Summary Display*

## Navigation

**Search** Type the name (or partial name) of the required entity on the first line under the heading “Internal Name”, then press [Enter].

[PF2] Delete Line under cursor position.

[PF3] Return to Configuration menu.

[PF4] List terminals associated with line.

[PF6] Return to the first page of the list.

[PF7] Display the previous page.

[PF8] Display the next page.

[PF12] Enter Line detail Screen for line under cursor position.

**Modifying a line** - In the summary screen position the cursor under the name of the entity to be modified. Press [PF12]. The line detail definition screen is displayed. Type the desired modifications into the appropriate fields then press [PF1]. Multiple definitions can be modified at the same time. Modifications are not recognized until you press the [PF1] key. Certain modifications require a restart of the VIRTEL system.

**Deleting a line** - In the summary screen position the cursor under the name of the entity to be deleted, then press [PF2]. The line associated with the entity to be deleted then appears highlighted, accompanied by the message CONFIRM DELETE. Then press [PF2] again to confirm deletion. The message DELETE OK confirms successful completion of the operation. Repeat the procedure for each entity to be deleted.

**Adding a line** - To add a new definition, press [PF12] at the summary screen, either with the cursor on an existing definition to copy its attributes, or on an empty line to create a new definition from a blank screen.

### 2.2.3 Detail Display

The Line detail display is accessed from the Line summary screen via PF12(EDIT) on a selected line identified by the cursor position. The screen shows a line detail display.

```

LINE DETAIL DEFINITION ----- Applid: APPLHOLT 16:14:20

Internal name ===> W-HTTP           1st character is line code
External name ===> HTTP-W2H         External entity name
Remote ident ===>                  Remote VTAM LU or TCP/IP address
Local ident ===> 192.168.170.33:41001 Local VTAM LU or TCP/IP address
Description ===> HTTP line (entry point WEB2HOST)
Prefix ===> DE                     Prefix for terminals
Pool ===>                         Pool for terminals
Entry Point ===> WEB2HOST          Default Entry Point on this line
Rule Set ===> W-HTTP               Rules to choose an entry point
Line type ===> TCP1                eg: TCP1 MQ1 XM1 BATCH1 APPC2 ...
Possible calls      ===> 1        0=None 1=Inbound 2=Outbound 3=I & O
Startup prerequisite ===>
Protocol program   ===> VIRHTTP  Dialog manager
Security program   ===>          Non standard security
Time out    ===> 0000     Action ===> 0  Action if t/o: 0=none 1=keepalive
Window      ===> 0000     Packet ===> 0000  eventual protocol parameters
Pad         ===>          Tran   ===> PAD=INTEG/TRANSP/NO, TRAN=EVEN/ODD/NO
Retries     ===> 0010     Delay   ===> Retries for linked to terminals

P1=Update          P3=Return          P4=Terminals
Enter=Add          P5=Rules

```

*Line Detail Display*

### Navigation

- [PF1] Update fields.
- [PF3] Return to Line Summary Display.
- [PF4] Display associated terminals.
- [PF5] Display associated rules.
- [ENTER] Add new line or update fields of current line.

### 2.2.4 Parameters

**Internal name** Internal name of the line. This is the name by which VIRTEL refers to the line internally. It must be unique within a VIRTEL instance.

**External name** External name of the line. This name appears in certain console messages. It can be used, for example, to display the real name of the line or link.

**Remote ident** This field contains the name or address of the remote partner. Usage depends on the line type and protocol. The contents of this field are described for each line type in the detailed examples which follow.

**Local ident** This field contains the name or address used by VIRTEL. Usage depends on the line type and protocol. The contents of this field are described for each line type in the detailed examples which follow.

For an IP connection, this field represents the listening port opened by VIRTEL. The port can be specified in any of the following forms:

**: pppp** VIRTEL opens port pppp on the default home IP address of the host TCP/IP. For example, :2048

**nnn.nnn.nnn.nnn: pppp** VIRTEL opens port pppp on the indicated IP address. nnn.nnn.nnn.nnn must be a valid HOME address defined in the host TCP/IP. For example, 192.168.0.100:2048

**0: pppp** VIRTEL opens port pppp without associating itself with a particular IP address. VIRTEL can receive calls on any HOME address defined in the host TCP/IP. For example, 0:2048 (or 0.0.0.0:2048)

The combination of IP address and port number must be unique. No two VIRTEL can contain a TCP/IP line with the same IP address and port number, except that:

- multiple VIRTELs can use a single distributed VIPA address, provided that the address is defined with a non-zero value for the TIMEDAFFINITY parameter.
- multiple XOT lines within a single VIRTEL can listen on the same IP address and port number, providing that this same address and port number are not used by another VIRTEL.

---

**Note:** Note that the use of port numbers less than 1024 may require authorization in the profile of the TCP/IP stack (see for example the RESTRICTLOWPORTS, PORT, and PORTRANGE parameters of the z/OS Communications Server). In general, port numbers 1024 and above do not require authorization.

---

**Description** Free-form description with no particular significance or syntax requirement, except for SMTP lines (see the detailed example of an SMTP line which follows).

**Prefix** Terminal prefix associated with the line. As a general rule, the terminal prefix is a required field. It allows VIRTEL to associate a series of terminals to a line. Two lines cannot share the same group of terminals. The particular details of this field are described for each line type in the detailed examples which follow.

**Pool** The name of a logical pool of terminals associated with the line. This pool is used for HTTP connections without predefined terminals (see “*HTTP connections with non-predefined LU names*”),. In all other cases this field can be left blank.

**Entry Point** Defines the default entry point used by the line. This is a required field for HTTP and SMTP lines. It is optional in all other cases.

**Rule Set** The name of the rule set used by this line. The same rule set can be used by more than one line. If this field is blank, no rules are used. Rules are described in detail in section .

For compatibility with VIRTEL versions prior to 4.26, the rule set name is usually the same as the internal name of the line.

**Line type** Defines the category to which the line belongs. VIRTEL supports the following categories of lines:

**X25 lines** Represented by the values GATE or FASTC

Support for this type of line is governed by the presence of the parameters MINITEL=YES, GATE=GENERAL and possibly FASTC=YES in the VIRTCT.

**Reverse-X25 lines** Represented by the values /GATE, /FASTC, or /PCNE

Support for this type of line does not require any special parameters in the VIRTCT.

**APP C lines** Represented by the values APPC1 or APPC2.

APPC1 represents a link with a BATCH environment

APPC2 represents all other types of APPC link with partners such as CICS or NT. Support for this type of line does not require any special parameters in the VIRTCT.

**TCP/IP lines** Represented by the values TCP1 or TCP2.

Support for this type of line is governed by the presence of the parameter TCP1 or TCP2 in the VIRTCT. Used for HTTP, SMTP, ICONNECT, XOT, NATIVE, VIRPESIT, VIRNEOX, or VIRPASS TCP lines.

**Cross-memory lines** Represented by the values XM1 or XM2

Support for this type of line is governed by the presence of the parameter XM1 or XM2 in the VIRTCT. Used for VIRPASS XM lines.

**MQSeries lines** Represented by the values MQ1 or MQ2

Support for this type of line is governed by the presence of the parameter MQ1 or MQ2 in the VIRTCT.

**Batch lines** Represented by the values BATCH1 or BATCH2

Support for this type of line is governed by the presence of the parameter BATCH1 or BATCH2 in the VIRTCT.

**Possible calls** Determines which calls can be made on this line. Since the line management interface is common to all types of lines, all values between 0 and 3 are accepted.

In addition to being used to authorize incoming, outgoing, or both incoming and outgoing calls, this parameter also has an effect during VIRTEL startup. Any line which has “Possible calls” set to 0 will not be activated at VIRTEL startup. Also note the“Possible calls” field in the definition of the associated terminals.

**Startup prerequisite** Allows conditional startup of the line. If this field is blank, VIRTEL starts the line automatically at system startup.

**WAIT-LINE(n-xxxxxx)** Waits for line n-xxxxxx to start. The name specified can be either the internal or external name of the other line.

**WAIT-MINUTES(nn)** Waits nn minutes after system startup before starting this line.

**WAIT-COMMAND** Waits for a console command LINE=linename,START (see “List of commands” in the VIRTEL Audit And Performance Guide)

**WAIT-PARTNER** Waits until VIRTEL receives an SNA BIND command from its partner LU.

**MIMIC-LINE(n-xxxxxx)** specifies that this line starts and stops in synchronisation with line n-xxxxxx. The name specified can be either the internal or external name of the other line.

**Protocol program** Indicates the protocol used for a TCP, XM, or MQ type line. The following values are valid for a TCP line:

**HTTP or VIRHTTP** For an HTTP line

**NATIVE2(P) or NATIVE4(P)** For a line in native TCP/IP mode

**SMTP or VIRSMTP** For an SMTP line

**ICONNECT** For a RESUME TPIPE connection with IMS Connect

**VIRPASS** For a VIRPASS TCP connection with an VIRNT or VIRKIX system

**VIRPESIT** For a TCP connection with a file transfer program such as CFT/IP

**VIRNEOX** For a TCP connection with a remote program using the VIRNEOX protocol

**XOT or VIRXOT** For an XOT line

The following values are valid for an XM line:

**VIRPASS** For a VIRPASS XM connection with a VIRKIX system running on the same MVS

The following values are valid for an MQ line:

**RAW** For communication via an MQSeries message queue

**PREFIXED or PREFIX12** For communication via an MQSeries message queue. This is similar to the RAW protocol except that VIRTEL adds 12 bytes of additional context information for the application program.

**PREFIX20** For communication via an MQSeries message queue. This is similar to the RAW protocol except that VIRTEL adds 20 bytes of additional context information for the application program.

---

**Note:** This field must not be completed for lines whose type is APPC1, APPC2, GATE, FASTC, /GATE, /FASTC, or /PCNE.

---

**Security program** Reserved for future use.

**Time out** Inactivity time in seconds after which the action specified in the following field will be taken. The value 0 inhibits the time out.

**Action if T/O** Action taken if a time out occurs. 0 = no action

1 = keepalive

**KEEPALIVE** is a message sent by the TCP/IP stack, during periods of inactivity, to check whether the connection has been broken. The value 1 is thus only valid for lines of type TCP. After a certain number of KEEPALIVE messages have been sent without being acknowledged by the partner (the number is determined by the TCP/IP stack), the session will be considered unusable and the connection will be terminated.

**OS/390 and z/OS** KEEPALIVE must also be activated in the PROFILE of the TCP/IP stack (refer to parameters KEEPALIVEOPTIONS or TCPCONFIG INTERVAL). For z/OS V1R7 and later, the time out value specified in the preceding field determines the interval between KEEPALIVE messages. If the time out value is zero then the default TCPCONFIG INTERVAL will be used. For OS/390 and z/OS prior to V1R7, the TCP/IP stack uses a single KEEPALIVE interval which applies to all sessions, and the time out value specified in the preceding field is ignored.

**TCP/IP for VSE** KEEPALIVE is managed globally by the TCP/IP command SET PULSE\_TIME, and the parameters "Time Out" and "Action=1" are ignored.

**Window** Window size at the packet level. This parameter is meaningful only for X25 (GATE or FASTC) and XOT lines.

Must correspond with your X25 service provider subscription, or with the X25 switch parameters if this type of equipment is used.

**Packet** Packet size. Usually 128. This parameter is meaningful only for X25 (GATE or FASTC) and XOT lines.

Must correspond with your TRANSPAC subscription, or with the X25 switch parameters if this type of equipment is used.

Replaces the PACKET global parameter in the VIRTCT for versions prior to 4.0.

**Pad** This parameter is meaningful only for X25 GATE non Fast-Connect lines and AntiGATE lines.

**INTEG** Data without X'00' prefix

**TRANSP** Data with prefix

**NO** Data with prefix

Must correspond with the NPSI parameters, or with the X25 switch parameters if this type of equipment is used.

**Tran** This parameter is meaningful only for Reverse-X25 AntiPCNE lines. Specifies whether EBCDIC/ASCII translation occurs.

**EVEN** ASCII data from the network is translated to EBCDIC when presented to the application, and vice versa (Even Parity)

**ODD** Ditto (Odd Parity)

**NO** No ASCII/EBCDIC translation

**Retries** Number of attempts to reacquire auto-activated terminals during VIRTEL startup. The delay between attempts is specified by the "Delay" parameter.

**Delay** Interval in seconds between attempts to reacquire terminals. The default delay is 2 seconds.

## 2.3 Line Overview Sub-Application

The Lines Overview display presents an overall view and allows the administrator to zoom in on individual definitions to display and optionally modify the detailed definition. Missing definitions (those referenced by another entity but not defined in the configuration) are highlighted in red. This sub-application allows the administrator to display and optionally modify the various entities associated with each line defined in the VIRTEL configuration. The Lines Overview sub-application is invoked by pressing [PF8] at the Configuration Menu, by pressing [PF15] at the Sub-Application Menu, or via the Multi-Session using a transaction which calls module VIR0049.

LINES OVERVIEW ----- Applid: APPLHOLT 14:54:51					
Line	Rule	Entry Point	Transac.	Terminal Server	Line out Terminal out
C-HTTP		CLIHOST	CLI-00	CLLOC	CLI-DIR
E-HTTP		EDSHOST	EDS-00	EHLOC	EDS-DIR
I-CONN		SOAPVIRT	OTMA-EX1	ICAL	\$NONE\$
LM01TX1		TEXAGRI		I01TX1	
O-HTTP					
P-PCLPDF					
V-HTTP		VSRHOST	VSR-00	VSLOC	VSR-DIR
W-HTTP		WEB2HOST	W2H-00	DELOC	W2H-DIR
9-XMPASS					CA40XM
9-XMVT					


  

P1=Expand	P2=Internal/external	Enter=Refresh
P3=Return	P7=Page-1	P8=Page+1
		P12>Show

*Lines overview summary display*

## 2.4 HTTP Inbound line

When an HTTP line is started, VIRTEL becomes an HTTP server, authorising connections from a web browser to applications at the host site. Activation of this type of line is subject to the presence of the TCP1 parameter in the VIRTCT, as well as to a definition providing linkage to a file containing the HTML pages.

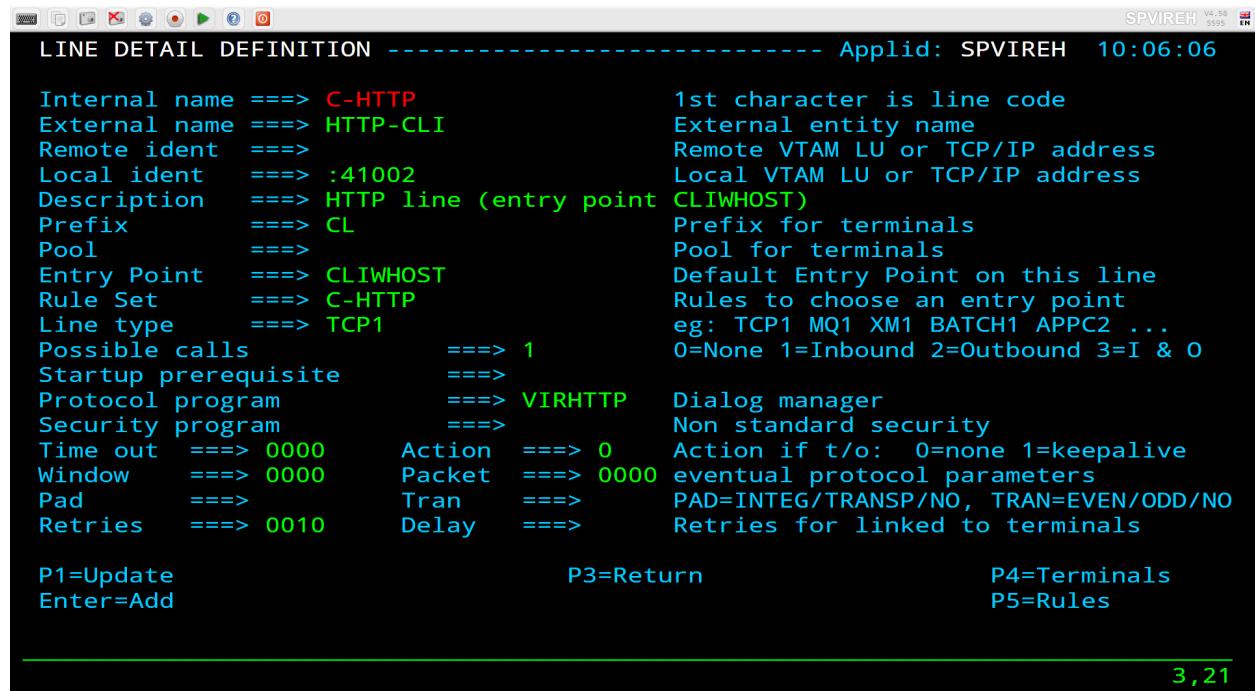

The screenshot shows the SPVIREH application interface with the title 'LINE DETAIL DEFINITION' and 'Applid: SPVIREH 10:06:06'. The screen displays various parameters for an HTTP line, each with a description. Parameters include:

- Internal name** ==> C-HTTP (1st character is line code)
- External name** ==> HTTP-CLI (External entity name)
- Remote ident** ==> (Remote VTAM LU or TCP/IP address)
- Local ident** ==> :41002 (Local VTAM LU or TCP/IP address)
- Description** ==> HTTP line (entry point CLIHOST) (Description)
- Prefix** ==> CL (Prefix for terminals)
- Pool** ==> (Pool for terminals)
- Entry Point** ==> CLIHOST (Default Entry Point on this line)
- Rule Set** ==> C-HTTP (Rules to choose an entry point eg: TCP1 MQ1 XM1 BATCH1 APPC2 ...)
- Line type** ==> TCP1 (Line type)
- Possible calls** ==> 1 (0=None 1=Inbound 2=Outbound 3=I & O)
- Startup prerequisite** ==>
- Protocol program** ==> VIRHTTP (Dialog manager)
- Security program** ==> (Non standard security)
- Time out** ==> 0000 (Action ==> 0 Action if t/o: 0=none 1=keepalive)
- Window** ==> 0000 (Packet ==> 0000 eventual protocol parameters)
- Pad** ==> (Tran ==> PAD=INTEG/TRANSP/NO, TRAN=EVEN/ODD/NO)
- Retries** ==> 0010 (Delay ==> Retries for linked to terminals)

At the bottom, there are command keys: P1=Update, Enter=Add, P3=Return, P4=Terminals, and P5=Rules.

3,21

*Definition of an HTTP line*

**Remote ident** Always blank.

**Local ident** This is the VIRTEL IP address and port number which browser users must specify in order to connect to VIRTEL. If the port number is omitted then the default is port 80. See the description of the “Local ident” field under the heading “*Line Parameters*”, for more details about how to code this field.

**Prefix** Terminal name prefix (see below).

**Entry Point** When defining an HTTP line, it is obligatory to define a default entry point. This entry point will be used for all incoming calls which do not match any of the rules of the line. The entry point contains a list of transactions, and these transactions determine which directories are used to retrieve the HTML pages, and which 3270 applications are accessible to the user.

---

**Note:** According to the type of application accessed, each transaction must refer to one of the terminal sub-groups associated with the HTTP line (see “HTTP terminals” below).

**For type 1 (Application) transactions** The prefix will be that of the terminal sub-group with an associated relay.

**For type 2 (Virtel) or type 4 (Page) transactions** The prefix will be that of the terminal sub-group without an associated relay.

**For type 3 (Server) transactions** No terminal prefix is required.

**Line type** One of the TCP/IP protocols defined in the VIRTCT, for example TCP1.

**Possible calls** Specify 1 (incoming calls only) to indicate that this line represents a listening port where VIRTEL is acting as an HTTP server.

For the case where VIRTEL acts as an HTTP requester, refer to the following section “*Definition of a HTTP Outbound line*”.

**Protocol** VIRHTTP or HTTP.

**Window** Always 0.

**Packet** Always 0.

**Pad** Always blank.

**Tran** Always blank.

#### **2.4.1 Terminal Definitions**

An HTTP line uses two sub-groups of type-3 terminals having a common prefix (in this case CL). Each terminal in the first sub-group represents one session between the client browser and VIRTEL; no relay is configured for this sub-group. Each terminal in the second sub-group represents one session between VIRTEL and a host application; in this sub-group, either a relay must be configured for each terminal, or the sub-group must refer to “*logical pool of relays*”. Whichever method is chosen, each relay must be defined by an APPL statement in a VTAM node of type APPL. Either explicit or repeated terminal definitions may be used.

Press [PF4] at the HTTP line detail definition screen to display the list of associated terminals whose prefix matches the prefix specified in the line definition. If the terminals refer to a logical pool, the pool itself may have a different prefix and will therefore not be displayed. In this case you can press [PF2] at the Configuration Menu to display a list of all terminals.

The example below shows the terminals for two HTTP lines which share a logical pool of relays. This list was displayed by pressing [PF2] at the Configuration Menu. The terminals with prefix CL belong to line C-HTTP, while the terminals with prefix DE belong to line W-HTTP. For line C-HTTP, the first sub-group consists of terminals CLLOC000-049 without a relay. The second sub-group consists of terminals CLVTA000-079 which refer to a logical pool of relays named

\*W2HPOOL. For line W-HTTP, the first sub-group is DELOC000-009, and the second sub-group is DE-VTA000-015 which also refers to the logical pool named \*W2HPOOL. The logical pool itself consists of terminals W2HTP000-015 whose relay LU names are REHVT000-079. The logical pool also refers to a pool of associated printer LU's. The printers are defined with terminal names W2HIP000-079 and LU names REHIP000-079. In each case, the terminal name is an internal name used only within VIRTEL, while the relay name is an LU name defined by a VTAM APPL statement. The relay LU name is the name by which the terminal is known to CICS or other VTAM applications.

LIST of TERMINALS ----- Applid: APPLHOLT 15:27:55							
Terminal	Repeated	Relay	Entry	Type	I/O	Pool	2nd Relay
CLLOC000	0050			3	3		
CLVTA000	0080	*W2HPOOL		3	3		
DELOC000	0010			3	3		
DEVT A000	0016	*W2HPOOL		3	3		
W2HIM000	0080	REHIM000		S	1		
W2HIP000	0080	REHIP000		P	1		
W2HTP000	0080	REHVT000		3	3	*W2HPOOL REHIM000	

P1=Update P2=Delete P3=Return P6=1st Page  
P7=Page-1 P8=Page+1 P12=Details

5,2

Terminals associated with an HTTP line

TERMINAL DETAIL DEFINITION ----- Applid: APPLHOLT 15:30:27		
Terminal	====> DELOC000	?wxyZZZZ for dynamic allocation w : Sna or Non-sna or * (category) x : 1, 2, 3, 4, 5 or * (model) y : Colour, Monochrome or * Z : any characters
Relay	====>	Name seen by VTAM applications = : copied from the terminal name
*Pool name	====>	Pool where to put this terminal
Description	====> HTTP terminals (no relay)	
Entry Point	====>	Enforced Entry Point
2nd relay	====>	Possible 2nd relay (Printer)
Terminal type	====> 3	1=LU1 2=3270 3=FC P=Printer S=Scs
Compression	====> 2	0, 1, 2 or 3 : compression type
Possible Calls	====> 3	0=None 1=Inbound 2=Outbound 3=Both
Write Stats to	====> 26	1,4,5,6=VIRSTAT 2=VIRLOG
Repeat	====> 0010	Number of generated terminals
P1=Update	P3=Return	Enter=Add P12=Server
KEY IN DATA AND PRESS ENTER		

3,26

HTTP terminals without relay

```

TERMINAL DETAIL DEFINITION ----- Applid: APPLHOLT 15:32:15

Terminal      ===> DEVTA000      ?wxyZZZZ for dynamic allocation
                                         w : Sna or Non-sna or * (category)
                                         x : 1, 2, 3, 4, 5 or * (model)
                                         y : Colour, Monochrome or *
                                         Z : any characters
Relay          ===> *W2HPOOL       Name seen by VTAM applications
                                         = : copied from the terminal name
*Pool name    ===>
Description   ===> HTTP terminals (with relay) Pool where to put this terminal

Entry Point   ===>
2nd relay     ===>
Terminal type ===> 3           1=LU1  2=3270  3=FC P=Printer S=Scs
Compression   ===> 2           0, 1, 2 or 3 : compression type
Possible Calls ===> 3           0=None 1=Inbound 2=Outbound 3=Both
Write Stats to ===> 26          1,4,5,6=VIRSTAT 2=VIRLOG

Repeat        ===> 0016         Number of generated terminals

P1=Update
P3=Return
Enter=Add
P12=Server

KEY IN DATA AND PRESS ENTER

```

3,26

*HTTP terminals with relay*

```

TERMINAL DETAIL DEFINITION ----- Applid: APPLHOLT 15:33:41

Terminal      ===> W2HPT000      ?wxyZZZZ for dynamic allocation
                                         w : Sna or Non-sna or * (category)
                                         x : 1, 2, 3, 4, 5 or * (model)
                                         y : Colour, Monochrome or *
                                         Z : any characters
Relay          ===> REHIM000       Name seen by VTAM applications
                                         = : copied from the terminal name
*Pool name    ===> *W2HPOOL       Pool where to put this terminal
Description   ===> Relay pool for HTTP

Entry Point   ===>
2nd relay     ===> REHIM000       Possible 2nd relay (Printer)
Terminal type ===> 3           1=LU1  2=3270  3=FC P=Printer S=Scs
Compression   ===> 2           0, 1, 2 or 3 : compression type
Possible Calls ===> 3           0=None 1=Inbound 2=Outbound 3=Both
Write Stats to ===> 26          1,4,5,6=VIRSTAT 2=VIRLOG

Repeat        ===> 0080         Number of generated terminals


P1=Update
P3=Return
Enter=Add
P12=Server

KEY IN DATA AND PRESS ENTER

```

3,26

*logical pool of relays for HTTP*

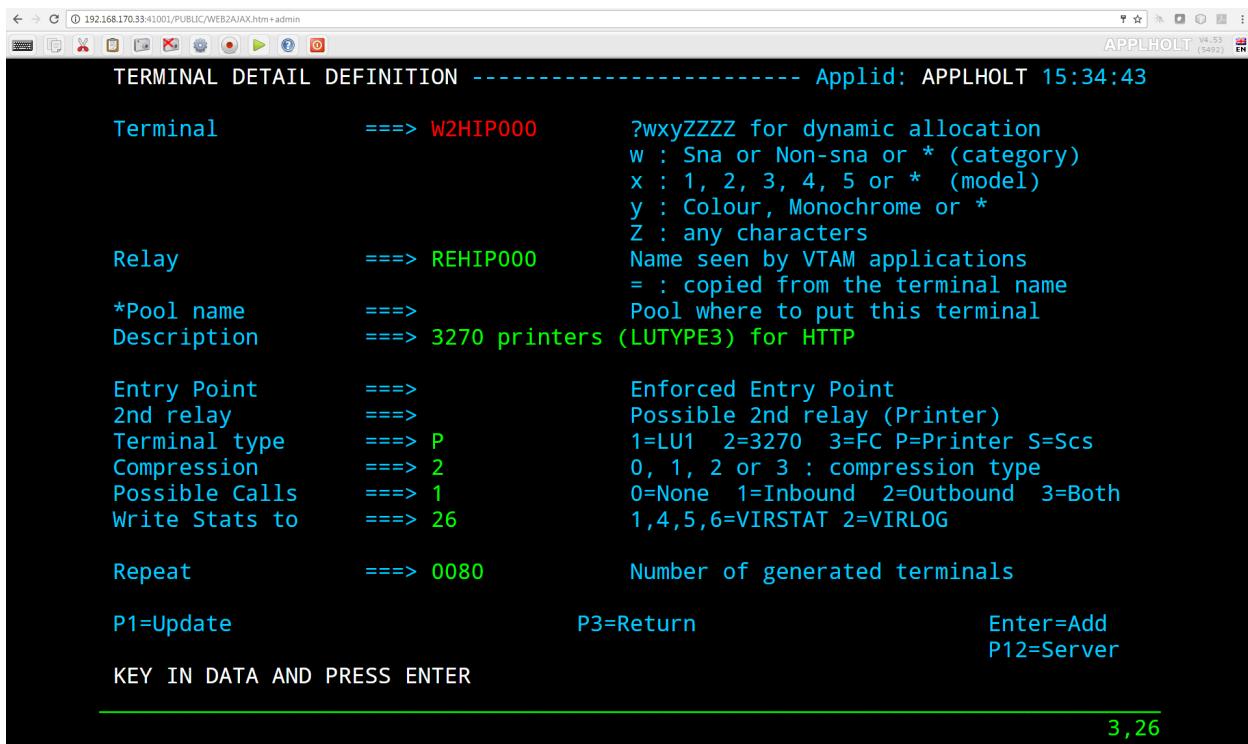

*Associated printer relays for HTTP*

Refer to the VIRTEL Web Access Guide for further information about printers.

#### 2.4.2 VTAM Terminal Definitions

HTTP relay LU's must be defined to VTAM by means of APPL statements in an application major node, as shown in the following example:

```
C52VIRTM VBUILD TYPE=APPL
*
* RHTVTxxx : Relay for VTAM appl accessed by WEB to HOST *
*
RHTVT000 APPL AUTH=(ACQ,PASS),MODETAB=ISTINCLM,DLOGMOD=SNX32702,EAS=1
RHTVT001 APPL AUTH=(ACQ,PASS),MODETAB=ISTINCLM,DLOGMOD=SNX32702,EAS=1
RHTVT002 APPL AUTH=(ACQ,PASS),MODETAB=ISTINCLM,DLOGMOD=SNX32702,EAS=1
RHTVT003 APPL AUTH=(ACQ,PASS),MODETAB=ISTINCLM,DLOGMOD=SNX32702,EAS=1
*
* RHTIPxxx : Printer relays for WEB to HOST terminals *
*
RHTIP000 APPL AUTH=(ACQ,PASS),MODETAB=ISTINCLM,DLOGMOD=DSILGMOD,EAS=1
RHTIP001 APPL AUTH=(ACQ,PASS),MODETAB=ISTINCLM,DLOGMOD=DSILGMOD,EAS=1
RHTIP003 APPL AUTH=(ACQ,PASS),MODETAB=ISTINCLM,DLOGMOD=DSILGMOD,EAS=1
RHTIP004 APPL AUTH=(ACQ,PASS),MODETAB=ISTINCLM,DLOGMOD=DSILGMOD,EAS=1
```

*VTAM definitions for HTTP terminals*

#### 2.4.3 CICS Definitions

The HTTP relay LU's must also be defined to CICS, as shown in the following example:

```
* VIRTEL 3270 TERMINALS FOR WEB2HOST
DEFINE TERMINAL(T000) GROUP(VIRTEL) TYPETERM(DFHLU2E2)
NETNAME(RHTVT000) PRINTER(I000)
DESC(VIRTEL WEB TO HOST TERMINAL)
DEFINE TERMINAL(T001) GROUP(VIRTEL) TYPETERM(DFHLU2E2)
NETNAME(RHTVT001) PRINTER(I001)
DESC(VIRTEL WEB TO HOST TERMINAL)
DEFINE TERMINAL(T002) GROUP(VIRTEL) TYPETERM(DFHLU2E2)
NETNAME(RHTVT002) PRINTER(I002)
DESC(VIRTEL WEB TO HOST TERMINAL)
DEFINE TERMINAL(T003) GROUP(VIRTEL) TYPETERM(DFHLU2E2)
NETNAME(RHTVT003) PRINTER(I003)
DESC(VIRTEL WEB TO HOST TERMINAL)
* VIRTEL 3284 PRINTERS FOR WEB2HOST
DEFINE TERMINAL(I000) GROUP(VIRTEL) TYPETERM(DFHLU3)
NETNAME(RHTIP000)
DESC(VIRTEL WEB TO HOST PRINTER)
DEFINE TERMINAL(I001) GROUP(VIRTEL) TYPETERM(DFHLU3)
NETNAME(RHTIP001)
DESC(VIRTEL WEB TO HOST PRINTER)
DEFINE TERMINAL(I002) GROUP(VIRTEL) TYPETERM(DFHLU3)
NETNAME(RHTIP002)
DESC(VIRTEL WEB TO HOST PRINTER)
DEFINE TERMINAL(I003) GROUP(VIRTEL) TYPETERM(DFHLU3)
NETNAME(RHTIP003)
DESC(VIRTEL WEB TO HOST PRINTER)
```

This job is supplied in member CSDW2H of the VIRTEL SAMPLIB.

## 2.5 HTTP Outbound line

An HTTP Outbound line allows VIRTEL to act as an HTTP requester. Activation of this type of line is subject to the presence of the TCP1 parameter in the VIRTCT.

By means of the OPTION\$ FOR-HTTP and SEND\$ TO-LINE instructions, a VIRTEL scenario can make requests to the remote HTTP server whose address is specified in the HTTP Outbound line definition. Multiple HTTP Outbound lines may be defined to allow requests to be sent to different HTTP servers. Refer to “VIRTEL Web Modernisation Scenarios” in the VIRTEL Web Access Guide for examples of the OPTION\$ FOR-HTTP instruction. The \$SITE\$ defines the IP address of the outbound server. It is passed via a scenario. See the OPTION\$ FOR-HTTP scenario instruction.

LINE DETAIL DEFINITION ----- Applid: APPLHOLT 13:58:58	
Internal name	====> O-HTTP
External name	====> WEBSERV1
Remote ident	====> \$SITE\$
Local ident	====> \$NONE\$
Description	====> Outbound HTTP line for Web Services
Prefix	=====
Pool	=====
Entry Point	=====
Rule Set	====> O-HTTP
Line type	====> TCP1
Possible calls	=====> 2
Startup prerequisite	=====>
Protocol program	=====> VIRHTTP
Security program	=====>
Time out	====> 0000
Window	====> 0000
Pad	====>
Retries	====> 0000
Action	=====> 0
Packet	=====> 0000
Tran	=====>
Delay	=====>
1st character is line code	
External entity name	
Remote VTAM LU or TCP/IP address	
Local VTAM LU or TCP/IP address	
Prefix for terminals	
Pool for terminals	
Default Entry Point on this line	
Rules to choose an entry point	
eg: TCP1 MQ1 XM1 BATCH1 APPC2 ...	
0=None 1=Inbound 2=Outbound 3=I & O	
P1=Update	P3=Return
Enter=Add	P4=Terminals
	P5=Rules

5,21

Definition of an HTTP Outbound line

## 2.5.1 Parameters

**Internal name** Must be unique.

**External name** Should be unique. Either the internal name or the external name may be specified in the SEND\$ TO-LINE instruction in the scenario.

**Remote ident** This is the IP address and port number of the remote HTTP server. The format is nnn.nnn.nnn.nnn:pppp where nnn.nnn.nnn.nnn is the IP address and pppp is the port number. The port number (normally port 80) must be specified, there is no default.

The remote HTTP server may also be specified by its DNS name and port number, for example webservices.mycompany.com:80

The special value \$SITE\$ indicates that the name and port number of the remote HTTP server are specified in the SITE parameter of the OPTION\$ FOR-HTTP instruction.

**Local ident** \$NONE\$ indicates that VIRTEL will not open a listening port for this line.

**Prefix** Leave blank. No terminals are required for an HTTP Outbound line.

**Line type** One of the TCP/IP protocols defined in the VIRTCT, for example TCP1.

**Possible calls** Specify 2 to indicate that this line is used for outbound calls.

**Protocol** VIRHTTP or HTTP.

## 2.6 HTTP Outbound SMTP line

An SMTP line establishes a TCP/IP link between VIRTEL and an external SMTP server. The external SMTP server receives outgoing mail from VIRTEL for distribution to users. The SMTP line also defines

the characteristics of VIRTEL's internal SMTP server which receives incoming mail sent to VIRTEL. The activation of this type of line requires the presence of the TCP1 parameter in the VIRTCT.

**..note::** In case of SMTP problems, use the command F VIRTEL,TRACE,L=S-SMTP to trace the dialog between VIRTEL and the SMTP server. The trace output is written to SYSPRINT or SYSLST.

```
DETAIL de la DEFINITION d'une LIGNE ----- Applid: SPVIRBW 15:41:25

Nom interne ===> S-SMTP          1er caract}re = code ligne
Nom externe ===> SMTP-LIG        Nom de la ligne
Partenaire ===> 192.168.0.131:8025 nom VTAM ou adresse TCP/IP
Notre adresse ===> 192.168.235.30:42000 Notre nom VTAM ou notre port TCP/IP
Description ===> spvirbw<spvirbw@syspertec.com>
Pr{fixe      ===> SM           Pr{fixe des terminaux auto-activ{s
Pool         ===>              Pool de terminaux
Entr{e       ===> SMTP         Point d'entr{e par d{faut
Jeu de r}gles ===> S-SMTP      R}gles de choix d'un point d'entr{e
Type de ligne ===> TCP1         ex: TCP1 MQ1 XM1 BATCH
Appels possibles      ===> 3    0=Aucun 1=Entrants 2=Sortants 3=E & S
Condition au d{marrage ===>      ==>
Protocole     ===> SMTP         Gestionnaire de la ligne
Programme de s{curit{   ===>      S{curit{ et/ou cryptage
Time out     ===> 0000          Action ===> 0    Action si t/o: 0=aucune 1=keepalive
Window       ===> 0000          Packet ===> 0000 cf WINDOW= et PACKET= de la VIRTCT
Pad          ===>              Tran  ===>      PAD=INTEG/TRANSP/NO, TRAN=EVEN/ODD/NO
R{essais     ===> 0010          Delai  ===>      R{essais de connexion des terminaux

P1=Mise @ jour          P3=Retour          P4=Terminaux
Entr{e=Ajout            P5=R}gles
```

*SMTP line definition*

### 2.6.1 Parameters

**Remote ident** This field is required and represents the IP address and port number of the SMTP server to which VIRTEL sends outgoing mail.

**Local ident** The IP address and port number on which VIRTEL listens for incoming mail. For details of how to code this field, refer to “Local ident” under the heading “*Line Parameters*”,.

**Description** The sender name generated in outgoing e-mails. Not used for incoming e-mails.

Generally, the description field does not contain any significant information. However, in the case of an SMTP line, the contents of this field are used by VIRTEL.

The description field for an SMTP line must be in a specific format. It must contain a domain name, followed by an e-mail address enclosed in angle brackets (characters “<” and “>”). Everything up to the first angle bracket is the operand of the HELO command which VIRTEL sends to the SMTP server. The e-mail address in angle brackets is the default operand of the MAIL FROM command which VIRTEL sends to the SMTP server. This default e-mail address can optionally be overridden by the sending application by means of the FAD4 structured field. The e-mail address used will normally need to be defined to the SMTP server.

**Prefix** Terminal name prefix (see below).

**Entry Point** When defining an SMTP line, it is obligatory to define a default entry point. This entry point will be used for all incoming calls which do not match any of the rules of the line.

Entry points for use with SMTP lines are described under the heading “Incoming E-mails” in the VIRTEL Web Access Guide.

**Line type** One of the TCP/IP protocols defined in the VIRTCT, for example TCP1.

**Possible calls** Direction of calls.

The value 3 must be used in order to allow exchanges in both directions between VIRTEL and the partner SMTP server.

**Protocol** Always SMTP.

**Window** Always 0.

**Packet** Always 0.

**Pad** Always blank.

**Tran** Always blank.

#### *SMTP terminals*

By pressing [PF4], the list of terminals associated with the SMTP line will be displayed. An SMTP line uses a single sub-group of type-3 terminals having a common prefix (in this case SM). The number of terminals defined determines the number of simultaneous SMTP sessions authorised. Either explicit or repeated Terminal Definitions may be used.

The example below shows a group of 16 SMTP terminals with associated relays:

```
TERMINAL DETAIL DEFINITION ----- Applid: APPLHOLT 15:49:32
Terminal      ===> SMLOC000      ?wxyZZZ for dynamic allocation
                           w : Sna or Non-sna or * (category)
                           x : 1, 2, 3, 4, 5 or * (model)
                           y : Colour, Monochrome or *
                           Z : any characters
Relay          ===> RSMVT200      Name seen by VTAM applications
                           = : copied from the terminal name
*Pool name    ===>
Description   ===> SMTP terminals      Pool where to put this terminal
Entry Point   ===> SMTP          Enforced Entry Point
2nd relay     ===>
Terminal type ===> 3            Possible 2nd relay (Printer)
                           1=LU1  2=3270  3=FC P=Printer S=Scs
Compression   ===> 2            0, 1, 2 or 3 : compression type
Possible Calls ===> 3            0=None  1=Inbound  2=Outbound  3=Both
                           1,4,5,6=VIRSTAT 2=VIRLOG
Write Stats to ===>
Repeat        ===> 0016         Number of generated terminals
P1=Update     P3=Return       Enter=Add
                           P12=Server
KEY IN DATA AND PRESS ENTER
```

*SMTP Terminal Definitions*

## 2.6.2 Terminal Definitions

**Terminal** The terminal name must match the prefix of the line.

**Relay** A relay LU must be specified if incoming e-mails are used to trigger the start of a CICS transaction (or another VTAM application). The relay LU's must be defined by APPL statements in a VTAM application major node, as described below.

**Entry point** Leave blank. The entry point is defined in the line (or in the rules of the line) for this type of terminal.

**Type de terminal** Always 3.

**Compression** Always 2.

**Possible Calls** Always 3.

**Repeat** The number of terminals defined.

### **2.6.3 VTAM Terminal Definitions**

```
RWSVT200 APPL AUTH=(ACQ,PASS),MODETAB=MODVIRT,DLOGMOD=DLOGREL  
RWSVT201 APPL AUTH=(ACQ,PASS),MODETAB=MODVIRT,DLOGMOD=DLOGREL  
RWSVT202 APPL AUTH=(ACQ,PASS),MODETAB=MODVIRT,DLOGMOD=DLOGREL  
RWSVT203 APPL AUTH=(ACQ,PASS),MODETAB=MODVIRT,DLOGMOD=DLOGREL
```

*VTAM definitions for SMTP relay LUs*

### **2.6.4 CICS Definitions**

Where incoming e-mails are used to trigger a CICS transaction (or other VTAM application), the SMTP relay LU's must be defined by APPL statements in a VTAM application major node, as shown in this example:

```
DEFINE TYPETERM(SMTP3270) GROUP(VIRTSMTP)  
DESCRIPTION(TYPETERM FOR SMTP PSEUDO-TERMINAL)  
DEVICE(3270) TERMMODEL(2) SHIPPABLE(YES) RECEIVESIZE(16384)  
PAGESIZE(24,80) DEFSCREEN(24,80) EXTENDEDDEDS(YES) QUERY(ALL)  
TTI(YES) RELREQ(YES) DISCREQ(YES) LOGONMSG(NO) UCTRAN(NO)  
DEFINE TERMINAL(SM00) GROUP(VIRTSMTP)  
DESCRIPTION(PSEUDO-TERMINAL FOR SMTP)  
TYPETERM(SMTP3270) NETNAME(RWSVT200) USERID(SPVIRSTC)  
DEFINE TERMINAL(SM01) GROUP(VIRTSMTP)  
DESCRIPTION(PSEUDO-TERMINAL FOR SMTP)  
TYPETERM(SMTP3270) NETNAME(RWSVT201) USERID(SPVIRSTC)  
DEFINE TERMINAL(SM02) GROUP(VIRTSMTP)  
DESCRIPTION(PSEUDO-TERMINAL FOR SMTP)  
TYPETERM(SMTP3270) NETNAME(RWSVT202) USERID(SPVIRSTC)  
DEFINE TERMINAL(SM03) GROUP(VIRTSMTP)  
DESCRIPTION(PSEUDO-TERMINAL FOR SMTP)  
TYPETERM(SMTP3270) NETNAME(RWSVT203) USERID(SPVIRSTC)
```

## 2.7 IMS Connect line

An IMS Connect line establishes a TCP/IP connection between VIRTEL and IMS Connect using the RESUME TPIPE protocol. Once the connection is established, IMS application programs running in an MPP or BMP region can send requests to VIRTEL using the ICAL DL/I call. VIRTEL processes these requests by launching a customer-written scenario. The scenario can perform actions such as making an outbound HTTP call to a web service before returning the result to the IMS application program. Activation of this type of line requires the presence of the TCP1 parameter in the VIRTCT.

LINE DETAIL DEFINITION ----- Applid: APPLHOLT 16:03:49	
Internal name	====> I-CONN
External name	====> IVP1
Remote ident	====> 192.168.170.11:7003
Local ident	====>
Description	====> Connection to IMS Connect
Prefix	====> ICAL
Pool	====>
Entry Point	====> SOAPVIRT
Rule Set	====> I-CONN
Line type	====> TCP1
Possible calls	====> 1
Startup prerequisite	====>
Protocol program	====>ICONNECT
Security program	====>
Time out	====> 0010
Window	====> 0003
Pad	====>
Retries	====> 0010
Action	====> 0
Packet	====> 0128
Tran	====>
Delay	====>
1st character is line code	
External entity name	
Remote VTAM LU or TCP/IP address	
Local VTAM LU or TCP/IP address	
Prefix for terminals	
Pool for terminals	
Default Entry Point on this line	
Rules to choose an entry point	
eg: TCP1 MQ1 XM1 BATCH1 APPC2 ...	
0=None 1=Inbound 2=Outbound 3=I & O	
P1=Update	P3=Return
Enter=Add	P4=Terminals
	P5=Rules

*Definition of an IMS Connect line*

### 2.7.1 Parameters

**Internal name** The VIRTEL internal name for this connection.

**External name** Must match the IMS destination id (IRM\_IMSDestId).

**Remote ident** IP address of IMS Connect followed by the port number.

**Local ident** Leave blank.

**Prefix** Terminal name prefix (see below).

**Entry Point** The entry point name must match the IMS TPIPE name (IRM\_CLIENTID).

**Line type** One of the TCP/IP protocols defined in the VIRTCT, for example TCP1.

**Possible calls** Always 1.

**Protocol** Always ICONNECT.

## 2.7.2 Terminals Definitions

Press [PF4] at the Line Detail Definition screen to display the list of terminals associated with an IMS Connect line. An IMS Connect line uses a single sub-group of type-3 terminals having a common prefix (ICAL in this example). No relays are defined for this type of line. The number of terminals defined determines the maximum number of simultaneous RESUME TPIPE sessions between VIRTEL and IMS Connect.

TERMINAL DETAIL DEFINITION ----- Applid: APPLHOLT 16:07:02		
Terminal	====> ICALV500	?wxyZZZ for dynamic allocation w : Sna or Non-sna or * (category) x : 1, 2, 3, 4, 5 or * (model) y : Colour, Monochrome or * Z : any characters
Relay	====>	Name seen by VTAM applications = : copied from the terminal name
*Pool name	====>	Pool where to put this terminal
Description	====>	IMS Connect terminals without relay
Entry Point	====>	Enforced Entry Point
2nd relay	====>	Possible 2nd relay (Printer)
Terminal type	====> 3	1=LU1 2=3270 3=FC P=Printer S=Scs
Compression	====> 2	0, 1, 2 or 3 : compression type
Possible Calls	====> 1	0=None 1=Inbound 2=Outbound 3=Both
Write Stats to	====> 12	1,4,5,6=VIRSTAT 2=VIRLOG
Repeat	====> 0016	Number of generated terminals
P1=Update	P3=Return	Enter=Add P12=Server
KEY IN DATA AND PRESS ENTER		

*Definition of terminals associated with an IMS Connect line*

**Terminal** The terminal name must match the prefix of the line.

**Relais** Leave blank.

**Entry point** Leave blank.

**Terminal Type** Always 3.

**Compression** Always 2.

**Possible calls** Always 1.

**Repeat** Number of terminals (RESUME TPIPE sessions) defined.

## 2.7.3 Entry Point

Each IMS Connect line must have an associated Entry Point whose name is specified in the line definition. An example is shown below:

```

ENTRY POINT DETAIL DEFINITION ----- Applid: APPLHOLT 16:10:10

Name      ===> SOAPVIRT          Name this ENTRY POINT (LOGON DATA)
Description ===> Requests from IMS Connect
Transactions ===> OTMA           Prefix for associated transactions
Last page   ===>
Transparency ===>
Time out    ===> 0150      minutes Maximum inactive time
Do if timeout ===> 0           0=logoff  1=bip+logoff  2=anti pad
Emulation   ===> SCENARIO        Type of terminal:
HOST4WEB   : program driven    HTML  : Web Browser
SCENARIO   : script driven     EMAIL : SMTP client
Directory for scenarios  ===> OTM-DIR If scenarios in VSAM, not LOADLIB
Signon program      ===> Controls user name and password
Menu program        ===> List of transactions
Identification scenario ===> eg XML identification
Type 3 compression   ===> Discover typical screens (Virtel/PC)
Mandatory identification ===> (PC or minitel)
3270 swap key       ===> eg P24
Extended colors     ===> E: extended X: extended + DBCS

P1=Update          P3=Return         P4=Transactions
Enter=Add

```

*Definition of entry point associated with an IMS Connect line*

**Name** The name of the entry point must match the IMS TPIPE name specified in the IRM\_CLIENTID parameter of the IMS Connect definition.

**Transactions** Prefix of associated transaction names (see next section).

**Emulation** Always SCENARIO.

**Directory for scenarios** The name of the VIRTEL directory which contains the scenario(s) for processing requests from IMS.

#### 2.7.4 Transactions

Each IMS Connect entry point must have one or more associated transactions. Press [PF4] at the Entry Point Detail Definition screen to display the list of transactions associated with an IMS Connect entry point. The transaction definition specifies the name of the scenario which will be invoked to process an incoming request from IMS. If the incoming request does not specify a transaction name, or if the specified transaction name is not defined in the entry point, then VIRTEL will invoke the transaction whose external name is the same as the entry point name. If there is no such default transaction, then the request is rejected and VIRTEL issues message VIRIC57E.

```

TRANSACTION DETAIL DEFINITION ----- Applid: APPLHOLT 16:12:39

Internal name ===> OTMA-EX1           To associate with an entry point name
External name ===> EXAMPLE1          Name displayed on user menu
Description  ===> Acc}s scenario SOAPVIRT
Application   ===> $NONE$             Option ===>
PassTicket    ===> 0  Name ===>      0=no 1=yes 2=unsigned
Application type ===> 2              1=VTAM 2=VIRTEL 3=SERV 4=PAGE 5=LINE
Pseudo-terminals ===>               Prefix of name of partner terminals
Logmode       ===>                 Specify when LOGMODE must be changed
How started    ===> 1                1=menu 2=sub-menu 3=auto
Security       ===> 0                0=none 1=basic 2=NTLM 3=TLS 4=HTML
Translation(s) ===>                 0=idem 1=8040 2=8080 3=4040 4=auto
Logon message  ===>

TIOA at logon   ===> &/S
TIOA at logoff  ===>
Initial Scenario ===> SOAPVIRT        Final Scenario     ===>
Input Scenario  ===>                 Output Scenario   ===>
                                         P1=Update          P3=Return         P12=Server

```

*Definition of a transaction associated with an IMS Connect entry point*

**Internal name** Must match the transaction prefix specified in the entry point.

**External name** This is the transaction name specified by the IMS application in the message header. For the default transaction, the external name must be the same as the entry point name.

**Application** Always \$NONE\$.

**Application type** Always 2.

**Security** Always 0.

**TIOA at logon** Always &/S.

**Initial scenario** The name of the VIRTEL scenario which will process requests from IMS for this transaction.

## 2.7.5 Scenarios

When a scenario is invoked to process a request message from IMS connect, VIRTEL places the contents of the request message in the variable \$INFILE\$. After processing the message, the scenario returns a response message to IMS by means of the SEND\$ AS-ANSWER instruction. By way of illustration, the simple example shown below converts the request message to uppercase before sending it back as a response message to IMS:

```

OTMACL SCREENS APPL=OTMACL
*
* Scenario for testing an IMS CONNECT connection
*
SCENARIO INITIAL
*
CONVERT$ EBCDIC-TO-UPPERCASE,VAR='$INFILE$'
SEND$ AS-ANSWER,VAR='$INFILE$',TYPE='TEXT'
*
```

```
SCENARIO END
*
SCRNEND
END
```

*Example scenario for processing an IMS Connect request*

.note:

More **complex** scenarios may be constructed **with** the aid of VIRTEL Studio.

## 2.7.6 Message format

Messages sent from an IMS application to VIRTEL may be prefixed by a 12-byte header. The format of the header is shown in the figure below:

Bytes	Length	EBCDIC	Meaning
0 - 3	4	/V1/	Identifies type of prefix
4 - 11	8	xxxxxx	Externql transaction name. Left justified and padded with blanks

*Format of an IMS Connect message header*

All data following the header is treated as binary data which is passed to the scenario without translation in the \$INFILE\$ variable.

## 2.8 MQ line

An MQ line establishes a connection between VIRTEL and an MQSeries message queue. Each MQ line can receive messages from, or send messages to, one MQSeries message queue. Activation of this type of line requires the presence of the MQ1 or MQ2 parameter in the VIRTCT. The queue can be shared with another application (another VIRTEL for instance) or used in exclusive mode depending on its own definition.

LINE DETAIL DEFINITION ----- Applid: SPVIRPCM 17:19:35		
Internal name ===> M-MQ1	1st character is line code	
External name ===> VIRTELIN	External entity name	
Remote ident ===>	Remote VTAM LU or TCP/IP address	
Local ident ===> VIRTELIN	Local VTAM LU or TCP/IP address	
Description ===> MQ - queue INPUT		
Prefix ===> MQIN	Prefix for terminals	
Pool ===>	Pool for terminals	
Entry Point ===> MQIN	Default Entry Point on this line	
Rule Set ===> M-MQ1	Rules to choose an entry point eg: TCP1 MQ1 XM1 BATCH1 APPC2 ...	
Line type ===> MQ1		
Possible calls	====> 0      0=None 1=Inbound 2=Outbound 3=I & O	
Startup prerequisite	====> WAIT-LINE(M-MQ2)	
Protocol program	====> RAW      Dialog manager	
Security program	====>      Non standard security	
Time out ===>	Action ===>      Action if t/o: 0=none 1=keepalive	
Window ===>	Packet ===>      eventual protocol parameters	
Pad ===>	Tran ===>      PAD=INTEG/TRANSP/NO, TRAN=EVEN/ODD/NO	
Retries ===>	Delay ===>      Retries for linked to terminals	
P1=Update	P3=Return	P4=Terminals
Enter=Add		P5=Rules

### 2.8.1 Parameters

**Remote ident** For the RAW protocol: Leave blank.

For the PREFIXED, PREFIX12, and PREFIX20 protocols: The special value \$REPLYTOQ indicates that outbound messages are sent to the destination indicated by the REPLYTOQ and REPLYTO-QMGR parameters taken from the inbound message and saved in the 12- or 20-byte header.

**Local ident** The name of the MQSeries message queue. The queue name prefix specified in the MQn parameter of the VIRTCT will be added to the front of this name. Refer to “Parameters of the VIRTCT” in the VIRTEL Installation Guide for details of the MQn parameter.

**Prefix** Terminal name prefix (see below).

**Entry Point** Required for MQ input queue.

**Line type** One of the MQn protocols defined in the VIRTCT, for example MQ1.

**Possible calls** Specify one of the following values:

-1 = Input: VIRTEL receives messages from the MQSeries queue -2 = Output: VIRTEL writes messages to the MQSeries queue

**Protocol** RAW, PREFIXED, PREFIX12, or PREFIX20.

#### Tran

Specify the way in which messages are processed on the line.

-STR = The messages are processed as MQFMT\_STRING formatted messages. This will allow MQ to perform the appropriate character set translations between the communicating systems. To support this feature, the PTF5135 must be applied on the system.

-no value = The messages are processed as MQFMT\_NONE formatted messages.

#### Navigation

Press [PF4] at the line definition screen to display the list of terminals associated with an MQ line. An MQ line uses a single sub-group of type-3 terminals having a common prefix (MQIN in this example). The number of terminals defined determines the maximum number of messages which can be processed simultaneously by VIRTEL.

TERMINAL DETAIL DEFINITION ----- Applid: SPVIRPCM 17:24:20		
Terminal	==> MQIN1000	?wxyZZZ for dynamic allocation w : Sna or Non-sna or * (category) x : 1, 2, 3, 4, 5 or * (model) y : Colour, Monochrome or * Z : any characters
Relay	==>	Name seen by VTAM applications = : copied from the terminal name
*Pool name	==>	Pool where to put this terminal
Description	==> Terminaux de ligne M-MQ1	
Entry Point	==>	Enforced Entry Point
2nd relay	==>	Possible 2nd relay (Printer)
Terminal type	==> 3	1=LU1 2=3270 3=FC P=Printer S=Scs
Compression	==> 2	0, 1, 2 or 3 : compression type
Possible Calls	==> 3	0=None 1=Inbound 2=Outbound 3=Both
Write Stats to	==> 12	1,4,5,6=VIRSTAT 2=VIRLOG
Repeat	==> 0016	Number of generated terminals
P1=Update	P3=Return	Enter=Add P12=Server
KEY IN DATA AND PRESS ENTER		

#### 2.8.2 Terminal Parameters

**Terminal** The terminal name must match the prefix of the line.

**Relais** Leave blank.

**Entry point** Leave blank.

**Terminal Type** Always 3.

**Compression** Always 2.

**Possible calls** Always 3.

**Repeat** Number of terminals defined.

## 2.9 Batch line

A batch line allows VIRTEL to process HTTP requests in batch mode. When a batch line is defined in the VIRTEL configuration, VIRTEL reads HTTP requests from an input sequential file at startup, processes the requests, writes the responses to an output sequential file, and shuts down. Activation of this type of line is subject to the presence of the BATCHn parameter in the VIRTCT.

LINE DETAIL DEFINITION -----		Applid: APPLHOLT 8:36:28
Internal name	====> B-BT1	1st character is line code
External name	====> BATCH-L1	External entity name
Remote ident	====>	Remote VTAM LU or TCP/IP address
Local ident	====>	Local VTAM LU or TCP/IP address
Description	====> Batch Line	
Prefix	====> BT1	Prefix for terminals
Pool	====>	Pool for terminals
Entry Point	====> EPBATCH	Default Entry Point on this line
Rule Set	====> B-BT1	Rules to choose an entry point
Line type	====> BATCH1	eg: TCP1 MQ1 XM1 BATCH1 APPC2 ... 0=None 1=Inbound 2=Outbound 3=I & O
Possible calls	====> 1	
Startup prerequisite	====>	
Protocol program	====> VIRHTTP	Dialog manager
Security program	====>	Non standard security
Time out	====> 0000	Action ==> 0 Action if t/o: 0=none 1=keepalive
Window	====> 0000	Packet ==> 0000 eventual protocol parameters
Pad	====>	Tran ==> PAD=INTEG/TRANSP/NO, TRAN=EVEN/ODD/NO
Retries	====> 0010	Delay ==> 0002 Retries for linked to terminals
P1=Update		P4=Terminals
Enter=Add		P5=Rules

### 2.9.1 Parameters

**Remote ident** Always blank.

**Local ident** Always blank.

**Prefix** Terminal name prefix (see below).

**Entry Point** When defining a batch line, it is obligatory to define a default entry point. This entry point is similar to the entry point used for an HTTP line. The entry point contains a list of transactions, and these transactions determine which directories are used to retrieve page templates, and which 3270 applications are accessible to the batch requests.

Each transaction must refer to one of the terminal sub-groups associated with the batch line (see "Batch terminals" below).

**For type 1 (Application) transactions:** The prefix will be that of the terminal sub-group with an associated relay.

**For type 2 (Virtel) or type 4 (Page) transactions** The prefix will be that of the terminal sub-group without an associated relay.

**For type 3 (Server) transactions** No terminal prefix is required.

**Line type** BATCH1 or BATCH2, corresponding to one of the BATCH parameters defined in the VIRTCT.

**Possible calls** Specify 1 (incoming calls only).

**Protocol** VIRHTTP or HTTP.

**Window** Always 0.

**Packet** Always 0.

**Pad** Always blank.

**Tran** Always blank.

## 2.9.2 Terminal Definitions

Like an HTTP line, a batch line uses up to two sub-groups of type-3 terminals having a common prefix (in this case BT1). Refer to “HTTP terminals” 26 for further details. If the batch requests do not require connection to a host VTAM application, then it is only necessary to define the first terminal sub-group (the sub-group without relays).

Press [PF4] at the line detail definition screen to display the list of associated terminals whose prefix matches the prefix specified in the line definition. Then press [PF12] to display the terminal detail definition. The example below shows the terminals for a batch line without relays:

```
TERMINAL DETAIL DEFINITION ----- Applid: APPLHOLT 8:42:21

Terminal      ===> BT1LOC00      ?wxyZZZZ for dynamic allocation
                           w : Sna or Non-sna or * (category)
                           x : 1, 2, 3, 4, 5 or * (model)
                           y : Colour, Monochrome or *
                           Z : any characters
Relay          ===>             Name seen by VTAM applications
*Pool name    ===>             = : copied from the terminal name
Description   ===>             Pool where to put this terminal
                           Batch terminals (no relay)

Entry Point   ===>             Enforced Entry Point
2nd relay     ===>             Possible 2nd relay (Printer)
Terminal type ===> 3           1=LU1  2=3270  3=FC P=Printer S=Scs
Compression   ===> 2           0, 1, 2 or 3 : compression type
Possible Calls ===> 3           0=None  1=Inbound  2=Outbound  3=Both
Write Stats to ===> 12          1,4,5,6=VIRSTAT 2=VIRLOG
Repeat         ===> 0004        Number of generated terminals

P1=Update      P3=Return      Enter=Add
                           P12=Server

KEY IN DATA AND PRESS ENTER
```

*Definition of terminals without relay for a batch line*

## 2.10 Native TCP/IP Gateway line

VIRTEL can act as an IP-to-SNA gateway allowing existing VTAM applications to communicate with partner applications via the IP network. By connecting to a VIRTEL NATIVE TCP/IP port, a remote application can establish a TCP/IP session with VIRTEL and exchange messages with a host VTAM application using a simple record-oriented protocol.

The connection is always established by the remote TCP/IP application, but messages can flow in both directions. Each message exchanged between VIRTEL and the partner application is preceded by a two- or four-byte length field.

Typically the host application is a CICS application designed to communicate with banking terminals such as the IBM 3650.

The activation of this type of line requires the presence of the >TCP1 parameter in the VIRTCT.

LINE DETAIL DEFINITION -----		Applid: APPLHOLT 8:46:43
Internal name	====> 7-IP	1st character is line code
External name	====> IP-LINE	External entity name
Remote ident	=====	Remote VTAM LU or TCP/IP address
Local ident	====> :7777	Local VTAM LU or TCP/IP address
Description	====> Incoming IP Call	
Prefix	====> VIP	Prefix for terminals
Pool	=====	Pool for terminals
Entry Point	====> IPVIR	Default Entry Point on this line
Rule Set	=====	Rules to choose an entry point eg: TCP1 MQ1 XM1 BATCH1 APPC2 ...
Line type	====> TCP1	0=None 1=Inbound 2=Outbound 3=I & O
Possible calls	=====> 1	
Startup prerequisite	=====	
Protocol program	=====> NATIVE2	Dialog manager
Security program	=====	Non standard security
Time out	====> 0000	Action =====> 0 Action if t/o: 0=none 1=keepalive
Window	====> 0000	Packet =====> 8192 eventual protocol parameters
Pad	=====	Tran =====> NO PAD=INTEG/TRANSP/NO, TRAN=EVEN/ODD/NO
Retries	====> 0010	Delay =====> Retries for linked to terminals
P1=Update		P3=Return
Enter=Add		P4=Terminals P5=Rules

### 2.10.1 Parameters

**Remote ident** Not used for a NATIVE TCP/IP line.

**Local ident** The IP address and port number on which VIRTEL listens for incoming connections from the partner application. For details of how to code this field, refer to “Local ident” under the heading “*Line Parameters*”.

**Prefix** Terminal name prefix (see below).

**Entry Point** The default entry point will be used for all incoming calls which do not match any of the rules of the line. Entry points for use with native TCP/IP lines must specify Emulation type \$NONE\$

**Line type** One of the TCP/IP protocols defined in the VIRTCT, for example TCP1.

**Possible calls** Specify 1 to allow inbound calls.

**Protocol** NATIVE2 or NATIVE2P for native TCP/IP protocol with a two-byte length field NATIVE4 or NATIVE4P for native TCP/IP protocol with a four-byte length field

**Packet** Specify a packet size sufficient to contain the largest message sent by either the host or the partner application, plus 2 or 4 bytes for the length field.

## 2.10.2 Line Terminals

By pressing [PF4], the list of terminals associated with the NATIVE TCP/IP line will be displayed. A NATIVE TCP/IP line uses a single group of type-3 terminals having a common prefix (VIP in this example). The number of terminals defined determines the number of simultaneous conversations authorised.

The example below shows a group of 4 NATIVE TCP/IP terminals:

```
TERMINAL DETAIL DEFINITION ----- Applid: APPLHOLT 8:53:08
Terminal      ===> VIPTER00      ?wxyZZZZ for dynamic allocation
                           w : Sna or Non-sna or * (category)
                           x : 1, 2, 3, 4, 5 or * (model)
                           y : Colour, Monochrome or *
                           Z : any characters
Relay          ===> *VIPPOOL      Name seen by VTAM applications
*Pool name    ===>             = : copied from the terminal name
Description   ===>             Pool where to put this terminal
                           IP Terminals (With relay)
Entry Point   ===>             Enforced Entry Point
2nd relay     ===>             Possible 2nd relay (Printer)
Terminal type ===> 3           1=LU1 2=3270 3=FC P=Printer S=Scs
Compression   ===> 2           0, 1, 2 or 3 : compression type
Possible Calls ===> 3           0=None 1=Inbound 2=Outbound 3=Both
Write Stats to ===> 2           1,4,5,6=VIRSTAT 2=VIRLOG
Repeat        ===> 0004       Number of generated terminals
P1=Update     P3=Return
                                         Enter=Add
                                         P12=Server
KEY IN DATA AND PRESS ENTER
```

## 2.10.3 Terminal Parameters

**Terminal** The terminal name must match the prefix of the line.

**Relay** Specify the name of the relay pool which defines the terminal LU names as seen by the VTAM application. The first character is an asterisk indicating that this is the name of a pool.

**Entry point** Leave blank. The entry point is defined in the line (or in the rules of the line) for this type of terminal.

**Terminal type** Always 3.

**Compression** Always 2.

**Possible Calls** Always 3.

**Repeat** The number of terminals defined.

## 2.10.4 Relay Pool

The figure below shows the definition of the NATIVE TCP/IP relay pool:

```

TERMINAL DETAIL DEFINITION ----- Applid: APPLHOLT 8:56:18

Terminal      ===> VIPREL00      ?wxyZZZZ for dynamic allocation
                           w : Sna or Non-sna or * (category)
                           x : 1, 2, 3, 4, 5 or * (model)
                           y : Colour, Monochrome or *
                           Z : any characters
Relay          ===> RVIPLU00      Name seen by VTAM applications
*Pool name     ===> *VIPPOOL      = : copied from the terminal name
Description    ===> Relay pool for Native
Entry Point    ===>             Enforced Entry Point
2nd relay      ===>             Possible 2nd relay (Printer)
Terminal type  ===> 3           1=LU1 2=3270 3=FC P=Printer S=Scs
Compression    ===> 2           0, 1, 2 or 3 : compression type
Possible Calls ===> 3           0=None 1=Inbound 2=Outbound 3=Both
Write Stats to ===> 2           1,4,5,6=VIRSTAT 2=VIRLOG
Repeat         ===> 0004        Number of generated terminals
P1=Update      P3=Return      Enter=Add
                                         P12=Server
KEY IN DATA AND PRESS ENTER

```

## 2.10.5 VTAM terminals definitions

Relay LU's must be defined to VTAM by means of APPL statements in an application major node, as shown in the following example:

```

VIRTAPPL VBUILD TYPE=APPL
* -----
* RVIPLU00 : VTAM relays for VIRTEL NATIVE TCP/IP terminals *
* -----
RVIPLU00 APPL AUTH=(ACQ,PASS),MODETAB=MODVIRT,DLOGMOD=DLOGREL
RVIPLU01 APPL AUTH=(ACQ,PASS),MODETAB=MODVIRT,DLOGMOD=DLOGREL
RVIPLU02 APPL AUTH=(ACQ,PASS),MODETAB=MODVIRT,DLOGMOD=DLOGREL
RVIPLU03 APPL AUTH=(ACQ,PASS),MODETAB=MODVIRT,DLOGMOD=DLOGREL

```

*VTAM definitions for NATIVE TCP/IP relay LU's*

## 2.10.6 CICS Definitions

The NATIVE TCP/IP relay LU's must also be defined to CICS, as shown in the following example:

```

DEFINE TYPETERM(DT3650) GROUP(VIRTEL)
DESC(3650 FOR VIRTEL TCP/IP)
DEVICE(3650) SESSIONTYPE(USERPROG)
SENDSIZE(1536) RECEIVESIZE(1536)
DEFINE TERMINAL(VR00) GROUP(VIRTEL) NETNAME(RVIPLU00)
DESC(VIRTEL NATIVE TCP/IP TERMINAL) TYPETERM(DT3650)
DEFINE TERMINAL(VR01) GROUP(VIRTEL) NETNAME(RVIPLU01)

```

```
DESC(VIRTEL NATIVE TCP/IP TERMINAL) TYPETERM(DT3650)
DEFINE TERMINAL(VR02) GROUP(VIRTEL) NETNAME(RVIPLU02)
DESC(VIRTEL NATIVE TCP/IP TERMINAL) TYPETERM(DT3650)
DEFINE TERMINAL(VR03) GROUP(VIRTEL) NETNAME(RVIPLU03)
DESC(VIRTEL NATIVE TCP/IP TERMINAL) TYPETERM(DT3650)
```

## 2.10.7 Message format

All messages sent on a NATIVE TCP/IP conversation are prefixed by a 2-byte or 4-byte header. The format of the header for the NATIVE2 protocol is shown in the figure below:

Bytes	Length	Meaning
0 - 1	2	Message length in bytes, excluding the length field itself This is a 16-bit unsigned binary number in big-endian format (Most significant byte first)

*Format of NATIVE2 message header*

The format of the header for the NATIVE4 protocol is shown in the figure below:

Bytes	Length	Meaning
0 - 3	4	Message length in bytes, excluding the length field itself This is a 32-bit unsigned binary number in big-endian format (Most significant byte first)

*Format of NATIVE4 message header*

All data following the header is treated as binary data which is passed to the CICS application without translation. The maximum message length is specified in the definition of the NATIVE TCP/IP line.

The variants NATIVE2P and NATIVE4P may be used if the terminal is defined to the application as a 3270 (LU2) device. In this case, VIRTEL will add the prefix X'7D4040' to inbound messages before sending them to the application, and will remove the 3270 prefix (for example X'F1C1') from outbound messages before sending them to the terminal. The message format to the terminal is the same as described above for NATIVE2 and NATIVE4.

## 2.11 VIRPASS TCP line (VIRKIX)

Communication between VIRTEL and CICS can be established via APPC, TCP/IP, or Cross-memory. This section describes communications in TCP/IP mode using the VIRKIX program on the CICS side.

LINE DETAIL DEFINITION ----- Applid: APPLHOLT 9:13:15		
Internal name	====> 9-XMPASS 1st character is line code	
External name	====> TCP44000 External entity name	
Remote ident	====> Remote VTAM LU or TCP/IP address	
Local ident	====> 127.0.0.1:44000 Local VTAM LU or TCP/IP address	
Description	====> Virpass IP/CICS for VIRKIX	
Prefix	====> CA40AT Prefix for terminals	
Pool	====> Pool for terminals	
Entry Point	====> Default Entry Point on this line	
Rule Set	====> 9-CPASS Rules to choose an entry point	
Line type	====> TCP1 eg: TCP1 MQ1 XM1 BATCH1 APPC2 ...	
Possible calls	====> 3 0=None 1=Inbound 2=Outbound 3=I & O	
Startup prerequisite	====>	
Protocol program	====> VIRPASS Dialog manager	
Security program	====> Non standard security	
Time out	====> 0000 Action	====> Action if t/o: 0=none 1=keepalive
Window	====> 0000 Packet	====> 0000 eventual protocol parameters
Pad	====> Tran	====> PAD=INTEG/TRANSP/NO, TRAN=EVEN/ODD/NO
Retries	====> 0010 Delay	====> 0003 Retries for linked to terminals
P1=Update	P3=Return	P4=Terminals
Enter=Add		P5=Rules

### 2.11.1 Parameters

**Remote ident** Contains the IP address and port number of the CICS side of the link. It must match the fields “adresse TCP/IP” and “port serveur” of the TCP/IP interface defined in VIRKIX. This field should only be used when the VIRKIX relay type is “Virpass TCP/IP” (previously known as “Virpass Symétrique”). If the VIRKIX relay type is “Virpass Asymétrique” (previously known as “Virtel TCP/IP”), this field must be blank, and VIRTEL will wait for VIRKIX to make the connection on the address specified in the “Local ident” field.

**Local ident** Must be specified. Contains the IP address and port number of the VIRTEL side of the link. Must match the fields “Adresse TCP/IP” and “port du serveur” specified in the VIRPASS interface (relay type “Virpass TCP/IP” or “Virpass Asymétrique”) defined in VIRKIX.

**Prefix** Terminal name prefix (see below).

**Entry point** Leave blank.

**Line type** TCP1

**Possible calls** Always 3.

**Protocol** Always VIRPASS.

**Window** Always 0.

**Packet** Always 0.

**Pad, Tran** Always blank.

## 2.11.2 Terminal Definitions

A VIRPASS TCP line for communication with VIRKIX uses a single sub-group of terminals dedicated to outgoing calls. Either explicit or repeated definitions can be used. The terminals are defined as type 3, compression 2, and the “Possible calls” field must be set to 2. The “Relay” field in the terminal definition must contain the name of the VIRKIX relay which will be activated at connection time. In the case of incoming X25 calls this relay is defined in the VIRKIX menu “Interface X25” – “Appels X25 entrant”. The “Type of line” field in the relay definition must contain the value X25VIRPA (or E25TCPIP in previous versions of VIRKIX). Unlike other terminal types, the relay name specified here is not the name of a VTAM LU.

```
TERMINAL DETAIL DEFINITION ----- Applid: APPLHOLT 9:29:44
Terminal      ===> CA40AT01      ?wxyZZZZ for dynamic allocation
                                         w : Sna or Non-sna or * (category)
                                         x : 1, 2, 3, 4, 5 or * (model)
                                         y : Colour, Monochrome or *
                                         Z : any characters
Relay          ===> VAPITCPE     Name seen by VTAM applications
                                         = : copied from the terminal name
*Pool name    ===>             Pool where to put this terminal
Description   ===> VIRTEL/VIRKIX link for X25
Entry Point   ===>             Enforced Entry Point
2nd relay     ===>             Possible 2nd relay (Printer)
Terminal type ===> 3           1=LU1  2=3270  3=FC P=Printer S=Scs
Compression   ===> 2           0, 1, 2 or 3 : compression type
Possible Calls ===> 2           0=None  1=Inbound  2=Outbound  3=Both
Write Stats to ===>             1,4,5,6=VIRSTAT 2=VIRLOG
Repeat        ===> 0006       Number of generated terminals
P1=Update      P3=Return      Enter=Add
                                         P12=Server
KEY IN DATA AND PRESS ENTER
```

*Terminals on a VIRPASS TCP line for VIRKIX*

## 2.12 VIRPASS TCP line (VIRNT)

A VIRNT system can be connected to VIRTEL to act as an X25 gateway handling incoming and outgoing connections to and from VIRTEL, or to act as a LECAM server. Communication between VIRTEL and VIRNT can be established using either an APPC line or a TCP/IP line. This section describes TCP/IP mode.

LINE DETAIL DEFINITION -----		Applid: APPLHOLT 9:33:24
Internal name	====> 6-NTTCP	1st character is line code
External name	====> NTTCP-LI	External entity name
Remote ident	====>	Remote VTAM LU or TCP/IP address
Local ident	====> :43002	Local VTAM LU or TCP/IP address
Description	====> VIRNT line for TCP/IP - VIRPASS	
Prefix	====> NTTC	Prefix for terminals
Pool	====>	Pool for terminals
Entry Point	====> VPASSTCP	Default Entry Point on this line
Rule Set	====> 6-NTTCP	Rules to choose an entry point
Line type	====> TCP1	eg: TCP1 MQ1 XM1 BATCH1 APPC2 ... 0=None 1=Inbound 2=Outbound 3=I & O
Possible calls	====> 3	
Startup prerequisite	====>	
Protocol program	====> VIRPASS	Dialog manager
Security program	====>	Non standard security
Time out	====> 0000	Action ==> 0 Action if t/o: 0=none 1=keepalive
Window	====> 0000	Packet ==> eventual protocol parameters
Pad	====>	Tran ==> PAD=INTEG/TRANSP/NO, TRAN=EVEN/ODD/NO
Retries	====> 0000	Delay ==> Retries for linked to terminals
P1=Update		P3=Return
Enter=Add		P4=Terminals P5=Rules

### 2.12.1 Parameters

**Remote ident** Always blank.

**Local ident** This field must be the same as the TCP/IP port referenced under the heading “HOST IP Port” in the VIRPASS.INI file on the VIRNT system.

**Prefix** Terminal name prefix (see below).

**Entry Point** Not required for this type of line.

**Line type** TCP1

**Possible calls** No special restriction.

**Protocol** Always VIRPASS.

**Window** Always 0.

**Packet** Always 0.

**Pad, Tran** Always blank.

A VIRPASS TCP connection with a VIRNT system can use up to two sub-groups of terminals. The first sub-group is dedicated to incoming calls and has an associated relay. The second sub-group is dedicated to outgoing calls and has no associated relay. The two sub-groups have a common prefix which associates them with the line. Either explicit or repeated terminal definitions may be used.

NTTCE980	0020	RNTTC000	\$X25\$	3	1
NTTCS980	0020		\$X25\$	3	2

## 2.12.2 Terminal Definitions

Each terminal in the pool dedicated to incoming calls must have an associated relay. The terminals are defined as type 3, compression 2, and the “Possible Calls” field must be set to 1:

TERMINAL DETAIL DEFINITION ----- Applid: APPLHOLT 9:39:46		
Terminal	====> NTTCE980	?wxyZZZZ for dynamic allocation w : Sna or Non-sna or * (category) x : 1, 2, 3, 4, 5 or * (model) y : Colour, Monochrome or * Z : any characters
Relay	====> RNTTC000	Name seen by VTAM applications = : copied from the terminal name
*Pool name	====>	Pool where to put this terminal
Description	====> VIRNT TCP/IP Inbound terminals	
Entry Point	====> \$X25\$	Enforced Entry Point
2nd relay	====>	Possible 2nd relay (Printer)
Terminal type	====> 3	1=LU1 2=3270 3=FC P=Printer S=Scs
Compression	====> 2	0, 1, 2 or 3 : compression type
Possible Calls	====> 1	0=None 1=Inbound 2=Outbound 3=Both
Write Stats to	====>	1,4,5,6=VIRSTAT 2=VIRLOG
Repeat	====> 0020	Number of generated terminals
P1=Update		P3=Return Enter=Add P12=Server
KEY IN DATA AND PRESS ENTER		

*Inbound terminals for a VIRPASS TCP line for VIRNT*

Terminals in the pool dedicated to outgoing calls do not have an associated relay. The terminals are defined as type 3, compression 2, and the “Possible Calls” field must be set to 2:

```

TERMINAL DETAIL DEFINITION ----- Applid: APPLHOLT 9:39:46

Terminal      ===> NTTCS980      ?wxyZZZZ for dynamic allocation
                                         w : Sna or Non-sna or * (category)
                                         x : 1, 2, 3, 4, 5 or * (model)
                                         y : Colour, Monochrome or *
                                         Z : any characters
Relay          ===>             Name seen by VTAM applications
*Pool name    ===>             = : copied from the terminal name
Description   ===> VIRNT TCP/IP Outbound terminals
                                         Pool where to put this terminal

Entry Point    ===> $X25$        Enforced Entry Point
2nd relay     ===>             Possible 2nd relay (Printer)
Terminal type  ===> 3           1=LU1  2=3270  3=FC P=Printer S=Scs
Compression   ===> 2           0, 1, 2 or 3 : compression type
Possible Calls ===> 2           0=None 1=Inbound 2=Outbound 3=Both
Write Stats to ===>             1,4,5,6=VIRSTAT 2=VIRLOG

Repeat         ===> 0020        Number of generated terminals

P1=Update      P3=Return      Enter=Add
P12=Server

KEY IN DATA AND PRESS ENTER

```

*Outbound terminals for a VIRPASS TCP line for VIRNT*

## 2.13 VIRPASS XM line (VIRKIX)

Communication between VIRTEL and CICS can be established via APPC, TCP/IP, or Cross-memory. This section describes communications in Cross-memory (XM) mode using the VIRKIX program on the CICS side.

```
LINE DETAIL DEFINITION ----- Applid: APPLHOLT 11:17:09

Internal name ===> 9-XMPASS           1st character is line code
External name ===> VIRTELXM          External entity name
Remote ident ===> SPCICST            Remote VTAM LU or TCP/IP address
Local ident ===> XM44000             Local VTAM LU or TCP/IP address
Description ===> Virpass XM / CICS connection for VIRKIX
Prefix      ===> CA40XM              Prefix for terminals
Pool        ===>
Entry Point ===>                  Default Entry Point on this line
Rule Set    ===> 9-XMPASS            Rules to choose an entry point
Line type   ===> XM1                eg: TCP1 MQ1 XM1 BATCH1 APPC2 ...
Possible calls      ===> 3          0=None 1=Inbound 2=Outbound 3=I & O
Startup prerequisite ===>
Protocol program   ===> VIRPASS   Dialog manager
Security program   ===>          Non standard security
Time out     ===> 0000      Action   ===> Action if t/o: 0=none 1=keepalive
Window       ===> 0000      Packet   ===> 0000  eventual protocol parameters
Pad          ===>          Tran     ===>          PAD=INTEG/TRANSP/NO, TRAN=EVEN/ODD/NO
Retries      ===> 0002      Delay    ===> 0003  Retries for linked to terminals

P1=Update          P3=Return          P4=Terminals
Enter=Add          P5=Rules
```

### 2.13.1 Parameters

**External name** Must match the relay name of a VIRPASS cross-memory interface in VIRKIX.

**Remote ident** Contains the jobname of the CICS region in which VIRKIX is running. The CICS region must be in the same MVS system as VIRTEL.

**Local ident** Must match the field “Nom de la liaison” specified in the definition of the VIRPASS cross-memory interface in VIRKIX.

**Prefix** Terminal name prefix (see below).

**Entry point** Leave blank.

**Line type** XM1

**Possible calls** Always 3.

**Protocol** Always VIRPASS.

**Window** Always 0.

**Packet** Always 0.

**Pad, Tran** Always blank.

## 2.13.2 Terminal Definitions

A VIRPASS XM line for communication with VIRKIX uses a single sub-group of terminals dedicated to outgoing calls. Either explicit or repeated definitions can be used. The terminals are defined as type 3, compression 2, and the “Possible calls” field must be set to 2. The “Relay” field in the terminal definition must contain the name of the VIRKIX relay which will be activated at connection time. In the case of incoming X25 calls this relay is defined in the VIRKIX menu “Interface X25” – “Appels X25 entrant”. The “Type de ligne” field in the relay definition must contain the value X25VIRPA (this is the same value as for VIRPASS TCP, which was coded as E25TCPIP in previous versions of VIRKIX).

Unlike other terminal types, the relay name specified here is not the name of a VTAM LU.

```
TERMINAL DETAIL DEFINITION ----- Applid: APPLHOLT 11:22:04
Terminal      ===> CA40XM01      ?wxyZZZZ for dynamic allocation
                                         w : Sna or Non-sna or * (category)
                                         x : 1, 2, 3, 4, 5 or * (model)
                                         y : Colour, Monochrome or *
                                         Z : any characters
Relay          ===> VAPIXMEM     Name seen by VTAM applications
                                         = : copied from the terminal name
*Pool name    ===>             Pool where to put this terminal
Description   ===> VIRTEL/VIRKIX link for XM

Entry Point   ===>             Enforced Entry Point
2nd relay     ===>             Possible 2nd relay (Printer)
Terminal type ===> 3           1=LU1  2=3270  3=FC P=Printer S=Scs
Compression   ===> 2           0, 1, 2 or 3 : compression type
Possible Calls ===> 2           0=None  1=Inbound  2=Outbound  3=Both
Write Stats to ===>             1,4,5,6=VIRSTAT 2=VIRLOG

Repeat        ===> 0006       Number of generated terminals

P1=Update     P3=Return      Enter=Add
                                         P12=Server

KEY IN DATA AND PRESS ENTER
```

*Terminals on a VIRPASS XM line for VIRKIX*

A VIRPASS cross-memory connection is defined in VIRKIX by means of an entity known as a “Virpass cross-memory interface”:

KIXADMIN - Virpass Cross-Memory -----	V2R5 - 30/06/2005 - 10:54:55
	Sysid CICS: CICT
Nom interface XM: VIRTELXM	
-----	
Nom du job partenaire : SPTSABYV	
Nom de la liaison : XM44000	
-----	
Autres définitions:	
Lancement :	A M:Manuel A:Autom, évt dans SYSID:
Nbr maxi de connexions: 0010	de 01 à 1024
Transaction associée : APIW	APIW par défaut
Trace et Snap : O	O:Oui N:Non
Trace Connexion : O	O:Oui N:Non
Snap centralisé : O	O:Oui N:Non
Priorité : 080	de 000 à 255
-----	

P3-----P4-----P5-----P6-----P7-----P8-----P12-----ENTER----
Menu Quitter M.A.J Supprimer Saisir Valider

*VIRKIX definitions for a VIRPASS XM connection*

**Nom interface** The name of the VIRPASS cross-memory interface (also known as the relay name or “nom relais”) must match the “external name” of the VIRPASS XM line in VIRTEL.

**Nom du job partenaire** Specifies the jobname of the VIRTEL STC, which must be in the same MVS system as VIRKIX.

**Nom de la liaison** Must match the “Local ident” of the VIRPASS XM line in VIRTEL.

Refer to the VIRKIX Configuration documentation for details of the other fields on this panel.

## 2.14 X25 XOT line

An XOT line establishes a connection between VIRTEL and a CISCO router. Across this type of line, VIRTEL processes incoming and outgoing calls to and from the X25 network. Activation of this type of line requires the presence of the TCP1 parameter in the VIRTCT parameter.

LINE DETAIL DEFINITION -----		Applid: SPVIRH 17:01:20
Internal name	====> 4-XOT	1st character is line code
External name	====> XOT-LIG	External entity name
Remote ident	====> 192.168.92.80:1998	Remote VTAM LU or TCP/IP address
Local ident	====> 192.168.170.43:1998	Local VTAM LU or TCP/IP address
Description	====> Connexions via routeur Cisco	Cisco
Prefix	====> XOTF	Prefix for terminals
Pool	====>	Pool for terminals
Entry Point	====>	Default Entry Point on this line
Rule Set	====> 4-XOT	Rules to choose an entry point eg: TCP1 MQ1 XM1 BATCH1 APPC2 ...
Line type	====> TCP1	
Possible calls	====> 3	0=None 1=Inbound 2=Outbound 3=I & O
Startup prerequisite	====>	
Protocol program	====> XOT	Dialog manager
Security program	====>	Non standard security
Time out	====> 0010	Action ==> 0 Action if t/o: 0=none 1=keepalive
Window	====> 0003	Packet ==> 0128 eventual protocol parameters
Pad	====>	Tran ==> PAD=INTEG/TRANSP/NO, TRAN=EVEN/ODD/NO
Retries	====> 0010	Delay ==> Retries for linked to terminals
P1=Update	P3=Return	P4=Terminals
Enter=Add		P5=Rules

### 2.14.1 Parameters

**Remote ident** IP address of the router followed by the port number 1998.

The address specified here is used by VIRTEL as the destination address for outgoing calls. Incoming calls are accepted from any IP address, except in the case of XOT lines which share a common IP address and port (specified in the “Local ident” field). Such lines only accept calls whose IP source address matches the router address specified in the “Remote ident” field. This allows VIRTEL to allocate incoming calls to the correct XOT line. The parameter UNIQUEP=Y (which can be specified only in batch definition mode using the VIRCONF utility) allows this check to be enforced regardless of whether the “Local ident” field specifies a shared address.

**..note::** Take care to ensure that the router presents the expected address to VIRTEL. You may need to use the xot-source parameter in the router configuration to ensure that the router presents the correct IP address to VIRTEL for incoming calls. Example:

```
x25 route .* xot 10.0.1.1 xot-source loopback0
```

**Local ident** The IP address and port number on the VIRTEL side. For details of how to code this field, refer to “Local ident” under the heading “*Line Parameters*”.

The port number must be 1998. This port number is fixed by the XOT protocol, and the router does not provide any configuration statement which allows the port number to be altered.

From VIRTEL version 4.24 onwards, multiple XOT lines with the same local IP address and port number can be defined within a single instance of VIRTEL. As explained above, VIRTEL uses the router IP address ("Remote ident") to match calls from a router with the correct XOT line. However, if multiple instances of VIRTEL are started on a single MVS system, each VIRTEL must have its own distinct IP address for XOT. The use of VIPA allows multiple IP addresses to be defined within a single TCP/IP stack (see the IBM manual z/OS Communications Server IP Configuration Guide for details of VIPA).

**Prefix** Terminal name prefix (see below).

**Entry Point** Not required for this type of line.

**Line type** One of the TCP/IP protocols defined in the VIRTCT, for example TCP1.

**Possible calls** No special restriction.

**Protocol** Always XOT.

**Window** In accordance with the window size for the X25 line specified in the router configuration (see note below).

**Packet** In accordance with the packet size for the X25 line specified in the router configuration (see note below).

Note: VIRTEL will normally use the window size and packet size negotiated with the partner during call setup. The Window and Packet values specified in the line definition are the default values which will be used if no values are supplied by the partner in the Call or Call Accepted packets.

**Pad** Always blank.

**Tran** Normally blank, unless non-standard ASCII translation is required for special applications.

## 2.14.2 Terminal Definitions

Press [PF4] at the line definition screen to display the list of terminals associated with an XOT line. An XOT line uses a single sub-group of type-3 terminals having a common prefix (XOTF in this example). Each terminal may be associated with an application relay defined by a VTAM APPL statement. The number of terminals defined determines the maximum number of simultaneous sessions (or virtual circuits) between the router and VIRTEL.

TERMINAL DETAIL DEFINITION -----		Applid: SPVIRH 17:10:41
Terminal	==> XOTF000	?wxyZZZ for dynamic allocation w : Sna or Non-sna or * (category) x : 1, 2, 3, 4, 5 or * (model) y : Colour, Monochrome or * Z : any characters
Relay	==> RXOTF000	Name seen by VTAM applications
*Pool name	==>	= : copied from the terminal name
Description	==> XOT Terminals	Pool where to put this terminal
Entry Point	==>	Enforced Entry Point
2nd relay	==>	Possible 2nd relay (Printer)
Terminal type	==> 3	1=LU1 2=3270 3=FC P=Printer S=Scs
Compression	==> 2	0, 1, 2 or 3 : compression type
Possible Calls	==> 3	0=None 1=Inbound 2=Outbound 3=Both
Write Stats to	==> 24	1,4,5,6=VIRSTAT 2=VIRLOG
Repeat	==> 0016	Number of generated terminals
P1=Update	P3=Return	Enter=Add P12=Server
KEY IN DATA AND PRESS ENTER		

*Definition of terminals associated with an XOT line*

**Terminal** The terminal name must match the prefix of the line.

**Relais** The name of a relay LU must be specified if incoming calls are routed to a type-1 transaction (VTAM application). The relay LU's must be defined by APPL statements in a VTAM application major node, as described below. If all incoming calls are routed to a type-3 transaction (external server), as is the case for calls routed to a GATE or PCNE application such as CFT or Inter.PEL, no relay is required on the terminals attached to the XOT line.

**Entry point** Leave blank.

**Terminal Type** Always 3.

**Compression** Always 2.

**Possible calls** Always 3.

**Repeat** Number of terminals (virtual circuits) defined.^

### 2.14.3 VTAM Terminal Definition

**When incoming calls are routed to a type-1 transaction (VTAM application), the relay LU's must be defined by APPL statements in a VTAM application major node, as shown in the example below:**

```
RXOTF000 APPL AUTH=(ACQ,PASS),MODETAB=MODVIRT,DLOGMOD=DLOGREL
RXOTF001 APPL AUTH=(ACQ,PASS),MODETAB=MODVIRT,DLOGMOD=DLOGREL
RXOTF002 APPL AUTH=(ACQ,PASS),MODETAB=MODVIRT,DLOGMOD=DLOGREL
RXOTF003 APPL AUTH=(ACQ,PASS),MODETAB=MODVIRT,DLOGMOD=DLOGREL
```

## 2.15 X25 VIRPESIT line

A VIRPESIT line establishes a TCP/IP link between VIRTEL and a file transfer application such as CFT. A VIRPESIT line allows VIRTEL to act as an IP-to-X25 gateway for file transfer sessions using the PESIT and ETEBAC protocols. File transfer requests arriving via IP on a VIRPESIT line may be routed either to a local GATE or PCNE application, or to a remote partner via the X25 network. Similarly, file transfer requests from the X25 network or from local GATE or PCNE applications may be routed to the IP network via a VIRPESIT line.

The activation of this type of line requires the presence of the TCP1 parameter in the VIRTCT.

LINE DETAIL DEFINITION -----		Applid: APPLHOLT 11:32:02
Internal name	==== I-PESIT	1st character is line code
External name	==== I001LINE	External entity name
Remote ident	====	Remote VTAM LU or TCP/IP address
Local ident	==== 192.168.235.30:2498	Local VTAM LU or TCP/IP address
Description	==== Gateway VIRTEL IP/PESIT	
Prefix	==== I001T	Prefix for terminals
Pool	====	Pool for terminals
Entry Point	==== I001EP	Default Entry Point on this line
Rule Set	==== I001LINE	Rules to choose an entry point
Line type	==== TCP1	eg: TCP1 MQ1 XM1 BATCH1 APPC2 ...
Possible calls	====> 3	O=None 1=Inbound 2=Outbound 3=I & O
Startup prerequisite	====>	
Protocol program	====> VIRPESIT	Dialog manager
Security program	====>	Non standard security
Time out	====> 0000	Action ==> 0 Action if t/o: 0=none 1=keepalive
Window	====> 0000	Packet ==> 0000 eventual protocol parameters
Pad	====>	TRAN=INTEG/TRANSP/NO, TRAN=EVEN/ODD/NO
Retries	====> 0000	Retries for linked to terminals
P1=Update Enter=Add		P3=Return
		P4=Terminals P5=Rules

### 2.15.1 Parameters

**Remote ident** (optional) IP address and port number of the default partner (for outbound calls when the external server does not specify a partner IP address).

**Local ident** The IP address and port number on which VIRTEL listens for incoming connections from the partner application. For details of how to code this field, refer to “Local ident” under the heading “*Line Parameters*”.

**Prefix** Terminal name prefix (see below).

**Entry Point** The default entry point will be used for all incoming calls which do not match any of the rules of the line.

Entry points for use with VIRPESIT lines are described under the heading “VIRPESIT gateway” in the “Incoming calls” section of the VIRTEL Technical Documentation.

**Line type** One of the TCP/IP protocols defined in the VIRTCT, for example TCP1.

**Possible calls** Specify 3 to allow exchanges in both directions.

**Protocol** Always VIRPESIT.

By pressing [PF4], the list of terminals associated with the VIRPESIT line will be displayed. A VIRPESIT line uses a single group of type-3 terminals having a common prefix (I001T in this example). The number of terminals defined determines the number of simultaneous file transfer sessions authorised. The example below shows a group of 8 VIRPESIT terminals:

```
TERMINAL DETAIL DEFINITION ----- Applid: APPLHOLT 11:36:21

Terminal      ===> I001T000      ?wxyZZZZ for dynamic allocation
                           w : Sna or Non-sna or * (category)
                           x : 1, 2, 3, 4, 5 or * (model)
                           y : Colour, Monochrome or *
                           Z : any characters
Relay          ===>             Name seen by VTAM applications
*Pool name    ===>             = : copied from the terminal name
Description   ===>             Pool where to put this terminal
                           Terminals for line I001LINE

Entry Point   ===>             Enforced Entry Point
2nd relay     ===>             Possible 2nd relay (Printer)
Terminal type ===> 3           1=LU1  2=3270  3=FC P=Printer S=Scs
Compression   ===> 2           0, 1, 2 or 3 : compression type
Possible Calls ===> 3           0=None  1=Inbound  2=Outbound  3=Both
Write Stats to ===> 24          1,4,5,6=VIRSTAT 2=VIRLOG
                           1,4,5,6=VIRSTAT 2=VIRLOG

Repeat         ===> 0008        Number of generated terminals

P1=Update      P3=Return      Enter=Add
                           P12=Server

KEY IN DATA AND PRESS ENTER
```

## 2.15.2 Terminal Definitions

**Terminal** The terminal name must match the prefix of the line.

**Relay** Leave blank.

**Entry point** Leave blank. The entry point is defined in the line (or in the rules of the line) for this type of terminal.

**Terminal type** Always 3.

**Compression** Always 2.

**Possible Calls** Always 3.

**Repeat** The number of terminals defined.

## 2.16 X25 VIRNEOX line

A VIRNEOX line allows VIRTEL to act as a server for communications with application programs over a TCP/IP connection using a simplified X25-like protocol. Typically the application will be an existing X25 application which has been converted to TCP/IP. The activation of this type of line requires the presence of the TCP1 parameter in the VIRTCT.

LINE DETAIL DEFINITION ----- Applid: APPLHOLT 11:38:57	
Internal name	====> 3-NEOX
External name	====> NEOX25
Remote ident	====>
Local ident	====> 192.168.235.61:2525
Description	====> Connections NEO X25
Prefix	====> XNE3
Pool	====>
Entry Point	====>
Rule Set	====> 3-NEOX
Line type	====> TCP1
Possible calls	====> 1
Startup prerequisite	====>
Protocol program	====> VIRNEOX
Security program	====>
Time out	====> 0010
Action	====> 0
Window	====> 0000
Packet	====> 8192
Pad	====>
Tran	====>
Retries	====> 0010
Delay	====>
1st character is line code	
External entity name	
Remote VTAM LU or TCP/IP address	
Local VTAM LU or TCP/IP address	
Prefix for terminals	
Pool for terminals	
Default Entry Point on this line	
Rules to choose an entry point	
eg: TCP1 MQ1 XM1 BATCH1 APPC2 ...	
0=None 1=Inbound 2=Outbound 3=I & O	
P1=Update	P3=Return
Enter=Add	P4=Terminals
	P5=Rules

### 2.16.1 Parameters

**Local ident** The IP address and port number on which VIRTEL listens for incoming connections from the partner application. For details of how to code this field, refer to “Local ident” under the heading “*Line Parameters*”.

**Prefix** Terminal name prefix (see below).

**Entry Point** The default entry point will be used for all incoming calls which do not match any of the rules of the line. Entry points for use with VIRNEOX lines must specify Emulation type \$NONE\$

**Line type** One of the TCP/IP protocols defined in the VIRTCT, for example TCP1.

**Possible calls** Specify 1 to allow inbound calls.

**Protocol** Always VIRNEOX.

**Packet** Specify a packet size sufficient to contain the largest message sent by either the host or the partner application.

By pressing [PF4], the list of terminals associated with the VIRNEOX line will be displayed. A VIRNEOX line uses a single group of type-3 terminals having a common prefix (XNE3 in this example). The number of terminals defined determines the number of simultaneous conversations authorised.

The example below shows a group of 8 VIRNEOX terminals:

```

TERMINAL DETAIL DEFINITION ----- Applid: APPLHOLT 11:42:55

Terminal      ===> XNE30000 ?wxyZZZZ for dynamic allocation
                           w : Sna or Non-sna or * (category)
                           x : 1, 2, 3, 4, 5 or * (model)
                           y : Colour, Monochrome or *
                           Z : any characters
Relay          ===> Name seen by VTAM applications
*Pool name    ===> = : copied from the terminal name
Description   ===> Pool where to put this terminal
                  ===> Terminals for VIRNEOX line

Entry Point    ===> Enforced Entry Point
2nd relay     ===> Possible 2nd relay (Printer)
Terminal type  ===> 3 1=LU1 2=3270 3=FC P=Printer S=Scs
Compression    ===> 2 0, 1, 2 or 3 : compression type
Possible Calls ===> 3 0=None 1=Inbound 2=Outbound 3=Both
Write Stats to ===> 24 1,4,5,6=VIRSTAT 2=VIRLOG

Repeat         ===> 0008 Number of generated terminals

P1=Update      P3=Return Enter=Add
                P12=Server

KEY IN DATA AND PRESS ENTER

```

## 2.16.2 Terminal Definitions

**Terminal** The terminal name must match the prefix of the line.

**Relay** Leave blank.

**Entry point** Leave blank. The entry point is defined in the line (or in the rules of the line) for this type of terminal.

**Terminal type** Always 3.

**Compression** Always 2.

**Possible Calls** Always 3.

**Repeat** The number of terminals defined.

## 2.17 X25 GATE Non Fast-Connect (NFC) line

An X25 GATE Non Fast-Connect line establishes a connection between VIRTEL and an X25 line connected to an IBM 3745 communications controller. Across this type of line, VIRTEL handles incoming and outgoing calls to and from the X25 network. Activation of this type of line requires the presence of the GATE and MINITEL parameters in the VIRTCT.

LINE DETAIL DEFINITION -----		Applid: APPLHOLT 13:25:22
Internal name	====> 2-X25G	1st character is line code
External name	====> X25G-MCH	External entity name
Remote ident	====> X25G-MCH	Remote VTAM LU or TCP/IP address
Local ident	====>	Local VTAM LU or TCP/IP address
Description	====> X25 Gate General (Non Fast-Connect)	
Prefix	====> X25G	Prefix for terminals
Pool	====>	Pool for terminals
Entry Point	====>	Default Entry Point on this line
Rule Set	====> 2-X25G	Rules to choose an entry point
Line type	====> GATE	eg: TCP1 MQ1 XM1 BATCH1 APPC2 ...
Possible calls	====> 3	0=None 1=Inbound 2=Outbound 3=I & O
Startup prerequisite	====>	
Protocol program	====>	Dialog manager
Security program	====>	Non standard security
Time out	====> 0000	Action ==> 0 Action if t/o: 0=none 1=keepalive
Window	====> 0003	Packet ==> 0128 eventual protocol parameters
Pad	====> INTEG	Tran ==> PAD=INTEG/TRANSP/NO, TRAN=EVEN/ODD/NO
Retries	====> 0010	Delay ==> Retries for linked to terminals
P1=Update		P4=Terminals
Enter=Add		P5=Rules

*Definition of an X25 GATE non-Fast Connect line*

### 2.17.1 Parameters

**Remote ident** Name of the MCH LU generated by NPSI.

**Local ident** Always blank.

**Prefix** Terminal name prefix (see below). The terminal names must be identical to the virtual circuit LU names generated by NPSI.

**Entry Point** Not required for this type of line.

**Line type** Always GATE.

**Possible calls** No special restriction.

**Protocol** Always blank.

**Window** Must agree with the NPSI definition.

**Packet** Must agree with the NPSI definition.

**Pad** Must agree with the NPSI definition.

**Tran** Must agree with the NPSI definition.

From VIRTEL version 4.15 onwards, TRAN must be blank if TRAN=EVEN is specified in the NPSI definition.

An X25 GATE Non Fast-Connect line uses a single sub-group of terminals dedicated to the management of sessions between VIRTEL and the switched virtual circuits on the one hand, and between VIRTEL and the host applications on the other hand. Each terminal is associated with an application relay defined by a VTAM APPL statement.

The relay name is compulsory for this type of terminal.

```

TERMINAL DETAIL DEFINITION ----- Applid: APPLHOLT 13:29:54

Terminal      ===> X25G0000      ?wxyZZZZ for dynamic allocation
                           w : Sna or Non-sna or * (category)
                           x : 1, 2, 3, 4, 5 or * (model)
                           y : Colour, Monochrome or *
                           Z : any characters
Relay          ===> RX25G000      Name seen by VTAM applications
                           = : copied from the terminal name
*Pool name     ===>           Pool where to put this terminal
Description    ===> Gate General terminals

Entry Point    ===>           Enforced Entry Point
2nd relay      ===>           Possible 2nd relay (Printer)
Terminal type  ===> 1          1=LU1  2=3270  3=FC P=Printer S=Scs
Compression    ===> 2          0, 1, 2 or 3 : compression type
Possible Calls ===> 3          0=None  1=Inbound  2=Outbound  3=Both
Write Stats to ===>           1,4,5,6=VIRSTAT 2=VIRLOG

Repeat         ===> 0016       Number of generated terminals

P1=Update      P3=Return      Enter=Add
                           P12=Server

KEY IN DATA AND PRESS ENTER

```

## 2.17.2 Terminal Definitions

**Terminal** The terminal name must match the virtual circuit LU names generated by the X25.VC macro in the NPSI.

**Relay** The application relay is a VTAM LU which represents the VIRTEL side of the session with NPSI for each virtual circuit. Relay LUs are defined in a VTAM application major node.

**Terminal type** Always 1.

**Compression** Always 2.

**Possible calls** Specify 3 to allow both incoming and outgoing calls.

**Repeat** The number of virtual circuits defined by NPSI.

## 2.17.3 VTAM Terminal Definitions

Each Minitel or PC wishing to benefit from VIRTEL functionality must be defined in a VTAM switched major node similar to the one shown below.

```

VIRTMINI VBUILD TYPE=SWNET
PU01 PU ADDR=01,                      *
IDBLK=003,                            *
IDNUM=xxyyyy, Note 1  *                Note 2  *
MAXDATA=4101,

```

MODETAB=MODVIRT,	Note 3	*
DLOGMOD=DLOGMINI,		*
PACING=1,		*
VPACING=3,		*
PUTYPE=1,		*
DISCNT=YES,		*
SSCPFM=USSNTO,		*
LOGAPPL=vvvvvv	Note 4	*
MINI1 LU LOCADDR=0,		*
TERM=TWX		

..note:

The switched major nodes must be defined as shown in the above example. The associated relays must refer to DLOGMODE DLOGREL in the MODVIRT mode table.

**Note 1** IDNUM takes the value xxxyy with xx equal to the value of the parameter IDNUMH in the NPSI X25MCH MACRO; yy is a hexadecimal value decrementing in steps of 2 from the CVC number assigned to the LU.

Let us suppose for example that we have a configuration made up of two TRANSPAC lines, L1 and L2, containing respectively 16 and 8 entries. The Minitels are installed on line L2. The value yy assigned to the first Minitel is X'030' ((16 + 8) x 2) in hexadecimal. The values of yy respectively assigned to the other Minitels are X'02E', X'02C', X'02A', X'028', etc.

**Note 2** The value of MAXDATA must not exceed MAXBFRU times UNITSZ, nor must it exceed the NCP MAXDATA value.

**Note 3** The MODVIRT mode table must be placed in an executable module library (VSE) or in a LOADLIB (MVS, VM) known to VTAM before activation of the switched major node.

**Note 4** LOGAPPL takes the value specified in the APPLID TYPE=INITIAL parameter in the VIRTCT. If both Minitels and PC's are used simultaneously, the LOGAPPL parameter must be replaced by the value USSTAB=USSVIRT (the source of this USSTAB is in the VIRTEL SSL for VSE and in the MACLIB for MVS).

..note:

The LOGAPPL and USSTAB parameters are valid only for non GATE lines. For sites making outgoing calls, from NCP 5.40 onwards, USSTAB and GATE are incompatible, and therefore the USSTAB keyword should be omitted for a switched major node describing type 1 LU's.

## 2.17.4 NCP Parameters

The LUDRPOOL MACRO must contain an NUMTYP1 parameter with a value greater than or equal to the number of CVC available on the lines. For LU6.2 connections, check for the presence of the NUMILU parameter which indicates the number of available PU type 2.1.

## 2.17.5 NPSI Parameters

The following parameters must agree with the specification of your TRANSPAC subscription.

### Macro X25VCCPT

**MAXPKTL (packet length)** Must equal the value given for “Packet Size” on your TRANSPAC subscription (usually 128).

**VWINDOW (packet level window size)** Must equal the value given for “Packet Window Size” on your TRANSPAC subscription (usually 3).

#### Macro X25MCH

**CONNECT** Must be specified as NO.

**GATE** Must be specified as GENERAL.

**LLCLIST** Must have the value LLC4. LLC0,LLC2,LLC3,LLC4 and LLC5 can for example take the values 0, 2, 3, 4 et 5. Only the value assigned to the LLC4 parameter is important, because it will be appended to the TRANSPAC number allowing access to the server.

**MWINDOW (frame level window size)** Must equal the value given for “Frame Window Size” on your TRANSPAC subscription (usually 7).

**FRMLENGTH** Must equal MAXPKTL + 3 (usually 131).

**PAD** Permissible values are NO, INTEG or TRANSP. If the value is INTEG, support for DARK (invisible fields) is not provided on Minitels in 80 column mode. It is provided where PAD=TRANSP.

In GATE mode, VIRTEL supports DARK in 80 column mode whatever the value of the PAD parameter.

**SUBADDR** Must be YES.

**TRAN** Must be EVEN or NO.

### 2.17.6 Routing on incoming calls

Incoming calls are routed by means of an entry point name specified in the Call User Data of the incoming call packet. If no Call User Data is specified, the value specified in the “Entry Point” parameter of the terminal definition is used. If this field is not supplied, the second value of the DEFENTR parameter in the VIRTCT is used.

Other possibilities are available through the use of a type 1 user exit.

While the sharing of a line in Fast-Connect mode would give better performance, it may prove necessary to use another method if, for example, the line is used for 3174 connections, or by another product which does not support Fast-Connect. Except for the definition of the line itself, the remainder of the configuration is similar to that of a non- shared GATE line. Be aware, however, that the implementation of such a solution can be complex.

To be able to support line sharing without Fast-Connect mode, the line must be defined as GATE=GENERAL and the X25MCH CONNECT parameter must be set to NO. The parameters SUBADDR, CTCP and CUD0 define the routing of connections and the use of the associated QLLC's.

X25.MCH RESS=003,	*
FRMLENGTH=131,	*
LUNAME=(XU01,XU02), LU MCH (Application x, VIRTEL)	*
LCGDEF=(0,19),	*
MWINDOW=3,	*
ANS=CONT,	*
DBIT=NO,	*
GATE=GENERAL,	*
CONNECT=NO,	Multi applications without F-C
CTCP=(00,01),	Reference CTCP
CUD0=(09,01),	*

```

* Calls with subaddr 9 connect the terminal to the application
* controlling line XU01 (CTCP=00)
* Calls with subaddr 1 connect the terminal to the application
* VIRTEL controlling line XU02 (CTCP=01)
LLCLIST=(LLC0,LLC4,LLCn,...),
LOGAPPL=(PELC00,VIRTEL),
SUBADDR=YES,
IDBLKC=62, Idblk for PCNE (LLC0) *
IDBLKG=63, Idblk for GATE (LLC4) *
* In VTAM there are 2 switched major nodes with the same IDNUM
* but different IDBLK (062 for the first, 063 for VIRTEL)
PAD=INTEG,
PKTMDL=8,
STATION=DTE,
SPPED=19200,
TRAN=EVEN
X25.LCG LCGN=0
X25.VC LCN=(0,19),                                20 physical CVC *
TYPE=SWITCHED,
MAXDATA=4101,                                     Largest VTAM message size *
VCCINDX=1,                                         *
CALL=INOUT                                         Incoming and outgoing calls

```

..note:

Each application can potentially use up to 20 CVC's. It is not possible to limit the  
 ↵number of circuits which can be used by each application, as can be done with Fast-  
 ↵Connect.

## 2.18 X25 GATE Fast-Connect (FastC) line

An X25 GATE Fast-Connect line establishes a connection between VIRTEL and an X25 line connected to an IBM 3745 communications controller. Across this type of line, VIRTEL handles incoming and outgoing calls to and from the X25 network. Activation of this type of line requires the presence of the FASTC, GATE and MINITEL parameters in the VIRTCT.

LINE DETAIL DEFINITION -----		Applid: APPLHOLT 13:45:03
Internal name	====> 1-X25F	1st character is line code
External name	====> X25F-MCH	External entity name
Remote ident	====> X25F-MCH	Remote VTAM LU or TCP/IP address
Local ident	====>	Local VTAM LU or TCP/IP address
Description	====> X25 Fast Connect Line	
Prefix	====> X25F	Prefix for terminals
Pool	====>	Pool for terminals
Entry Point	====>	Default Entry Point on this line
Rule Set	====> 1-X25F	Rules to choose an entry point eg: TCP1 MQ1 XM1 BATCH1 APPC2 ... 0=None 1=Inbound 2=Outbound 3=I & O
Line type	====> FASTC	
Possible calls	====> 3	
Startup prerequisite	====>	
Protocol program	====>	Dialog manager
Security program	====>	Non standard security
Time out	====> 0000	Action ==> 0 Action if t/o: 0=none 1=keepalive
Window	====> 0003	Packet ==> 0128 eventual protocol parameters
Pad	====> NO	Pad=INTEG/TRANSP/NO, TRAN=EVEN/ODD/NO
Retries	====> 0010	Delay ==> Retries for linked to terminals
P1=Update		P3=Return
Enter=Add		P4=Terminals P5=Rules

### 2.18.1 Parameters

**Remote ident** Name of the MCH LU generated by NPSI.

**Local ident** Always blank.

**Prefix** An X25 GATE Fast-Connect line uses a single sub-group of terminals dedicated to the management of sessions between VIRTEL and the switched virtual circuits on the one hand, and between VIRTEL and the host applications on the other hand. Each terminal is associated with an application relay defined by a VTAM APPL statement.

**Entry Point** Not required for this type of line.

**Line type** Always FASTC.

**Possible calls** No special restriction.

**Protocol** Always blank.

**Window** Must agree with the NPSI definition.

**Packet** Must agree with the NPSI definition.

**Pad** Must agree with the NPSI definition.

**Tran** Must agree with the NPSI definition.

Terminals on a X25 GATE Fast-Connect line

An X25 GATE Fast-Connect line uses a single sub-group of terminals dedicated to the management of sessions between VIRTEL and the switched virtual circuits on the one hand, and between VIRTEL and the host applications on the other hand. Each terminal is associated with an application relay defined by a VTAM APPL statement.

The relay name is compulsory for this type of terminal.

TERMINAL DETAIL DEFINITION ----- Applid: APPLHOLT 13:49:00		
Terminal	====> X25F0000	?wxyZZZZ for dynamic allocation w : Sna or Non-sna or * (category) x : 1, 2, 3, 4, 5 or * (model) y : Colour, Monochrome or * Z : any characters
Relay	====> RX25F000	Name seen by VTAM applications = : copied from the terminal name
*Pool name	====>	Pool where to put this terminal
Description	====> Fast Connect terminals	
Entry Point	====>	Enforced Entry Point
2nd relay	====>	Possible 2nd relay (Printer)
Terminal type	====> 1	1=LU1 2=3270 3=FC P=Printer S=Scs
Compression	====> 2	0, 1, 2 or 3 : compression type
Possible Calls	====> 3	0=None 1=Inbound 2=Outbound 3=Both
Write Stats to	====>	1,4,5,6=VIRSTAT 2=VIRLOG
Repeat	====> 0016	Number of generated terminals
P1=Update	P3=Return	Enter=Add P12=Server
KEY IN DATA AND PRESS ENTER		

## 2.18.2 Terminal Definitions

**Terminal** The terminal name must match the virtual circuit LU names generated by the X25.VC macro in the NPSI.

**Relay** The application relay is a VTAM LU which represents the VIRTEL side of the session with NPSI for each virtual circuit. Relay LUs are defined in a VTAM application major node.

**Terminal type** Always 1.

**Compression** Always 2.

**Possible calls** Specify 3 to allow both incoming and outgoing calls.

**Repeat** The number of virtual circuits defined by NPSI.

## 2.18.3 VTAM Terminal Definitions

Each Minitel or PC wishing to take advantage of VIRTEL functionality must be defined to VTAM in a switched major node similar to that shown in section “*Definition of a X25 GATE Non Fast-Connect line*”.

## 2.18.4 NCP/NPSI Definitions

As well as offering a noticeable performance improvement, the use of Fast-Connect allows one line to be shared between several CTCP's. When the Fast-Connect option is used, there is no VTAM switched major node. The switched virtual circuit is directly connected to the CTCP. This permanent connection minimizes connection time as well as the consumption of memory and CPU resources.

The definition of a Fast-Connect line is similar to that of a GATE line, apart from:

### Macro X25MCH

**CONNECT** Must have a value other than NO. The remaining parameters depend on the value of the CONNECT parameter.

**LLCLIST** Must contain the value LLC5.

## 2.18.5 Sharing of FastC lines

```
X25.MCH ADRESS=003, *
FRMLENGTH=131, *
LUNAME=(XU01,XU02), LU associated with each VIRTEL *
LCGDEF=(0,19), *
MWINDOW=3, *
ANS=CONT, *
DBIT=NO, *
GATE=GENERAL, *
CONNECT=SUBD, F-C to multiple VIRTEL *
SUBD=(4,9,1), Subaddresses 4, 9, 1 *
CTCP=(0,1,1) 1st VIRTEL if 4, *
2nd VIRTEL if 9 or 1 *
LOGAPPL=(VIRTEL1,VIRTEL2) Applid of each VIRTEL *
LLCLIST=(LLC4) *
SUBADDR=NO, *
PAD=NO, *
PKTMDL=8, *
STATION=DTE, *
SPEED=19200, *
TRAN=NO
X25.LCG LCGN=0
X25.VC LCN=(0,19), 20 physical CVC *
TYPE=SWITCHED, *
MAXDATA=4101, Largest VTAM message size *
VCCINDX=1, *
CALL=INOUT Incoming and outgoing calls
X25.FCG QTY=(15), No.of CVC used for CTCP 0 *
CTCPNO=(0), CTCP number *
ANS=CONT, *
MAXDATA=4101, *
PRFLINE=XU01, Line name prefix *
PRFPU=XP01, PU name prefix *
PRFLU=XL01, Virtual LU name prefix *
SUFFIX=0001 LU numbers incremented by 1
X25.FCG QTY=(15), No of CVC used for CTCP 1 *
CTCPNO=(1), CTCP number *
ANS=CONT, *
MAXDATA=4101, *
PRFLINE=XU02, Line name prefix *
PRFPU=XP02, PU name prefix *
```

PRFLU=XL02, SUFFIX=0001	Virtual LU name prefix *
	LU numbers incremented by 1

*Example of a Fast-Connect line shared between 2 VIRTELs using subaddressing*

..note:

The number of "logical" virtual circuits can be greater than the number of "physical" virtual circuits. This example has 20 physical virtual circuits for 30 (2 X 15) logical virtual circuits.

```
X25.MCH ADDRESS=003,
FRMLENGTH=131,
LUNAME=XU01,           MCH LU associated with VIRTEL *
LCGDEF=(0,19),
MWINDOW=3,
ANS=CONT,
DBIT=NO,
GATE=GENERAL,
CONNECT=YES,          F-C to multiple VIRTEL *
LOGAPPL=VIRTEL1,      Applid of VIRTEL *
LLCLIST=LLC4,
SUBD=NO,              SUBD=NO *
PAD=NO,
PKTMODL=8,
STATION=DTE,
SPPED=19200,
TRAN=NO
X25.LCG                  LCGN=0
X25.VC LCN=(0,19),       20 physical CVC *
TYPE=SWITCHED,
MAXDATA=4101,            Largest VTAM message size *
PRFLINE=ZL01,
PRFPU=ZPU01,
PRFLU=ZLU01,
VCCINDX=1,
CALL=INOUT Incoming and outgoing calls
```

*Example of a Fast-Connect line with a single CTCP without subaddressing*

## 2.19 X25 AntiGATE line

A Reverse-X25 AntiGATE line establishes a link between VIRTEL and a Communication and Transmission Control Program (CTCP) application. On this type of line, VIRTEL communicates with the CTCP to manage incoming and outgoing calls to and from the X25 network. Once a virtual circuit is established, data flows across LU-LU sessions between the VIRTEL terminals and the CTCP. In this way, VIRTEL emulates an IBM 3745 controller with NPSI.

LINE DETAIL DEFINITION -----		Applid: APPLHOLT 14:06:07
Internal name	==> X-AGCFT	1st character is line code
External name	==> ANTIGATE	External entity name
Remote ident	==> CFT2GATE	Remote VTAM LU or TCP/IP address
Local ident	==> VXU21	Local VTAM LU or TCP/IP address
Description	==> Connection ANTIGATE with CFT	
Prefix	==> AG21	Prefix for terminals
Pool	==>	Pool for terminals
Entry Point	==>	Default Entry Point on this line
Rule Set	==> X-AGCFT	Rules to choose an entry point eg: TCP1 MQ1 XM1 BATCH1 APPC2 ...
Line type	==> /GATE	
Possible calls	==> 3	0=None 1=Inbound 2=Outbound 3=I & O
Startup prerequisite	==> WAIT-PARTNER	
Protocol program	==>	Dialog manager
Security program	==>	Non standard security
Time out	==> 0000	Action ==> 0 Action if t/o: 0=none 1=keepalive
Window	==> 0003	Packet ==> 0128 eventual protocol parameters
Pad	==> NO	Tran ==> NO PAD=INTEG/TRANSP/NO, TRAN=EVEN/ODD/NO
Retries	==> 0010	Delay ==> Retries for linked to terminals
P1=Update		P3=Return
Enter=Add		P4=Terminals
		P5=Rules

### 2.19.1 Parameters

**Remote ident** LU name of the CTCP (CFT, Inter.PEL, etc). May be blank if WAIT-PARTNER is coded in the “Startup pre-requisite” field.

**Local ident** Name of the LU which represents the physical circuit for the AntiGATE line (analogous to the LU generated by the NPSI X25.MCH macro in the NCP). This LU must be defined by a VTAM APPL statement.

**Prefix** Terminal name prefix (see below).

**Entry Point** The default entry point, if no entry point is defined at the terminal level, or in the line rules or call user data.

**Line type** Always /GATE.

**Possible calls** No special restriction.

**Startup prerequisite** WAIT-PARTNER is recommended for AntiGATE lines. WAIT-PARTNER must be specified if the partner is CFT.

**Protocol** Always blank.

**Window, Packet** Must agree with the definition in the CTCP.

**Pad, Tran** Must agree with the definition in the CTCP.

## 2.19.2 Terminal Definitions

An AntiGATE line uses a single sub-group of terminals which represent the virtual circuits allocated to the line (analogous to the LU's linked to the virtual circuits defined by the NPSI macro X25.VC in the NCP). The terminal name is an internal name which is used to associate the terminal definition with the AntiGATE line. The associated relay name must match the name of a VTAM APPL statement. Either explicit or repeated terminal definitions may be used.

```

TERMINAL DETAIL DEFINITION ----- Applid: APPLHOLT 13:49:00

Terminal      ===> AG21TM01      ?wxyZZZZ for dynamic allocation
                           w : Sna or Non-sna or * (category)
                           x : 1, 2, 3, 4, 5 or * (model)
                           y : Colour, Monochrome or *
                           Z : any characters
Relay          ===> AG21LU01      Name seen by VTAM applications
                           = : copied from the terminal name
*Pool name     ===>             Pool where to put this terminal
Description    ===> Terminal AntiGATE

Entry Point    ===>             Enforced Entry Point
2nd relay      ===>             Possible 2nd relay (Printer)
Terminal type  ===> 3          1=LU1  2=3270  3=FC P=Printer S=Scs
Compression    ===> 0          0, 1, 2 or 3 : compression type
Possible Calls ===> 3          0=None  1=Inbound  2=Outbound  3=Both
Write Stats to ===>             1,4,5,6=VIRSTAT 2=VIRLOG

Repeat         ===> 0008       Number of generated terminals

P1=Update      P3=Return      Enter=Add
                                         P12=Server

KEY IN DATA AND PRESS ENTER

```

*Terminals on an X25 AntiGATE line*

## 2.19.3 VTAM Terminal Definitions

The LU's representing the line and the virtual circuits must be defined by APPL statements in a VTAM application major node similar to the following example:

```

VIRAGATE VBUILD TYPE=APPL
* -----
* Pseudo ligne gate émulée par Virtel (note 1) *
* -----
VXU21 APPL AUTH=(ACQ,PASS),MODETAB=MODVIRT,DLOGMOD=DLOGANTI
* -----
* Pseudo cvcs pour ligne gate émulée par Virtel (note 1) *
* -----
AG21LU01 APPL AUTH=(ACQ,PASS),MODETAB=MODVIRT,DLOGMOD=DLOGANTI
AG21LU02 APPL AUTH=(ACQ,PASS),MODETAB=MODVIRT,DLOGMOD=DLOGANTI
AG21LU03 APPL AUTH=(ACQ,PASS),MODETAB=MODVIRT,DLOGMOD=DLOGANTI
AG21LU04 APPL AUTH=(ACQ,PASS),MODETAB=MODVIRT,DLOGMOD=DLOGANTI
...

```

*VTAM definitions for an X25 AntiGATE line*

**Note 1** The LU's defined in the "Local ident" field of the line must specify logmode DLOGANTI.

**Note 2** The LU's for the terminal relays can use a logmode appropriate for the application.

**Note 3** The MODVIRT phase must be placed in an executable library (VSE) or in a LOADLIB (MVS, VM) defined to VTAM before the application major node can be activated.

## 2.20 X25 Anti Fast Connect (FastC) line

Similar to an AntiGATE line, a Reverse-X25 AntiFastC line establishes a link between VIRTEL and a Communication and Transmission Control Program (CTCP) application. On this type of line, VIRTEL communicates with the CTCP to manage incoming and outgoing calls to and from the X25 network. Once a virtual circuit is established, data flows across LU-LU sessions between the VIRTEL terminals and the CTCP. In this way, VIRTEL emulates an IBM 3745 controller with NPSI.

```
LINE DETAIL DEFINITION ----- Applid: APPLHOLT 14:06:07

Internal name ===> 8-AFAST           1st character is line code
External name ===> X25AFMCH          External entity name
Remote ident ===> CTCPAPPL          Remote VTAM LU or TCP/IP address
Local ident ===> VXU14              Local VTAM LU or TCP/IP address
Description ===> Connection X25 /Fast Connect
Prefix      ===> VFAS               Prefix for terminals
Pool        ===>
Entry Point ===>
Rule Set    ===> 8-AFAST            Rules to choose an entry point
Line type   ===> /FASTC             eg: TCP1 MQ1 XM1 BATCH1 APPC2 ...
Possible calls      ===> 3          0=None 1=Inbound 2=Outbound 3=I & O
Startup prerequisite ===>
Protocol program    ===>
Security program    ===>
Time out     ===> 0000   Action ===> 0   Action if t/o: 0=none 1=keepalive
Window       ===> 0003   Packet  ===> 0128 eventual protocol parameters
Pad          ===> NO     Tran    ===> NO   PAD=INTEG/TRANSP/NO, TRAN=EVEN/ODD/NO
Retries      ===> 0010   Delay   ===>
P1=Update          P3=Return          P4=Terminals
Enter=Add          P5=Rules
```

### 2.20.1 Parameters

**Remote ident** CTCP LU name.

**Local ident** Name of the LU which represents the physical circuit for the AntiFastC line (analogous to the LU generated by the NPSI X25.MCH macro in the NCP). This LU must be defined by a VTAM APPL statement.

**Prefix** Terminal name prefix (see below).

**Entry Point** The default entry point, if no entry point is defined at the terminal level, or in the line rules or call user data.

**Line type** Always /FASTC.

**Possible calls** No special restriction.

**Protocol** Always blank.

**Window, Packet** Must agree with the definition in the CTCP.

**Pad** Must agree with the definition in the CTCP.

**Tran** Specify EVEN, ODD, or NO according to the requirements of the CTCP. Additionally, for AntiFastC lines only: the special value EBCD indicates that VIRTEL will perform the necessary conversion to allow a Videotex server CTCP to be accessed in 3270 mode (VIRTEL Multisession or Web Access).

## 2.20.2 Terminal Definitions

An AntiFastC link uses a single sub-group of terminals which represent the virtual circuits allocated to the line (analogous to the LU's linked to the virtual circuits defined by the NPSI macro X25.VC in the NCP). The terminal name is an internal name which is used to associate the terminal definition with the AntiFastC line. The associated relay name must match the name of a VTAM APPL statement. Either explicit or repeated terminal definitions may be used.

TERMINAL DETAIL DEFINITION ----- Applid: APPLHOLT 14:18:53		
Terminal	====> VFAS0000	?wxyZZZZ for dynamic allocation w : Sna or Non-sna or * (category) x : 1, 2, 3, 4, 5 or * (model) y : Colour, Monochrome or * Z : any characters
Relay	====> X25AF500	Name seen by VTAM applications = : copied from the terminal name
*Pool name	=====>	Pool where to put this terminal
Description	=====> Terminals on X25 AntiFastC line	
Entry Point	=====>	Enforced Entry Point
2nd relay	=====>	Possible 2nd relay (Printer)
Terminal type	=====> 3	1=LU1 2=3270 3=FC P=Printer S=Scs
Compression	=====> 2	0, 1, 2 or 3 : compression type
Possible Calls	=====> 3	0=None 1=Inbound 2=Outbound 3=Both
Write Stats to	=====>	1,4,5,6=VIRSTAT 2=VIRLOG
Repeat	=====> 0016	Number of generated terminals
P1=Update	P3=Return	Enter=Add P12=Server
KEY IN DATA AND PRESS ENTER		

Terminals on an X25 AntiFastC line

The LU's representing the line and the virtual circuits must be defined by APPL statements in a VTAM application major node similar to the following example:

```
VIRAFAST VBUILD TYPE=APPL
* -----
* Pseudo ligne fastc émulée par Virtel (note 1) *
* -----
VXU14 APPL AUTH=(ACQ,PASS),MODETAB=MODVIRT,DLOGMOD=DLOGANTI
* -----
* Pseudo cvcs pour ligne fastc émulée par Virtel (note 1) *
* -----
X25AF500 APPL AUTH=(ACQ,PASS),MODETAB=MODVIRT,DLOGMOD=DLOGANTI
X25AF501 APPL AUTH=(ACQ,PASS),MODETAB=MODVIRT,DLOGMOD=DLOGANTI
X25AF502 APPL AUTH=(ACQ,PASS),MODETAB=MODVIRT,DLOGMOD=DLOGANTI
X25AF503 APPL AUTH=(ACQ,PASS),MODETAB=MODVIRT,DLOGMOD=DLOGANTI
```

## 2.20.3 VTAM Terminal Definitions

**Note 1** The LU's defined in the "Local ident" field of the line must specify logmode DLOGANTI.

**Note 2** The LU's for the terminal relays can use a logmode appropriate for the application.

**Note 3** The MODVIRT phase must be placed in an executable library (VSE) or in a LOADLIB (MVS, VM) defined to VTAM before the application major node can be activated.

## 2.21 X25 AntiPCNE line

Like an AntiGATE or AntiFastC line, a Reverse-X25 AntiPCNE line establishes a link between VIRTEL and an application. By contrast however, VIRTEL does not use a line-level LU to manage call setup, and the application does not supply VIRTEL with a call packet. Instead, the application makes outgoing calls by choosing a particular LU associated with the AntiPCNE line. The X25 called number is defined at the terminal level by means of an associated external server definition. In this way, VIRTEL emulates an IBM 3745 controller with NPSI.

```
LINE DETAIL DEFINITION ----- Applid: APPLHOLT 14:23:30

Internal name ===> P-PCNE1           1st character is line code
External name ===> ANTIPCN1          External entity name
Remote ident ===> CFTAACB1          Remote VTAM LU or TCP/IP address
Local ident ===>                   Local VTAM LU or TCP/IP address
Description ===> AntiPCNE line for CFTA
Prefix      ===> PCN1               Prefix for terminals
Pool        ===>                  Pool for terminals
Entry Point ===>                 Default Entry Point on this line
Rule Set    ===> P-PCNE1          Rules to choose an entry point
Line type   ===> /PCNE            eg: TCP1 MQ1 XM1 BATCH1 APPC2 ...
Possible calls      ===> 3       0=None 1=Inbound 2=Outbound 3=I & O
Startup prerequisite ===>
Protocol program   ===>          Dialog manager
Security program   ===>          Non standard security
Time out   ===> 0000     Action  ===> 0   Action if t/o: 0=none 1=keepalive
Window     ===> 0003     Packet  ===> 0128 eventual protocol parameters
Pad        ===> NO      Tran    ===> NO  PAD=INTEG/TRANSP/NO, TRAN=EVEN/ODD/NO
Retries    ===> 0001     Delay   ===>      Retries for linked to terminals

P1=Update          P3=Return          P4=Terminals
Enter=Add          P5=Rules
```

### 2.21.1 Parameters

**Remote ident** Partner application LU name.

**Local ident** Always blank.

**Prefix** Terminal name prefix (see below).

**Entry Point** Leave blank. The entry point should be defined in the rules of the line.

**Line type** Always /PCNE.

**Possible calls** No special restriction.

**Protocol** Always blank.

**Window** Not used for an AntiPCNE line.

**Packet** Not used for an AntiPCNE line.

**Pad** Always NO.

**Tran** Always NO.

## 2.21.2 Terminal Definitions

An AntiPCNE line uses two sub-groups of terminals. In each case, the terminal name is an internal name which is used to associate the terminal definition with the AntiPCNE line. The associated relay name must match the name of a VTAM APPL statement.

The first sub-group is used for outgoing calls (from the point of view of the application), and consists of explicitly defined terminals with the “Possible calls” field set to 1. Each terminal in this first sub-group corresponds to a single remote partner. The “Relay” field of each terminal in this first sub-group must contain the LU name which the application uses to make outgoing calls to the remote partner concerned. The entry point specified by the rules of the line contains a type-3 transaction which specifies “&R” as the application name. This makes the link with an external server whose name is identical to the Relay LU name. The external server contains the call parameters (X25 number, etc) needed to route calls to the required partner.

The example below shows the definition of an AntiPCNE terminal for outbound calls made using LU name AP1LU01O, and the associated external server containing the X25 call parameters:

```
TERMINAL DETAIL DEFINITION ----- Applid: APPLHOLT 14:27:54

Terminal      ===> PCN10001      ?wxyZZZZ for dynamic allocation
                           w : Sna or Non-sna or * (category)
                           x : 1, 2, 3, 4, 5 or * (model)
                           y : Colour, Monochrome or *
                           Z : any characters
Relay          ===> AP1LU010      Name seen by VTAM applications
                           = : copied from the terminal name
*Pool name     ===>           Pool where to put this terminal
Description    ===> Outbound Calls to customer 101

Entry Point    ===>           Enforced Entry Point
2nd relay      ===>           Possible 2nd relay (Printer)
Terminal type  ===> 3        1=LU1  2=3270  3=FC P=Printer S=Scs
Compression    ===> 0        0, 1, 2 or 3 : compression type
Possible Calls ===> 1        0=None  1=Inbound  2=Outbound  3=Both
Write Stats to ===>           1,4,5,6=VIRSTAT 2=VIRLOG

Repeat         ===> 0001      Number of generated terminals

P1=Update      P3=Return      Enter=Add
                           P12=Server

KEY IN DATA AND PRESS ENTER
```

*Outbound Terminal Definition for X25 AntiPCNE*

EXTERNAL SERVER DETAIL DEFINITION ----- Applid: APPLHOLT 14:31:00		
Name	====> AP1LU010	Name of this server
Description	====> PCNECFT1 to customer 101	
Number	====> 123456101	Number to call
Data	====>	Data to complete call packet
Line number	====> 4-XOT	Line for OUT calls (*=auto)
Backup line	====>	Used when first line is unavailable
Caller	====>	Caller id number (*=auto)
Emulation	====> 2	0=none 1=VirtelPc 2=Minitel 3=M80 4=VT100 5=3174 6=VT200 7=LECAM 8=Bull 1= ASCII-7 2= ASCII-8 3= EBCDIC
Character set	====> 3	
Server time out	====> 0030 seconds	Maximum inactivity time for server
User time out	====> 0001 minutes	Maximum idle time for user
Cut off warning	====> 0	0=none 1=bell 2=message
Price level	====> 7	0 - Z : price level for this server
Secret	====> 1	1=not shown in the list
Facilities	====>	In hex, inserted into call packet
CUDO (hex)	====> C0123450	protocol identification
TIOA at start up	====>	
P1=Update		P3=Return
		Enter=Add

External server definition for X25 AntiPCNE

The second sub-group is used for incoming calls (from the point of view of the application). In this sub-group, the “Possible calls” field is set to 2. Either explicit or repeated terminal definitions may be used for this second sub-group, and no entry point is necessary. Each terminal in the second sub-group can be used for calls originating from any remote partner. This method is suitable for applications such as CFT which do not verify the LU name for incoming calls.

TERMINAL DETAIL DEFINITION ----- Applid: APPLHOLT 14:35:28		
Terminal	====> PCN1I001	?wxyZZZ for dynamic allocation w : Sna or Non-sna or * (category) x : 1, 2, 3, 4, 5 or * (model) y : Colour, Monochrome or * Z : any characters
Relay	====> AP1LU01I	Name seen by VTAM applications = : copied from the terminal name
*Pool name	====>	Pool where to put this terminal
Description	====> P-PCNE inbound calls	
Entry Point	====>	Enforced Entry Point
2nd relay	====>	Possible 2nd relay (Printer)
Terminal type	====> 3	1=LU1 2=3270 3=FC P=Printer S=Scs
Compression	====> 0	0, 1, 2 or 3 : compression type
Possible Calls	====> 2	0=None 1=Inbound 2=Outbound 3=Both
Write Stats to	====>	1,4,5,6=VIRSTAT 2=VIRLOG
Repeat	====> 0001	Number of generated terminals
P1=Update		P3=Return
		Enter=Add P12=Server
KEY IN DATA AND PRESS ENTER		

Inbound terminal definition for X25 AntiPCNE (method 1)

A second method of defining AntiPCNE terminals allows the administrator to specify the selection of an

LU name according to the characteristics of the incoming call. This method is suitable for applications such as Inter.PEL which require incoming calls to arrive on specific LU names according to the identity of the partner which originated the call. In this case, the terminals in the second sub-group specify the name of a logical pool instead of a relay LU name (see “*logical pool of relays*”). The terminals in the logical pool contain the relay LU’s. The selection of an LU is done by means of the rule which routes the incoming call, by specifying the required LU name in the “Parameter” field of the rule. Note that the rules which route incoming calls are those attached to the line on which the call arrives (for example, an XOT line) and not those attached to the AntiPCNE line.

The example below shows the definition of a set of inbound terminals (PCN1TM51-54) attached to an AntiPCNE line. These terminals, which are defined using the repeated method, all refer to a logical pool \*POOLPCN. Terminal Definitions PCNETM51-54 are explicitly defined and constitute the logical pool. The relay names AP30LU51-54 are defined in the logical pool. A set of rules attached to the XOT line on which incoming calls arrive assigns an LU from the pool to each incoming call according to the contents of the CUD0 field in the incoming call packet.

Terminal	Repeated	Relay	Entry	Type	I/O	Pool	2nd Relay
PCNETM51	0001	AP30LU51		3	2	*POOLPCN	
PCNETM52	0001	AP30LU52		3	2	*POOLPCN	
PCNETM53	0001	AP30LU53		3	2	*POOLPCN	
PCNETM54	0001	AP30LU54		3	2	*POOLPCN	
PCN1TM01	0000	AP30LU01		3	1		
PCN1TM02	0001	AP30LU02		3	1		
PCN1TM03	0001	AP30LU03		3	1		
PCN1TM04	0001	AP30LU04		3	1		
PCN1TM51	0004	*POOLPCN		3	2		

List of inbound terminal definitions for X25 AntiPCNE

TERMINAL DETAIL DEFINITION ----- Applid: APPLHOLT 14:35:28		
Terminal	====> PCN1TM51	?wxyZZZZ for dynamic allocation w : Sna or Non-sna or * (category) x : 1, 2, 3, 4, 5 or * (model) y : Colour, Monochrome or * Z : any characters
Relay	====> *POOLPCN	Name seen by VTAM applications = : copied from the terminal name
*Pool name	====>	Pool where to put this terminal
Description	====> PCNE LU calls towards Inter.PEL	
Entry Point	====>	Enforced Entry Point
2nd relay	====>	Possible 2nd relay (Printer)
Terminal type	====> 3	1=LU1 2=3270 3=FC P=Printer S=Scs
Compression	====> 0	0, 1, 2 or 3 : compression type
Possible Calls	====> 2	0=None 1=Inbound 2=Outbound 3=Both
Write Stats to	====>	1,4,5,6=VIRSTAT 2=VIRLOG
Repeat	====> 0004	Number of generated terminals
P1=Update		P3=Return Enter=Add P12=Server
KEY IN DATA AND PRESS ENTER		

Inbound terminal definition for X25 AntiPCNE

TERMINAL DETAIL DEFINITION ----- Applid: APPLHOLT 14:35:28		
Terminal	====> PCN1TM53	?wxyZZZZ for dynamic allocation w : Sna or Non-sna or * (category) x : 1, 2, 3, 4, 5 or * (model) y : Colour, Monochrome or * Z : any characters
Relay	====> AP30LU53	Name seen by VTAM applications = : copied from the terminal name
*Pool name	====> *POOLPCN	Pool where to put this terminal
Description	====> PCNE LU calls towards Inter.PEL	
Entry Point	====>	Enforced Entry Point
2nd relay	====>	Possible 2nd relay (Printer)
Terminal type	====> 3	1=LU1 2=3270 3=FC P=Printer S=Scs
Compression	====> 0	0, 1, 2 or 3 : compression type
Possible Calls	====> 2	0=None 1=Inbound 2=Outbound 3=Both
Write Stats to	====>	1,4,5,6=VIRSTAT 2=VIRLOG
Repeat	====> 0001	Number of generated terminals
P1=Update		P3=Return Enter=Add P12=Server
KEY IN DATA AND PRESS ENTER		

Logical pool definition for X25 AntiPCNE

```

DETAIL of RULE from RULE SET: C-HTTP      ----- Applid: APPLHOLT 14:44:55

Name      ===> 4X060PEL          Rule priority is per name
Status    ===> INACTIVE         Mon, 24 Sep 2001 14:19:14
Description ===> XOT->AntiPCNE->PEL (CUD0=C0005300)
Entry point ===> APPEL          Target Entry Point
Parameter  ===> AP30LU53        &1 value or LUNAME
Trace     ===>                1=commands 2=data 3=partner

C : 0=IGNORE 1=IS 2=IS NOT 3=STARTS WITH 4=DOES NOT 5=ENDS WITH 6=DOES NOT
0 IP Subnet ===>               Mask      ===>
0 Host      ===>
0 eMail     ===>
0 Calling DTE ===>            Calling DTE address or proxy
0 Called     ===>            Called DTE address
0 CUD0 (Hex) ===> C0005300   First 4 bytes of CUD (X25 protocol)
0 User Data ===>

0 Days      ===> M:       T:       W:       T:       F:       S:       S:
0 Start time ===> H:       M:       S:       End time ===> H:       M:       S:

P1=Update          P3=Return          Enter=Add
P4=Activate        P5=Inactivate    P12=Entry P.

```

*Rule for incoming X25 AntiPCNE calls*

### 2.21.3 VTAM Terminal Definitions

The LU's representing the line and the virtual circuits must be defined by APPL statements in a VTAM application major node similar to the following example:

```

VIRAPCNE VBUILD TYPE=APPL
* -----
* Pseudo cvcs pour ligne pcne émulée par Virtel (note 1) *
* -----
AP30LU01 APPL AUTH=(ACQ,PASS),MODETAB=MODVIRT,DLOGMOD=DLOGPCNE
AP30LU02 APPL AUTH=(ACQ,PASS),MODETAB=MODVIRT,DLOGMOD=DLOGPCNE
AP30LU03 APPL AUTH=(ACQ,PASS),MODETAB=MODVIRT,DLOGMOD=DLOGPCNE
AP30LU04 APPL AUTH=(ACQ,PASS),MODETAB=MODVIRT,DLOGMOD=DLOGPCNE
AP30LU51 APPL AUTH=(ACQ,PASS),MODETAB=MODVIRT,DLOGMOD=DLOGPCNE
AP30LU52 APPL AUTH=(ACQ,PASS),MODETAB=MODVIRT,DLOGMOD=DLOGPCNE
AP30LU53 APPL AUTH=(ACQ,PASS),MODETAB=MODVIRT,DLOGMOD=DLOGPCNE
AP30LU54 APPL AUTH=(ACQ,PASS),MODETAB=MODVIRT,DLOGMOD=DLOGPCNE

Note 1
The LU's for the terminal relays must specify logmode DLOGPCNE.

Note 2
The MODVIRT phase must be placed in an executable library (VSE) or in a LOADLIB
→ (MVS, VM) defined to VTAM before the application major node can be activated.

```

### 2.21.4 Add or changing AntiPCNE LU names

From VIRTEL version 4.28 onwards, it is possible to add a new terminal to an AntiPCNE line, or to change the relay LU name in an existing terminal, without stopping and restarting VIRTEL.

**The procedure for adding a new AntiPCNE terminal is as follows:**

1. For an outbound terminal, add a new terminal definition by pressing [PF12] at the List of Terminals screen (position the cursor on an existing terminal if desired to copy its definition). Specify the new terminal name and LU name in the “Terminal” and “Relay” fields, and specify “Terminal type 3” “Compression 0” and “Possible Calls 1”. Then press [Enter] to add the new definition. While still in the Terminal Detail Definition screen, press [PF12] to define a new external server with the same name as the relay. Fill in the outbound call parameters and press [Enter] to add the new definition.
2. For an inbound terminal, add a new terminal definition as above but with “Possible Calls 2”. Specify either an LU name or the name of a logical pool in the “Relay” field. If using a logical pool, also add a new terminal definition to the logical pool specifying the LU name in the “Relay” field, and add a rule to the XOT line to allocate incoming calls to this LU.
3. Define the new LU name as an APPL statement in a VTAM application major node and activate it.
4. Use the VIRTEL LINE START command to activate the new terminal(s) on the AntiPCNE line. For example:

**:: F VIRTEL,LINE=P-PCNE1,START**

**The procedure for changing the LU name of an existing AntiPCNE terminal is as follows:**

1. Enter the new LU name in the “Relay” field of the Terminal Detail Definition screen for the terminal or logical pool concerned, and press [PF1] to record the change.
2. For an outbound terminal, copy the existing external server definition for the old LU name, renaming it using the new LU name. For an inbound terminal, go to the XOT line definition and alter the rule (if any) which specifies the old LU name in its “Parameter” field, replacing the old LU name by the new LU name, and press [PF1].
3. Inactivate the existing VTAM LU.
4. Define the new LU name as an APPL statement in a VTAM application major node and activate it.
5. Use the VIRTEL LINE START command to reactivate the changed terminal(s) on the AntiPCNE line.  
For example: **F VIRTEL,LINE=P-PCNE1,START**

## **2.21.5 Support of X25 non GATE terminals**

Support for incoming connections via an X25 non GATE line still exists. This type of connection does not require a line definition in VIRTEL. All that is needed is to create a series of terminals using the Terminal Management sub-application. Each terminal is defined as type 1 compression 2 and is associated with an application relay.

.note:

This mode allows only incoming calls, **with** no facility **for** call routing.

## **2.21.6 VTAM definitions for X25 non GATE terminals**

Each Minitel or PC which is to log on to VIRTEL must be defined in a VTAM switched major node as described in “*Definition of an X25 GATE Non Fast-Connect line*”.

### 2.21.7 NCP/NPSI parameters for X25 non GATE terminals

The information presented in the section “Definition of an X25 GATE Non Fast-Connect line” applies here with the following addition:

**Macro X25.MCH**

**LLCLIST** Must contain the value LLC5.



**VIRTEL RULES**

### 3.1 Introduction

Each Virtel line can have a set of rules which allow the selection of an entry point for each incoming call according to the characteristics of the call and the rule criteria. Rules are processed in alphanumeric order of name, so it is important that the name you choose guarantees order of the rule processing. As soon as a match is found within the defined rule criteria the designated entry point will be assigned to the caller. Rules are useful to force or nail Virtel Relay LU names or to establish different application lists depending on the incoming IP address. The last rule should be the “default” rule which is used to catch callers that didn’t match with previous rules. If no default rule is present then the caller will drop through the rule processing and the connection will be closed. See the “How-To” guide ‘Virtel LU Nailing’ for examples on how to define and use Virtel Rules.

#### 3.1.1 Summary Display

Press [PF5] at the line detail definition screen to display the summary list of rules associated with the line:

LIST of RULES in RULE SET: C-HTTP			Applid: APPLHOLT 15:12:57
Name	Status	Description	Entry Point
C100PROX	INACTIVE	Test incoming IP address	CLIWHOST
C999REJ	INACTIVE	Reject all other callers	EPRERJECT

P1=Update      P2=Suppress      P3=Return  
P6=1st page      P7=Page-1      P8=Page+1      P12>Edit

*Rule Summary Display*

## Field Contents

**Name** The name of the rule. Rules associated with a line are processed in alphanumeric order.

**Status** Indicates whether the rule is ACTIVE or INACTIVE. To change the status, display the detailed definition of the rule [PF12], then press [PF4] to activate, or [PF5] to deactivate.

**Description** Free-form description of the rule.

**Entry Point** Name of the entry point which will be assigned to incoming calls whose characteristics match this rule.

## Navigation

**Search** Type the name (or partial name) of the required entity on the first line under the heading “Name”, then press [Enter].

[**PF6**] Return to the first page of the list.

[**PF7**] Display the previous page.

[**PF8**] Display the next page.

**Modifying a rule** - Pressing [PF12] at the Rules screen displays the rule detail definition screen. Type the desired modifications into the appropriate fields then press [PF1]. Multiple definitions can be modified at the same time. If the modification affects a field not displayed on the summary screen, first position the cursor on the definition concerned, then press [PF12] to access the definition detail screen.

**..warning:::** Modifications are not recognized until you press the [PF1] key. Certain modifications require a restart of the VIRTEL system.

**Deleting a rule** - In the summary screen position the cursor under the name of the entity to be deleted, then press [PF2]. The line associated with the entity to be deleted then appears highlighted, accompanied by the message CONFIRM DELETE. Then press [PF2] again to confirm deletion. The message DELETE OK confirms successful completion of the operation. Repeat the procedure for each entity to be deleted.

**Adding a rule** - To add a new definition, press [PF12] at the summary screen, either with the cursor on an existing definition to copy its attributes, or on an empty line to create a new definition from a blank screen.

### 3.1.2 Detail Display

To display or update the detailed definition of an entity, place the cursor on the name of the entity within the summary display and press [PF12]. The detail definition screen will then be displayed.

```

DETAIL of RULE from RULE SET: C-HTTP      ----- Applid: APPLHOLT 15:17:59

Name      ===> C100PROX          Rule priority is per name
Status    ===> INACTIVE         Mon, 24 Sep 2001 14:19:14
Description ===> Test incoming IP address
Entry point ===> CLIWHOST        Target Entry Point
Parameter   ===>               &1 value or LUNAME
Trace      ===>               1=commands 2=data 3=partner

C : 0=IGNORE 1=IS 2=IS NOT 3=STARTS WITH 4=DOES NOT 5=ENDS WITH 6=DOES NOT
0 IP Subnet ===>               Mask      ===> 255.255.255.255
0 Host      ===>
0 eMail     ===>
3 Calling DTE ===> 192.168.092.062    Calling DTE address or proxy
0 Called     ===>
0 CUD0 (Hex) ===>               First 4 bytes of CUD (X25 protocol)
0 User Data  ===>

0 Days      ===> M:       T:       W:       T:       F:       S:       S:
0 Start time ===> H:       M:       S:       End time ===> H:       M:       S:

P1=Update          P3=Return          Enter=Add
P4=Activate        P5=Inactivate    P12=Entry P.

```

Rule detail definition screen

### 3.1.3 Parameters

**Name** The name of the rule. This name must be unique across all rules in the system. The rules associated with a line are processed in alphanumeric order of this name. The rule name thus determines the priority of the rule within the line.

**Status** Indicates whether the rule is ACTIVE or INACTIVE. To activate a rule, press [PF4]. To deactivate a rule, press [PF5].

**Description** Description of the rule. This information is not used.

**Entry point** The name of the entry point which will be assigned to the incoming call if this rule matches the call characteristics.

---

**Note:** The value \$COOKIE\$ in the “Entry Point” field has a special meaning. This value is meaningful only in rules attached to an HTTP line. If a rule with this value is found, and if the HTTP request contains a cookie named VirtelRef, then the value of the cookie is used to identify the user, and VIRTEL switches to the rule set associated with the user, instead of processing the remainder of the rules attached to the line. If the HTTP request does not contain a cookie named VirtelRef, VIRTEL ignores this rule, and continues with the next rule attached to the line. See “Correspondent management” in the VIRTEL Web Access Guide.

**Parameter** (optional) A parameter which will be associated with incoming calls matched by this rule. This parameter can be used in the following cases:

- the value of the parameter can be retrieved in a connection script via the ‘&1’ variable (see “Connection – Disconnection Scripts”)
- For an XOT line: the parameter can specify the LU name for an incoming PCNE call. The terminals on the AntiPCNE line to which the call is routed must be defined in a logical pool (see “Terminals on an AntiPCNE line”)

- For an HTTP line: the parameter can specify the LU name to be used as the VTAM relay for an incoming HTTP call. The relay terminals on the HTTP line must be defined in a logical pool (see “Terminals on an HTTP line”).

An asterisk at the end of the LU name signifies that the parameter is a prefix rather than a specific value.

For an HTTP line: The value \$URL\$ in the “Parameter” field indicates that the actual parameter value will be obtained from the userdata field of the URL (see “VIRTEL URL formats” in the VIRTEL Web Access Guide).

---

**Note:** The value \$COOKIE\$ in the “Parameter” field has a special meaning. This value is meaningful only in rules attached to an HTTP line. If a rule with this value is found, and if the HTTP request contains a cookie named VirtelRef, and the value of the cookie matches a record in the VIRTEL correspondent file (see “Correspondent management” in the VIRTEL Web Access Guide), then VIRTEL selects this rule and uses the VTAM LU name contained in the correspondent record as the VTAM relay for the incoming HTTP call. If the HTTP request does not contain a cookie named VirtelRef, or if the value of the cookie does not match any user in the correspondent file, then VIRTEL ignores this rule, and continues with the next rule attached to the line.

---

**Trace** Trace indicator for incoming calls which match this rule.

**Blank** No trace.

**1** Trace X25 commands.

**2** Trace X25 data.

**12** Trace X25 commands + data.

**123** Where the call is rerouted via an external server, the trace will also be applied on the line used for the outgoing call.

---

**Note:** Each of the following fields is preceded by a comparison indicator. The comparison indicator can be 0 (ignore), 1 (must equal), 2 (must not equal), 3 (must begin with), 4 (must not begin with), 5 (must end with), or 6 (must not end with). An incoming call matches this rule if all of the fields (except those whose comparison indicator is 0) match the corresponding characteristic of the call. A rule with all its comparison indicators set to 0 is an unconditional rule, which matches all incoming calls not matched by a higher priority rule.

---

**IP Subnet** For an HTTP or SMTP line: The originating IP address or subnet address.

**Mask** Indicates which bit positions in the IP address form the subnet address. For example, IP address 192.168.210.0 combined with mask 255.255.255.0 corresponds to addresses 192.168.210.0 through 192.168.210.255.

**HTTP Host** For an HTTP line: The host name (possibly followed by a port number) supplied by the browser in the Host: HTTP header when connecting to VIRTEL.

For example, www.virtel.com:21000

In the case of requests forwarded by a reverse proxy (bastion host), the rule compares the value of this field with the X-Forwarded-Host: header (if present) instead of the Host: header.

For an SMTP line: The recipient's email address.

**eMail** For an SMTP line: The sender's email address.

**Calling DTE** For an X25 line: The calling number specified in the X25 call packet.

For an HTTP line: The IP address of the reverse proxy (bastion host) which forwarded the request on behalf of the originating user. If this field is present in the rule, and matches the source IP address of the HTTP request, then a “forwarding header” (see below) in the HTTP request is considered to contain the real originating IP address. This real originating IP address will be the one used for testing against the “IP Subnet” and “Mask” fields (if any) in the rule. If the rule matches, then message VIRHT56I will be issued and the call will henceforth be considered to have originated from the real originating IP address for the purposes of console messages and VIRLOG.

VIRTEL recognizes the following “forwarding headers” (in order of priority):

- iv-remote-address:
- X-Forwarded-For:

---

**Note:** When the “Calling DTE” field contains an IP address, leading zeroes must be included where necessary. For example, 192.168.001.020

---

Reverse proxy addresses may also be specified in the HTFORWD parameter of the VIRTCT (see “Parameters of the VIRTCT” in the VIRTEL Installation Guide).

**Called** For an X25 line: The called number specified in the X25 call packet. CUD0 (Hex)For an X25 line: Up to 8 hexadecimal digits representing the first 4 bytes of the CUD field of the X25 call packet. For example, 01000000 (PAD), C0123450 (PCNE), C4 (GATE).

**User Data** For an X25 line: The remaining part of the CUD (call user data) in the X25 call packet. The data in this field is expressed in character format. It is compared with the ASCII data starting at the 5th byte of the CUD field in the X25 call packet. VIRTEL performs the necessary ASCII-EBCDIC translation prior to comparing the contents of this field. To test the first 4 bytes of the CUD, use the CUD0 field in the rule instead. Example: a call packet whose “Call User Data” field contains: C0123450 41424331 matches a rule which specifies CUD0=C0123450 and UserData=ABC1. For an HTTP line: The contents of the userdata field of the URL (see “VIRTEL URL formats” in the VIRTEL Web Access Guide).

---

**Note:** The following fields indicate the time periods during which this rule is active. The comparison indicator can be 0, 1, or 2.

---

**Days** The days of the week on which this rule applies. Applicable days are marked by an ‘X’.

**Start Time / End Time** Indicates the period of operation of this rule for each applicable day.



## **TERMINALS**

### **4.1 Introduction**

All terminals, whether physical or virtual, using the services of VIRTEL must be referenced. This chapter describes the group of functions associated with the management of the terminals as well as their existing relationship to other administration functions, for example, management of lines or entry points.

#### **4.1.1 Terminal Management Sub-Application**

This sub-application enables the definition of VIRTEL terminals either in the form of a pool, or individually. When the sub-application is started, it first presents a summary of existing terminal definitions presented in alphanumeric order.

The terminal management sub-application is accessed by pressing [PF2] in the Configuration Menu, or [PF5] in the Sub Application Menu, or from the Multi-session Menu via a transaction referencing module VIR0023. This sub-application allows for the management of the parameters associated with each terminal under control of VIRTEL. This subapplication is also accessible by pressing [PF4] from the line management sub-application.

#### **4.1.2 Security**

When security is active, access to the terminal management menu from the Configuration Menu or the Sub-Application Menu is controlled by the resource \$\$TERM\$\$. When this menu is accessed via a transaction, the rules governing the security management of transactions will apply. Security management is described in chapter 4 of the VIRTEL Technical Documentation.

#### **4.1.3 Summary Display**

The first screen displayed by the terminal management sub-application shows a summary of existing definitions in alphanumeric order. A complete description of each field is given in the following paragraphs. Place the cursor under an entry a press [PF12] to display the terminal details.

LIST of TERMINALS ----- Applid: APPLHOLT 18:52:54				
Terminal	Repeated	Relay	Entry	Type
				I/O
CA40XM01	0006	VAPIXMEM		3
CLLC0000	0010			3
CLLOC000	0050			3
CLVTA000	0080	*W2HPOOL		3
CLVT0000	0010	*W2HPOOL		3
CLVT3000	0010	*W2HPOOL		3
DELOC000	0050			3
DEVTA000	0016	*W2HPOOL		3
EHLOC000	0016			3
EHVTAA000	0016	*W2HPOOL		3
ICALV500	0016			3
IPLOC000	0080			3
IPVTA000	0080	*W2HPOOL		3
I01TX101	0004	VEHTX101		3
VSLOC000	0010			3
VSVTA000	0016	*W2HPOOL		3
P1=Update		P2=Delete	P3=Return	P6=1st Page
P7=Page-1		P8=Page+1	P12=Details	

Terminal Summary Display

## Navigation

In browse, alter, or delete mode, it is possible to scroll the list of terminals under the control of VIRTEL.

**Search** Type the name (or partial name) of the required entity on the first line under the heading “Terminal”, then press [Enter].

[PF6] Return to the first page of the list.

[PF7] Display the previous page.

[PF8] Display the next page.

**Modifying a terminal entry** - Pressing [PF12] at the summary screen displays the Terminal Detail Definition screen, which allows creation of a new terminal definition, or modification of an existing definition. Type the desired modifications into the appropriate fields then press [PF1]. Multiple definitions can be modified at the same time. If the modification affects a field not displayed on the summary screen, first position the cursor on the definition concerned, then press [PF12] to access the definition detail screen. Modifications are not recognized until you press the [PF1] key. Certain modifications require a restart of the VIRTEL system.

**Adding a terminal entry** - To add a new definition, press [PF12] at the summary screen, either with the cursor on an existing definition to copy its attributes, or on an empty line to create a new definition.

**Deleting a terminal entry** - Position the cursor under the name of the entry to be deleted, then press [PF2]. The line associated with the terminal to be deleted then appears highlighted, accompanied by the message CONFIRM DELETE. Then press [PF2] again to confirm deletion. The message DELETE OK confirms successful completion of the operation. Repeat the procedure for each entry to be deleted.

#### 4.1.4 Detail Display

```

TERMINAL DETAIL DEFINITION ----- Applid: APPLHOLT 18:56:00

Terminal      ===> EHVTA000      ?wxyz for dynamic allocation
                           w : Sna or Non-sna or * (category)
                           x : 1, 2, 3, 4, 5 or * (model)
                           y : Colour, Monochrome or *
                           Z : any characters
Relay          ===> *W2HPOOL      Name seen by VTAM applications
                           = : copied from the terminal name
*Pool name    ===>           Pool where to put this terminal
Description   ===> HTTP terminals (with relay)

Entry Point   ===>           Enforced Entry Point
2nd relay     ===>           Possible 2nd relay (Printer)
Terminal type ===> 3         1=LU1  2=3270  3=FC P=Printer S=Scs
Compression   ===> 2         0, 1, 2 or 3 : compression type
Possible Calls ===> 3         0=None  1=Inbound  2=Outbound  3=Both
Write Stats to ===> 26        1,4,5,6=VIRSTAT 2=VIRLOG

Repeat        ===> 0016       Number of generated terminals

P1=Update     P3=Return      Enter=Add
                           P12=Server

KEY IN DATA AND PRESS ENTER

```

*Terminal Definition detail screen*

From within the detail display parameters can be updated.

#### 4.1.5 Parameters

**Terminal** Maximum of 8 characters containing:

- For a 3270 terminal which logs on to the VIRTEL application: The VTAM-defined LU name of the terminal
- For an LU which connects to VIRTEL via a GATE or FASTC line: The NPSI-defined LU name, whose prefix associates the terminal with the VIRTEL GATE or FASTC line
- For all other types of terminal: An internal name whose prefix associates the terminal with a VIRTEL line.
- For a logical pool: An internal name of no significance.
- For a physical pool: A sequence of 8 characters starting with "?" (see "Physical pool of terminals").

If the "Repeat" field contains a value greater than 1, then the terminal name must contain a numeric portion which will be incremented for each occurrence of the terminal (see "Repeat" parameter below).

**Relay** (Optional) The name of the relay LU associated with this terminal. The relay name corresponds to a VTAM APPL statement. The same relay cannot be shared between multiple definitions.

The "Relay" field may alternatively contain a name in the form \*POOLNAM which refers to the logical pool which has the same name \*POOLNAM specified in its "\*Pool name" field. In this case, a relay will be assigned dynamically from the specified logical pool each time a relay is required. See "logical pool of relays". Certain terminals (those associated with an AntiPCNE line) require the definition of

an external server whose name is equal to the relay name of the terminal. In this case, you can press [PF12] to display the external server detail definition. If the “Repeat” field contains a value greater than 1, then the relay name, if supplied, must contain a numeric portion which will be incremented for each occurrence of the terminal (see “Repeat” parameter below), or it must refer to a logical pool. If SYSPLUS=YES is specified (see “Parameters of the VIRTCT” in the VIRTEL Installation Guide), any ‘+’ character in the relay name will be replaced by the value of the SYSCLONE system symbol. SYSCLONE is specified in the IEASYMxx member of SYS1.PARMLIB, and identifies the particular LPAR that VIRTEL is running on in a sysplex environment.

Terminal Definition records in the VIRARBO file whose repeat count is greater than 1 may now contain special pattern characters in the “terminal name”, “relay”, and “2nd relay” fields. Multiple instances of the terminal will be generated at Virtel startup by incrementing the pattern characters according to the rules shown below. If a name contains no pattern characters then Virtel will increment the rightmost numeric portion of the name, as before.

Pattern characters:

```
> Alphabetic A-Z  
? Alphanumeric A-Z, 0-9, $, #, @  
% Hexadecimal digits 0-9, A-F  
< Decimal digits 0-9
```

---

**Note:** Different combinations of pattern characters may be specified within a single field, for example RH>VT?%% the terminal name and relay names do not have to follow the same pattern (see example below). The ‘?’ character cannot be used in the first character position of the terminal name field because this indicates a physical pool

---

Example:-

Terminal name	W2HVT000
Relay name	RHTERM%%
Relay2 name	RH>X<Z00
Repeat count	256

Would generate terminals W2HVT000-W2HVT255 with relay names RHTERM00-RHTERMFF and relay2 names RHAX0Z00-RHIX5Z00

**\*Pool name** In the definition of a logical pool, this field contains the name of the pool. A logical pool name is a 7 character name preceded by an asterisk, in the form \*POOLNAM, which matches the logical pool name specified in the “Relay” field of all terminals which use the logical pool. See “logical pool of relays”. For regular terminals, this field must be blank.

**Description** Free-format field.

**Entry Point** An optional field which may contain the name of the associated entry point. For details of how VIRTEL uses this field, see “Choosing the Entry Point”. It is only useful to specify the entry point at the terminal level in the following cases:

- 3270 terminals
- Asynchronous terminals on X25 non-GATE lines. Since this type of terminal is not associated with a VIRTEL line, it may be useful to specify a default entry point at the terminal level. This overrides the default defined by the DEFENTR parameter in the VIRTCT.
- Terminals on VIRNT or VIRKIX lines in APPC mode. If the link between the NT or CICS system and VIRTEL is of type APPC2, the terminal must specify entry point \$X25\$ (for a connection with VIRNT) or VAPI (for a connection with VIRKIX). It is not necessary to create entry point definitions for these special names, as they are entry points implicitly defined by VIRTEL.

- Type P or S printer terminals on HTTP lines. This type of printer will be automatically connected to the host application defined by the first transaction under the specified entry point.

In all other cases, the “Entry Point” field in the terminal definition should be blank, as the preferred method of defining the entry point is by the rules of the line (see “Rules”). Rules have the advantage that they can be altered dynamically, while allowing more flexibility in the selection of the entry point according to the characteristics of the incoming call.

**2nd Relay** Contains the name of a relay associated with a virtual printer simulated by VIRTEL. Each of these relays corresponds to an APPL statement known to VTAM. This virtual printer must be defined in VIRTEL in the form of a terminal of type 1, 2, P, or S.

This field must only be completed for type 1 or type 3 terminals.

If the “Repeat” field contains a value greater than 1, then the 2nd relay name, if supplied, must contain a numeric portion which will be incremented for each occurrence of the terminal (see “Repeat” parameter below).

**Terminal type** Indicates the type of terminal. Permissible values are:

- 1 for an asynchronous Non Fast-Connect terminal (Minitel, PC or VT) or a pseudo-printer of type SCS (LUTYPE1)
- 2 for a 3270 synchronous terminal (LUTYPE2) or a pseudo-printer of type 3270 (LUTYPE3)
- 3 for all terminals other than type 1 and 2
- P for a virtual printer of type 3270 (LUTYPE3) with auto-connection to the application defined by the “Entry Point” field
- S for a virtual printer of type SCS (LUTYPE1) with auto-connection to the application defined by the “Entry Point” field

The concept of an APPC connection now being at the line level, definitions of type 6 no longer exist at the terminal level.

**Compression** Indicates the optimization mode applicable during transmission of 3270 messages towards the terminal. Permissible values are:

- 0 no optimisation. No message compression is performed by VIRTEL. This value is usually used at sites which only use VIRTEL Multi-Session or file-transfer terminals. This value is only allowed for type 2 terminals.
- 1 simple message optimisation. Replacement of repeated characters by Repeat-to-Address orders, allowing a throughput gain of approximately 30%. This value could for example be used for local 3270 terminals. This value is only allowed for type 2 terminals.
- 2 simple message optimisation + logical compression. Replacement of repeated characters by Repeat-to-Address orders, and VIRTEL only sends to the terminal those characters which have changed compared with the contents of the 3270 buffer. The management of the MDT bits allows a further optimization for inbound data, i.e. in the terminal to host direction. This level of compression allows a gain of 40% to 60 %. This value is mandatory for type 1 and type 3 terminals.
- 3 message optimisation + logical compression + learning of screen types. (VIRTEL/PC only) All messages destined for these terminals are subject to special processing. VIRTEL determines gradually from their frequency of use which the most commonly used screen images and automatically creates a “screen type” referenced by number and stored at the host. When a message is to be sent to a PC type terminal, VIRTEL performs a lookup to determine whether the message to be sent can be associated with a “screen type”. If it can, then it sends a datastream representing the difference between the screen type and the final desired result. The PC automatically learns the “screen types” which it must use.

This level of compression allows a reduction of approximately 80% of the message volume. It can for example be used for PC's connected at 1200 or 2400 Bps, thereby allowing response times approaching those of a 9600 Bps synchronous line.

---

**Note:** This value can only be used for VIRTEL/PC connections. It is however possible to assign this value to type 2 color terminals in order to facilitate the learning of "screen types".

---

**Possible calls** Determines which calls can be made on this terminal. Depending on the associated line, certain values are meaningless. For example, the value 2 (outgoing calls) is not appropriate for a definition associated with an HTTP line since outgoing calls are impossible on this type of line.

In addition to being used to authorize incoming, outgoing, or both incoming and outgoing calls, this parameter also has an effect during VIRTEL startup. Any terminal which has "Possible calls" set to 0 will not be activated at VIRTEL startup. Also note the "Possible calls" field in the definition of the associated line.

**Write stats to** Indicates the recording of statistics for the terminal entry.

**Blank** No statistics.

- 1** Recording in VIRSTAT (classic format).
- 2** Recording in VIRLOG.
- 4** Recording in VIRSTAT (alternate format for X25).
- 5** Recording in VIRSTAT (web format, alphanumeric).
- 6** Recording in VIRSTAT (web format, with binary fields for the PRTSTATW program).

More than one value may be specified. For example:

- 12** Recording in both VIRSTAT (classic format) and VIRLOG.
- 24** Recording in both VIRLOG and VIRSTAT (alternate format).
- 124** Recording in VIRSTAT (classic and alternate formats) and VIRLOG.

VIRSTAT classic format recording is intended for use with Minitel calls on terminals associated with NPSI lines (Gate or Fast Connect). VIRSTAT alternate format recording may be requested for terminals associated with any X25 line (GATE, FASTC, XOT). Either of the two VIRSTAT web formats may be requested for terminals associated with HTTP lines. VIRLOG recording may be requested for terminals associated with X25 lines (GATE, FASTC, XOT) and HTTP lines. For terminals associated with all other line types (including /GATE, /PCNE, and /FASTC) the statistics field should be left blank. Refer to the "Audit and Performance" chapter of the VIRTEL Messages and Operations Guide for details of the VIRSTAT and VIRLOG record formats.

**Repeat** Up to 4 decimal digits indicating the number of desired repetitions of this terminal definition. See "Repeated fixed entries" for more details and examples. A repeat count of blank, zero, or 1 indicates definition of a single terminal.

## **ENTRY POINTS**

### **5.1 Introduction**

Entry points define the session context for a terminal or for certain types of lines. A terminal connecting to VIRTEL must connect via an entry point. This section describes the functions associated with entry point management, as well as the correlation with other elements of VIRTEL system administration, for example, line and terminal management.

An entry point is a named entity that groups certain information designed to authorise, personalise and protect access to the host site. Entry points define the type of emulation required, the type of security control, which sign-on screen must be sent to the user at log on time, what type of Multi-session menu must be used and what applications are to be made available to the user.

#### **5.1.1 Entry Point Management Sub-Application**

The Entry Point Management sub-application is accessed by pressing [PF3] in the Configuration Menu, or [PF13] in the Sub-Application Menu, or from the Multi-Session Menu via a transaction referencing module VIR0044. This subapplication allows management of the parameters associated with each entry point.

#### **5.1.2 Security**

When security is active, access to entry point management from the Configuration Menu or the Sub-Application Menu is controlled by the resource \$\$GLOG\$\$. When accessed by a transaction, the rules governing the management of transaction security apply. Security management is described in chapter 4 of the VIRTEL Technical Documentation.

#### **5.1.3 Selecting an Entry Point**

The entry point used in the connection from a terminal may be specified in various ways:

##### **3270 Terminals**

The entry point to be used for a connection from a 3270 terminal can be specified: - In the DATA parameter of a logon sequence. For example: LOGON APPLID(VIRTEL) DATA(PE-0001) - In the VIRTEL terminal definition (see “Parameters Of The Terminal”). - If no entry point is specified, the default entry point is the first value of the DEFENTR parameter in the VIRTCT. If this value does not exist, the terminal receives a signon screen compatible with the original Multi-Session VIRTEL (before version 3.0).

### **Asynchronous terminals on X25 non-GATE lines**

A Minitel connecting to VIRTEL in LLC5 mode uses a VIRTEL terminal not associated with any line (see “Support of X25 non GATE terminals”, page 71). The entry point used for this type of connection can be specified:

- In the X25 call packet. The entry point is specified in the CUD (Call User Data) field of the call packet. The entry point name is in ASCII character format starting at the 5th byte of the CUD field, following the 4-byte protocol identifier.
- In the VIRTEL terminal definition (see “Parameters Of The Terminal”, page 109).
- If no entry point is specified, the default entry point is the second value of the DEFENTR parameter in the VIRTCT. If this value does not exist, the terminal is rejected.

### **Incoming calls on X25 lines - GATE, FastC, XOT**

The entry point to be used for an X25 connection (GATE, FastConnect, XOT) can be specified:

- By the rules of the line. If one of the rules associated with the line matches the characteristics of the call, the entry point chosen by the rule takes precedence over that specified in the call packet.
- In the X25 call packet. The entry point is specified in the CUD (Call User Data) field of the call packet. The entry point name is in ASCII character format starting at the 5th byte of the CUD field, following the 4-byte protocol identifier.
- A default entry point can be specified in the line definition (see “Line Parameters”, page 11).
- If no entry point is specified, the default entry point is the second value of the DEFENTR parameter in the VIRTCT. If this value does not exist, the call is rejected.

### **Incoming calls on HTTP or SMTP lines**

For an incoming call on this type of line, the entry point is chosen:

- By the rules of the line, if a rule exists which matches the characteristics of the request.
- Otherwise the default entry point specified in the definition of the HTTP or SMTP line will be used.

### **Outgoing calls from an X25 application via a reverse X25 line - /GATE, /FASTC, or /PCNE**

For an outgoing call from an application connected to VIRTEL via this type of line, the entry point is chosen according to the following procedure. Note that incoming calls (network to application) on this type of line are processed by the rules attached to the incoming line (X25 GATE, FASTC, XOT) and not by the rules attached to the reverse X25 line.

- The entry point defined in the terminal associated with the reverse X25 line, if specified. This value takes precedence over all other values.
- The entry point chosen by the rules of the reverse X25 line, if a rule matches the characteristics of the outgoing call from the application.
- The entry point specified in the Call User Data of the call packet sent by the application, if present.
- The default entry point defined in the reverse X25 line, if specified.
- If no entry point was specified by any of the preceding steps, the default is the second value of the DEFENTR parameter in the VIRTCT. If this value does not exist, the call is rejected.

#### **5.1.4 Summary Display**

The entry point management application manages the entry points and their associated transactions. The first screen displayed shows a summary of existing entry points in alphanumeric order. A complete description of each field is presented in the following section.

LIST of ENTRY POINTS ----- Applid: APPLHOLT 15:50:40		
Name	Description	Transactions
\$STI	X25 native to \$ENTRANT	X25TCP
AM51	APPC connection from CICS	PC
AM51X25	X25 outgoing calls from CICS	X25-
CLIHOST	HTTP entry point (CLIENT application)	CLI
EDSHOST	HTTP entry point (EDS application)	EDS
E01TX1	XOT Test	T01TX1
IPAHOST	IPAD entry point	IPA
PC	3270 connections	PC
PRTAPPL	Connect printers to host application	PRTA
SOAPVIRJ	Requests from IMS Connect	OTMA
SOAPVIRT	Requests from IMS Connect	OTMA
VSRWHOST	HTTP entry point (Virtel Screen Redesigner)	VSR
VTGWHOST	VTG entry point	VTG
WEB2HOST	HTTP entry point (SysperTec menu)	W2H

P1=Update      P2=Delete      P3=Return      P4=Transactions  
 P6=First page    P7=Previous    P8=Next      P12=View / Add

*Entry Point Summary Display*

### Field Contents

**Name:** The name of the entry point.

**Description:** Description of the entry point.

**Transaction:** Prefix of the names of the transactions associated with this entry point (maximum 6 characters).

**Modifying an entry point definition:** - To modify the definition of an entry point, enter the required information in the field then press [PF1]. Several definitions may be modified simultaneously. If the field you wish to modify does not appear on the summary screen, position the cursor on the entry and press [PF12] to display the definition detail screen. Modifications do not take effect until you press [PF1]. Certain modifications, for instance a modification to an entry point used by a line, require a restart of VIRTEL.

**Deleting an entry point definition:** - To delete a definition, position the cursor on the name of the entry to be deleted and press [PF2]. The line associated with the entry to be deleted will appear highlighted with the message CONFIRM DELETE. Press [PF2] again to confirm deletion. The message DELETE OK confirms successful completion of the operation. Repeat the procedure for each entry to be deleted.

**Adding an entry point definition:** - To add a new definition, press [PF12] at the summary screen, either with the cursor on an existing definition to copy certain of its attributes, or on an empty line to create a new definition.

### 5.1.5 Transaction Display

To access the list of transactions associated with an entry point, position the cursor on the desired entry point and press [PF4]. The transaction management menu will then appear.

### 5.1.6 Detail Display

To display the details of an entry point, position the cursor on the desired entry point in the summary screen and press [PF12].

```
ENTRY POINT DETAIL DEFINITION ----- Applid: APPLHOLT 15:54:38

Name      ===> EDSHOST          Name this ENTRY POINT (LOGON DATA)
Description ===> HTTP entry point (EDS application)
Transactions ===> EDS           Prefix for associated transactions
Last page   ===>
Transparency ===>
Time out    ===> 0720      minutes Maximum inactive time
Do if timeout ===> 0           0=logoff 1=bip+logoff 2=anti pad
Emulation   ===> HTML          Type of terminal:
HOST4WEB   : program driven   HTML : Web Browser
SCENARIO   : script driven    EMAIL : SMTP client
Directory for scenarios ===> SCE-DIR If scenarios in VSAM, not LOADLIB
Signon program ===> VIR0020H Controls user name and password
Menu program  ===> VIR0021A List of transactions
Identification scenario ===> SCENLOGM eg XML identification
Type 3 compression ===>
Mandatory identification ===>
3270 swap key    ===>
Extended colors   ===> E       eg P24
                           E: extended X: extended + DBCS

P1=Update          P3=Return          P4=Transactions
Enter=Add
```

*Entry point detail display*

### 5.1.7 Parameters

**Name** Represents the name of the entry point as specified in a logon sequence, or in the “Entry point” field of a terminal, line, or rule definition.

**Description** Describes the entry point.

**Transactions** Indicates the prefix (0 to 6 characters) of the transactions associated with this entry point.

**Last page** This field, which is used only for HTTP connections, indicates the name of the HTML page which will be displayed after the connection with the host application terminates. If blank, then the default page (whose name is equal to the entry point name) will be displayed.

---

**Note:** For Minitel entry points, the “Last page” field is not displayed, and the “Videotex key” field is displayed instead.

---

**Videotex key** This field, which is used only for Minitel connections, indicates the key word used to direct the request to the Minitel tree structure.

---

**Note:** If routing is not necessary, for example for STI or JOUTEL, the keyword \$NONE\$ may be used.

---

**Transparency** Indicates the type(s) of external server(s) where translation from ASCII to EBCDIC must not be used.

**Time Out** User inactivity timeout period (in minutes). If the user (or calling terminal) sends no messages during this period, the “Do if timeout” procedure is invoked. This timeout takes effect only for terminals using this entry point via HTTP, VIRTELPC, or X25 connections. It has no effect for 3270 connections. The default is 720 minutes. A value of 0 implies no timeout.

**Do if timeout** Action to be taken if the value specified in the “Time Out” field is exceeded.

- 0** Break the session.
- 1** Sound an alarm, then break the session if user takes no action.
- 2** Generate an audible alarm to avoid X25 PAD timeout.

---

**Note:** While the terminal is connected to an external server application, session outage can also occur if the timeouts specified in the external server definition are exceeded.

---

**Emulation** Indicates the type of emulation if the terminal using the entry point is not a 3270.

- BORNE** For Minitels without accentuated character support.
- EBCDIC** For asynchronous connections without ASCII / EBCDIC translation.
- EMAIL** For SMTP connections.
- HTML** For HTTP connections.
- HOST4WEB or H4W** For HTTP connections. Same as HTML, except that it also allows HOST4WEB commands to be embedded in 3270 screens (for details, refer to the “Programming Interfaces” section in the VIRTEL Web Access Guide).
- MINITEL** For Minitel connections in 40 or 80 column mode.
- PC** For connections via VIRTEL/PC.
- VT** For VT100 or VT200 type connections.
- X25** For connections via Reverse-X25 or APPC2 lines.
- \$NONE\$** For simple terminals in LUTYPE0 mode with ASCII translation. Even or odd parity, if required, can be specified at the line level.
- \$NONE\$-E** Same as \$NONE\$ but without ASCII translation.

**Signon program** Indicates the name of the program used to control user sign-on with the active security tool. If this field is not completed, no sign-on control is performed. Allowable values for this field are listed in section 1.4.4 117.

**Menu program** Indicates the name of the program which presents the list of transactions which the user is allowed to access. Permissible values are listed in section 1.4.5.

**Identification scenario** For emulation type MINITEL: Indicates the name of the program responsible for physical identification of Minitels connecting to VIRTEL. For all other emulation types: Indicates the name of the presentation module containing the identification scenario for this entry point.

Scenarios are described under the heading “Presentation modules” in the VIRTEL Web Access Guide.

**Type 3 compression** Indicates whether this entry point allows the use of level 3 compression. For more information on this subject, refer to “Parameters Of The Terminal”. An ‘X’ in this field activates support for level 3 compression.

**Mandatory identification** Indicates whether connections made via VIRTEL/PC must present a physical identification of the connecting PC. Refer to the chapter VIRTEL PC/VT100 for more information on this subject. An ‘X’ in this field activates the PC identification process.

**3270 swap key** Indicates the function key which allows the user to return from a transaction to the Multi-Session Menu. Permissible values are PF1 to PF24, PA1, PA2, PA3. If this field is blank, the swap key is specified by the SWAP parameter in the VIRTCT.

**Extended colors** An ‘E’ in this field indicates support for 3270 extended attributes and colors. An ‘X’ indicates support for 3270 extended attributes and colors together with support for DBCS (Double Byte Character Set).

### **5.1.8 Signon Programs**

The Signon Program field of the entry point indicates the name of the program used to control user sign-on. The following signon programs are supplied with VIRTEL:

**VIR0020A** Standard program for sign-on processing by entry of USER/PASSWORD sequence via sign-on screen.

**VIR0020B** Program used to process a logon sequence containing USER and PASSWORD. The logon sequence must conform to the following format: LOGON APPLID(ACBVIRTEL) DATA(EP USER PASSWORD) or EP (where EP is the entry point name).

**VIR0020C** Program identical to VIR0020B, but without any validity check on the password.

**VIR0020H** Sign-on program with WINDOWS user interface for HTTP mode.

**VIR0020M** Standard sign-on program for 40-column Minitel.

**VIR0020L** Standard sign-on program for 40-column Minitel by entry of USER and PASSWORD. The sign-on screen is produced with the help of a Videotex overlay whose name is the same as the entry point used. The source of this screen is in the member MAPSIGN. After changing the source, the resultant phase or load module can be placed into a separate LOADLIB concatenated to DFHRPL.

**VIR0020P** Program similar to VIR0020L which allows access to public transactions (those defined with security = 0), if sign-on is rejected by the security system.

### **5.1.9 Menu Programs**

The Menu Program field of the entry point indicates the name of the program which presents the list of transactions which the user is allowed to access. The following program names can be specified:

**VIR0021A** Standard menu program for VIRTEL Multi-Session and HTTP.

**VIR0021B** Program for connecting to a single transaction. This program only manages transactions defined in startup mode 1. The terminal is directly connected to the first transaction defined in startup mode 1.

**VIR0021C** Program for connecting in Flip-Flop mode to authorized transactions. This program only manages transactions defined in startup mode 1. The user is directly connected to the first transaction defined in startup mode 1. When the user exits this application, the user is automatically connected to the next one and so on. When the last transaction in the list is reached, the user is reconnected to the first one. The use of a transaction referencing the LOGOFF subapplication allows the user to exit from VIRTEL.

**VIR0021D** Program reserved for STI.

**VIR0021E** Program for connecting incoming X25 calls destined for an AntiPCNE line. This program emulates the function of a VTAM logon interpret table. It reads the first message and selects the transaction whose external name matches the first 8 characters of the message. If there is no matching transaction then message VIR2151E is issued and the call is cleared.

**VIR0021F** Program for connecting incoming X25 calls destined for an AntiPCNE line. This program emulates the function of a VTAM logon interpret table. It reads the first message sent by the partner (known as the pre-connexion message) and selects the transaction whose “Logon message” field matches the start of the pre-connexion message. The “Logon message” field can contain an EBCDIC character string enclosed in apostrophes (case sensitive), or a hexadecimal string in the format X’hh...hh’. An empty string (two apostrophes) matches any message. The pre-connexion message is passed on to the application. If there is no transaction whose “Logon message” matches the pre-connexion message, then console message VIR2161E is issued and the call is cleared.

**VIR0021G** Program for connecting incoming X25 calls destined for an AntiPCNE line. This program is similar to VIR0021F except that (a) the pre-connexion message is not passed on to the transaction, and (b) if the pre-connexion message does not match any transaction, the program continues to read incoming messages until a match is found. The entry point may contain additional transactions whose external name is USSMSGnn. These transactions do not participate in the matching of pre-connexion messages, but instead are used to generate responses to the terminal during the preconnection phase. If a transaction with external name USSMSG10 is present, the contents of its “Logon message” field are sent to the terminal upon receipt of the call packet. If a pre-connexion message arrives from the terminal which does not match any transaction, then the program looks for a transaction whose external name is USSMSG01 and sends the contents of its “Logon message” field to the terminal; if there is no transaction named USSMSG01 then message VIR2172E is issued and the call is cleared. If a transaction with external name USSMSG00 is present, the contents of its “Logon message” field are sent to the terminal immediately before the call is connected to the target application.

**VIR0021J** Program for connecting to the first available transaction in a list. This program is similar to VIR0021B, but instead of connecting to the first transaction, it connects to the first transaction whose application is active. This allows VIRTEL to automatically select a backup application if the primary application is down.

**VIR0021M** Standard menu program for 40-column Minitel. Identical to VIR0021A, this program is not a Multi-Session program.

**VIR0021O** Program for connecting to a single transaction. Identical to VIR0021B, except that it does not disconnect the terminal when the application finishes.



**TRANSACTIONS**

## 6.1 Introduction

A transaction is a named entity that allows access to an “application” at the host site. The term “application” may be either a VTAM application, a VIRTEL sub-application, an external server, or an HTML directory. Each transaction is known to the user by its external name, and defines the rules of connection / disconnection of the referenced application. When a security tool is used, for example VIRTEL security, only the transactions defined as resources appearing in the profiles of a user are accessible by that user. Each entry point has a list of associated transactions. The entry point management sub-application allows the administrator to manage the entry point and its associated transactions.

### 6.1.1 Summary Display

Press [PF4] at the entry point detail screen to display the list of associated transactions:

LIST of TRANSACTIONS prefixed by: CLI			Applid: APPLHOLT 16:27:11
Internal Name	External Name	Description	Application
CLI-00	CLIWHOST	Default directory = entry point name	CLI-DIR
CLI-01	PUBLIC	HTML page directory (non secured mode)	CLI-DIR
CLI-02	SECURE	HTML page directory (secured mode)	CLI-DIR
CLI-03A	w2h	Global files directory	GLB-DIR
CLI-03CC	w2h	Directory for custom.css	CLI-DIR
CLI-03CH	w2h	Directory for help.html	W2H-DIR
CLI-03CJ	w2h	Directory for custom.js	CLI-DIR
CLI-03CO	option	CLI option directory (/option)	CLI-DIR
CLI-03G	w2h	Group files directory	GRP-DIR
CLI-03P	w2h	Directory for w2hparm.js	W2H-DIR
CLI-03U	w2h	User files directory	USR-DIR
CLI-03W	w2h	W2H toolkit directory (/w2h)	W2H-DIR
CLI-03Y	yui	YUI toolkit directory (/yui)	YUI-DIR
CLI-04	dynarch	Dynarch toolkit directory (/dynarch)	DYN-DIR
CLI-09	doc	Documentation directory	DOC-DIR
CLI-10	Cics	Logon to CICS	SPCICST
P1=Update P6=First page		P2=Delete P7=Previous	P3=Return P8=Next P12=View/Add

*Transaction Summary Display*

**Field Contents**

**Internal name** Indicates the internal name of the transaction as it is known to the system. If a security tool is used, this name must be defined as a resource. Only those users with the resource in one of their profiles can access this transaction.

---

**Note:** Note that on the Multi-Session Menu, these transactions appear by alphanumeric order of their internal name.

---

**External name** Indicates the name of the transaction as it is known to the end user. This name appears in field [10] of the Multi-Session Menu, as shown in the chapter describing Multi-Session. This is also the name by which the transaction is referenced in an HTTP request.

**Description** Caption associated with the transaction. This caption appears on the Multi-Session Menu.

**Application** Indicates the name of the application accessed via the transaction. This application can be a VTAM application, a VIRTEL sub-application, an external server, or a directory of HTML pages.

## **Navigation**

The list can be positioned in the following ways:

**Search** Type the name, or the partial name, of the desired entity in the first line of the first column and press [Enter].

**[PF6]** Return to the first page of the list.

**[PF7]** Display the previous page of the list.

**[PF8]** Display the next page of the list.

**Modifying a transaction definition** - To modify the details of a transaction, type the required changes in the appropriate fields and press [PF1]. You can change more than one definition at a time. To modify a field not shown on the summary screen, position the cursor on the transaction and press [PF12] to display the transaction detail screen. Important note: Changes do not take effect until you press [PF1]. After updating a transaction definition, you must also update the entry point(s) concerned by pressing [PF3] twice (to return to the list of entry points) then [PF1] to register the change(s) to the entry point.

**Deleting a transaction definition** - To delete a definition, position the cursor on the name of the transaction to be deleted and press [PF2]. The line associated with the transaction to be deleted will appear highlighted with the message CONFIRM DELETE. Press [PF2] again to confirm deletion. The message DELETE OK confirms successful completion of the operation. Repeat the procedure for each transaction to be deleted.

**Adding a transaction definition** - To add a new definition, press [PF12] at the summary screen, either with the cursor on an existing definition to copy certain of its attributes, or on an empty line to create a new definition. Complete all required fields and press [ENTER]. The message CREATE OK indicates that the operation completed successfully.

### **6.1.2 Detail Display**

To access the detailed transaction definition, position the cursor on the desired transaction and press [PF12]. The transaction detail definition screen will then be displayed.

```

TRANSACTION DETAIL DEFINITION ----- Applid: APPLHOLT 16:33:32

Internal name ===> PC-0008           To associate with an entry point name
External name ===> VTAM             Name displayed on user menu
Description ===> Logon to VTAM application
Application ===> VIR0021U          Option ===>
PassTicket ===> 0 Name ===>        0=no 1=yes 2=unsigned
Application type ===> 2            1=VTAM 2=VIRTEL 3=SERV 4=PAGE 5=LINE
Pseudo-terminals ===>             Prefix of name of partner terminals
Logmode ===>                      Specify when LOGMODE must be changed
How started ===> 2                1=menu 2=sub-menu 3=auto
Security ===> 1                  0=none 1=basic 2=NTLM 3=TLS 4=HTML
Translation(s) ===> 04            0=idem 1=8040 2=8080 3=4040 4=auto
Logon message ===>

TIOA at logon ===>
TIOA at logoff ===>
Initial Scenario ===>             Final Scenario      ===>
Input Scenario ===>               Output Scenario     ===>

P1=Update
P3=Return
P12=Server

```

Transaction Detail Screen - non-HTML transaction

```

TRANSACTION DETAIL DEFINITION ----- Applid: APPLHOLT 16:34:17

Internal name ===> CLI-10           To associate with an entry point name
External name ===> Cics             Name displayed on user menu
Description ===> Logon to CICS
Application ===> SPCICST          Option ===>
PassTicket ===> 0 Name ===>        0=no 1=yes 2=unsigned
Application type ===> 1            1=VTAM 2=VIRTEL 3=SERV 4=PAGE 5=LINE
Pseudo-terminals ===> CLVTA       Prefix of name of partner terminals
Logmode ===>                      Specify when LOGMODE must be changed
How started ===> 1                1=menu 2=sub-menu 3=auto
Security ===> 1                  0=none 1=basic 2=NTLM 3=TLS 4=HTML
H4W commands ? ===>              0=no 1=yes 2;if2VIRTEL 4=auto
Logon message ===>

TIOA at logon ===>
TIOA at logoff ===>
Initial Scenario ===>             Final Scenario      ===>
Input Scenario ===>               Output Scenario     ===>

P1=Update
P3=Return
P12=Server

```

Transaction Definition Screen - HTML transaction

### 6.1.3 Parameters

**Internal name** The name of the transaction as it is known to the system. The first “n” characters of this name are the prefix by which the transaction is linked to one or more entry points. Transaction security is based on this internal name. It should be noted that the transactions are placed on the Multi-Session Menu in alphanumeric order of the internal name.

**External name** The name of the transaction as it is presented to the user in the selection screen. This is also the name by which the transaction is referenced in an HTTP request (see “VIRTEL URL formats” in the VIRTEL Web Access Guide).

**Description** The descriptive label associated with the transaction as it is presented to the user in the selection screen.

**Application** The name of the application associated with the transaction. This application can be a VTAM application, a VIRTEL sub-application, an external server, a directory containing HTML pages, or the name of a VIRTEL line. When the “Application Type” is 3 (external server), the following values have special meaning:

- &L the server name is the same as the terminal name
- &R the server name is the same as the relay name
- &1 the server name is the same as the “parameter” field of the rule which matched the incoming call
- = (for incoming calls via a VIRPESIT line only) the server name is the same as the destination partner name specified in the PESIT file transfer header.

For application type 3 or 4, you can press [PF12] to display the detailed definition of the external server or HTML directory.

When the “Application Type” is 5, this field contains the internal or external name of a VIRTEL line. Application type 5 is used by the SEND\$ TO and SEND\$ VARIABLE-TO instructions (see “VIRTEL Scenarios” in the VIRTEL Web Access Guide)

**PassTicket** Indicates whether VIRTEL should generate PassTickets for this application. Possible values are:

- 0 (default value) indicates that VIRTEL should not generate PassTickets for this application.
- 1 specifies that VIRTEL should generate a PassTicket, using the specified RACF application name, if the user has signed on to VIRTEL. The PASSTCK=YES parameter must also be specified in the VIRTCT.
- 2 specifies that VIRTEL should generate a PassTicket, even if the user has not signed on to VIRTEL. The PASSTCK=YES parameter must also be specified in the VIRTCT.

---

**Note:** Note: The value 2 implies that the user has supplied the userid in some other way, for example by means of a scenario containing the COPY\$ VARIABLE-TO-SYSTEM, FIELD=(NAME-OF,USER) instruction (see VIRTEL Web Access Guide)

---

**Name** The name of the application as known to RACF for generation of PassTickets. This may be different from the VTAM application name.

**Application Type** Defines the type of application described in the “Application” field. Permissible values for this field are:

- 1 for a VTAM application
- 2 for a VIRTEL sub-application
- 3 for an external server
- 4 for a directory containing HTML pages
- 5 for a reference to a VIRTEL line

**Pseudo Terminals** Specifies the prefix of the name of the VIRTEL terminal which will be used to connect to the application. The value \$LINE\$ in the “Pseudo Terminals” field indicates that this transaction is reserved for HTTP connections using non-predefined terminals (see “[HTTP connections with non-predefined LU names](#)”).

**Logmode** The name of the new LOGMODE that **MUST** be used to connect to the application. This overrides any LOGMODE parameter specified in the URL.

**How started** Represents the desired startup mode for the transaction. Permissible values are as follows:

- 1 The transaction is integrated in the primary list. If authorised after security checking, it will appear in the primary Multi-Session menu. User intervention will be required to access this application, unless menu programs VIR0021B or VIR0021C are used.
- 2 The transaction is integrated in the secondary list. If authorised after security checking, it will appear in the Multi-Session sub-menu. User intervention will be required to access this application.
- 3 The transaction is integrated in the primary list with automatic startup when the terminal connects to VIRTEL. If several transactions defined with automatic startup appear in the primary list, only the last one in the hierarchy is activated at connection time.

Do not confuse automatic startup in transparent mode (menu program VIR0021B + transaction startup mode 1) with automatic startup offering the possibility to return to a selection menu screen (menu program other than VIR0021B or VIR0021C + transaction startup mode 3).

---

**Note:** Note than startup mode 4 which was present in VIRTEL prior to version 4.0 has been replaced by value 0 in the “Security” field.

---

**Security** The type of security applied to the transaction.

- 0 Public transaction. A public transaction is always available whatever security tool is used.
- 1 Secure transaction (Basic security). A secure transaction is only available to a user if authorized by the active security tool. For HTTP access, the user is prompted, if necessary, for a userid and password.

---

**Note:** if passphrase is not active then passwords will be truncated to the first 8 characters. Passphrase support is activated by the PASSPHRASE option of the SECUR keyword in the TCT. See the Virtel Installation Guide for further details.

---

- 2 Secure transaction (NTLM security). For HTTP access only, security type 2 allows VIRTEL to obtain the Windows userid of the user, without prompting the user to signon again. The active security tool must recognize the userid and grant access to the transaction. This type of security should only be used on a LAN or on an encrypted session.
- 3 Secure transaction (Certificate security). A transaction with type 3 security must be accessed via HTTPS (secure session), and the client browser must present a certificate recognized by the active security tool (RACF). The userid associated with the certificate must be granted permission by the security tool to access the transaction. Type 3 security is only possible when running z/OS V1R7 or later, using a secure connection provided by AT-TLS
- 4 Secure transaction (HTML security). Used with HTTP access, security type 4 allows VIRTEL to obtain the userid and password of the user from fields supplied in the HTML page. The fields must be declared by means of the DECLARE-FIELD-AS tag in the page

template. For more details, refer to the section “Creating HTML and XML template pages: Signon and password management” in the VIRTEL Web Access Guide.

**Translation(s)** Type(s) of translation supported for MINITEL connections. Specify one or more of the following values:

- 0** Same type of translation required in the sub-server node definition.
- 1** 3270 messages are processed in 80 column format but are only displayed as 40 columns unless otherwise specified (for example, if \$%80 is present in the data stream).
- 2** 3270 messages are processed in and displayed in 80 column format unless otherwise specified (for example, if \$%40 is present in the data stream). Modes 1 and 2 are mutually exclusive.
- 3** 3270 messages are processed in 40 column format. This mode is used only for certain IMS applications.
- 4** Automatic detection of translation mode. This mode supports applications which produce both 3270 messages and videotex messages. VIRTEL adapts the display format automatically according to the type of message being processed. For example suppose a transaction defined with translation modes 2 and 4 is accessed from a sub-server node. Messages from this application will be automatically displayed as if they were already in videotex format (mode 4) or displayed directly in 80 column format for other cases (mode 2). This translation mode is compulsory for SRTV applications. For transactions attached to an entry point type HTML, HOST4WEB, or H4W the field “Translation(s)” is replaced by the field “H4W commands”

**H4W commands** For HTTP connections, this field indicates under what conditions HOST4WEB commands should be processed. Specify one of the following values:

- 0** Never process HOST4WEB commands.
- 1** Always process HOST4WEB commands.
- 2** Process HOST4WEB commands only if the first field of the message begins with the characters “2VIRTEL”.
- 4** Process HOST4WEB commands if either (a) the entry point specifies emulation type HOST4WEB or H4W, or (b) the entry point specifies HTML and the first field of the message begins with the characters “2VIRTEL”. These values are meaningful only when the entry point specifies emulation type HTML, HOST4WEB, or H4W. For further details, refer to the “Programming Interfaces” section in the VIRTEL Web Access Guide.

**Logon message** Application type 1: Character string sent to the application as “Logon data” at connection time. This string may also contain certain script variables and orders as described below. Application type 3: For transactions associated with an entry point which specifies menu program VIR0021F or VIR0021G (see “Menu Programs”) this field is used to identify incoming calls. For type 4 (HTML directory definition) transactions, the field “Logon message” is replaced by the field “Check URL Prefix”

**Check URL Prefix** Application type 4: If the pathname of a URL matches the character string specified in this field, then the pathname corresponds to the VIRTEL directory whose name is specified in the “Application” field. See “How the path name corresponds to a VIRTEL directory” in the “VIRTEL URL formats” section of the VIRTEL Web Access Guide.

**TIOA at logon** Application types 1-3: Script to be run at application connection time. Scripts are described under the heading “Connection – Disconnection Scripts”. Application type 4: For type 4 (HTML directory definition) transactions having the same name as an entry point, the “TIOA at logon” field contains the default URL for the entry point. Refer to the “VIRTEL URL formats” section of the VIRTEL Web Access Guide for further details.

**TIOA at logoff** Application types 1-3: Script to be run before disconnecting from the application.

Initial Scenario

Final Scenario

Input Scenario

Output Scenario

For HTML transactions, each of these fields may contain the name of an HTML presentation module. For each field which is non-blank, VIRTEL will call the corresponding scenario (INITIAL, FINAL, INPUT, or OUTPUT) in the named presentation module. An OUTPUT scenario may also be referenced by a VIRTEL Multi-Session transaction.

---

**Note:** Scenarios are described under the heading “Presentation modules” in the VIRTEL User Guide.

---

**Warning:** After adding, deleting or updating a transaction, it is essential to update the entry points used by this transaction by pressing [PF1] at the entry point summary screen.



## CONNECTION / DISCONNECTION SCRIPTS

When connecting to an application, it may be useful, if desired, to automatically execute certain operations to direct the user to a defined point within the application. The most commonly used operations are application signon procedures. Similarly, when the user logs off from an application, it can be useful to run various commands to release application resources. These operations are called “connection and disconnection scripts”. Scripts are entered in the fields “TIOA at logon” and “TIOA at logoff” of a transaction, or in the “TIOA at start up” field of an external server, with the help of the language described below. A script can send data and 3270 attention keys to the application, send data to the terminal, and wait for specific data from the application.

### 7.1 Script Programming Language

A connection / disconnection script consists of a sequence of “clauses”. A clause consists of some data (which may contain embedded variables and orders) followed by a command. All commands, variables, and orders begin with the ‘&’ character.

#### 7.1.1 Transmission and filter commands

The command acts upon the data which precedes it. The commands are as follows:-

Desired operation	Command
Transmit the preceding data to the application	&/A
Transmit the preceding data to the terminal	&/T
Ignore and discard the current application message	&/I
Wait until the application sends a message containing the character string specified in the preceding data	&/W
Same as &/W except that messages are still sent to the terminal while being filtered	&/F
Kill the script (connection / disconnection)	&/K

---

**Note:** Any blanks immediately following a &/ command are ignored.

---

For compatibility with versions of VIRTEL prior to 4.31, the / (slash) in the above commands may also be coded as the EBCDIC character whose hexadecimal value is X'4F'. In the US, Canada, and UK codepages, X'4F' is represented by a vertical bar. In some European countries, X'4F' appears as an exclamation point.

### 7.1.2 System variables

System variables are information known only to VIRTEL at the time of accessing an application. These variables are in the format &n where “n” represents the desired variable. Available information Corresponding variable:-

Available information	Corressponding variable
Transaction name	&T
VTAM terminal name	&L
Transaction external name	&X
Transaction description	&D
Application name	&A
Call User Data (12 bytes)	&C
Relay name	&R
User name	&U
User password	&P
Rerouting parameters	&1, &82, &83,..., &8F
URL parameter	&=paramn=
VIRTEL variable	&=varname=

**Note 1** System variables may also be coded in the Logon Message field.

**Note 2** The system variable &=name= is used to obtain the value of either a URL parameter or of a VIRTEL variable created by a scenario (described in the VIRTEL Web Access Guide). If both a URL parameter and a VIRTEL variable exist with the same name then the VIRTEL variable takes precedence.

### 7.1.3 Orders

Orders may be embedded in the clause data. Orders are used to set the 3270 (or Minitel) attention key to be sent by the following &/A command, to embed hexadecimal or special values in the data, or to cause the script to wait for the first message from the application, or to process a scenario.

Information to be sent	Corresponding order
Set the AID and cursor address for a 3270 read operation. See note 1	&*xxrrcc where xx is: F1-F9=PF1-PF9, 7A-7C=PF10-PF12, C1-C9=PF13-PF21, 4A-4C=PF22-24, 7D=Enter; rrcc is the cursor address in 3270 buffer address format
Set the AID for a 3270 short read operation (note 2)	&#yy or &*yy where yy is: 6C=PA1, 6E=PA2, 6B=PA3, 6D=Clear, FD=Attn
Minitel keys in external server	&*0Dxx40 where xx is: F1=Guide, F2=Repet, F3=Somm, F4=Annul, F7=Retour, F8=Suite, F9=Copier, 7B=EndPage, 7C=Corr, 7D=Envoi, 6D=Conn/Fin
Data in hexadecimal (note 4)	&'hhhhhhhhhh'
Ampersand character (note 4)	&&
Wait for first message (note 3)	&W
Write preceding character string to console and discard	&/M
Start of repeating script for service transaction (note 5)	&(
End of repeating script for service transaction (note 5)	&)
Execute scenario (note 6)	&/S
Use tab key to skip to next available input field (note 7)	&>

**Note 1** If a function key occurs in the middle of a script, the transmission sequence for the function key must be &\*xxrrcc&/A. Where the function key is at the end of the script, there is no need to add &/A. If &/A or end of script occurs with no AID key specified, the default is &\*7D4040 (Enter with cursor at row 1 col 1).

**Note 2** Never use &/A to send PA keys or Clear to the application.

**Note 3** The &W order is processed only if it appears at the start of the script; otherwise it is ignored.

**Note 4** Orders &'hh...hh' and && may also be coded in the Logon Message field.

**Note 5** &( and &) enclose a section of the script which will be repeated. When the script reaches the & order, the transaction is converted into a “service transaction” and remains active waiting for similar requests from other users (see “Service transactions” in the VIRTEL Web Access Guide).

**Note 6** The &/S order executes a scenario. If coded in the connexion script (“TIOA at logon”), it executes the INITIAL scenario of the presentation module named in the “Initial Scenario” field of the transaction. If coded in the disconnection script (“TIOA at logoff”), it executes the FINAL scenario of the presentation module named in the “Final Scenario” field of the transaction (see “Presentation modules” in the VIRTEL Web Access Guide). Any data preceding the &/S order is ignored. Any blanks immediately following the &/S order are ignored.

**Note 7** The &> order does not transmit anything and must be completed with a transmission order. This order can be concatenated as many times as necessary before transmission. Exemple : &>&> can be used to simulate two tab key usage.

#### 7.1.4 Method of operation

If present, a script is first called when the initial connection is made to the application. VIRTEL examines the start of the script to see if it begins with the order &W (wait for first message from application). If so, then no further action is taken at this time, and script processing continues after the first message is received from the application. Otherwise, the first clause of the script is actioned according to its command code, as follows:

- &/W, &/F, &/I : no further action is taken at this time, the clause will be reprocessed when the first message arrives from the application
- &/T, &/A : the data preceding the command is transmitted to the terminal or application
- &/K : the connection is scheduled for termination

Subsequently, VIRTEL processes one clause of the script each time a message arrives from the application. Each clause is actioned according to its command code, as follows:

- &/W : VIRTEL tests whether the data preceding the &/W command appears in the message. If the data is not found, then the message is discarded, and the &/W clause is processed again when the next message arrives from the application. If the data is found, then the message is discarded and the next clause in the script is immediately processed.
- &/F : VIRTEL tests whether the data preceding the &/F command appears in the message. If the data is not found, then the message is sent to the terminal, and the &/F clause is processed again when the next message arrives from the application. If the data is found, then the message is discarded and the next clause in the script is immediately processed.
- &/I : the application message is discarded.
- &/T, &/A : the data preceding the command is transmitted to the terminal or application.
- &/K : VIRTEL will send the message and immediately disconnect the communication, without waiting for the response (asynchronous mode used with certain servers).

Data sent to the application by means of the &/A command must be constructed in the format expected by the application. In the case of a 3270 application, the message is in the form of a 3270 data stream. VIRTEL adds a standard 3-byte 3270 prefix (consisting of AID character and cursor SBA) which defaults to default is 7D4040 but may be overridden by a &\* or &£ order embedded in the preceding script data. In the case of a Minitel application, VIRTEL adds the appropriate suffix (0Dxx) as indicated by an &\* order embedded in the preceding script data (see table of script orders below).

Data sent to the terminal by means of the &/T command must be constructed in the same format as the application would generate. In the case of a 3270 application, the message must be in the form of a 3270 data stream prefixed by a 3270 command code and WCC. VIRTEL will translate the message to the format required by the terminal (for example, HTML or Minitel) as appropriate.

## 7.2 Script Examples

---

**Note:** In these examples, script commands are introduced by the preferred sequence &/ (ampersand slash). For compatibility with existing scripts created before version 4.31 of VIRTEL, the slash may optionally be replaced by the EBCDIC character whose hexadecimal value is X'4F'.

---

### 7.2.1 Connect to CICS (no sign-on) with automatic start of a transaction

In the simplest case, the CICS transaction code is entered in the field “TIOA at logon”. The script below simply sends the ABC1 transaction code to CICS at connection time:

Internal name ===> W2H-10	To associate <b>with</b> an entry point name
External name ===> Cics	Name displayed on user menu
Description ===> Logon to CICS	
Application ===> ACBCICS	Application to be called
Application type ===> 1	1=VTAM 2=VIRTEL 3=SERV 4=PAGE 5=LINE

Pseudo-terminals ==> DEVT	Prefix of name of partner terminals
Security ==> 0	0=none 1=basic 2=NTLM 3=TLS 4=HTML
Logon message ==>	
TIOA at logon ==> ABC1	

*Connection script to start a CICS transaction*

This example works only if the CICS TYPETERM definition specifies LOGONMSG(NO). If CICS is configured to send an initial message to the terminal at logon, by means of the LOGONMSG(YES) parameter, then a bracket error would occur when the above script is executed. To avoid this, the transaction code must be prefixed by &W to wait for the initial message to be delivered, as shown in the next example.

### 7.2.2 Connect to CICS and start transaction CESN with transmission of credentials

The variables &U and &P can be used to pass the current VIRTEL userid and password to the CICS signon transaction:-

Internal name ==> W2H-11	To associate <b>with</b> an entry point name
External name ==> Cics2	Name displayed on user menu
Description ==> Logon to CICS	
Application ==> ACBCICCS2	Application to be called
Application <b>type</b> ==> 1	1=VTAM 2=VIRTEL 3=SERV 4=PAGE 5=LINE
Security ==> 1	0=none 1=basic 2=NTLM 3=TLS 4=HTML
Logon message ==>	
TIOA at logon ==> &WCESN&/ASignon&/F&*&7D4EC9&'114BE9'&U&'114CF9'&P&/A	

*Connection script with automatic signon to CICS*

This script waits for the initial message from CICS, then enters the transaction code CESN. It waits for the “Signon” prompt to be displayed, then enters the userid and password in two separate fields and sends the completed screen to the host. Security=1 is specified to ensure that the user is signed on to VIRTEL. The SBA orders 11xxxx identify the position of the userid and password fields in the CESN signon panel and may vary as a function of the site.

### 7.2.3 Connect to CICS VSE with ICCF sign-on and start transaction CEMT

The following script illustrates the use of a PF key:

Internal name ==> W2H-12	To associate <b>with</b> an entry point name
External name ==> ICCF	Name displayed on user menu
Description ==> Logon to CICS VSE	
Application ==> DBDCCICS	Application to be called
Application <b>type</b> ==> 1	1=VTAM 2=VIRTEL 3=SERV 4=PAGE 5=LINE
Security ==> 1	0=none 1=basic 2=NTLM 3=TLS 4=HTML
Logon message ==>	
TIOA at logon ==> REMOTE&/W&'11E35C'&U&'11E560'&P&/AEScape&/W&*F64040&/ACEMT&/A	

*Connection script with automatic signon to ICCF*

This script waits for the ICCF signon screen (recognized by the word ‘REMOTE’), then enters the userid and password in two separate fields and sends the completed screen to the host. It waits for the ICCF main menu (recognized by the word “Escape”) and presses F6. It then enters the transaction code CEMT. The SBA orders 11xxxx identify the position of the userid and password fields in the ICCF signon panel and may vary as a function of the site.

## 7.2.4 Connect to TSO with USER and PASSWORD and await start of ISPF

This is an example of an HTTP transaction which uses the “Logon Message” field to pass the userid to TSO, followed by a script to complete the TSO/ISPF logon process:

Internal name ===> W2H-13	To associate <b>with</b> an entry point name
External name ===> Tso	Name displayed on user menu
Description ===> Logon to Tso	
Application ===> TSO	Application to be called
Application <b>type</b> ===> 1	1=VTAM 2=VIRTEL 3=SERV 4=PAGE 5=LINE
Security ===> 1	0=none 1=basic 2=NTLM 3=TLS 4=HTML
Logon message ===> &U	
TIOA at logon ===> TSO/E LOGON&/W&'11C9C3'&P&/A***&/W&/A	

*Connection script with automatic logon to TSO/ISPF*

The script waits for the TSO/E LOGON panel for the specified userid, then enters the password into the appropriate field. It waits for the \*\*\* prompt to appear, and presses enter. Security=1 is specified to ensure that the user is already signed on to VIRTEL. The SBA order 11C9C3 identifies the password field (at row 8 col 20) in the TSO/E LOGON panel and may vary as a function of the site.

## 7.2.5 Connect to CICS and navigate a user application

Internal name ===> W2H-14	To associate <b>with</b> an entry point name
External name ===> Cics4	Name displayed on user menu
Description ===> Logon to CICS	
Application ===> ACBCICSS2	Application to be called
Application <b>type</b> ===> 1	1=VTAM 2=VIRTEL 3=SERV 4=PAGE 5=LINE
Security ===> 1	0=none 1=basic 2=NTLM 3=TLS 4=HTML
Logon message ===>	
TIOA at logon ===> & 'F5C21140401D4013'&/TWELCOME&/W&*7D40C1	
TIOA at logoff ===> & #6BCESF LOGOFF&/A	

*Connection script with message to terminal*

This script sends an initial 3270 message to the terminal to format the screen and position the cursor. The data in this initial message consists of a 3270 Write-Erase command (F5), a Write Control Character (C2), a Set Buffer Address order (114040), a Start Field order (1D40) and an Insert Cursor order (13). Having sent this message, the script waits for the CICS application to send a message containing the string “WELCOME”, then it sends the “Enter” key to the CICS application. When the terminal user disconnects, the logoff script sends the “Clear” key to CICS followed by CESF LOGOFF.

## 7.2.6 Service Transaction

This example shows a script which connects to CICS and repeatedly issues an enquiry transaction whose parameters are supplied in the URL of an HTTP request:

Internal name ===> W2H-15	To associate <b>with</b> an entry point name
External name ===> Cics5	Name displayed on user menu
Description ===> CICS Service Transaction	
Application ===> ACBCICSS2	Application to be called
Application <b>type</b> ===> 1	1=VTAM 2=VIRTEL 3=SERV 4=PAGE 5=LINE
Security ===> 1	0=none 1=basic 2=NTLM 3=TLS 4=HTML
Logon message ===>	
TIOA at logon ===> Signon to CICS&/W&*F34BE9&/A&(TRA1==MYPARAM=&/A&)	

*Connection script for service transaction*

The first part of this script signs on to CICS using the default CICS userid. This part of the script is executed once only when the VIRTEL transaction is called for the first time. The remainder of the script, bracketed by the &(< and &>) orders, is executed repeatedly. Because the script has a repeating part, this transaction is known as a “Service Transaction”. Each time an HTTP request arrives in the form `http://ipaddr:port/pagename+cics5?myparam=xyz123` it is dispatched to the service transaction, if one is available, and the script executes the CICS transaction `TRA1xyz123` where xyz123 is the value of the URL parameter “myparam=” specified in the HTTP request. The result of this CICS transaction is returned to the requester using pagename as a page template. The request is then terminated, but the session between VIRTEL and CICS remains connected waiting for the next request.



## **EXTERNAL SERVERS**

### **8.1 Introduction**

The external server management sub-application allows the administrator to maintain the call parameters relating to the various servers available for outgoing calls. External server definitions allow users at 3270 terminals to access Videotex servers via an X25 network. Additionally, starting with VIRTEL version 4.14, the concept of an external server is extended to handle the routing of incoming and outgoing calls to and from X25 GATE/PCNE applications such as CFT and Inter.PEL. Starting with VIRTEL version 4.42, the external server may also be used to define the parameters for outbound calls to a PESIT/IP file transfer server via a VIRPESIT line.

#### **8.1.1 External Server Management Sub-Application**

The external server management sub-application is accessed by pressing [PF7] in the Configuration Menu, or [PF11] in the Sub-Application Menu, or from the Multi-Session Menu via a transaction referencing module VIR0031. This subapplication allows management of the parameters associated with each external server.

#### **8.1.2 Security**

When security is active, access to external server management from the Configuration Menu or the Sub-Application Menu is controlled by the resource \$\$SERV\$\$. When accessed by a transaction, the rules governing the management of transaction security apply. Security management is described in chapter 4 of the VIRTEL Technical Documentation.

#### **8.1.3 Summary Display**

The first screen displayed by the external server management sub-application shows a summary of existing definitions in alphanumeric order:

LIST of EXTERNAL SERVERS ----- Applid: APPLHOLT 18:36:10			
Server	Description	Server address	Parameter
\$ENTRANT	X25 incoming calls (\$NATIF3)	1111	0 9
\$SORTANT	X25 outgoing		0 4
TEXAGRI	TEXAGRI from 3270 terminal	72372	= 2 L

P1=Update                    P2=Delete                    P3=Return  
 P7=Previous                P8=Next                    P12>Add                    P6=1st page

*External Server Summary Display*

## Navigation

In browse, alter, or delete mode, it is possible to scroll the list of external servers under the control of VIRTEL.

**Search** Type the name (or partial name) of the required entity on the first line under the heading “Service”, then press [Enter].

**[PF6]** Return to the first page of the list.

**[PF7]** Display the previous page.

**[PF8]** Display the next page.

**Modifying an external server definition** - Type the desired modifications into the appropriate fields then press [PF1]. Multiple definitions can be modified at the same time. The message UPDATE OK indicates that the modifications have been accepted. If the modification affects a field not displayed on the summary screen, first position the cursor on the definition concerned, then press [PF12] to access the definition detail screen.

**Deleting an external server definition** - To delete a definition, position the cursor on the name of the service to be deleted and press [PF2]. The line associated with the service to be deleted will appear highlighted with the message CONFIRM DELETE. Press [PF2] again to confirm deletion. The message DELETE OK confirms successful completion of the operation. Repeat the procedure for each external server to be deleted.

**Adding an external server definition** - To add a new definition, press [PF12] at the summary screen, either with the cursor on an existing definition to copy its attributes, or on an empty line to create a new definition.

### 8.1.4 Detail Display

To access the detailed definition of an external server, position the cursor on the desired service in the summary screen and press [PF12]. The external server detail definition screen will then be displayed. To return to the configuration menu, press [PF3] or [Clear].

```

EXTERNAL SERVER DETAIL DEFINITION ----- Applid: APPLHOLT 18:39:27

Name      ==> $ENTRANT          Name of this server
Description ==> X25 incoming calls ($NATIF3)
Number    ==> 1111             Number to call
Data      ==>                Data to complete call packet
Line number ==> 9-XMPASS        Line for OUT calls (*=auto)
Backup line ==>               Used when first line is unavailable
Caller    ==> *               Caller id number (*=auto)
Emulation ==> 0               0=none 1=VirtelPc 2=Minitel 3=M80
                               4=VT100 5=3174 6=VT200 7=LECAM 8=Bull
                               1= ASCII-7 2= ASCII-8 3= EBCDIC
Character set ==> 3           Server time out ==> 0000 seconds
                               Maximum inactivity time for server
User time out ==> 0000 minutes Cut off warning ==> 0
                               Maximum idle time for user
                               0=none 1=bell 2=message
Price level ==>               Secret ==> 1
                               0 - Z : price level for this server
                               1=not shown in the list
Facilities ==>               CUD0 (hex) ==>
                               In hex, inserted into call packet
TIOA at start up ==>         protocol identification

P1=Update          P3=Return          Enter=Add

```

*External Server Detail display*

### 8.1.5 Parameters

**Name** Contains the name of the service as displayed to the user in the “Call External Server” screen. This name may also be referenced in the “Application” field of a type 3 transaction.

**Description** Description of the service as displayed to the user in the “Call External Server” screen.

**Number** For outbound calls via an X25 line:

The X25 call number required to access the service.

If the service is invoked by an X25 incoming call, the called number can be defined as “=”. In this case, the called number for the outgoing call will be copied from the incoming call packet. In the case of an external server which processes outgoing calls originating from an application linked to VIRTEL via an AntiGATE line (CFT, Pelican), the value “=” indicates that the called number will be supplied by the application. In the case of an external server which processes outgoing calls originating from a VIRKIX application, the “Number” field must be blank, which indicates to VIRTEL that the called number and the caller number, as well as the data, facilities, and CUD0 (if applicable), will all be supplied by application. However, if the “Caller” field of the external server is non-blank, then this value will override the caller number supplied by the application. For this type of external server, the entry point must contain a transaction whose external name is “Mirror” as the first transaction.

For outbound calls via a VIRPESIT line:

The IP address of the partner in the form nnn.nnn.nnn.nnn

**Data** For outbound calls via an X25 line:

User data. The contents of this field will be converted to ASCII and placed in the outgoing call packet immediately following the contents of the CUD0 field. If the service is invoked by an X25 incoming call, the data can be defined as “=”. In this case, the Call User Data for the outgoing call (Data and CUD0 fields) will be copied from the incoming call packet. In the case of an external server invoked by an HTTP request, for example:

```
GET /PUBLIC/WEB3270.htm+videotex+SERVICE1
```

the value “=” indicates that the parameter (SERVICE1 in this example) will be placed  
in ASCII in the outgoing call packet immediately following the CUD0 field.

For outbound calls via a VIRPESIT line:

The TCP port number of the partner.

**Line number** Specifies the internal name of the line on which the outgoing call will be made. The line type may be either X25 (GATE, FASTC, XOT, AntiGATE, AntiPCNE, AntiFC) or TCP with protocol VIRPESIT. “\*” indicates that the first available line will be used.

---

**Note:** For users of VIRTEL prior to version 4.20:

External server definitions which were created using a version of VIRTEL prior to 4.20 refer to the line using a single character name. When processing these definitions, VIRTEL selects the first line whose internal name begins with the character specified, and VIRTEL displays the complete name of the selected line in this field on the external server definition detail screen. When the external server definition is updated for the first time under VIRTEL 4.20 or later, the single character reference is replaced in the external server definition by the complete line name. Prior to VIRTEL version 4.20, if the “Line number” field of the external server was blank, the line selected for the outgoing call was the first line whose internal name began with the figure 1. From VIRTEL version 4.20 onwards, it will be necessary to update any such external server definitions, by specifying explicitly the full internal name of the required line.

---

**Backup line** The internal name of the backup line which will be used for the outgoing call if the primary line is not available. Following an error on the primary line, VIRTEL uses the backup line for all subsequent calls. Similarly, following an error on the backup line, VIRTEL switches back to the primary line for all subsequent calls. From version 4.24 onwards, if both the primary and backup lines are available and operational, both will be used for outgoing calls. For each line, VIRTEL maintains a counter of outgoing calls which have been made but which have not yet received a response. Before making each call, VIRTEL compares the counters of each of the two lines, and selects the line with the lowest number of calls awaiting response. This procedure has the effect of balancing the load between the two lines, and bypasses possible blockages caused by router errors. The rules for specifying the backup line are the same as for the primary line.

**Caller** Optional caller number to be placed in the outgoing call packet. If the service is invoked by an X25 incoming call, the caller number can be defined as “\*” or “=”. In this case, the caller number for the outgoing call will be copied from the incoming call packet.

**Emulation** Type of emulation required. Possible values are:

- 0** no emulation (Called by FA25 API)
- 1** VIRTELPC emulation
- 2** Minitel 40 column emulation, reverse X25, or VIRPESIT
- 3** Minitel 80 column emulation

- 4** VT100 emulation
- 5** 3174 switched node
- 6** VT200 emulation
- 7** Minitel emulation with LECAM via VIRNT
- 8** BULL emulation

**Character set** Type of characters expected by the external server.

- 1** ASCII 7 bits
- 2** ASCII 8 bits
- 3** EBCDIC

**Server time out** Timeout period (in seconds) for the server. VIRTEL will disconnect the call if the server sends no messages during this period. 0 indicates that there is no timeout.

**User time out** Timeout period (in minutes) for the caller. VIRTEL will disconnect the call if the caller sends no messages during this period. If 0 is specified, the value of the TIMEOUT parameter in the VIRTCT is used instead.

**Cut off warning** Type of message sent to the user before disconnection occurs due to user time out. Possible values are:

- 0** User receives no warning of disconnection
- 1** User is warned by an audible ‘bip’ 30 seconds before disconnection
- 2** User is warned by a message 30 seconds before disconnection or if the server does not respond

**Price level** The tariff for this service. Possible values are:

- 0** Cost is not calculated for this service
- n** (n is a value from 1 to Z), the cost of the call is calculated and presented to the user at the end of the connection. The values of n are defined in VIRTEL exit 7 (see VIRTEL Installation Guide).

**Secret** 1 indicates that this service will not appear in the list of servers shown to the user in the “Call External Server” screen. This value is typically used in external server definitions which are intended to be called only by a type 3 transaction.

**Facilities** Optional facilities (in hexadecimal) to be placed in the X25 call packet.

If the service is invoked by an X25 incoming call, the facilities can be defined as “=”. In this case, the facilities for the outgoing call will be copied from the incoming call packet.

If neither packet size (42) nor window size (43) appears in the facilities specified here or copied from the incoming call packet, then VIRTEL will generate packet size and window size facilities fields in the outgoing call packet according to the values specified in the outbound line definition.

**CUD0 (hex)** Protocol indicator (2 to 8 hexadecimal characters) to be placed in the outgoing call packet before the user data. If this field is blank, the default value is 01000000 (indicating PAD protocol). If the value of the “Data” field is “=” then the “Data” and “CUD0” will be copied from the incoming call packet.

**TIOA at start up** Contains a connection script to be run immediately after connection to the server. For more information, see “Connection – Disconnection Scripts”.



## CONNECTION MODES

There are various methods of connecting terminals to VIRTEL. This chapter includes the **WELCOME** and **RELAY** modes of connection

### 9.1 WELCOME mode

Exclusively for 3270 terminals, WELCOME mode allows 3270 terminals to connect to VIRTEL without being predefined. There are two conditions which must be fulfilled: - The ACCUEIL parameter in the VIRTCT must be set to YES, - The connecting terminal must not match any existing fixed terminal definition or terminal pool definition.

In this mode, terminals not defined in VIRTEL can connect, but they cannot benefit from compression or full Multi- Session functionality. The first screen displayed depends on the characteristics of the entry point used. If no entry point is used, each terminal connecting in WELCOME mode will see the VIRTEL sign-on screen, or the Multi-Session Menu, or the Configuration Menu depending on the options specified in the VIRTCT for the SECUR and MULTI parameters.

If the Multi-Session Menu is accessible from a terminal connected in WELCOME mode, it is regarded simply as a selection screen. Thus, when an application is selected, VIRTEL connects the terminal directly to this application and relinquishes control of the terminal. In this case, VIRTEL functions somewhat like a dynamic USSTAB.

### 9.2 RELAY mode

3270 terminals can be connected in RELAY mode if a suitable definition exists in the system. The relays are defined to VTAM by means of APPL statements. Each terminal connected in this way can benefit from VIRTEL compression and/or Multi-Session functionality. Whether a sign-on screen or a Multi-Session Menu is displayed depends on the characteristics associated with the entry point used. When no entry point is used, the rules described in the previous paragraph apply.

### 9.3 Terminal Connection Types

The definition of a terminal / relay pair can be accomplished in various ways: by means of a fixed entry; by inclusion in a physical pool (which may be dynamic or non-dynamic); or by means of a reserved entry (logical pool). A fixed entry is a definition which can only be used by one specific terminal. A physical pool is a generic definition which can be shared by several different terminals. A logical pool is a reserved definition which is used not for connecting a terminal to VIRTEL, but for connection to a VTAM application. This

definition allows the same physical terminal, for example a Minitel, to be presented to applications with different relays depending on the context. Each type of definition can be explicit or repeated.

. index:: pair: Connection Modes; Explicit Fixed Terminal entries

### 9.3.1 Explicit fixed entries

Each terminal in the group is explicitly named within VIRTEL. This mode of definition is useful when a group of relays must be attached to a line via a common terminal name prefix, but the relay LU names do not follow a numeric pattern. The following example shows a group of terminals and corresponding relay LU names associated with a line via prefix PCN1:

LIST of TERMINALS ----- Applid: SPVIRH1 18:15:52					
Terminal	Repeated	Relay	Entry	Type	I/O Pool
PCN1TM01	0001	PARIS	3	1	
PCN1TM02	0001	ROMA	3	1	
PCN1TM03	0001	BERLIN	3	1	
PCN1TM04	0001	BRUSSEL	3	1	
PCN1TM05	0001	DENHAAG	3	1	
PCN1TM06	0001	KOBNHAVN	3	1	
PCN1TM07	0001	LONDON	3	1	
PCN1TM08	0001	DUBLIN	3	1	
P1=Update		P2=Delete	P3=Return		P6=1st Page
P7=Page-1		P8=Page+1	P12=Details		

*Explicit fixed terminals*

### Repeated fixed entries

Only the first terminal in the list is defined. The repeat count indicates the number of terminals which VIRTEL will create. The numeric portion of the terminal name, relay name, and 2nd relay name (if supplied) are incremented for each occurrence of the terminal.

---

**Note:** The repetition increment takes effect from the rightmost numeric character and continues until the next nonnumeric character to the left. The increment is decimal and not hexadecimal.

---

### Examples

In the examples shown below: - Terminal TERM0001, relay RELAY001, repetition 0016 causes the creation of 16 terminals TERM0001 to TERM0016 with relays RELAY001 to RELAY016. - Terminal G001T001, relay RELAY200, repetition 0020 causes the creation of 20 terminals G001T001 to G001T020 with relays RELAY200 to RELAY219. - Terminal TER00LUA, relay REL00CVA, 2nd relay FIX00CVA, repetition 0100 causes the creation of 100 terminals TER00LUA to TER99LUA with relays REL00CVA to REL99CVA and 2nd relays FIC00CVA to FIC99CVA. - The remaining examples show invalid repetitions caused by improper definitions. In each case the size of the numeric portion of one or more of the names is insufficient to allow the generation of a unique name for each occurrence in the repeat range.

LIST of TERMINALS ----- Applid: SPVIRH1 18:13:49					
Terminal	Repeated	Relay	Entry	Type	I/O Pool
TERM0001	0016	RELAY001	PC	2	3
G001T001	0020	RELAY200		3	3
TER00LUA	0100	REL00CVA		3	3
TERX0LUB	0015	REL00CVB		3	3
TER00LUC	0015	RELX0CVC		3	3
					FIC00CVA
					FIC00CVB
					FIC00CVC

TER00LUD 0015	REL00CVD	3      3	FICX0CVD
TER90LUE 0015	REL00CVE	3      3	
P1=Update	P2=Delete	P3=Return	P6=1st Page
P7=Page-1	P8=Page+1	P12=Details	

*Repeated fixed terminals*

### 9.3.2 Physical Terminal Pools

Physical pools allow 3270 terminals to connect to VIRTEL and to be assigned a relay LU, without the need to create an individual definition for each connecting terminal. A relay LU is assigned from the physical pool at the time the terminal connects to VIRTEL. There are two types of physical pool, dynamic and non-dynamic, as described later.

Whether or not a pool is dynamic, the definition of a physical pool is indicated by the presence of a "?" character in the first position of the terminal name. The next three characters denote the characteristics of the pool. The last four characters are free-format and serve to distinguish one definition from another.

A physical pool thus has a name in the format ?xxxxyyy.

The concept of a physical pool only applies to 3270 terminals. Other types of terminal cannot be defined by means of a physical pool.

Although a physical pool allows connection of a large number of terminals, it is sometimes necessary to restrict the connection to certain types of terminals. This selection is done with the three characters represented by "x" in the name of the physical pool definition.

**1st character** Tests the terminal type.

\* No restriction on terminal type

**S** SNA terminal

**N** Non SNA terminal

**2nd character** Tests the terminal model

\* No restriction on model

**2 to 5** Restricted to specified model

**3rd character** Tests colour support

\* No restriction on colour support

**C** Colour terminal

**N** Monochrome terminal

Examples:

- ?S\*\*YZABVIRTEL tests only if the terminal is SNA.
- ?S3CYZABVIRTEL tests if the terminal is SNA model 3 colour.

### 9.3.3 Dynamic Terminal Pools

In a dynamic physical pool, the associated relay is defined by a combination of alphanumeric characters and "=" signs. Each "=" sign will be dynamically replaced by the value of the corresponding character in the name of the connecting terminal.

For example, for a definition specifying VIR===== as the relay name, each terminal connecting to VIRTEL will be allocated a relay whose first three characters are VIR and whose last five characters are the last five characters of the terminal LU name. VIRTEL must be able to open a VTAM application LU for each possible relay defined in the pool. The use of the VTAM generic character “?” allows all possible relay names to be defined to VTAM by a single APPL statement, as shown in the following example:

```
VIR????? APPL AUTH=(ACQ, PASS)
```

A single definition may be sufficient to connect all 3270 terminals in the network.

### 9.3.4 Non-Dynamic Terminal Pools

In a non-dynamic physical pool, the associated relay is defined by a combination of alphanumeric characters without “=” signs. A given terminal may be assigned a different relay on each connection according to availability. Each relay in the pool must be defined to VTAM by means of an APPL statement.

It is advisable to define as many entries as there are terminals to be connected.

### 9.3.5 Terminal Pool Definition Examples

#### Physical Pool

In the examples shown below, ?\*\*\*0000 is a dynamic physical pool which allows connection of an unlimited number of terminals. ?S5CTM01 is a non-dynamic physical pool which allows connection of up to 8 terminals (of type 3270-5 SNA Colour) which will be assigned relay names VIR5LU01 to VIR5LU08.

```
LIST of TERMINALS ----- Applid: SPVIRH1 18:13:49
Terminal Repeated   Relay    Entry   Type I/O Pool 2nd Relay
```

?***0000	VIR=====	PC	2	3
?S5CTM01 0008	VIR5LU01	PC5	2	3

P1=Update	P2=Delete	P3=Return	P6=1st Page
P7=Page-1	P8=Page+1	P12=Details	

*Physical pools of terminals*

#### Logical pool

A logical pool is a group of relays which are not permanently assigned to any terminal. Instead, the relays in the group are available for allocation by terminals as and when required. The logical pool is defined as a group of terminals (the definitions can be explicit or repeated) whose “\*Pool name” field contains a name prefixed preceded by the character “\*”. The terminal name is not significant, except to distinguish it from other terminal definitions. Terminals which use the pool specify the pool name (with the “\*” prefix) in their relay name field. The difference between a logical pool and a physical pool is that a relay in a physical pool is assigned when the requesting terminal connects, whereas a relay in a logical pool is assigned at the time the requesting terminal needs the relay to connect to a VTAM application.

In the example shown below, W2HTP000 is a logical pool whose pool name is \*W2HPOOL. The logical pool contains 16 relay LU's named RHDVT000 to RHDVT015, with associated printer LU's named RHDM000 to RHDM015. The relays in 7. Terminals 117 the \*W2HPOOL logical pool are available for use by terminals CLVTA000-015, DEVTA000-015, and HTVTA000-015. Appropriate VTAM APPL statements must be provided for RHDVT??? And RHDM???.

LIST of TERMINALS ----- Applid: SPVIRD1 18:02:53						
Terminal	Repeated	Relay	Entry	Type	I/O Pool	2nd Relay
?***0000		RVTAM==	PC	2		
CLLOC000 0010				3	3	
CLVTA000 0016		*W2HPOOL		3	3	
DELOC000 0010				3	3	
DEVTA000 0016		*W2HPOOL		3	3	
HTLOC000 0016				3	3	
HTVTA000 0016		*W2HPOOL		3	3	
SMLOC000 0016			SMTP	3	3	
W2HIM000 0016		RHDIM000		S	1	
W2HTP000 0016		RHDVT000		3	3	*W2HPOOL RHDIM000

P1=Update	P2=Delete	P3=Return	P6=1st Page
P7=Page-1	P8=Page+1	P12=Details	

*Definition of a logical pool of terminals*

Terminals using a logical pool are defined with a “Relay” field referencing the logical pool rather than a VTAM APPL statement.

### 9.3.6 Terminal Pool Selection

When a 3270 terminal is defined to a physical pool, the selection of a pool is managed automatically by VIRTEL at connection time. It starts from the end of the list of defined terminals. When the characteristics of the terminal match those of the entry being processed, the terminal assumes an application relay.

#### Rules for opening relay ACBs

For explicit or repeated fixed entry definitions, the relay ACBs are opened at VIRTEL startup time. For terminals defined in a physical pool, the relay ACBs are opened at terminal connection time. For terminals which reference a logical pool, the relay ACB is opened only when accessing an application.

#### Use of a terminal logical pool

When a single terminal must be presented under a different name according to the applications it logs on to across the same line, a logical pool must be used.

---

**Note:** Logical pools are not usable on X25 Fast-Connect lines managed by NPSI. The following examples reference type 3 (Fast-Connect) terminals, used for example on an XOT line.

---

As a concrete example, suppose that Minitels use an X25 line with 50 logical channels to logon to 3 distinct applications under different names according to sub-address or a specific user data value. The first two applications are accessible via the same entry point ENTRYP01, the third via entry point ENTRYP02. Applications APPLI01, APPLI02, APPLI03 must be accessed via relays with prefixes AP01R, BP02R and CP03R respectively. The first application only allows 5 simultaneous logons, the second has no limit, and the third allows 2 simultaneous logons. The set of VIRTEL definitions to resolve this problem is as follows.

#### Terminal Definitions

The definition of the physical terminals and their association with the 3 sub-groups of logical terminals belonging to the same pool is:

DEFINITION OF X25 TERMINALS					
Terminal	Repeat	Relay	Entry	Type	Compression 2nd Relay
XOTF0001 0050		*POOL001	Libre	3 2	Vide
DEFINITION OF 3 GROUPS OF RESERVED TERMINALS					
Terminal	Repeat	Relay	Entry	Type	Compression 2nd Relay
ARESA001 0005		AP01R001	Libre	3 2	Libre
BRESA001 0050		BP02R001	Libre	3 2	Libre
CRESA001 0002		CP03R001	Libre	3 2	Libre

**Note:** These 3 terminal groups contain the value \*POOL001 under the heading “\*Pool name” in their definition. When virtual printers are associated with a logical pool, they may be defined as fixed explicit or repeated entries, but they must not be placed in a logical pool.

---

### Entry point definitions

The two entry points are assigned transactions TRPE01 and TRPE02 respectively.

DEFINITION OF ENTRY POINTS		
Name	Description	Transactions
ENTRYP01	EP <b>for</b> APPLI01 <b>and</b> APPLI02	TRPE01
ENTRYP02	EP <b>for</b> APPLI03	TRPE02

#### *Transaction definitions and terminal selection*

Transactions TRPE0101, TRPE0102 and TRPE0203 are defined as illustrated below.

DEFINITION OF THE FIRST TRANSACTION FOR ENTRYP01		
Nom interne	====> TRPE0101	Pour l'associer a un point d'entrée
Nom externe	====> APPLI-01	Nom affiche dans le menu utilisateur
Description	====> Application 01	avec terminaux ARESA
Application	====> APPLI01	Application gérant la transaction
Alias	====>	Nom suite a CLSDST PASS
Type d'application	====> 1	1=VTAM 2=VIRTEL 3=SERVEUR 4=PAGES
Terminaux	====> ARESA	Préfixe des terminaux associés

DEFINITION OF THE SECOND TRANSACTION FOR ENTRYP01		
Nom interne	====> TRPE0102	Pour l'associer a un point d'entrée
Nom externe	====> APPLI-02	Nom affiche dans le menu utilisateur
Description	====> Application 02	avec terminaux BRESA
Application	====> APPLI02	Application gérant la transaction
Alias	====>	Nom suite a CLSDST PASS
Type d'application	====> 1	1=VTAM 2=VIRTEL 3=SERVEUR 4=PAGES
Terminaux	====> BRESA	Préfixe des terminaux associés

DEFINITION OF THE FIRST TRANSACTION FOR ENTRYP02		
Nom interne	====> TRPE0201	Pour l'associer a un point d'entrée
Nom externe	====> APPLI-03	Nom affiche dans le menu utilisateur

Description	====> Application 03 avec terminaux CRESA
Application	====> APPLI03 Application gérant la transaction
Alias ==>	Nom suite a CLSDST PASS
Type d'application	====> 1 1=VTAM 2=VIRTEL 3=SERVEUR 4=PAGES
Terminaux	====> CRESA Préfixe des terminaux associés

## 9.4 Terminal Connection Examples

This section presents a number of examples covering the definitions relating to terminals and details the parameters required on the VIRTEL and VTAM sides. The list is not exhaustive.

### 9.4.1 3270 terminal in WELCOME mode

This mode allows any terminal to logon to VIRTEL. The ACCUEIL parameter in the VIRTCT must be set to YES. There must be no definition which allows an application relay to be assigned to the terminal.

### 9.4.2 3270 terminal in RELAY mode

A VTAM APPL statement must be defined for each terminal. If there is no such definition then message VIR0005W is issued at VIRTEL startup time. Example definitions:

DEFINITION EXPLICITE					
Terminal	Répété	Relais	Entrée	Type	Compression
				2eme	Relais
TERM0001	0000	RELAY001	Libre	2	Libre Vide
TERM0002	0000	RELAY003	Libre	2	Libre Vide
TERM0003	0000	RELAY004	Libre	2	Libre Vide
TERM0004	0000	RELAY005	Libre	2	Libre Vide

DEFINITION REPETEE					
Terminal	Répété	Relais	Entrée	Type	Compression
				2eme	Relais
TERM0001	0004	RELAY001	Libre	2	Libre Vide

DEFINITION DYNAMIQUE					
Terminal	Répété	Relais	Entrée	Type	Compression
				2eme	Relais
?***0001	0000	RELAY==	Libre	2	Libre Vide

DEFINITION EN POOL NON DYNAMIQUE					
Terminal	Répété	Relais	Entrée	Type	Compression
				2eme	Relais
?***0001	0000	RELAY001	Libre	2	Libre Vide
?***0002	0000	RELAY002	Libre	2	Libre Vide
?***0003	0000	RELAY003	Libre	2	Libre Vide
?***0004	0000	RELAY004	Libre	2	Libre Vide

### 9.4.3 Asynchronous terminal on an X25 or XOT line

A VTAM APPL statement must be defined for each terminal. If there is no such definition then message VIR0005W is issued at VIRTEL startup time. Example definitions:

EXPLICIT DEFINITION WITHOUT PSEUDO-PRINTER						
Terminal	Répété	Relais	Entrée	Type	Compression	2eme Relais
X25F0001	0000	RX25F001	Libre	3	2	Libre
X25F0002	0000	RX25F002	Libre	3	2	Libre
X25G0001	0000	RX25G001	Libre	1	2	Libre
X25G0002	0000	RX25G002	Libre	1	2	Libre

REPEATED DEFINITION WITHOUT PSEUDO-PRINTER						
Terminal	Répété	Relais	Entrée	Type	Compression	2eme Relais
X25F0001	0004	RX25F001	Libre	3	2	Libre
X25G0001	0004	RX25G001	Libre	3	2	Libre

EXPLICIT DEFINITION WITH PSEUDO-PRINTER						
Terminal	Répété	Relais	Entrée	Type	Compression	2eme Relais
FICTF001	0000	IMPRF001	Vide	2	0	
FICTF002	0000	IMPRF002	Vide	2	0	
FICTG001	0000	IMPRG001	Vide	2	0	
FICTG002	0000	IMPRG002	Vide	2	0	
X25F0001	0000	RX25F001	Libre	3	2	IMPRF001
X25F0002	0000	RX25F002	Libre	3	2	IMPRF002
X25G0001	0000	RX25G001	Libre	1	2	IMPRG001
X25G0002	0000	RX25G002	Libre	1	2	IMPRG002

DEFINITION REPETEE AVEC IMPRIMANTE FICTIVE						
Terminal	Répété	Relais	Entrée	Type	Compression	2eme Relais
FICTF001	0002	IMPRF001	Vide	2	0	
FICTG001	0002	IMPRG001	Vide	2	0	
X25F0001	0002	RX25F001	Libre	3	2	IMPRF001
X25G0001	0002	RX25G001	Libre	1	2	IMPRG001

The value entered in the “2nd Relay” field of an X25 terminal corresponds to the value in the “Relay” field of the pseudo-printer definition. Pseudo-printer definitions are type 2 and do not correspond to any terminal known to VTAM.

### 9.4.4 Logical terminals

It is possible to assign a physical terminal to a relay when a transaction connects the terminal to an application, instead of when the terminal connects to VIRTEL. An example of such a definition is:

PHYSICAL TERMINAL DEFINITION						
Terminal	Repeat	Relay	Entry	Type	Compression	2nd Relay

TERM0001 0050	*POOL001	Free	Free	2	Empty
---------------	----------	------	------	---	-------

DEFINITION OF 3 GROUPS OF RESERVED TERMINALS

Terminal	Repeat	Relay	Entry	Type	Compression	2nd Relay
TRESA001 0005		RELAYA01	Free	2 or 3 2		Free
TRESB001 0050		RELAYB01	Free	3 or 3 2		Free
TRESC001 0002		RELAYC01	Free	3 or 3 2		Free

The 3 groups of terminals contain the value \*POOL001 under the heading “\*Pool name” in their definition. When virtual printers are associated with a logical pool, they must be defined as fixed explicit or repeated entries – they cannot be placed in a logical pool.



## **CONTROLLING LUNAMES**

### **10.1 Introduction**

In this section we look at how we can control LUNAME selection for inbound HTTP calls. When a user connects to a 3270 application through VIRTEL Web Access, VIRTEL makes it appear to the application as if the user is connecting from a virtual 3270 terminal. In VTAM terms a virtual 3270 terminal is called a *Logical Unit* or *LU*, and each LU has a unique eight character name (*LU name*). VIRTEL has at its disposal a pool of LUs known to VTAM, whose names are specified in the VIRTEL configuration file (the VIRARBO file). Normally when a user connects to a 3270 application, VIRTEL chooses any available LU from the pool.

While most mainframe applications will accept a connection from any LU name, certain applications (particularly applications which run under IMS) are sensitive to the LU name because they assign permissions to the user based upon the LU name of the user's terminal. LU nailing allows VIRTEL to assign a particular LU name to a user based one of the following:-

- By IP address
- By cookie
- By URL

### **10.2 LU Nailing By URL**

The URL can contain information which can be used to force an LUNAME. This is done by using either the FORCELUNAME= keyword or by using the *UserData* in the URL.

Using *UserData* to select an LU name requires that a rule be associated with the line whereas this is not required for the *Forceluname* option. The rule is used to determine the action taken on processing the *UserData*. Coding the desired LU name, or alternatively an LU name prefix terminated by an asterisk, in the "Parameter" field of the Virtel Rule which selects the incoming HTTP request. Alternatively, if the value \$URL\$ is entered in the "Parameter" field of the Virtel rule, then the desired LU name will be taken from the userdata supplied in the caller's URL (see "VIRTEL URL formats: Dynamic pages" in the VIRTEL Web Access Guide).

For example:-

`http://192.168.170.33:41003/w2h/appmenu.htm+applist+myluname` *UserData* example

or

`http://n.n.n.n:41002/w2h/web2ajax.htm+IMS+ForceLUNAME=RLHVT500` *ForceLUNAME* example

### 10.2.1 UserData example using a work station name

In this example we use a batch job on the user's PC to initiate a session with VirTEL. The batch job obtains the terminal name of the work station, opens a browser window and passes the work station name through to VirTEL. With a VirTEL RULE we can test the name of the workstation and assign a particular relay LUNAME from a VirTEL terminal POOL.

Here is an example of a VirTEL RULE.


```
RULE ID=ESH0000,  
RULESET=E-HTTP,  
STATUS=ACTIVE,  
DESC='Rule for terminal EHPMA00',  
ENTRY=EDSWHOST,  
PARAM=EHPMA000,  
NETMASK=255.255.255.255,  
USERDATA=(EQUAL,HOLT-W)
```

The rule instructs VirTEL to test the **UserData** field passed in a URL and if it matches the string HOLT-W than to assign an LU name prefix of EHPMA00 and directs the terminal call to use an entry point of EDSWHOST. A static rule would have to be built for each unique work station name.

Getting the PC workstation name to VirTEL is through a batch job which fires up the default browser and passes the work station name as a user data parameter. Here is an example:-


```
title Test Propagation of Userdata Parameter  
@echo on  
color 1f  
cls  
SET P1=%COMPUTERNAME:~0,6%  
start http://192.168.170.33:41003/w2h/appmenu.htm+applist+%P1% &goto:eof  
:exit
```

The SET command takes the first six characters of the work station name and passes it into the start command. Following the VirTEL transaction I wish to execute which in this case is an APPLIST menu list. The start command will open a default browser window and connect to VirTEL:-

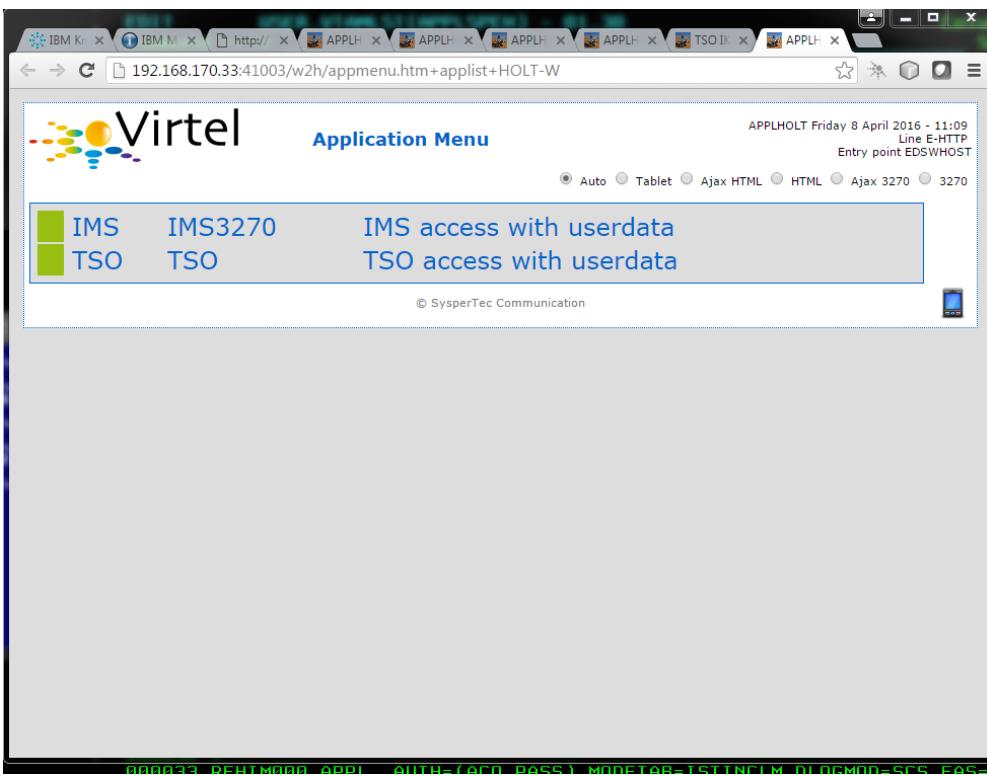

### *Passing User Data to Virtel*

When a transaction is selected from the menu list the RULE will be invoked to allocate the correct LUNAME.

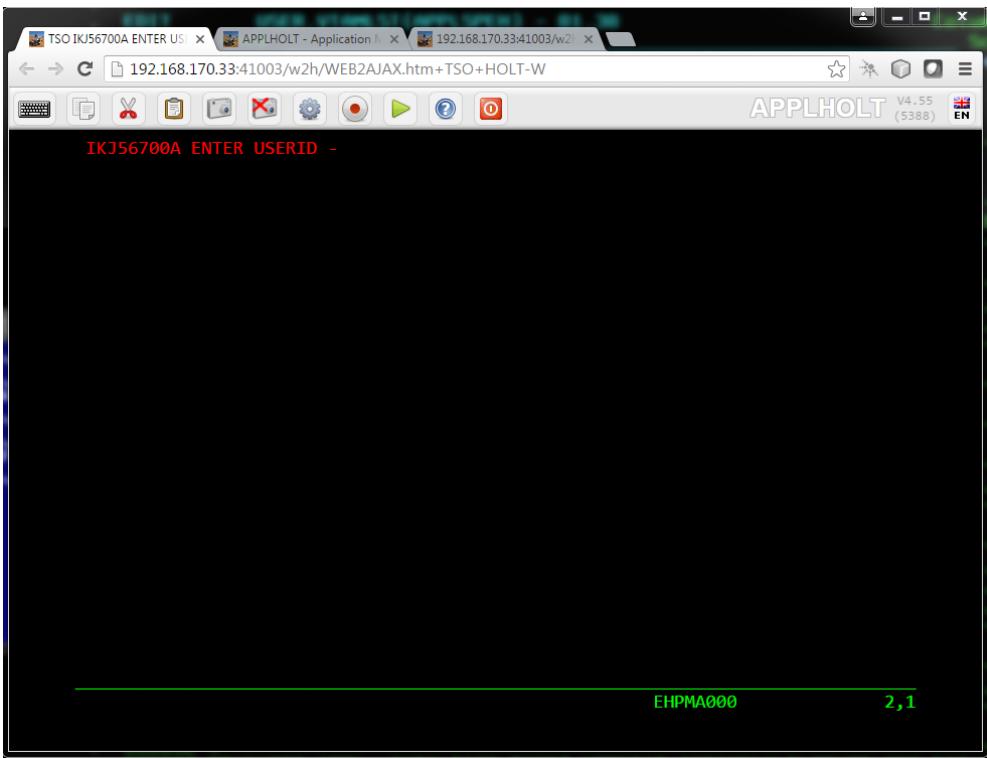

### *Selecting a LU name through a rule and work station id in the URL*

The Virtel RULE has forced an LU name prefixed EHPMA000 to be used from the VIRTEL terminal pool associated with the Virtel line. In this case relay LUNAME EHPMA000 has been allocated.

### 10.2.2 UserData example using a LU Name


Instead of passing a work station name in the user data field of the URL in this example we are passing an LU name. Again with a Virtel RULE we can extract the user data parameter from the URL and use that as the Virtel relay LUNAME name.

[http://192.168.170.33:41003/w2h/appmenu.htm+applist+EHPMA00\\*](http://192.168.170.33:41003/w2h/appmenu.htm+applist+EHPMA00*)

For this example the rule looks like:-

```
RULE ID=ESH0001,  
RULESET=E-HTTP,  
STATUS=ACTIVE,  
DESC='Rule for terminal EHPMA00',  
ENTRY=EDSWHOST,  
PARAM=$URL$,  
NETMASK=255.255.255.255
```

We use the special PARAM=\$URL\$ which indicates that the VTAM LU Name to be used is the user data passed in the URL.

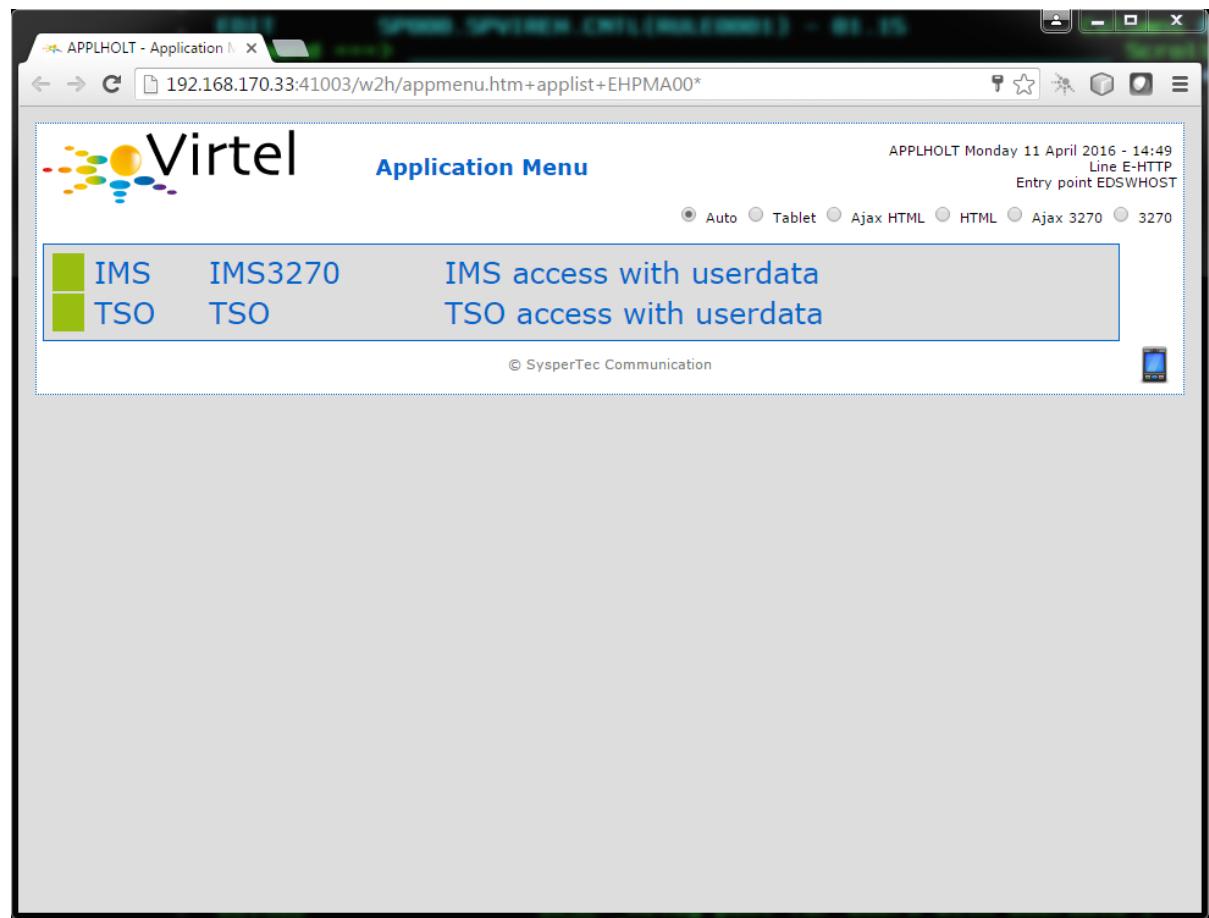

Using \$URL\$ to pass a LU name in the URL

The user data in the URL, in this case EHPMA00\*, will be added to each transaction in the APPLIST menu and used as the Virtel relay LUNAME. When connecting to an application VIRTEL will use the LU name defined in the URL. In this example we are using a generic LUNAME which supports a range from EHPMA000 through to EHPMA009.

### 10.2.3 ForceLUNAME Example

In the preceding examples both required that a terminals and relays be predefined. For some installations this could be a maintenance headache and doesn't scale up very well. It is possible for an HTTP client to connect to VIRTEL with a parameter specifying an arbitrary VTAM LU name to be used as relay name for host applications. For this to work, four conditions must be fulfilled:-

- the VTAM LU name should be specified in the connection URL. For example, if the desired LU name is RLHVT500:

```
http://n.n.n.n:41002/w2h/web2ajax.htm+IMS+ForceLUNAME=RLHVT500
```

- the VIRTEL transaction must specify \$LINE\$ in the "Pseudo-terminals" field instead of a terminal name prefix.
- the HTTP line must specify a pool name
- a terminal pool of the same name should be defined; only the pool is needed, not the predefined pseudo-terminals that are normally defined alongside a pool. The terminal and printer pseudo-terminals will be automatically generated using the pool as a template together with the relay name specified in the ForceLUNAME parameter of the URL.

The ForceLUNAME=luname parameter in the URL is valid only for transactions which specify TERMINAL=\$LINE\$ when attached to a line which has an associated terminal pool.

In this example the transaction whose external name is IMS defined under entry point CLIWHOST. The terminal prefix in the transaction definition is \$LINE\$:

```
TRANSACTION DETAIL DEFINITION ----- Applid: VIRTEL1A 9:46:26
Internal name ===> CLI-14 To associate with an entry point name
External name ===> IMS Name displayed on user menu
Description ===> Logon to IMS
Application ===> IMS3270 Application to be called
PassTicket ===> 0 Name ===> 0=no 1=yes 2=unsigned
Application type ===> 1 1=VTAM 2=VIRTEL 3=SERV 4=PAGE 5=LINE
Pseudo-terminals ===> $LINE$ Prefix of name of partner terminals
Logmode ===> Specify when LOGMODE must be changed
How started ===> 1 1=menu 2=sub-menu 3=auto
Security ===> 1 0=none 1=basic 2=NTLM 3=TLS 4=HTML
H4W commands ? ===> 0=no 1=yes 2;if2VIRTEL 4=auto
Logon message ===>
TIOA at logon ===>
TIOA at logoff ===>
Initial Scenario ===> Final Scenario ===>
Input Scenario ===> Output Scenario ===>
P1=Update P3=Return P12=Server
```

*Transaction definition using non-predefined LU names*

The definition of line C-HTTP on port 41002 specifies \*MYPOOL as the line pool name:

LINE DETAIL DEFINITION ----- Applid: VIRTEL1A 9:51:14	
Internal name	==> C-HTTP
External name	==> HTTP-CLI
Remote ident	==>
Local ident	==> 192.168.170.15:41002
Description	==> HTTP line (entry point CLIHOST)
Prefix	==> CL
Pool	==> *MYPOOL*
Entry Point	==> CLIHOST
Rule Set	==> C-HTTP
Line type	==> TCP1
Possible calls	==> 1
Startup prerequisite	==>
Protocol program	==> VIRHTTP
Security program	==>
Time out	==> 0000
Window	==> 0000
Pad	==>
Retries	==> 0010
Action	==> 0
Packet	==> 0000
Tran	==>
Delay	==>
1st character is line code External entity name Remote VTAM LU or TCP/IP address Local VTAM LU or TCP/IP address Prefix for terminals Pool for terminals Default Entry Point on this line Rules to choose an entry point eg: TCP1 MQ1 XM1 BATCH1 APPC2 ... 0=None 1=Inbound 2=Outbound 3=I & O Dialog manager Non standard security Action if t/o: 0=none 1=keepalive eventual protocol parameters PAD=INTEG/TRANSP/NO, TRAN=EVEN/ODD/NO Retries for linked to terminals	
P1=Update	P3=Return
Enter=Add	P4=Terminals P5=Rules

*HTTP line definition using non-predefined LU names*

The definition of the terminal pool \*MYPOOL contains mask characters in the “Relay” and “2nd relay” fields. When a terminal is dynamically created, each “=” sign is substituted by the corresponding character in the ForceLUNAME parameter of the URL:

TERMINAL DETAIL DEFINITION ----- Applid: VIRTEL1A 9:54:33	
Terminal	==> W2HTP000
Relay	==> =====
*Pool name	==> *MYPOOL
Description	==> Pool for non-predefined relays
Entry Point	==>
2nd relay	==> ==PR==
Terminal type	==> S
Compression	==> 2
Possible Calls	==> 3
Write Stats to	==> 26
Repeat	==> 0080
P1=Update	P3=Return
Enter=Add	P12=Server

*Terminal pool definition using non-predefined LU names*

..note:

The name of the pool is only used to match the pool to its associated line.

Using these definitions with URL parameter ForceLUNAME=RLHVT500 will dynamically generate two pseudo-terminals: RLHVT500 for the terminal session, and RLHPR500 for the associated printer.

The TCT option RTERM= can be used to check that ForceLUNAME parameter. If RTERM=classname is specified in the TCT than a RACHECK against the ForcedLUNAME will be executed to ensure that the luname is allowed for a particular user.

---

**Note:** The presence of a ForceLUNAME=luname parameter in the URL implies \$UseCookieSession\$. If a valid VirtelSession cookie is supplied, which corresponds to a currently active session, then the request will be reconnected to that session. If no VirtelSession cookie is present, or if the cookie does not correspond to any currently open session, then an LU name will be constructed by applying the value of the ForceLUNAME parameter with the mask specified in the pool associated with the line. If the LU name constructed in the preceding step is already in use then the request will be rejected with HTTP code 406. Otherwise a new session will be opened using the constructed LU name.

---

## **10.3 LU Nailing by cookie**

Virtel also can use cookies to select a relay LU name. Virtel uses a cookie as a part of the “Correspondence Sub Application”. Within the cookie sent to Virtel is a security token. This token is used to identify a user and their associated VTAM LU relay name. A Correspondent file is used to maintain the user details. The cookie can be sent to the user as part of an Email from which the User selects a link to access Virtel or it can be part of the ‘self-registration’ process. For further information see the How-To document *Virtel – How to Activate LU Nailing*.

## 10.4 LU Nailing by IP address

The Virtel Rules attached to the HTTP line allow the LU name to be selected according to the caller's IP address, by using the fields "IP Subnet" and "Mask" in the rule to match with an IP address or range of IP addresses. The Virtel Rules associated with a user allow an LU name to be assigned according to a variety of different criteria. For example such as a user's e-mail address [Correspondent Management] which in this case, the user is identified by a "Cookie" which the browser presents to VIRTEL with the HTTP request. See "["Virtel Rules"](#)", for further information on Virtel Rules.

This technique uses a rule to associate an IP address with an LU Name. The rule is associated with a line. In the example below we define a rule on line W-HTTP which will force a terminal connecting with IP address 192.168.000.039 to use LU name RHTVT001. The LU name must be pre-defined in a Virtel terminal pool.

```
DETAIL of RULE from RULE SET: W-HTTP ----- Applid: SPVIRBW 14:30:38
Name ==> WHT00110 Rule priority is per name
Status ==> ACTIVE 15 Feb 2010 14:30:35 SPTBOWL
Description ==> HTTP access from IP 192.168.0.39
Entry point ==> WEB2HOST Target Entry Point
Parameter ==> RHTVT001 &1 value or LUNAME
Trace ==> 1=commands 2=data 3=partner
C : 0=IGNORE 1=IS 2=IS NOT 3=STARTS WITH 4=DOES NOT 5=ENDS WITH 6=DOES NOT
1 IP Subnet ==> 192.168.000.039 Mask ==> 255.255.255.255
0 Host ==>
0 eMail ==>
0 Calling DTE ==> Calling DTE address or proxy
0 Called ==> Called DTE address
0 CUDO (Hex) ==> First 4 bytes of CUD (X25 protocol)
0 User Data ==>
0 Days ==> M: T: W: T: F: S: S:
0 Start time ==> H: M: S: End time ==> H: M: S:
P1=Update P3=Return Enter=Add
P4=Activate P5=Inactivate P12=Entry P.
```

*Rule to map IP address 192.168.100.nnn to LU pool RHTVT1xx*

Multiple terminals can be defined with a rule by using the \* suffix. In the following example a range of IP address is mapped to a pool of LU names. Address range 192.168.100.0 through to 192.168.100.255 will be assigned the next unused LU name in the range RHTVT1xx.

```
DETAIL of RULE from RULE SET: W-HTTP ----- Applid: SPVIRBW 17:53:56
Name ==> WHT00140 Rule priority is per name
Status ==> ACTIVE 15 Feb 2010 17:53:49 SPTBOWL
Description ==> HTTP access from IP 192.168.100.nnn
Entry point ==> WEB2HOST Target Entry Point
Parameter ==> RHTVT1* &1 value or LUNAME
Trace ==> 1=commands 2=data 3=partner
C : 0=IGNORE 1=IS 2=IS NOT 3=STARTS WITH 4=DOES NOT 5=ENDS WITH 6=DOES NOT
1 IP Subnet ==> 192.168.100.000 Mask ==> 255.255.255.000
0 Host ==>
0 eMail ==>
0 Calling DTE ==> Calling DTE address or proxy
0 Called ==> Called DTE address
0 CUDO (Hex) ==> First 4 bytes of CUD (X25 protocol)
0 User Data ==>
0 Days ==> M: T: W: T: F: S: S:
0 Start time ==> H: M: S: End time ==> H: M: S:
P1=Update P3=Return Enter=Add P4=Activate P5=Inactivate P12=Entry P.
```

*Rule to map IP address 192.168.100.nnn to LU pool RHTVT1xx*

The new rule is named WHT00140, the “IP Subnet” field specifies the IP address 192.168.100.000, and the “Mask” is set to 255.255.255.000 to indicate that only the first three octets of the IP address are tested to determine whether the rule matches the IP address of the client browser. The “parameter” field specifies a generic LU name RHTVT1\* which signifies that any LU whose name begins with RHTVT1 may be assigned to clients whose IP address matches this rule.

## 10.5 Comparison Table

Type	RULE Required	TERMINAL Definition Reqd.	COOKIES	Terminal POOL Reqd.
By UserData	Yes. 1 per work station	Yes. Individual or group	No	Yes
By \$URL\$ - LUNAME in URL	Yes. 1 generic Rule.	Yes. Individual or group	No	Yes
ForceLUNAME	No	No	No	Yes
By IP (Correspondent)	Yes	Yes	Yes	Yes
By IP	Yes	Yes	No	Yes



## AT-TLS SECURE SESSION

### 11.1 Introduction

This section provides details on how to implement AT-TLS security. To provide secure HTTP (https) sessions to client browsers, VIRTEL uses the Application Transparent Transport Layer Security (AT-TLS) feature of z/OS Communication Server. AT-TLS is included with z/OS V1R7 and later releases.

AT-TLS allows socket applications to access encrypted sessions by invoking system SSL within the transport layer of the TCP/IP stack. A Policy Agent task decides which connections are to use AT-TLS, and provides system SSL configuration for those connections. Virtel continues to send and receive clear text over the socket, but data sent over the network is encrypted and protected by system SSL. The supported protocols are TLS, SSLv3, and SSLv2.

**Warning:** Higher CPU usage will result in the TCP/IP address space if this feature is used without the services of a hardware Crypto Card.

### 11.2 Installation

#### 11.2.1 Install Policy Agent procedure

If you do not already have the Communications Server Policy Agent (PAGENT) active in your z/OS system, copy the cataloged procedure EZAPAGSP from TCPIP.SEZAINST into your proclib, renaming it as PAGENT.

#### 11.2.2 Create the Policy Agent configuration file

If you do not already run the Policy Agent, you will need to create a configuration file /etc/pagent.conf using z/OS Unix System Services. If you already run Policy Agent, you will need to find the existing configuration file and add the TTLS definitions to it to support Virtel. Sample jobs are provided in the Virtel SAMPLIB library to assist in performing this step.

#### Member SSLSETUP

Step PCONFIG in the SSLSETUP sample job contains a starter configuration. The following changes should be made:

- Replace %virtjob% by the name of your VIRTEL started task (SSLSETUP line 70)

- Replace *41000-41002* by *41002* in the LocalPortRange parameter (SSLSETUP line 71) to activate AT-TLS for VIRTEL line C-HTTP
- Replace *ServerWithClientAuth* by *Server* in the HandshakeRole parameter (SSLSETUP line 82) as we will not be using Client Certificates in the initial setup.

### **11.2.3 Allow the Policy Agent to run during TCP/IP initialization**

The Policy Agent must be given READ access to the resource EZB.INITSTACK.\* in RACF class SERVAUTH. See step EZBAUTH in the SSLSETUP sample job (delivered in VIRTEL SAMPLIB).

### **11.2.4 Create the server certificate**

A server certificate for VIRTEL must be created, signed by a certificate authority, and stored in the RACF database. In the SSLSETUP sample job we create a signing certificate and use RACF itself as the certificate authority. Alternatively, you may use an external certificate authority such as Verisign to create and sign the certificate, then import it into RACF.

At SSLSETUP line 228, replace %virtssl% by the DNS name assigned to the VIRTEL host (for example, virtssl.syspertec.com)

### **11.2.5 Add the certificate to the keyring**

The server certificate must be added to the Virtel keyring - VIRTRING. See step CCERTIF in the SSLSETUP sample job.

### **11.2.6 Allow VIRTEL to access its own certificate**

To allow VIRTEL to access its own keyring and server certificate, the VIRTEL started task must have READ access to the resource IRR.DIGTCERT.LISTRING in the RACF class FACILITY. See step IRRAUTH in the SSLSETUP sample job.

### **11.2.7 Activate AT-TLS**

To activate AT-TLS, add the following statements to TCPIP PROFILE:

```
TCPCONFIG TTLS  
AUTOLOG 5 PAGENT ENDAUTOLOG
```

Stop and restart TCP/IP to activate the TCPCONFIG TTLS profile statement. The AUTOLOG statement will cause the PAGENT procedure to be started automatically during TCP/IP initialization.

## 11.3 Operations

### 11.3.1 Starting the Policy Agent

The AUTOLOG statement in the TCP/IP profile will start the PAGENT procedure automatically at TCP/IP initialization. Alternatively you can issue the MVS command **S PAGENT**.

---

**Note:** if this is the first time you have activated the SERVAUTH class, you are likely to see RACF failure messages during TCP/IP initialization indicating that other applications are unable to access the resource EZB.INITSTACK. This is normal, because Communications Server uses this mechanism to prevent applications from accessing TCP/IP before the Policy Agent is started. Do not be tempted to authorize applications to use this RACF resource. Either ignore the messages (they will go away once PAGENT has started), or ensure that PAGENT starts before all other applications.

---

### 11.3.2 Altering the Policy Agent configuration

To make changes to the Policy Agent configuration file, either edit and resubmit the PCONFIG step of the SSLSETUP sample job, or use the TSO ISHELL command to edit the file /etc/pagent.conf directly from ISPF.

After you make changes to the Policy Agent configuration, use the MVS command **F PAGENT,REFRESH** to force PAGENT to reread the file.

### 11.3.3 Logon to VIRTEL using secure session

To access VIRTEL line C-HTTP you must now use URL

*https://n.n.n.n:41002* instead of *http://n.n.n.n:41002*

(where n.n.n.n is the IP address of the z/OS host running VIRTEL).

## **11.4 Problem determination**

### **11.4.1 Policy Agent log file**

Policy Agent startup messages are written to the /tmp/pagent.log file of z/OS Unix System Services. You can use the TSO ISHELL command to browse this file from ISPF.

### **11.4.2 Common error messages**

Error messages relating to session setup are written to the MVS SYSLOG. The most common error message is:

#### **EZD1287I TTLS Error RC: nnn event**

where nnn represents a return code. Return codes under 5000 are generated by System SSL and are defined in the System SSL Programming manual. Return codes over 5000 are generated by AT-TLS and are defined in the IP Diagnosis Guide. Some commonly encountered return codes are:

- 7 No certificate
- 8 Certificate not trusted
- 109 No certification authority certificates
- 202 Keyring does not exist
- 401 Certificate expired or not yet valid
- 402 or 412 Client and server cannot agree on cipher suite
- 416 VIRTEL does not have permission to list the keyring
- 431 Certificate is revoked
- 434 Certificate key not compatible with cipher suite
- 435 Certificate authority unknown
- 5003 Browser sent clear text (http instead of https)
- 5006 SSL failed to initialize. Check job SSLSETUP.

#### **VIRHT57E LINE IS NOT SET UP FOR HTTPS**

Means that the browser sent an https request, but it has not been decrypted by AT-TLS before being sent to VIRTEL, and VIRTEL has received the message in encrypted format. Normally this means the AT-TLS rules did not match the incoming request. This is not a Virtel configuration issue.

#### **EZD1287I TTLS Error RC: 5003**

This is the opposite situation. It means that the AT-TLS rules matched the incoming request, and so AT-TLS was expecting to receive an https request, but it received an http request instead.

Normally AT-TLS is transparent to VIRTEL. AT-TLS performs the decryption and transforms the https request into an http request before passing it to VIRTEL. The only case where VIRTEL is AT-TLS aware is when the VIRTEL transaction definition specifies SECURITY=3 (TLS) and in this case VIRTEL will check that the session has been processed by AT-TLS and will issue an IOCTL to obtain the userid associated with the certificate. In the normal case, you should specify HandshakeRole Server, ClientAuthType Full, and ApplicationControlled Off in the AT-TLS rules, as in the example in VIRT447.SAMPLIB(SSLSETUP).

VIRTEL does not issue an IOCTL to turn decryption on and off, so if you specified ApplicationControlled On then you would get VIRHT57E because AT-TLS has not been instructed to start decryption.

If you still get an error when you have ApplicationControlled Off then we will need to see the SYSLOG (for the EZD TTLS messages), the JESMSGGLG from the VIRTEL started task, and the SYSPRINT resulting from a z/OS command F VIRTEL,SNAP immediately after the error occurs. We would also like to see the exact URL which was entered at the browser, as well as the AT-TLS pagent.conf file.

### 11.4.3 Verifying AT-TLS is active

To verify that AT-TLS is still activated, you can submit this MVS command:

```
D TCPIP,,N,TTLS
```

The response is:

```
EZD0101I NETSTAT CS V1R12 TCPIP 378 TTLSGRPACTION GROUP ID CONNS VIRTELGROUP 00000002
↪0 1 OF 1 RECORDS DISPLAYED END OF THE REPORT
```

The UNIX command

```
pasearch
```

displays the parameters used by PAGENT from /etc/pagent.conf

The TSO command:-

```
netstat conn
```

displays active connexions for the VIRTEL STC.

Once a connexion has been established between a client and a Virtel port, the TSO command:-

```
netstat ttls conn nnnn detail
```

where nnnn is the identification of the connexion will display the AT-TLS parameters used in the Virtel connexion.

## **11.5 The Cipher suites**

The client and server cipher specifications must contain at least one value in common. The TTLSEnvironmentAdvancedParms parameter of the Policy Agent configuration file allows you to turn on or off the SSLv2, SSLv3, and TLSv1 protocols at the server end. The list of supported cipher suites for each protocol is in the TTLSCipherParms parameter. Check the /tmp/pagent.log file to determine whether any cipher suites were discarded at startup time.

In Microsoft Internet Explorer, follow the menu *Tools – Internet Options – Advanced*. Under the security heading there are three options which allow you to enable or disable the SSL 2.0, SSL 3.0, and TLS 1.0 protocols. You cannot enable or disable individual cipher suites.

In Firefox the cipher specifications are accessed by typing *about:config* in the address bar and typing *security* in the filter box. By default, ssl2 is disabled, and ssl3 and tls are enabled. By default, all weak encryption cipher suites are disabled, and 128-bit or higher cipher suites are enabled.

## **11.6 Client certificates**

Virtel can extract the userid of a user from a client certificate presented to Virtel during the SSL handshake. For this to occur the following must be true:-

- The HTTP session is secured using AT-TLS. URL = <https://....>
- The Policy Agent TTLSConnectionAction or TTLSEnvironmentAction statement contains the parameter “HandShakeRole ServerWithClientAuth”
- The client has provided a valid certificate.
- The security subsystem has validate the certificate as belonging to a user.
- The Virtel transaction has Security = 3 defined.

If these conditions are met then the userid contained within the clients digital certificate can be extracted by Virtel and used in the signon process. In this process it is normal that a PASS Ticket is generated and associated with the extracted userid.

See the SAMPLIB members SSLSETUP and SSLUCERT for examples on setting up AT-TLS and client certificates.

## 11.7 Resources

### 11.7.1 IBM Manuals

- SA22-[7683-07](#) z/OS V1R7 Security Server: RACF Security Administrator's Guide Chapter [21.](#) RACF and Digital Certificates
- SC24-[5901-04](#) z/OS V1R6 Cryptographic Services: System SSL Programming Chapter [12.](#) [Messages and Codes](#)
- SC31-[8775-07](#) z/OS V1R7 Communications Server: IP Configuration Guide Chapter [14.](#) Policy-based networking Chapter [18.](#) Application Transparent Transport Layer Security (AT-TLS) data protection Configuration Reference Chapter [21.](#) Policy Agent [and](#) policy applications
- GC31-[8782-06](#) z/OS V1R7 Communications Server: IP Diagnosis Guide Chapter [28.](#) Diagnosing Application Transparent Transport Layer Security (AT-TLS)
- SC31-[8784-05](#) z/OS V1R7 Communications Server: IP Messages: Volume [2](#) (EZB, EZD) Chapter [10.](#) EZD1xxxx messages

### 11.7.2 Virtel Material

- *TN201407 Pass tickets and supporting Proxy Servers – CA-SiteMinder® & IBM Tivoli WebSeal®*
- *TN201416 Virtel TLS/SSL Security: Signing on using server and client certificates*




## SSO, PASSTICKETS AND PROXY SERVERS

### 12.1 Introduction

Many businesses now implement products which provide a centralized enterprise-class secure single sign-on (SSO) and authentication system. The products tend to run on a server(s) and provides access to a business's assets like web enabled applications or portals. The basic process is to trap the incoming HTTP call request and establish some user credentials before allowing access to an asset. For example, the user credentials can be extracted from the callers request or determined by the callers IP address. The credentials will be validated against a LDAP or similar active directory server. The result of the validation will either allow or deny the caller access to the requested asset. Security and asset control is managed by the SSO server which as a central server can validate credentials to all business assets, be it on the mainframe or other platforms. Userid and password administration for all assets can be controlled through the functions of the SSO software employed. Virtel will integrate within this SSO infrastructure and process sign on request once they have passed validation. Virtel provides its own validation of the SSO server through the use of rules.

In the example that follows we are using CA-Site Minder as an example SSO Server and we will document how to define Virtel to interface with the SSO Server and RACF. Our target asset is a CICS application called SPCICSH. The caller will provide no userid or password data.

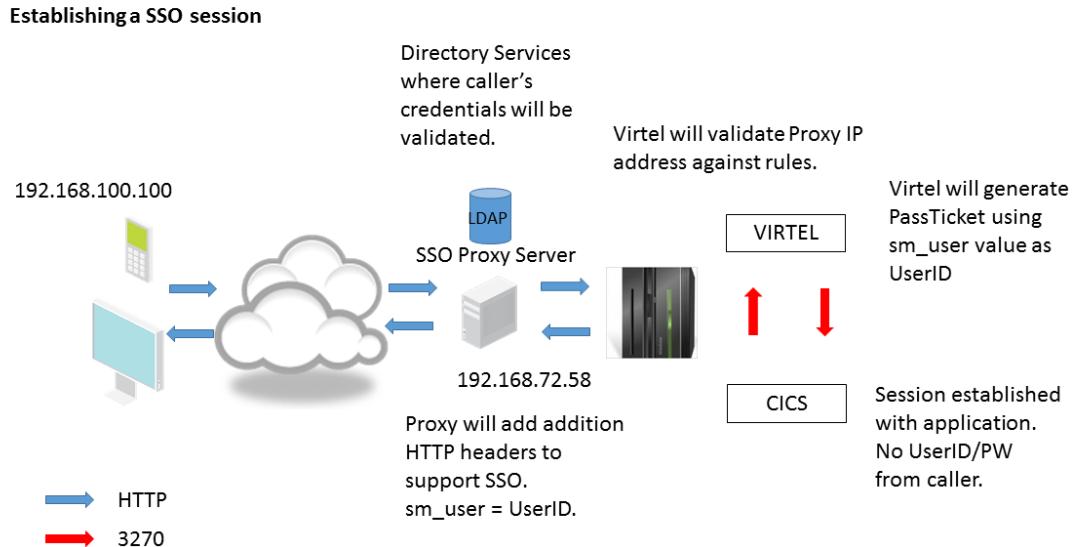

*Data flow of an SSO session setup*

The initial request is passed through the SSO server. The server will trap and validate the caller. If the validation is successful a session will be established between the SSO server and Virtel. Two things to note at this point. One, the IP address presented to Virtel will be that of the SSO Proxy Server and two, that the server will modify the HTTP headers to provide additional information, that being the source IP address and the user id.


A Virtel line trace will reveal these additional headers.

```
GET /w2h/WEB2SUB.HTML++VirtelSession=AFo0JQAAAAMeuCAo+disconnect=1?pf=DISCONNECT HTTP/  
→1.1  
Host: 192.168.170.30:41002  
User-Agent: Mozilla/5.0 (Windows NT 6.1; WOW64; rv:27.0) Gecko/20100101 Firefox/27.0  
Accept: text/html,application/xhtml+xml,application/xml;q=0.9,*/*;q=0.8  
Accept-Language: en-gb,en;q=0.5  
Accept-Encoding: gzip, deflate  
Referer: http://192.168.170.30:41002/w2h/WEB2AJAX.htm+CICS  
Cookie: SYSLANG=en; SYSSTYL=BLUE; SYSPAGE=auto  
**SM_User: sptholt <<**  
**X-Forwarded-For: 192.168.100.100 <<**  
Connection: keep-alive  
  
HTTP/1.1 200 Ok  
Server: Virtel/4.53  
Date: Wed, 26 Mar 2014 15:31:12 GMT  
Content-type: text/html  
Content-length: 00000125  
  
<html><head><Meta HTTP-EQUIV="refresh" CONTENT="1; URL=LASTPAGE.HTML"></head>  
<body bgcolor="black"><br>  
<br>  
</body></html>  
HTTP/1.0 205 Reset Content  
Server: Virtel/4.53
```

In the above trace the CA-SiteMinder specific header “SM\_User” can be seen as identifying the userid and the X-Forwarded-For;, a standard HTTP header, identifies the source IP address. For security reasons this proxy IP address must be tested for in a VIRTEL rule before the session can be established between the caller and the asset. There is no password associated with this logon – this will be generated via a passTicket request on behalf of the userid identified in the “SM\_User” header. The PassTicket will be created as part of the session setup between Virtel and the asset and on behalf of the caller.


## 12.2 Adding headers to the HTTP request

Access the CICS application using FireFox. Use the FireFox “AddIn” Modify Headers to add the headers to the HTTP request. After adding the headers you will need to “START” the addIn to get the headers added.

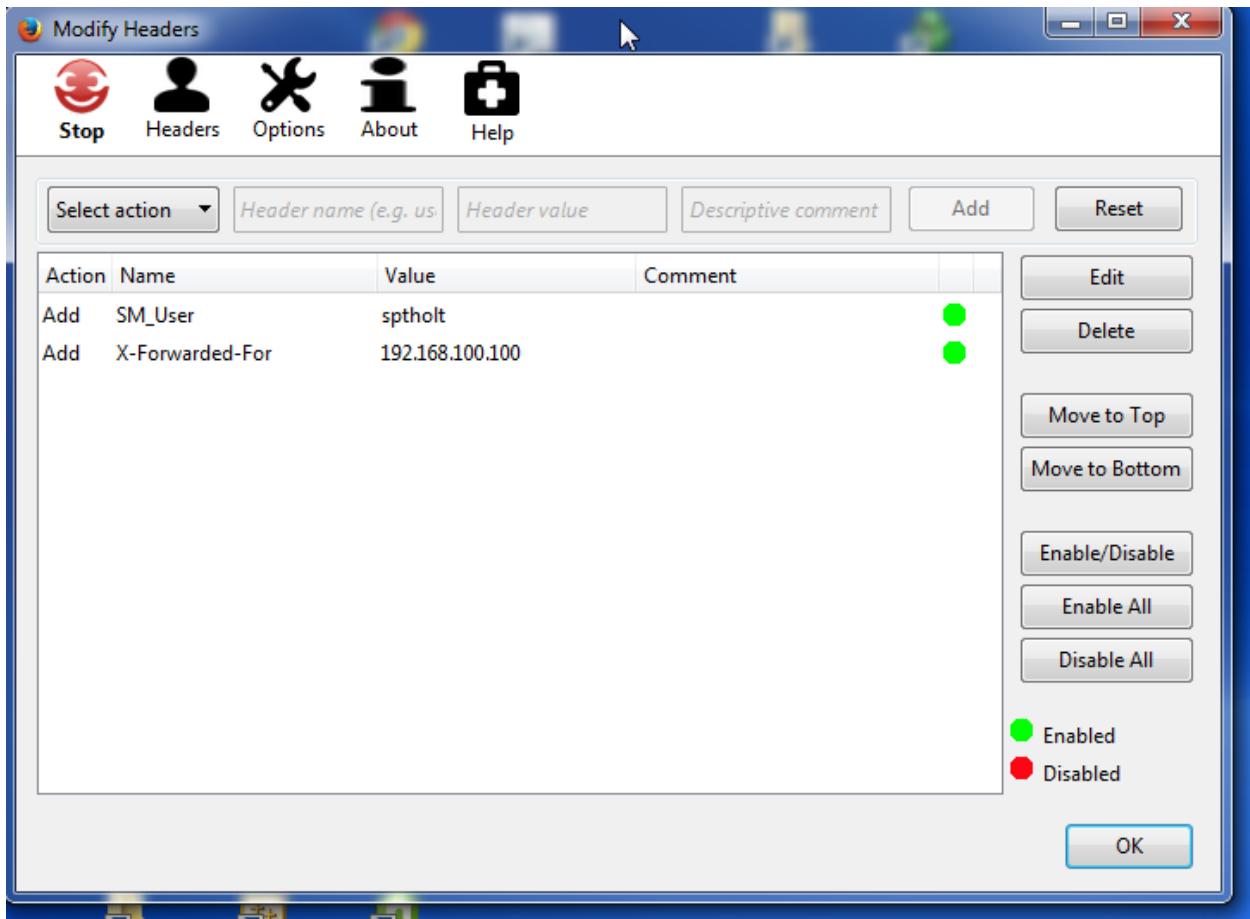

Using the Firefox “Modify Headers” addin.

When access the CICS system make sure the “Modify Headers” has started. The ICON should be red.

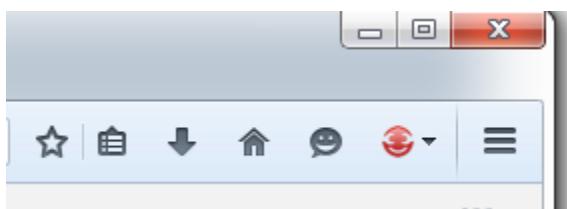

Modify Header active - red ICON

The following definitions define what needs to be done to enable a user to log on without specifying a userid/password to an asset supported by the SSO server. In our example Virtel will logon to a CICS asset on behalf of the caller using a userid passed by the SSO Proxy and a generated PassTicket. The caller provides no userid/password information. Once the SSO has validated the callers credential the caller will be logged on to CICS and will be presented with the following screen:-

```
-  
  
DFHCE3549 Sign-on is complete (Language ENU).  
H:73ms J:6ms          REHVT001 REHIM001 1.1
```

*Accessing CICS using a callers credentials. No LOGON required.*

## 12.3 RACF Passtickets

Pass tickets are an alternative to passwords and can greatly improve the security surrounding SSO and multiple applications access. Passtickets are a dynamically generated password that lasts for approximately 10 minutes. Further information on RACF Passtickets can be found on the web. For the purpose of this newsletter we will look at the Virtel requirements needed to access our target CICS asset whose RACF APPL is SPCICSH. Our Virtel task runs under the RACF userid of SPVIRSTC. Here are the RACF definitions required to support the generation of PassTickets for the target application APPL SPCICSH.

### 12.3.1 Define Pass Ticket RACF profiles

This job will have to be modified to a customer's RACF setup. Some profiles may already be defined! If the PERMIT statements do not run then that probably means that some of the RDEFINE entries already exist in the RACF database - these need to be removed, or an RDELETE added to delete the profile entry, in order for the job to complete successfully. It should produce a RC=0. See the output in SDSF.

```
//STEP1 EXEC PGM=IKJEFT1A,DYNAMNBR=20
//SYSTSPRT DD SYSOUT=*
//SYSTSIN DD *
      SETROPTS CLASSACT(APPL)
      SETROPTS CLASSACT(PTKTDATA)
      SETROPTS RACLIST(PTKTDATA)
      SETROPTS GENERIC(PTKTDATA)
      RDEFINE FACILITY IRR.RTICKETSERV
      RDEFINE PTKTDATA IRRPTAUTH.SPCICSH.\* UACC(NONE)
      RDEFINE PTKTDATA SPCICSH SSIGNON(KEYMASKED(998A654FEBCDA123)) +
          UACC(NONE)
      PERMIT IRR.RTICKETSERV CL(FACILITY) ID(SPVIRSTC) ACC(READ)
      PERMIT IRRPTAUTH.SPCICSH.\* CL(PTKTDATA) ID(SPVIRSTC) ACC(UPDATE)
      SETROPTS REFRESH RACLIST(PTKTDATA)
      SETROPTS REFRESH RACLIST(FACILITY)
```

Three distinct RACF profiles are required to use RACF pass tickets:-

FACILITY IRR.RTICKETSERV	* Can use PassTickets *
PTKTDATA IRRPTAUTH.passTicketName.	* Let's VIRETL generate PassTickets on behalf of an
↳ application for all users. * or *userid*	
PTKTDATA profile_name	* APPLNAME used by RACROUTE REQUEST=VERIFY *

#### Virtel Name correlation

- passTicketName must equal the PassTicket Name defined in the VIRTEL transaction.
- profile\_name must equal the VTAM application name defined in the VIRTEL transaction.

These names are normally the same, but they do not have to be.

---

**Note:** If you are running separate RACF databases across LPARS the KEYMASKED must be the same in each RACF database or else the wrong password will be generated and the logon will fail.

---

### 12.3.2 RACF Profiles related to Virtel and Pass Tickets

As mentioned RACF needs to have some profiles set up to allow Virtel to use Pass Tickets. The first profile is the FACILITY Class profile with the IRR.RTICKETSERV name. The Virtel STC userid must have READ access to this profile.

```
BROWSE  RACF COMMAND EDITOR          DATE  08/08/2008 08:01 000
COMMAND ==> _                                SCROLL ==> CSR
***** Top of Data *****
CLASS      NAME
-----
FACILITY   IRR.RTICKETSERV

LEVEL     OWNER      UNIVERSAL ACCESS  YOUR ACCESS  WARNING
-----  -----
00       SPTBOWL    NONE             NONE        NO

INSTALLATION DATA
-----
NONE

APPLICATION DATA
-----
NONE

SECLEVEL
-----
NO SECLEVEL

CATEGORIES
-----
NO CATEGORIES

SECLABEL
-----
NO SECLABEL

AUDITING
-----
FAILURES(READ)

NOTIFY
-----
NO USER TO BE NOTIFIED

USER      ACCESS      ACCESS COUNT
-----  -----
SPTBOWL   ALTER       000000
SPTSABY   READ        000000
SPVIRSTC  READ        000000

ID      ACCESS      ACCESS COUNT  CLASS          ENTITY      NAME
-----  -----

```

*RACF profile to allow Virtel to use Pass Tickets*

```
RDEFINE FACILITY IRR.RTICKETSERV
PERMIT IRR.RTICKETSERV CL(FACILITY) ID(SPVIRSTC) ACC(READ)
```

To allow Virtel to generate Pass Tickets for a particular application we must define any entry in the PTKT-DATA class. This entry has the name “IRRPTAUTH.passTicketName.\*” and is a Group Entry. The Virtel USERID should have update authority to this profile.

```
***** Top of Data *****
CLASS      NAME
----      -----
PTKTDATA   IRRPTAUTH.SPCICSH.* (G)
-----+-----+-----+-----+-----+
LEVEL     OWNER      UNIVERSAL ACCESS YOUR ACCESS WARNING
-----+-----+-----+-----+-----+
00       SPTHOLT    NONE                  ALTER        NO
-----+-----+-----+-----+-----+
INSTALLATION DATA
-----+-----+
NONE
-----+-----+
APPLICATION DATA
-----+-----+
NONE
-----+-----+
SECLEVEL
-----+-----+
NO SECLEVEL
-----+-----+
CATEGORIES
-----+-----+
NO CATEGORIES
-----+-----+
SECLABEL
-----+-----+
NO SECLABEL
-----+-----+
AUDITING
-----+-----+
FAILURES(READ)
-----+-----+
NOTIFY
-----+-----+
NO USER TO BE NOTIFIED
-----+-----+
USER      ACCESS
-----+-----+
SPTHOLT   ALTER
SPVIRSTC  UPDATE
-----+-----+-----+-----+
ID          ACCESS CLASS           ENTITY NAME
-----+-----+-----+-----+
NO ENTRIES IN CONDITIONAL ACCESS LIST
```

This is the same name that is defined in the transaction as the PassTicket name. In our example we have defined a CICS transaction in VIRTEL which connects to a CICS application whose APPLID = SPCICSH and uses a PassTicket name of SPCICSH.

Allow USERID SPVIRSTC to generate pass tickets for this application.

Setting Virtel up with RACF access to PTKTDATA class.

```
RDEFINE PTKTDATA IRRPTAUTH.SPCICSH.\* UACC(NONE)
PERMIT IRRPTAUTH.SPCICSH.\* CL(PTKTDATA) ID(SPVIRSTC) ACC(UPDATE)
SSIGNON(KEYMASKED(998A654FEBCDA123)) UACC(NONE)
```

The name in IRRPTAUTH.passTicketName.\* profile must match the name in the Virtel Transaction definition. The PassTicket Name is the name of the application as known to RACF for the generation of Passtickets. This may be different to the VTAM application name.

Finally, define a PTKTDATA profile entry that matches the Virtel Transaction **APPLICATION** name. In this case it is SPCICSH. Virtel passes this APPLNAME to RACF via a RACROUTE REQUEST=VERIFY.

TRANSACTION DETAIL DEFINITION ----- Applid: APPLHOLT 8:51:24	
Internal name ===> CLI-10	Name must match PTKTDATA discrete profile_name
External name ===> Cics	To associate with an entry point name Name displayed on user menu
Description ===> Logon to CICS	
Application ===> SPCICSH	Application to be called 0=no 1=yes 2=unsigned
PassTicket ===> 2 Name ===> SPCICSH	1=VTAM 2=VIRTEL 3=SERV 4=PAGE 5=LINE
Application type ===> 1	Prefix of name of partner terminals
Pseudo-terminals ===> CLVTA	Specify when LOGMODE must be changed
Logmode ===>	1=menu 2=sub-menu 3=auto
How started ===> 1	0=none 1=basic 2=NTLM 3=TLS 4=HTML
Security ===> 1	0=no 1=yes 2;if2VIRTEL 4=auto
H4W commands ? ===>	
Logon message ===>	
TIOA at logon ===> Signon&/F&*7D4EC9&'114BE9'&U&'114CF9'&P&/A	
TIOA at logoff ===>	
Initial Scenario ===>	Final Scenario ===>
Input Scenario ===>	Output Scenario ===>
P1=Update	P3=Return
	P12=Server

Setting the Pass Ticket name in the Virtel transaction.

```
RDEFINE PTKTDATA SPCICSH SSIGNON(KEYMASKED(998A654FEBCDA123)) +
UACC(NONE)
```

The key thing here is that the PassTicket name must tie up with the generic IRRPTAUTH.SPCICSH.\* entry and the VIRTEL application name must match the discrete PTKTDATA.SPCICSH profile. They can be the same but needn't be!

## 12.4 Virtel Requirements

### 12.4.1 Transaction requirements

The Virtel Transaction, under the Entry Point CLIWHOST, will be used to access the CICS asset. It has a Virtel external name of “CICS”. We modify our transaction to use pass tickets and add a TIOA to logon to our CICS transaction. The transaction details now look like:-

```
TRANSACTION DETAIL DEFINITION ----- Applid: APPLHOLT 17:58:05

Internal name ===> CLI-10          To associate with an entry point name
External name ===> Cics            Name displayed on user menu
Description ===> Logon to CICS
Application ===> SPCICSH          Application to be called
PassTicket ===> 2 Name ===> SPCICSH
Application type ===> 1           0=no 1=yes 2=unsigned
Pseudo-terminals ===> CLVTA        1=VTAM 2=VIRTEL 3=SERV 4=PAGE 5=LINE
Logmode ===>
How started ===> 1               Prefix of name of partner terminals
Security ===> 0                 Specify when LOGMODE must be changed
H4W commands ? ===>             1=menu 2=sub-menu 3=auto
Logon message ===>              0=none 1=basic 2=NTLM 3=TLS 4=HTML
                                 0=no 1=yes 2;if2VIRTEL 4=auto

TIOA at logon ===> Signon&/F&*7D4EC9&'114BE9'&U&'114CF9'&P&/A
TIOA at logoff ===>
Initial Scenario ===>           Final Scenario      ===>
Input Scenario ===>             Output Scenario    ===>

P1=Update                         P3=Return          P12=Server
```

*Modified CICS Virtel transaction to support Pass Tickets.*

The PassTicket option is set to 2 and uses the APPL name associated with CICS transaction. Using option 2 means that we do not have to sign onto Virtel first before generating a PassTicket. Virtel will expect the Virtel System variable USER to be established. This will be accomplished in an identification scenario where we have access to the SM\_User header value.

The TIOA sign on field waits for the initial CICS sign on screen to appear and then plugs in the userid (&U) and PassTicket generated password (&P) into their respective locations. The screen is then “forwarded” to the CICS application with the USERID and PASSWORDS fields completed.

### 12.4.2 Identification Scenario

To obtain the “SM\_User” value and set the userid in the VirTEL System USER variable an identification scenario is used. The following is an example of such a scenario:-

```
SCENSITE SCREENS APPL=SCENSITE,EXEC=NO
*
* SCENARIO for SiteMinder
*
* The purpose of this scenario is to retrieve the contents of
* the identification headers inserted by the SiteMinder Proxy
*
SCENARIO IDENTIFICATION
*
    COPY$ SYSTEM-TO-VARIABLE,VAR='USER', -
          FIELD=(TCT-HTTP-HEADER,SM\_USER)
    IF$ NOT-FOUND,THEN=NOUSER1
    COPY$ VARIABLE-TO-SYSTEM,VAR='USER', -
          FIELD=(NAME-OF,USER)
*
EXIT1 DS 0H
    SCENARIO END
*
NOUSER1 DS 0H
    ERROR$ 0,'SCENSITE ERROR: NO USER VARIABLE'
    GOTO$ EXIT1
    SCREND
    END
```

This SCENARIO has to be set in the Entry Point definition for the line being used. In our case this is the default Entry Point, CLIWHOST, associated with the external line HTTP-CLI. The following is a snapshot of the entry point definition:-

ENTRY POINT DETAIL DEFINITION ----- Applid: APPLHOLT 18:29:08	
Name	====> <b>CLIWHOST</b> Name this ENTRY POINT (LOGON DATA)
Description	====> <b>HTTP entry point (CLIENT application)</b>
Transactions	====> <b>CLI</b> Prefix for associated transactions
Last page	====> <b>LASTPAGE.HTML</b> Displayed at end of session
Transparency	====> Server types NOT to emulate
Time out	====> <b>0720 minutes</b> Maximum inactive time
Do if timeout	====> <b>0</b> 0=logoff 1=bip+logoff 2=anti pad
Emulation	====> <b>HTML</b> Type of terminal:
HOST4WEB	: program driven <b>HTML</b> : Web Browser
SCENARIO	: script driven <b>EMAIL</b> : SMTP client
Directory for scenarios	====> If scenarios in VSAM, not LOADLIB
Signon program	====> <b>VIR0020H</b> Controls user name and password
Menu program	====> <b>VIR0021A</b> List of transactions
Identification scenario	====> <b>SCENSITE</b> eg XML identification
Type 3 compression	====> Discover typical screens (Virtel/PC)
Mandatory identification	====> (PC or minitel)
3270 swap key	====> eg P24
Extended colors	====> <b>E</b> E: extended X: extended + DBCS
P1=Update	P3=Return
Enter=Add	P4=Transactions

Defining an Identification Scenario in the Virtel Entry Point.

The Identification Scenario field is filled in with the name of our scenario SCENSITE. This scenario is called when the inbound call is assigned to an entry point and before any transactions are invoked. The scenario sets the Virtel system USER variable which will be used in the PassTicket generation.

### 12.4.3 TCT Considerations

The TCT has to include the following parameters if HTTP User Headers and PassTicket generation is required. The parameters are:-

HTHEADR=(SM_USER),	*
VIRSECU=YES, SECUR=(RACROUTE,RACF),	*
RAPPL=FACILITY, RNODE=FACILITY, PRFSECU=SPVIREH,	*
PASSTCK=YES,	*

The HTHEADR identifies the "SM\_USER" as a non standard header and one that Virtel must process. The PASSTCK keyword enables Virtel to generate PassTickets.

#### 12.4.4 Line Rules

To ensure that the source SSO proxy IP address is valid we can code some rules and associate them with the line. In our example we have coded two sets of rules. The first one will test the calling proxy IP address. If that is successful the connection will continue and establish an association with the named VirTEL entry point. If the first rule fails because the IP address doesn't match what we expect, the second rule will be called. This does no more than establish an entry point with a default transaction. The default transaction will just return an error page to the browser. Here are the two rules that we have associated with our VirTEL line:-

Name	Status	Description	Entry Point
C100PROX	ACTIVE	Test incoming IP address	CLIWHOST
C999REJ	ACTIVE	Reject all other callers	EPREJECT

P1=Update P6=1st page P2=Suppress P7=Page-1 P3=Return P8=Page+1 P12>Edit

Ma 0.0 03/27/14.086 12:47PM 192.168.92.162 a 6,2

*List of rules associated with the VirTEL line*

The second rule is coded as follows:-

```

File Edit Font Transfer Macro Options Window Help
DETAL of RULE from RULE SET: C-HTTP ----- Applid: APPLHOLT 12:34:49
Name      ==> C100PROX          Rule priority is per name
Status     ==> ACTIVE           26 Mar 2014 15:05:36      SPTHOLT
Description ==> Test incoming IP address
Entry point ==> CLIWHOST        Target Entry Point
Parameter   ==>                &1 value or LUNAME
Trace       ==>                1=commands 2=data 3=partner

C : 0=IGNORE 1=IS NOT 3=STARTS WITH 4=DOES NOT 5=ENDS WITH 6=DOES NOT
0 IP Subnet ==> 000.000.000.000      Mask      ==> 255.255.255.255
0 Host      ==>
0 eMail     ==>
3 Calling DTE ==> 192.168.092.058    Calling DTE address or proxy
0 Called     ==>
0 CUD0 (Hex) ==>                   First 4 bytes of CUD (X25 protocol)
0 User Data  ==>

0 Days      ==> M:      T:      W:      T:      F:      S:      S:
0 Start time ==> H:      M:      S:      End time ==> H:      M:      S:

P1=Update          P3=Return          Enter=Add
P4=Activate        P5=Inactivate    P12=Entry P.

Ma 0.0 03/27/14.086 12:41PM 192.168.92.162 a 3,21

```

Rule C100PROX to test Proxy IP Address

If the IP address of the SSO Proxy matches the Caller DTE address we have specified in the rule than the Entry Point CLIHOST will be associated with line and the transactions defined under that entry point, CLIHOST in this case, can be invoked. If the address match fails then the next rule will be called. In our case this will be rule C999REJ which will invoke transaction EPREJECT, the default transaction for Entry Point EPREJECT.

**Warning:** It is important that you use option 3 “STARTS WITH” when defining the Calling DTE option.

File Edit Font Transfer Macro Options Window Help

DETAIL of RULE from RULE SET: C-HTTP ----- Applid: APPLHOLT 12:48:49

Name	==> C999REJ	Rule priority is per name
Status	==> ACTIVE	26 Mar 2014 14:31:04 SPTHOLT
Description	==> Reject all other callers	
Entry point	==> EPREJECT	Target Entry Point
Parameter	==>	&1 value or LUNAME
Trace	==>	1=commands 2=data 3=partner

```
C : 0=IGNORE 1=IS 2=IS NOT 3=STARTS WITH 4=DOES NOT 5=ENDS WITH 6=DOES NOT
0 IP Subnet ==> 000.000.000.000 Mask ==> 255.255.255.255
0 Host ==>
0 eMail ==>
0 Calling DTE ==> Calling DTE address or proxy
0 Called ==> Called DTE address
0 CUD0 (Hex) ==> First 4 bytes of CUD (X25 protocol)
0 User Data ==>

0 Days ==> M: T: W: T: F: S: S:
0 Start time ==> H: M: S: End time ==> H: M: S:

P1=Update P3=Return Enter=Add
P4=Activate P5=Inactivate P12=Entry P.
```

Ma 0.0 03/27/14.086 12:52PM 192.168.92.162 a 3,21

Rule C999REJ to reject the session request

This rule does no more than to establish the entry point EPREJECT. EPREJECT will have a default transaction which just returns an error page to the caller.

## 12.5 Common Errors

### Message VIR1502E

VIRTEL does not have sufficient access rights to create or validate a passticket allowing user userid at terminal termed to access application applname. This message is usually preceded by message ICH408I which shows the name of the resource to which VIRTEL must be granted access.

#### Action

Examine the SAF and RACF return codes and the RACF reason code to determine the cause. Check that VIRTEL has access to resource IRR.RTICKETSERV in the FACILITY class, and also to resource IRRPTAUTH.applname.userid in the PTKTDATA class. The generic resource IRRPTAUTH.\*\* may be used to permit VIRTEL to generate passtickets for all applications.

For an explanation of the return codes and reason codes, see z/OS Security Server RACF Callable Services Chapter 2 “R\_ticketserv”. Some common codes are:

SAF RC	RACF RETC	RACF Reason	Description
8	8	4	Paramlist error. Ensure that the SCENSITE scenario is available to process the sm_header.
8	8	16	VIRTEL is not authorized to generate passtickets, or is not authorized to generate passtickets for this application. See preceding ICH408I message in the log.
8	16	28	There is no profile in the PTKTDATA class for this application or the PTKTDATA class is not active.


## **12.6 Related material**

Technical newsletter - *TN201416 Virtel Security. Using server and client certificates*

## RUNNING MULTIPLE INSTANCES OF VIRTEL

### 13.1 Introduction

For High Availability and performance reasons it is often necessary to run multiple copies of Virtel, preferably within separate LPARs on separate physical machines. This newsletter discusses the issues raised when implementing such a setup and how Virtel can exploit the IBM Sysplex technologies. In the following example there are two instances of Virtel running on separate physical machines sharing the same ARBO configuration file. The configuration looks like this:-

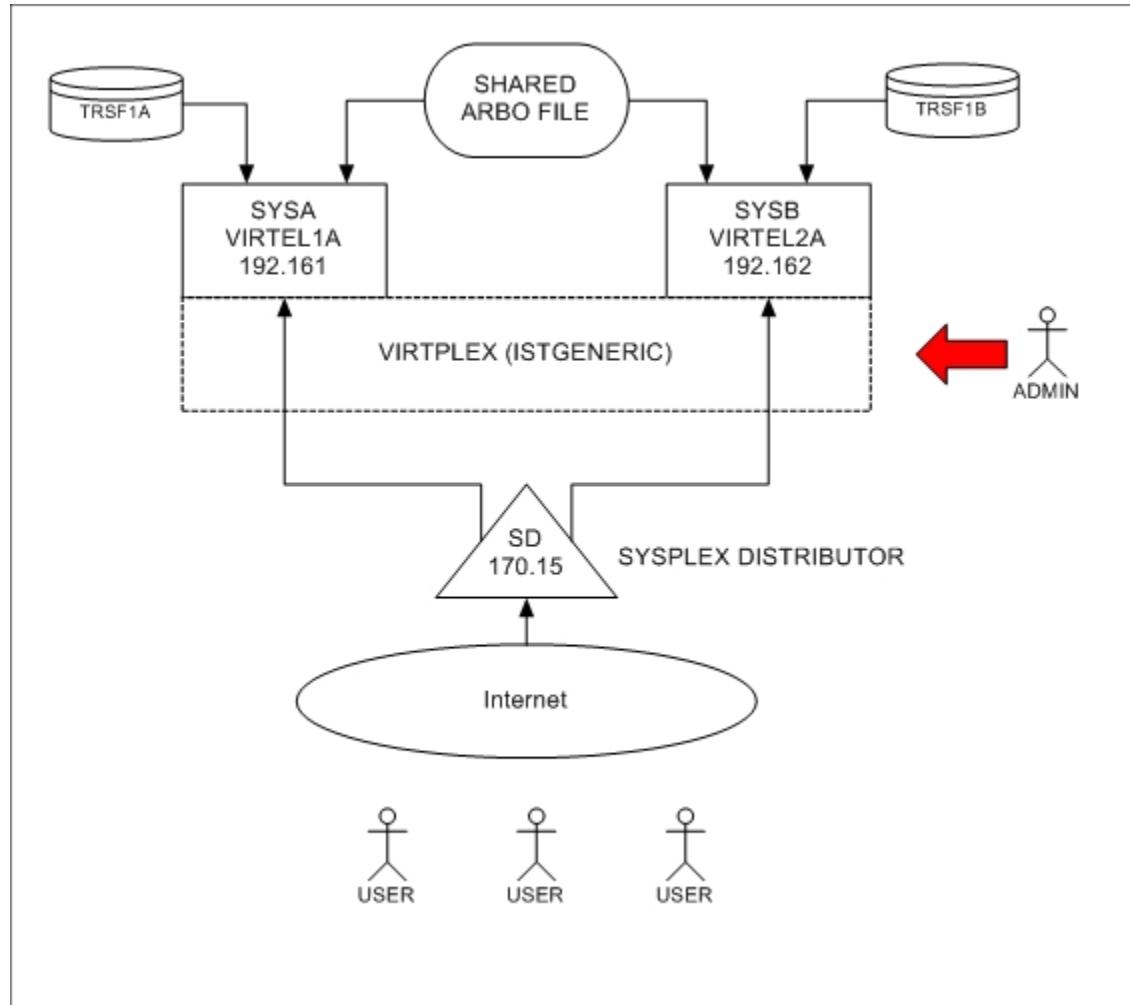

Virtel is using several Sysplex technologies to achieve this configuration. For example, Virtel is using VTAM Generic Resources to facilitate access to the Virtel Administration functions from either instance of Virtel. VTAM generic resources can be used to distribute workloads across applications that perform the same task or function. Administration of the ARBO file is through the Virtel Administrator who can logon on to Virtel using the generic Virtel ACB name VIRTPLEX. This generic ACB enables management of the ARBO file through either VIRTEL1A or VIRTEL2A. This can be useful, for example, If SYSA was down for maintenance. VIRTEL administration could still conducted via VIRTEL2A access. No change would be necessary to any session management tools.

Here are the relevant definitions required to support the VTAM generic resource within Virtel.

### **13.1.1 VIRTEL TCT Settings**

GRNAME=VIRTPLEX, VTAM GENERIC RESOURCE NAME

### **13.1.2 SYSPLEX definitions**

The ISTGENERIC structure will have to be allocated before you can use VTAM generic resources. See the IBM Network Implementation Guide for further information on configuring the CFRM.

Use the following command to display coupling allocation details for ISTGENERIC.

```
D XCF,STR,STRNM=ISTGENERIC
```

*VTAM display of the generic resource*

The results from the D NET, ID=VTAMPLEX,E identifies the two Virtel instances which are grouped into the generic resource name VIRTPLEX. The example below shows VIRTEL1A and VIRTEL2A as participating in the VIRTPLEX resource name group.

```
D NET, ID=VIRTPLEX,E

IST097I DISPLAY ACCEPTED
IST075I NAME = VIRTPLEX, TYPE = GENERIC RESOURCE 917
IST1359I MEMBER NAME OWNING CP SELECTABLE APPC
IST1360I SPNET.VIRTEL1A ZAM1SSCP YES NO
IST1360I SPNET.VIRTEL2A ZAM2SSCP YES NO
IST2210I GR PREFERENCE TABLE ENTRY = **DEFAULT**
IST2202I GREXIT = NO WLM = YES LOCLU = YES
IST2204I LOCAPPL = YES PASSOLU = NO
IST314I END
```

When the VIRTEL\*A application is display in VTAM the following messages are written to the console log:-


```
D NET, ID=VIRTEL1A,E
IST097I DISPLAY ACCEPTED
IST075I NAME = SPNET.VIRTEL1A, TYPE = APPL 925
IST486I STATUS= ACT/S, DESIRED STATE= ACTIV
IST1447I REGISTRATION TYPE = CDSERVR
IST1363I GENERIC RESOURCE NAME VIRTPLEX REPRESENTS SPNET.VIRTEL1A
IST977I MDLTAB=****NA**** ASLTAB=****NA****
IST861I MODETAB=****NA**** USSTAB=****NA****LOGTAB=****NA****
IST934I DLOGMOD=****NA**** USS LANGTAB=****NA****
IST1632I VPACING = 7
IST1938I APPC = NO
IST597I CAPABILITY-PLU ENABLED ,SLU ENABLED ,SESSION LIMIT NONE
```

```
IST231I APPL MAJOR NODE = APPLVIPX
IST654I I/O TRACE = OFF, BUFFER TRACE = OFF
IST1500I STATE TRACE = OFF
IST271I JOBNAME = SPVIR1A, STEPNAME = SPVIR1A, DSPNAME = ISTEBBDB
IST228I ENCRYPTION = OPTIONAL , TYPE = DES
IST1563I CKEYNAME = VIRTEL1A CKEY = PRIMARY CERTIFY = NO
IST1552I MAC = NONE MACTYPE = NONE
IST1050I MAXIMUM COMPRESSION LEVEL - INPUT = 0, OUTPUT = 0
IST1633I ASRCVLM = 1000000
IST1634I DATA SPACE USAGE: CURRENT = 0 MAXIMUM = 1280
IST171I ACTIVE SESSIONS = 0000000001, SESSION REQUESTS = 0000000000
IST206I SESSIONS:
IST634I NAME STATUS SID SEND RECV VR TP NETID
IST635I SC0TCP13 ACTIV-S CA7B8B52D125F31F 0003 0001 SPNET
IST314I END
```

Message IST1363I confirms that VIRTEL operating under the ACB of VIRTEL1A is associated with the VTAM resource name VIRTPLEX.

### 13.1.3 Workload balancing in a SYSPLEX environment

In the following configuration we can see how the VTAM generic resource facility can also be used to distribute workloads across applications. In this example there are several CICS TOR regions within CICSA, CICSB and CICSC that are accessed through a VTAM generic resource name or CICSPLEX group name. VIRTEL uses this name to access the CICS application. The WLM and/or VTAM will distribute sessions across the members of the CICS generic resource name.

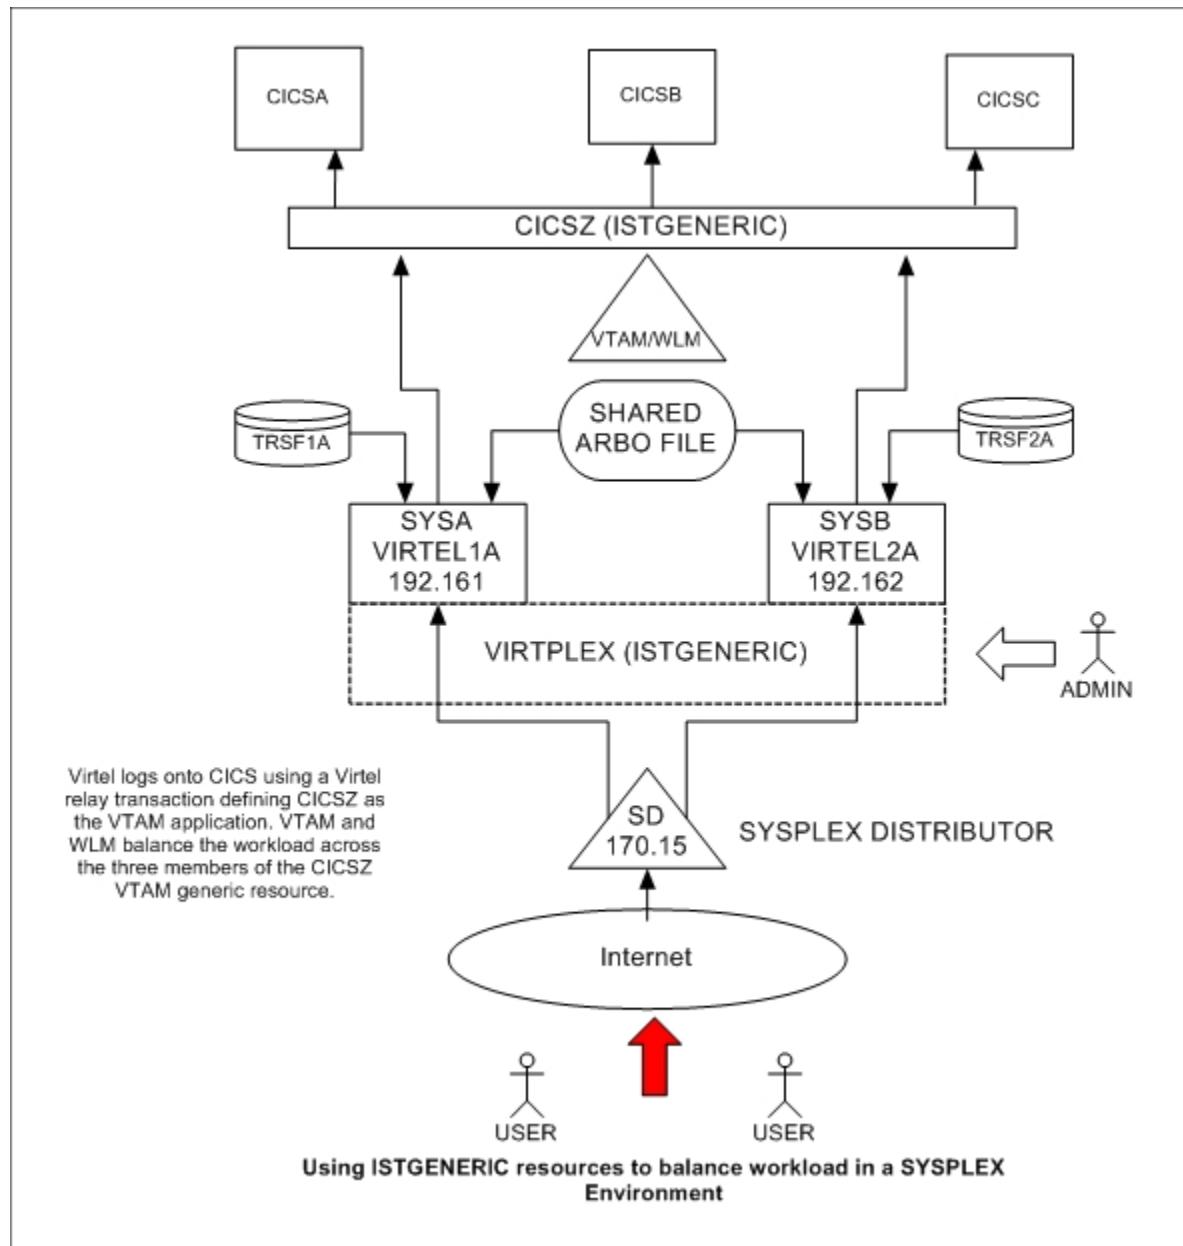

From a High Availability aspect both CICSA and CICSB could both be down and service would still be provided by CICSC either through VIRTEL1A or VIRTEL2A. In this configuration VIRTEL exploits SYSPLEX technologies to provide a HA solution. The only VIRTEL requirement is to define a VIRTEL transaction which targets CICSZ as the VTAM application, i.e. the VTAM Generic Resource or CICSPLEX group name.

### 13.1.4 Sharing the ARBO and other VSAM files

In a SYSPLEX or sharing environment the VSAM files, like the ARBO and TRSF files, must be shared only in READ mode. To support this the following TCT parameter should be coded:-

```
VSAMTYP=READONLY
```

This VIRTCT parameter allows the setup of 'READ-ONLY' Virtels, to be used in production or in a Sysplex. Almost all Virtel VSAM files may be set to read-only mode. (But note that the VIRSWAP file; being a work file it cannot be read-only.)

If this TCT value is coded then the following changes should also be made to the TCT.

- The MACRF statements should be amended from MACRF=(SEQ,DIR,OUT,LSR) to MACRF=(SEQ,DIR,LSR).
- The UFILE parameter string should also be changed from 0,10,01 to 0,10,05. For example:-

```
HTMLTRSF,ACBH2,0,10,01 becomes HTMLTRSF,ACBH2,0,10,05
```

This will ensure the integrity of the VSAM files across a SYSPLEX or shared environment. When Virtel is started the following messages will be issued:-

```
VIR0093I VTAM GENERIC RESOURCE NAME IS VIRTPLEX
VIR0024I OPENING FILE VIRARBO
VIR0024I READ ONLY
VIR0024I OPENING FILE VIRSWAP
VIR0024I OPENING FILE VIRHTML
VIR0024I READ ONLY
VIR0024I OPENING FILE SAMPTRSF
VIR0024I READ ONLY
VIR0024I OPENING FILE HTMLTRSF
VIR0024I READ ONLY
VIR0024I ATTACHING SUBTASKS
```

**Danger:** Do not set the SHROPTIONS to (4,3) as this will have undesirable results!

Using a READ only environment enables you to not only share the ARBO file but also the SAMP and HTML TRSF files.

### 13.1.5 READ ONLY Restrictions

If you share the VSAM files (SAMP.TRSF, ARBO, HTML.TRSF) in READ only mode Virtel Administration is not possible. For example uploading web updates to the SAMP.TRSF or adding macros to the DDI repositories. In this configuration you will have to have a maintenance instance of Virtel which can write to the VSAM files. This can be brought up during a maintenance slot when the READ ONLY instances are down. An alternative to this method is to maintain a copy of the VSAM files and use these for maintenance and updates then copy these VSAM files to the READ ONLY versions during a maintenance slot.

### 13.1.6 Virtel naming conventions

When running more than one VIRTEL STC care must be taken when defining the VTAM relay names that each VIRTEL tasks will use. In the above configuration each Virtel instance is running on a different LPAR, and for the HA reasons, probably on a different physical machine; however, the VTAM names employed must be unique. With Virtel you can define a single configuration within the ARBO and TCT which contains a unique pool of Virtel relays for each Virtel instance.

Here are two possible ways to define the relay pools for multiple Virtel instances:

The first way is to include the SYSCLONE value as part of the LU name. The relay definitions utilize the system symbolic SYSCLONE value in the IEASYMxx member of PARMLIB. The clone value is taken from the system symbolic &SYSCLONE and is identified in the VIRTEL definitions through the + (plus) character:

LIST of TERMINALS ----- Applid: VIRTEL1A 15:11:01							
Terminal	Repeated	Relay	Entry	Type	I/O	Pool	2nd Relay
CLLOC000	0050			3	3		
CLVTA000	0080	*	W2HPOOL	3	3		
DELOC000	0010			3	3		
DEVTA000	0016	*	W2HPOOL	3	3		
W2HIM000	0080	R+IM000		1	1		
W2HTP000	0080	R+VT000		3	3	*W2HPOOL	R+IM000

### 13.1.7 TCT definition

In the configuration above there are two Virtel STCs running on different LPARS whose &SYSCLONE values are 1A and 2A. With the same TCT being used for both VIRTEL1A and VIRTEL2A the following is specified in the common TCT:-

```
APPLID=VIRTEL+,
SYSPLUS=YES,
```

This will means that the two Virtels STCs will have a VTAM APPLID of ^VIRTEL1A and VIRTEL2A. The Virtel relay LU names are R1AVT000-079 for LPAR 1A, and R2AVT000-079 for LPAR 2A. The VTAM definition to support this configuration would like:-

```
APPLVIPX VBUILD TYPE=APPL
* -----
* Product : VIRTEL
* Description : APPL for VIRTEL SYSPLEX (SPVIR1A and SPVIR2A)
* -----
VIRTEL&SYSCLONE APPL EAS=160,AUTH=(ACQ,BLOCK,PASS,SPO),
      ACBNAME=VIRTEL&SYSCLONE
* -----
* R&SYSCLONEVTxxx : VTAM application relays for VIRTEL Web Access
* -----
R&SYSCLONE.VT??? APPL AUTH=(ACQ,PASS),MODETAB=ISTINCLM,
      DLOGMOD=SNX32702,EAS=1
* -----
* R&SYSCLONEIMxxx : Printer relays for VIRTEL Web Access terminals
* -----
R&SYSCLONE.IM??? APPL AUTH=(ACQ,PASS),MODETAB=ISTINCLM,
      DLOGMOD=SCS,EAS=1
R&SYSCLONE.IP??? APPL AUTH=(ACQ,PASS),MODETAB=ISTINCLM,
      DLOGMOD=DSILGMOD,EAS=1
```

Because this naming convention could be constraining if you want to use 4-character LU names, there is a second method which allows you to freely choose the LU names without the need to include the &SYSCLONE characters as part of the LU name. In the next example two pools are defined. Pool \*W1APOOL has relay names J000-J999, K000-K999, L000-L999 for LPAR 1 (with printer names Pnnn,Qnnn,Rnnn), and pool \*W2APOOL has relay names M000-M999, N000-N999, O000-O999 (with printer names Snnn,Tnnn,Unnn) for LPAR 2:-

Terminal	Repeated	Relay	Entry	Type	I/O	Pool	2nd	Relay
CLLOC000	0500			3	3			
CLVTA000	1000	*W+POOL		3	3			
CLVTB000	1000	*W+POOL		3	3			
CLVTC000	1000	*W+POOL		3	3			
DELOC000	0010			3	3			
DEVTA000	0016	*W+POOL		3	3			
W2HIP000	1000	P000		1	1			
W2HIQ000	1000	Q000		1	1			
W2HIR000	1000	R000		1	1			
W2HIS000	1000	S000		1	1			
W2HIT000	1000	T000		1	1			
W2HIU000	1000	U000		1	1			
W2HTJ000	1000	J000		3	3	*W1APOOL	P000	
W2HTK000	1000	K000		3	3	*W1APOOL	Q000	
W2HTL000	1000	L000		3	3	*W1APOOL	R000	
W2HTM000	1000	M000		3	3	*W2APOOL	S000	
W2HTN000	1000	N000		3	3	*W2APOOL	T000	
W2HTO000	1000	O000		3	3	*W2APOOL	U000	

The VTAM definitions would be similar to those from the previous example except the &SYSCLONE would be replaced by the relay characters.

```
APVIRT&SYSCLONE. VBUILD TYPE=APPL
* -----
* Product      : VIRTEL
* Description   : Main ACB for VIRTEL application
* -----
VIRTEL&SYSCLONE APPL AUTH=(ACQ,BLOCK,PASS,SPO),EAS=160,
      ACBNAME=VIRTEL&SYSCLONE
* -----
* Jxxx,Kxxx    : VTAM application relays for VIRTEL Web Access*
* Lxxx,Mxxx    : VTAM application relays for VIRTEL Web Access *
* Nxxx,Oxxx    : VTAM application relays for VIRTEL Web Access*
* -----
J??? APPL AUTH=(ACQ,PASS),MODETAB=ISTINCLM,DLOGMOD=SNX32702,EAS=1
K??? APPL AUTH=(ACQ,PASS),MODETAB=ISTINCLM,DLOGMOD=SNX32702,EAS=1
L??? APPL AUTH=(ACQ,PASS),MODETAB=ISTINCLM,DLOGMOD=SNX32702,EAS=1
M??? APPL AUTH=(ACQ,PASS),MODETAB=ISTINCLM,DLOGMOD=SNX32702,EAS=1
N??? APPL AUTH=(ACQ,PASS),MODETAB=ISTINCLM,DLOGMOD=SNX32702,EAS=1
O??? APPL AUTH=(ACQ,PASS),MODETAB=ISTINCLM,DLOGMOD=SNX32702,EAS=1
* -----
* Pxxx,Qxxx    : Printer relays for VIRTEL Web Access terminals   *
* Rxxx,Sxxx    : Printer relays for VIRTEL Web Access terminals   *
* Txxx,Uxxx    : Printer relays for VIRTEL Web Access terminals   *
* -----
P??? APPL AUTH=NVPACE,EAS=1,PARSESS=NO,MODETAB=ISTINCLM,SESSLIM=YES
Q??? APPL AUTH=NVPACE,EAS=1,PARSESS=NO,MODETAB=ISTINCLM,SESSLIM=YES
R??? APPL AUTH=NVPACE,EAS=1,PARSESS=NO,MODETAB=ISTINCLM,SESSLIM=YES
S??? APPL AUTH=NVPACE,EAS=1,PARSESS=NO,MODETAB=ISTINCLM,SESSLIM=YES
T??? APPL AUTH=NVPACE,EAS=1,PARSESS=NO,MODETAB=ISTINCLM,SESSLIM=YES
```

U??? APPL AUTH=NVPACE, EAS=1, PARSESS=NO, MODETAB=ISTINCLM, SESSLIM=YES
---

## 13.2 Using a Distributed VIPA to load balance

Using a Dynamic VIPA with IBM's SYSPLEX Distributor (SD) you can balance Virtel session workload across more than one Virtel STC. The distributing TCPIP stack will balance workload across the participating target TCPIP stacks. Allocation of new sessions on the IP side will depend on the selected SD/WLM algorithm. For example this can be a Round Robin policy or WLM policy workload algorithm. Access to the Virtel tasks is through using distributed VIPA address which is defined in a TCPIP profile. In the configuration above it is defined as 192.168.170.15. The relevant PROFILE definitions for TCPIP would look like:-

```
VIPADYNAMIC
VIPARANGE DEFINE MOVEABLE NONDISRUPTIVE 255.255.255.0 192.168.170.20
VIPADEFINE MOVE IMMED 255.255.255.0 192.168.170.15
VIPADISTRIBUTE DEFINE TIMEDAFF 60 DISTMETHOD ROUNDROBIN 192.168.170.15
DESTIP ALL
ENDVIPADYNAMIC
```

### 13.2.1 Session Affinity

It is essential to include the TIMEDAFF parameter in the VIPA definition as this maintains session affinity. The TIMEDAFF facility ensures that a user will always connect to the same VIRTEL while a session is open. Also, it is recommended that the Virtel line W-HTTP (port 41001) is used for Virtel Administration and line C-HTTP (port 41002) for user access to applications.

Line W-HTTP should be defined using the base address of the LPAR (i.e.the home address of the default interface) by specifying only the port number. For example:

Local ident ==> :41001

Line C-HTTP should be defined using the distributed VIPA address and port number if you are using a dynamic VIPA:

Local ident ==> 192.168.170.15:41002

If you are not using a dynamic VIPA to point to your Virtel then the port address must be prefixed with 0 or 0.0.0.0. For example:-

Local ident ==> 0:41002

This will ensure the Virtel doesn't associate itself with a particular IP address.


The Virtel Line display command displays this configuration:

```
F SPVIR1A,LINES
VIR0200I LINES
VIR0201I VIRTEL 4.54 APPLID=VIRTEL1A LINES
VIR0202I INT.NAME EXT.NAME TYPE ACB OR IP
VIR0202I -----
VIR0202I C-HTTP HTTP-CLI TCP1 192.168.170.15:41002
VIR0202I W-HTTP HTTP-W2H TCP1 :41001
VIR0202I ---END OF LIST---
```

In this way the administrator can access a specific Virtel using port 41001 of the appropriate LPAR's IP address, while the users can access both Virtels using port 41002 on the DVIPA address.

### 13.3 Using an Apache Proxy to load balance

Another way of balancing workloads across multiple VirTEL instances is through an Apache Reverse Proxy Server. In this setup the proxy server load balances IP sessions across the known TCPIP stacks, very much like IBM's Sysplex Distributor.

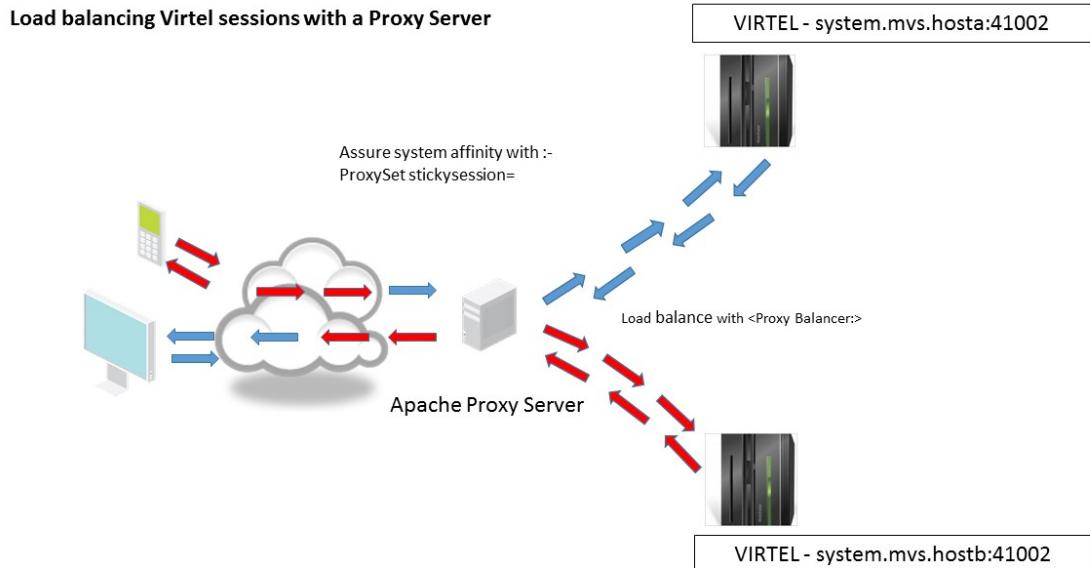

Again, to maintain session affinity the correct load balancing parameters must be used. An example from the http.conf looks like this:-

```
#  
# VirTEL  
#  
ProxyPass / balancer://hostcluster/  
ProxyPassReverse / balancer://hostcluster/  
<Proxy balancer://hostcluster>  
BalancerMember http://syt00101.gzaop.local:41002 retry=5  
BalancerMember http://syt00101.gzaop.local:51002 retry=5  
ProxySet lbmethod=byrequests  
</Proxy>
```

For more information on setting up an Apache Proxy Server visit [http://httpd.apache.org/docs/2.2/mod/mod\\_proxy\\_balancer.html](http://httpd.apache.org/docs/2.2/mod/mod_proxy_balancer.html)

To use Apache as a Proxy Server it is essential that the correct configuration modules are loaded at startup. Here is an example:-

```
#LoadModule foo_module modules/mod_foo.so  
LoadModule authz_host_module modules/mod_authz_host.so  
LoadModule auth_basic_module modules/mod_auth_basic.so  
LoadModule authn_file_module modules/mod_authn_file.so  
LoadModule authz_user_module modules/mod_authz_user.so  
#LoadModule authz_groupfile_module modules/mod_authz_groupfile.so  
LoadModule include_module modules/mod_include.so
```

```

LoadModule log_config_module modules/mod_log_config.so
LoadModule env_module modules/mod_env.so
#LoadModule mime_magic_module modules/mod_mime_magic.so
#LoadModule expires_module modules/mod_expires.so
LoadModule headers_module modules/mod_headers.so
LoadModule unique_id_module modules/mod_unique_id.so
LoadModule setenvif_module modules/mod_setenvif.so
LoadModule proxy_module modules/mod_proxy.so
LoadModule proxy_connect_module modules/mod_proxy_connect.so
#LoadModule proxy_ftp_module modules/mod_proxy_ftp.so
LoadModule proxy_http_module modules/mod_proxy_http.so
LoadModule mime_module modules/mod_mime.so
#LoadModule dav_module modules/mod_dav.so
#LoadModule dav_fs_module modules/mod_dav_fs.so
LoadModule autoindex_module modules/mod_autoindex.so
#LoadModule asis_module modules/mod_asis.so
#LoadModule info_module modules/mod_info.so
LoadModule cgi_module modules/mod_cgi.so
LoadModule dir_module modules/mod_dir.so
LoadModule actions_module modules/mod_actions.so
#LoadModule spelng_module modules/mod_speling.so
#LoadModule userdir_module modules/mod_userdir.so
LoadModule alias_module modules/mod_alias.so
#LoadModule rewrite_module modules/mod_rewrite.so
#LoadModule deflate_module modules/mod_deflate.so
LoadModule proxy_balancer_module modules/mod_proxy_balancer.so

```

Some other Apache configuration recommendations are:-

```

* Timeouts
SSLDisable
SSLV3Timeout 18010
* Format log with router information
LogFormat "%h %l %u %t\"%r\" %>s %b \"%{Referer}i\" \"%{User-Agent}i\" \"%{BALANCER_
↪WORKER_ROUTE}e\"" combined
* set Max-Age to 12h (doesn't work with IE) or
* enable mod_expires and set: (this should be checked)
ExpiresActive On
ExpiresDefault "access plus 16 h"

```

See [https://httpd.apache.org/docs/2.2/mod/mod\\_expires.html](https://httpd.apache.org/docs/2.2/mod/mod_expires.html) for more information.



---


CHAPTER  
**FOURTEEN**

---

## **PROTECTING BUSINESS ASSETS WITH VIRTEL RULES**

### **14.1 Introduction**

In this chapter we discuss how to protect access to business assets using Virtel rules. In this scenario we have two types of business assets or applications. The first type is the production assets which are protected by LDAP and use SSO to facilitate security and automatic logon without the user having to specify a userid and password. The other type of business asset is a standard application, like TSO or CICS, which requires the user to enter a userid and password when the application is accessed. LDAP and SSO are not discussed in this newsletter. There may be alternatives to this SSO setup but for our scenario we are assuming two types of asset – secure (requiring no application logon) and insecure (application logon required). The scenario utilizes a proxy server to load balance across the Virtel instances.

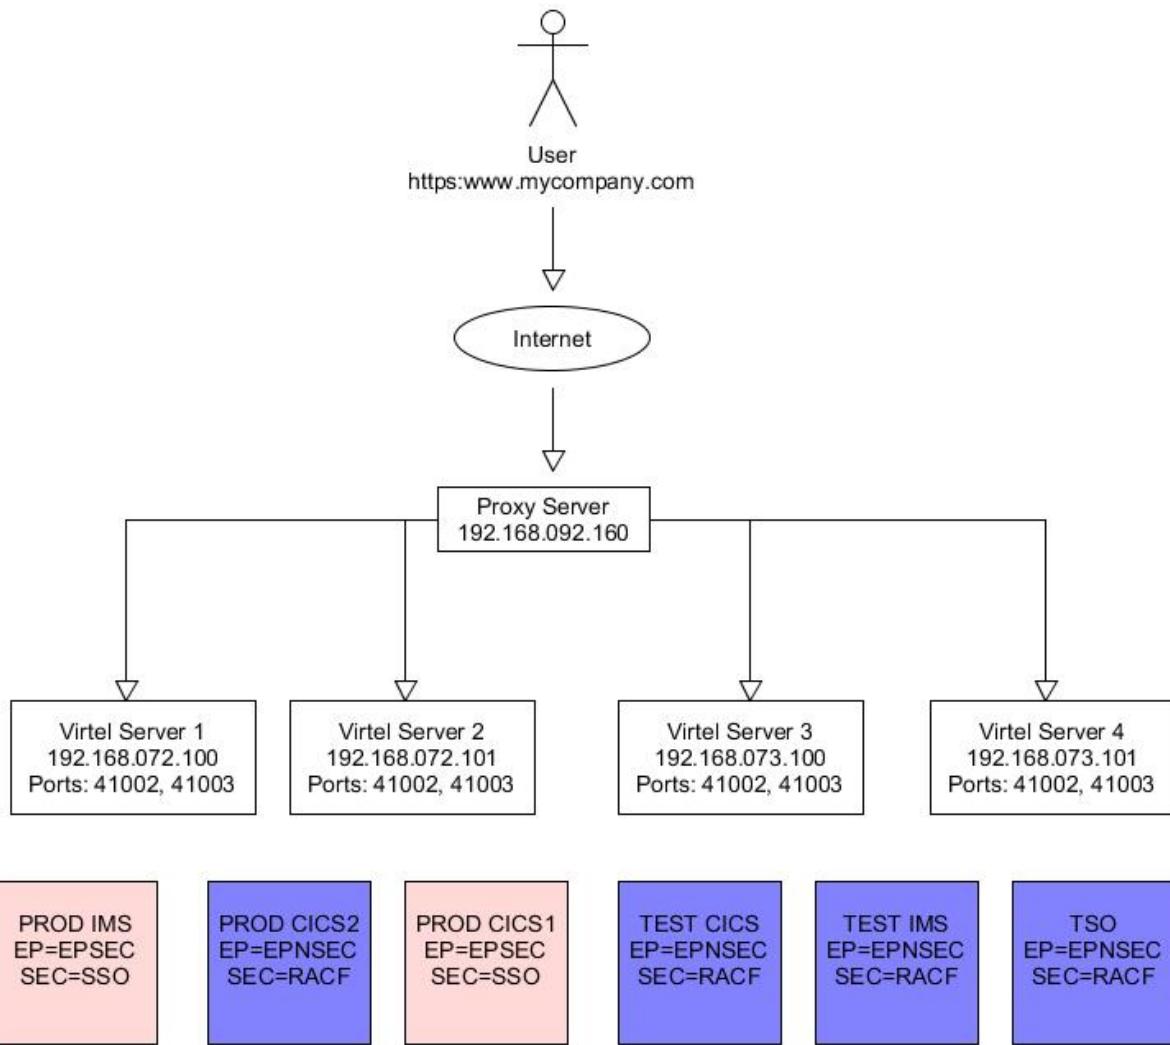

## 14.2 Virtel Setup

From a Virtel perspective it has been decided that secure assets are associated with port 41002, and non-secure through port 41003. Access to the assets should only be through the proxy server using a secure port, in our case the standard SSL port 443. Our goal is to protect the assets from being accessed internal, or external, using the assigned Virtel IP and port addresses. For example, users in the accounts department should be able to access PROD IMS/CICS. Other users, who work offsite or from home, and have access to the company VPN shouldn't be able to access PROD IMS/CICS. In this simplistic scenario, anyone could in theory could access any one of the Virtel instances through their internal IP address – 192.168.07x.10x:4100x and attempt to logon. What is required is means to guarantee that access to any of the assets should only be via the proxy server and not through any other IP address.

### 14.2.1 Virtel Rules

Using Virtel Rules we can compare the calling IP address and if it doesn't match with the rule then the user will be re-directed to another Virtel entry point. To implement this protection we use the following ARBO statements for each line, 41002 and 41003:-

```

RULE ID=R0000100,
RULESET=C-HTTP,                                     < Our Line 41002
STATUS=ACTIVE,
DESC='HTTP access (Test calling address)', 
ENTRY=EPSEC,                                         < Associated Entry point
IPADDR=(EQUAL,192.168.092.160),                      < IP address of Proxy
NETMASK=255.255.255.255
*

RULE ID=R0000199,
RULESET=C-HTTP,                                     < Our Line 41002
STATUS=ACTIVE,
DESC='HTTP access (Calling IP address not valid)', 
ENTRY=EPREJECT
*

RULE ID=R0000200,
RULESET=R-HTTP,                                     < Our Line 41003
STATUS=ACTIVE,
DESC='HTTP access (Test calling address)', 
ENTRY=EPSEC,                                         < Associated Entry point
IPADDR=(EQUAL,192.168.092.160),                      < IP address of Proxy
NETMASK=255.255.255.255
*

RULE ID=R0000299,
RULESET=R-HTTP,                                     < Our Line 41003
STATUS=ACTIVE,
DESC='HTTP access (Calling IP address not valid)', 
ENTRY=EPREJECT
ENTRY ID=EPREJECT,
DESC='Entry point for unauthorized HTTP users',
TRANSACT=REJ,
TIMEOUT=0720,
ACTION=0,
EMUL=HTML,
SIGNON=VIR0020H,
MENU=VIR0021A,
EXTCOLOR=X
*
TRANSACT ID=REJ-00,

```

```

NAME=EPREJECT,
DESC="Default directory = entry point name",
APPL=CLI-DIR,                                     < User template directory
TYPE=4,
TERMINAL=CLLOC,
STARTUP=2,
SECURITY=0

```

So what is happening here? When a user attempts to establish a session Virtel will match the users calling IP address against the IPADDR in rule R0000x00. If it matches then they will be able to access the entry point defined in the rule – in this case EPSEC or EPNSEC. For line 41002 this Entry Point will contain a list of the W2H applications using SSO. For line 41003, using Entry Point EPNSEC, this will contain a list of W2H transactions which use standard RACF protection.

Now, if the calling IP addressed is not matched, the RULE fails and the next rule in the ruleset is tested, in this case rule R0000x99. This is a catch all rule. Any user falling into this rule will be directed to entry point EPREJECT. The Entry Point EPREJECT only has one transaction, its default transaction, and this will invoke the template page EPREJECT.HTM.

To protect the business assets the calling IP address can only be that of the proxy server - 192.168.092.160. Any other calling IP address will be rejected by the Virtel ruleset. By default, the ruleset associated with a line is normally the internal name of the line – C-HTTP for example. How the rejected session is handled depends on how Virtel has been setup.

#### 14.2.2 Default Rule Template

In the following example, the default template EPREJECT.HTM, which is associated with the entry point EPREJECT, looks like this:-

```

<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<!--VIRTEL start="{{" end="}}"-->
<html>
<script>
// customization for reject
window.location.replace("http://www.mycompany.com");
</script>
</html>

```

This template must exist in the CLI-DIR directory as this is where the Entry Point EPREJECT expects to find them. When the template is served it will display the companies “public” web site.

To upload the ARBO statements to your ARBO use the following JCL:-

```

/*
// SET LOAD=SPTHOLT.VIRT456.LOADLIB
// SET ARBO=SP000.SPVIREHO.ARBO1A
/*
//DELETE EXEC PGM=VIRCONF,PARM='LOAD,NOREPL',REGION=2M
//STEPLIB DD DSN=&LOAD,DISP=SHR
//SYSPRINT DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//VIRARBO DD DSN=&ARBO,DISP=SHR
//SYSIN DD *
DELETE TYPE=RULE, ID=R0000100 Delete rule
DELETE TYPE=RULE, ID=R0000199 Delete rule
DELETE TYPE=RULE, ID=R0000200 Delete rule

```

```
DELETE TYPE=RULE, ID=R0000299 Delete rule
DELETE TYPE=ENTRY, ID=EPREJECT Entry point
DELETE TYPE=TRANSACT, ID=REJ-00 Delete transaction
*
//CONFIG EXEC PGM=VIRCONF, PARM='LOAD, NOREPL', REGION=2M
//STEPLIB DD DSN=&LOAD, DISP=SHR
//SYSPRINT DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//VIRARBO DD DSN=&ARBO, DISP=SHR
//SYSIN DD *
RULE Definitions
/*
```



---

**CHAPTER  
FIFTEEN**

---

**APPENDIX**

## **15.1 Trademarks**

SysperTec, the SysperTec logo, syspertec.com and VIRTEL are trademarks or registered trademarks of SysperTec Communication Group, registered in France and other countries.

IBM, VTAM, CICS, IMS, RACF, DB2, MVS, WebSphere, MQSeries, System z are trademarks or registered trademarks of International Business Machines Corp., registered in United States and other countries.

Adobe, Acrobat, PostScript and all Adobe-based trademarks are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States and other countries.

Microsoft, Windows, Windows NT, and the Windows logo are trademarks of Microsoft Corporation in the United States and other countries.

UNIX is a registered trademark of The Open Group in the United States and other countries. Java and all Java-based trademarks and logos are trademarks or registered trademarks of Oracle and/or its affiliates.

Linux is a trademark of Linus Torvalds in the United States, other countries, or both.

Other company, product, or service names may be trademarks or service names of others.

# INDEX

- Add or changing LU Names
  - X25 AntiPCNE line, 91
- Adding headers to the HTTP request
  - SSO, Passtickets and Proxy Servers, 169
- Administration, 21
  - Configuration Menu, 22
  - Screen Navigation, 23
  - Sub-Application Menu, 23
- AT-TLS Secure Session, 157
  - Client certificates, 164
  - Installation, 159
  - Operations, 161
  - Problem determination, 162
  - Resources, 165
  - The Cipher suites, 164
- Batch Line
  - Lines, 51
  - Parameters, 51
  - Terminal Definitions, 52
- CICS Definitions
  - HTTP Inbound Line, 37
  - HTTP Outbound SMTP Line, 42
  - Native Gateway Line, 55
- Client certificates
  - AT-TLS Secure Session, 164
- Common Errors
  - SSO, Passtickets and Proxy Servers, 181
- Comparison table
  - Controlling LUNAMES, 157
- Configuration Menu
  - Administration, 22
- Connect to CICS and autostart transaction
  - Scripts Examples, 126
- Connect to CICS and navigation of user application
  - Scripts Examples, 128
- Connect to CICS and transmission of credentials
  - Scripts Examples, 127
- Connect to CICS VSE with ICCF signon and start of CEMT transaction
  - Scripts Examples, 127
- Connect to TSO and start of ISPF
- Scripts Examples, 127
- Connection / Disconnection Scripts, 121
  - Method of Operation, 125
  - Orders, 124
  - Script Programming Language, 123
  - System Variables, 123
  - Transmission and filter commands, 123
- Connection Modes, 135
  - Dynamic Terminal Pools, 139
  - Logical Terminals, 144
  - Non-Dynamic Terminal Pools, 140
  - Physical Terminal Pools, 139
  - Relay Mode, 137
  - RELAY Mode Terminal Connection Example, 143
  - Terminal connection types, 137
  - Terminal Pool Definition Examples, 140
  - Terminal Pool Selection, 141
  - Virtel Terminal Connection Examples, 143
  - Welcome Mode, 137
  - WELCOME Mode Terminal Connection Example, 143
  - X25 Asynchronous Terminal Connection Example, 143
- Controlling LUNAMES, 145
  - Comparison table, 157
  - LU Nailing by cookie, 154
  - UserData example using a LU Name, 150
  - UserData example using a work station name, 147
  - Using an IP address, 155
  - Using an LU Name with no predefined terminal, 151
- Default Rule Template
  - Protecting business assets with Virtel Rules, 198
- Detail Display
  - Entry Point Management Sub-Application, 109
  - External Server Management Sub-Application, 132
  - Line Management Sub-Application, 27
  - Terminal Management Sub-Application, 102
  - Transactions, 116

- Virtel Rules, 96
- Dynamic Terminal Pools
  - Connection Modes, 139
- Entry Point
  - IMS Connect, 44
- Entry Point Management Sub-Application
  - Detail Display, 109
  - Entry Points, 107
  - Menu Programs, 112
  - Parameters, 110
  - Security, 107
  - Selection an Entry Point, 107
  - Signon Programs, 112
  - Transaction list Display, 109
- Entry Point Sub-Application
  - Summary Display, 108
- Entry Points, 106
  - Entry Point Management Sub-Application, 107
- Example Rules
  - Protecting business assets with Virtel Rules, 197
- External Server Management Sub-Application
  - Detail Display, 132
  - External Servers, 131
  - Parameters, 133
  - Security, 131
  - Summary Display, 131
- External Servers, 129
  - External Server Management Sub-Application, 131
- HTTP Inbound Line
  - CICS Definitions, 37
  - Lines, 33
  - Parameters, 33
  - Terminal Definitions, 34
  - VTAM Terminal Definitions, 37
- HTTP Outbound Line
  - Parameters, 39
- HTTP Outbound line
  - Lines, 38
- HTTP Outbound SMTP Line
  - Parameters, 40
  - Terminal Definitions, 41
  - VTAM Terminal Definitions, 42
- HTTP Outbound SMTP line
  - Lines, 39
- HTTP Outbound SMTP Line
  - CICS Definitions, 42
- IMS Connect
  - Entry Point, 44
  - Terminal Definitions, 43
  - Transactions, 45
- IMS Connect Line
- Lines, 43
- Installation
  - AT-TLS Secure Session, 159
- Line Management Sub-Application
  - Detail Display, 27
  - Lines, 25
  - Parameters, 27
  - Summary Display, 25
- Line Overview Sub-Application
  - Lines, 32
- Line terminals
  - Native Gateway Line, 54
- Lines, 24
  - Batch Line, 51
  - HTTP Inbound Line, 33
  - HTTP Outbound line, 38
  - HTTP Outbound SMTP line, 39
  - IMS Connect Line, 43
  - Line Management Sub-Application, 25
  - Line Overview Sub-Application, 32
  - MQ Line, 48
  - Native TCP/IP Gateway line, 53
  - VIRPASS TCP line (VIRKIX), 57
  - VIRPASS TCP line (VIRNT), 59
  - VIRPASS XM line (VIRKIX), 62
  - X25 Anti Fast Connect (FastC) line, 84
  - X25 AntiGATE line, 81
  - X25 AntiPCNE line, 86
  - X25 GATE Fast-Connect (FC) line, 77
  - X25 GATE Non Fast-Connect (NFC) line, 72
  - X25 VIRNEOX line, 70
  - X25 VIRPESIT line, 68
  - X25 XOT line, 65
- Load balancing with a Distributed VIPA
  - Running multiple instances of Virtel, 191
- Load balancing with Apache Proxy
  - Running multiple instances of Virtel, 192
- Logical Terminals
  - Connection Modes, 144
- LU Nailing by cookie
  - Controlling LUNAMES, 154
- Menu Programs
  - Entry Point Management Sub-Application, 112
- Message Format
  - Native Gateway Line, 56
- Message format
  - IMS Connect, 47
- Method of Operation
  - Connection / Disconnection Scripts, 125
- MQ Line
  - Lines, 48
  - MQ Line parameters, 48

- Terminals Parameters, 49
- MQ Line parameters
  - MQ Line, 48
- Native Gateway Line
  - CICS Definitions, 55
  - Line terminals, 54
  - Message Format, 56
  - Native TCP/IP Gateway line parameters, 53
  - Relay Pool, 54
  - Terminal Parameters, 54
  - VTAM Terminal Definitions, 55
- Native TCP/IP Gateway line
  - Lines, 53
- Native TCP/IP Gateway line parameters
  - Native Gateway Line, 53
- Navigation
  - Terminal Management Sub-Application, 102
- NCP Parameters
  - X25 GATE NFC line, 74
- NCP/NPSI Definitions
  - X25 GATE FastC line, 78
- NCP/NPSI definitions for X25 Non Gate terminals
  - X25 AntiPCNE line, 92
- Non-Dynamic Terminal Pools
  - Connection Modes, 140
- NPSI Parameters
  - X25 GATE NFC line, 74
- Operations
  - AT-TLS Secure Session, 161
- Orders
  - Connection / Disconnection Scripts, 124
- Parameters
  - Batch Line, 51
  - Entry Point Management Sub-Application, 110
  - External Server Management Sub-Application, 133
  - HTTP Inbound Line, 33
  - HTTP Outbound Line, 39
  - HTTP Outbound SMTP Line, 40
  - Line Management Sub-Application, 27
  - Terminal Management Sub-Application, 103
  - Transactions, 117
  - VIRPASS (VIRKIX) line, 57
  - VIRPASS (VIRNT) line, 59
  - VIRPASS XM Line (VIRKIX), 62
  - Virtel Rules, 97
  - X25 Anti-FastC line, 84
  - X25 AntiGATE line, 81
  - X25 AntiPCNE line, 86
  - X25 GATE FastC line, 77
  - X25 GATE NFC line, 72
  - X25 VIRNEOX line, 70
- X25 VIRPESIT line, 68
- X25 XOT line, 65
- Pattern Characters
  - Terminal Management Sub-Application, 104
- Physical Terminal Pools
  - Connection Modes, 139
- Problem determination
  - AT-TLS Secure Session, 162
- Protecting business assets with Virtel Rules, 193
  - Default Rule Template, 198
  - Example Rules, 197
  - Virtel Setup, 197
- RACF Passtickets
  - SSO, Passtickets and Proxy Servers, 171
- Related material
  - SSO, Passtickets and Proxy Servers, 182
- Relay Mode
  - Connection Modes, 137
- RELAY Mode Terminal Connection Example
  - Connection Modes, 143
- Relay Pool
  - Native Gateway Line, 54
- Resources
  - AT-TLS Secure Session, 165
- Routing Incoming Calls
  - X25 GATE NFC line, 75
- Running multiple instances of Virtel, 182
  - Load balancing with a Distributed VIPA, 191
  - Load balancing with Apache Proxy, 192
  - Session Affinity with Apache, 192
  - Session Affinity with DVIPA, 191
  - SYSPLEX definitions, 184
  - Virtel TCT Settings, 184
  - Workload balancing, 186
- Scenarios
  - IMS Connect, 46
- Screen Navigation
  - Administration, 23
- Script Programming Language
  - Connection / Disconnection Scripts, 123
- Scripts Examples, 126
  - Connect to CICS and autostart transaction, 126
  - Connect to CICS and navigation of user application, 128
  - Connect to CICS and transmission of credentials, 127
  - Connect to CICS VSE with ICCF signon and start of CEMT transaction, 127
  - Connect to TSO and start of ISPF, 127
  - Service Transactions, 128
- Security
  - Entry Point Management Sub-Application, 107

- External Server Management Sub-Application, 131
  - Terminal Sub-Application, 101
- Selection an Entry Point
  - Entry Point Management Sub-Application, 107
- Service Transactions
  - Scripts Examples, 128
- Session Affinity with Apache
  - Running multiple instances of Virtel, 192
- Session Affinity with DVIPA
  - Running multiple instances of Virtel, 191
- Sharing of FastC Lines
  - X25 GATE FastC line, 79
- Signon Programs
  - Entry Point Management Sub-Application, 112
- SSO, Passtickets and Proxy Servers, 165
  - Adding headers to the HTTP request, 169
  - Common Errors, 181
  - RACF Passtickets, 171
  - Related material, 182
  - Virtel Requirements, 175
- Sub-Application Menu
  - Administration, 23
- Summary Display
  - Entry Point Sub-Application, 108
  - External Server Management Sub-Application, 131
  - Line Management Sub-Application, 25
  - Terminal Management Sub-Application, 101
  - Transactions, 115
  - Virtel Rules, 95
- Support of non GATE terminals
  - X25 AntiPCNE line, 92
- SYSPLEX definitions
  - Running multiple instances of Virtel, 184
- System Variables
  - Connection / Disconnection Scripts, 123
- Terminal connection types
  - Connection Modes, 137
- Terminal Definitions
  - Batch Line, 52
  - HTTP Inbound Line, 34
  - HTTP Outbound SMTP Line, 41
  - IMS Connect, 43
  - VIRPASS (VIRKIX) line, 57
  - VIRPASS (VIRNT) line, 60
  - VIRPASS XM Line (VIRKIX), 62
  - X25 Anti-FastC line, 84
  - X25 AntiGATE line, 81
  - X25 AntiPCNE line, 86
  - X25 GATE FastC line, 78
  - X25 GATE NFC line, 73
  - X25 VIRNEOX line, 71
- X25 VIRPESIT line, 69
- X25 XOT line, 66
- Terminal Management Sub-Application
  - Detail Display, 102
  - Navigation, 102
  - Parameters, 103
  - Pattern Characters, 104
  - Summary Display, 101
  - Terminals, 101
- Terminal Parameters
  - Native Gateway Line, 54
- Terminal Pool Definition Examples
  - Connection Modes, 140
- Terminal Pool Selection
  - Connection Modes, 141
- Terminal Sub-Application
  - Security, 101
- Terminals, 99
  - Terminal Management Sub-Application, 101
- Terminals Parameters
  - MQ Line, 49
- The Cipher suites
  - AT-TLS Secure Session, 164
- Transaction list Display
  - Entry Point Management Sub-Application, 109
- Transactions, 113
  - Detail Display, 116
  - IMS Connect, 45
  - Parameters, 117
  - Summary Display, 115
- Transmission and filter commands
  - Connection / Disconnection Scripts, 123
- UserData example using a LU Name
  - Controlling LUNAMES, 150
- UserData example using a work station name
  - Controlling LUNAMES, 147
- Using an IP address
  - Controlling LUNAMES, 155
- Using an LU Name with no predefined terminal
  - Controlling LUNAMES, 151
- VIRPASS (VIRKIX) line
  - Parameters, 57
  - Terminal Definitions, 57
- VIRPASS (VIRNT) line
  - Parameters, 59
  - Terminal Definitions, 60
- VIRPASS TCP line (VIRKIX)
  - Lines, 57
- VIRPASS TCP line (VIRNT)
  - Lines, 59
- VIRPASS XM Line (VIRKIX)
  - Parameters, 62

- Terminal Definitions, 62
- VIRPASS XM line (VIRKIX)
  - Lines, 62
- Virtel Requirements
  - SSO, Passtickets and Proxy Servers, 175
- Virtel Rules, 93
  - Detail Display, 96
  - Parameters, 97
  - Summary Display, 95
- Virtel Setup
  - Protecting business assets with Virtel Rules, 197
- Virtel TCT Settings
  - Running multiple instances of Virtel, 184
- Virtel Terminal Connection Examples
  - Connection Modes, 143
- VTAM Terminal Definitions
  - HTTP Inbound Line, 37
  - HTTP Outbound SMTP Line, 42
  - Native Gateway Line, 55
  - X25 Anti-FastC line, 85
  - X25 AntiPCNE line, 91
  - X25 GATE FastC line, 78
  - X25 GATE NFC line, 73
  - X25 XOT line, 67
- VTAM Terminal Definitions for X25 Non Gate terminals.
  - X25 AntiPCNE line, 92
- VTAM Terminals Definitions
  - X25 AntiGATE line, 82
- Welcome Mode
  - Connection Modes, 137
- WELCOME Mode Terminal Connection Example
  - Connection Modes, 143
- Workload balancing
  - Running multiple instances of Virtel, 186
- X25 Anti Fast Connect (FastC) line
  - Lines, 84
- X25 Anti-FastC line
  - Parameters, 84
  - Terminal Definitions, 84
  - VTAM Terminal Definitions, 85
- X25 AntiGATE line
  - Lines, 81
  - Parameters, 81
  - Terminal Definitions, 81
  - VTAM Terminals Definitions, 82
- X25 AntiPCNE line
  - Add or changing LU Names, 91
  - Lines, 86
  - NCP/NPSI definitions for X25 Non Gate terminals, 92
  - Parameters, 86
- Support of non GATE terminals, 92
- Terminal Definitions, 86
- VTAM Terminal Definitions, 91
- VTAM Terminal Definitions for X25 Non Gate terminals., 92
- X25 Asynchronous Terminal Connection Example
  - Connection Modes, 143
- X25 GATE Fast-Connect (FC) line
  - Lines, 77
- X25 GATE FastC line
  - NCP/NPSI Definitions, 78
  - Parameters, 77
  - Sharing of FastC Lines, 79
  - Terminal Definitions, 78
  - VTAM Terminal Definitions, 78
- X25 GATE NFC line
  - NCP Parameters, 74
  - NPSI Parameters, 74
  - Parameters, 72
  - Routing Incoming Calls, 75
  - Terminal Definitions, 73
  - VTAM Terminal Definitions, 73
- X25 GATE Non Fast-Connect (NFC) line
  - Lines, 72
- X25 VIRNEOX line
  - Lines, 70
  - Parameters, 70
  - Terminal Definitions, 71
- X25 VIRPESIT line
  - Lines, 68
  - Parameters, 68
  - Terminal Definitions, 69
- X25 XOT line
  - Lines, 65
  - Parameters, 65
  - Terminal Definitions, 66
  - VTAM Terminal Definitions, 67
- IMS Connect
  - Message format, 47
  - Scenarios, 46