

6. MASS AND BALANCE

No change in the basic Flight Manual data.

7. SYSTEM DESCRIPTION

No change in the basic Flight Manual data.

8. HANDLING, SERVICING, AND MAINTENANCE

No change in the basic Flight Manual data.

9. OPERATIONAL INFORMATION

9.1 TRAINING

9.1.1 OEI Simulation with One Engine at IDLE

To simulate OEI operation with one engine at IDLE, follow the emergency procedures this supplement subsection, however, use the GENERAL DATA, Engine and Transmission Power Training Limitations (see subsection A, Para 9.1.1) and the gross mass value from the TRAINING MAT curve this subsection (see Fig. 20).

EXAMPLE: (see Fig. 20)

Determine: **Training takeoff and landing gross mass, wind calm**

Known: OAT 15 °C
 Pressure altitude SL
 Wind Calm

Solution: 1. Enter chart at known OAT (15 °C).
 2. Move up to known pressure altitude (SL).
 3. Move right and read gross mass = 1790 kg.

Determine: **Training takeoff and landing gross mass, with headwind**

Known: OAT 15 °C
 Pressure altitude SL
 Headwind 10 kt

Solution: 1. Enter chart at known OAT (15 °C).
 2. Move up to known pressure altitude (SL).
 3. Move right to reference line and trace further right following parallel to headwind guide lines.
 4. Reenter chart at known headwind (10 kt) and move up to intersect tracing from above.
 5. From point of intersection move right and read gross mass = 1860 kg.

VTOL - TRAINING TAKEOFF AND LANDING GROSS MASS


1 X ALLISON 250-C20B

OEI - TRAINING RATINGS



ANTI-ICING - OFF

BLEED AIR CONSUMERS - OFF

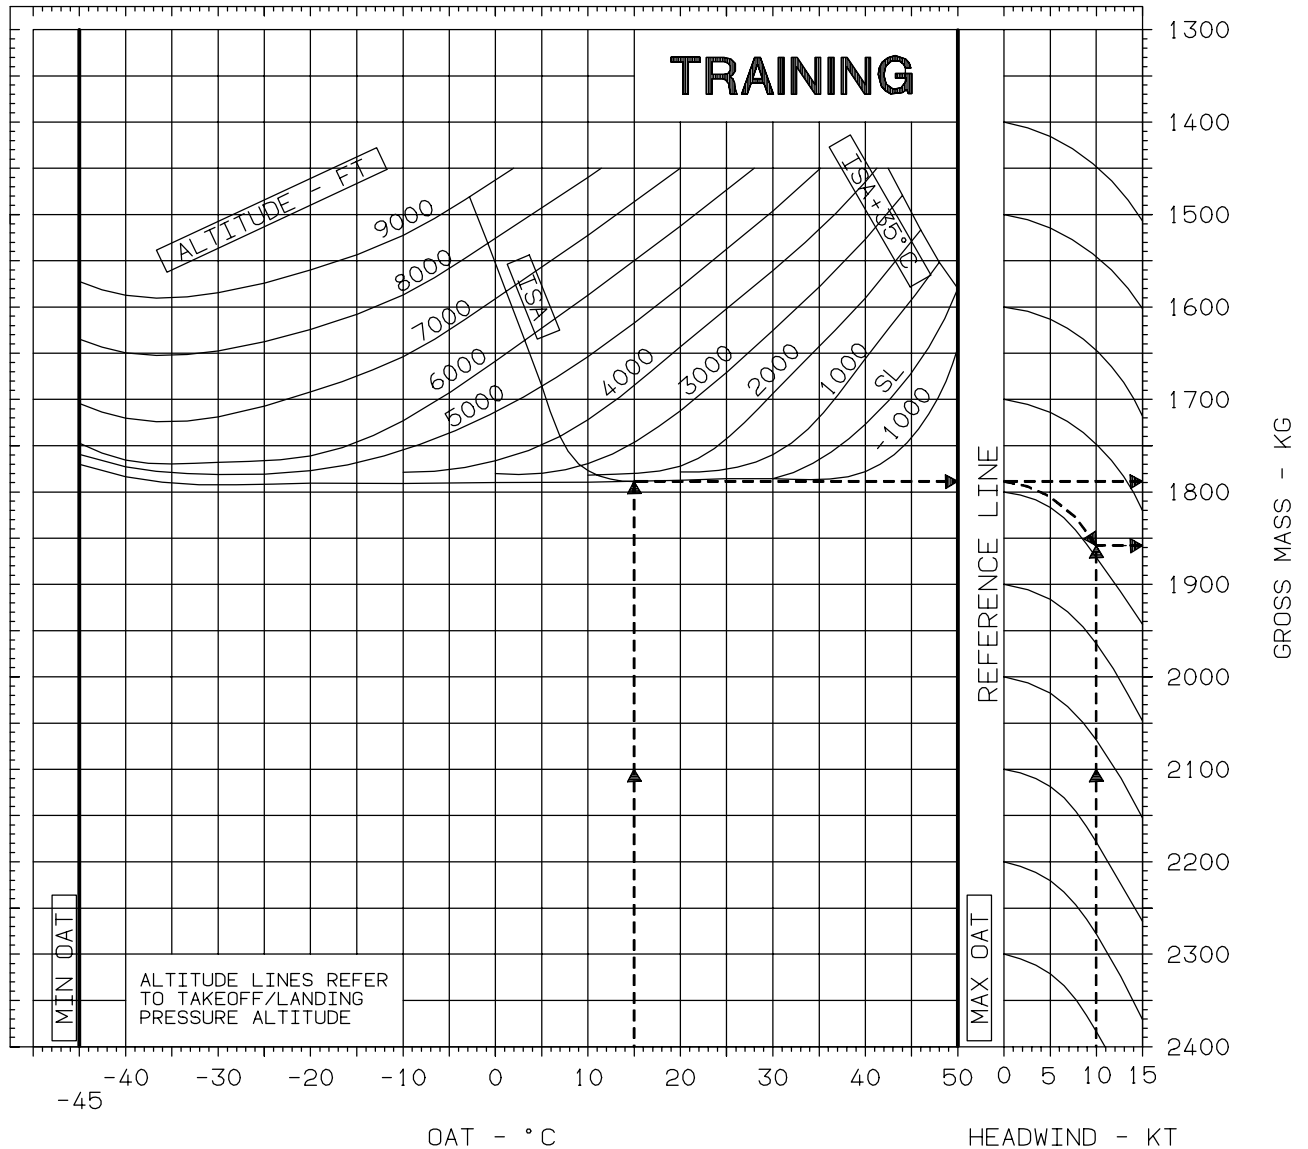

NOTE WIND SPEEDS ARE UNFACTORED.
APPLY FACTOR AS REQUIRED
BY OPERATIONAL RULES.

BO5-11-4AYM, 1

Fig. 20 VTOL - Training Takeoff and Landing Gross Mass

MANUFACTURER'S DATA

Rev. 1

11 - 4 - 37/(11 - 4 - 38 blank)

