IPv6 DNSMasq IPv6 Router Advertisement and DHCP6c settings

IPv6 setup for the router with prefix delegation is a two-step procedure
First you have to get the IPv6 prefix from the upstream router.
The package responsible for this is [Kame's wide-dhcp6](#)

Options see: https://manpages.debian.org/testing/wide-dhcpv6-client/dhcp6c.conf.5.en.html

Note routers with little flash ram (< 8MB) might not have IPv6
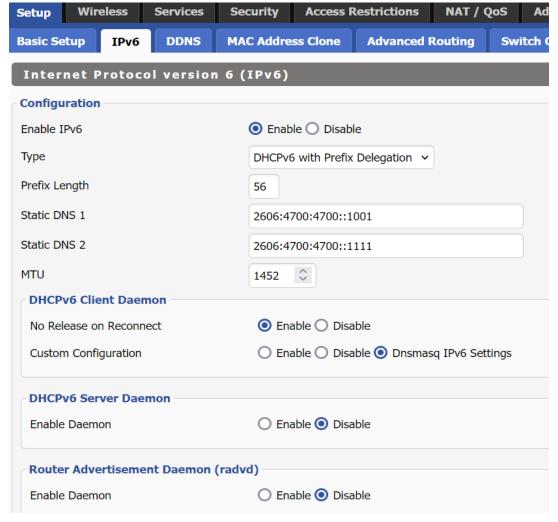
STEP 1

Open the DDWRT GUI and go to Setup > IPv6
1. Set *Type* : *DHCPv6 with Prefix Delegation*
2. Set *Prefix Length* at the prefix length the ISP or the upstream router will handout, usually 48 or 56.
   If you only got a 64 prefix length delegated, then you can only use one subnet. That is not ideal, there are ways to deal with this (relayd) but this is outside the scope of this guide
3. If desired set IPv6 DNS servers in *Static DNS 1* and *2.*
4. Consider *Enabling No Release on Reconnect* to keep the same prefix.
5. Set *Custom Configuration DNSMasq IPv6 settings* to use DNSMasq settings from step 2.
6. Save and Apply
7. If desired check settings with: *cat /tmp/dhcp6c.conf*
   These settings can function as a blue print if you want custom settings , which can be useful if you want e.g. br0 to have a smaller prefix (=subnet mask) than /64 (e.g. /60), necessary if you want to delegate a prefix to a downstream router via dhcp6 server. You can do this by altering the sla-len.
   The sla-len = desired prefix - Prefix Length. So if the Prefix Length (given by upstream) is 56 and you want a prefix for br0 of 64 it is then the sla-len is 64 -56 = **8**

Setup	Wireless	Services	Security	Access Restrictions	NAT / QoS	Ad

Basic Setup	IPv6	DDNS	MAC Address Clone	Advanced Routing	Switch C

Internet Protocol version 6 (IPv6)

Configuration

Enable IPv6	⦿ Enable ○ Disable
Type	DHCPv6 with Prefix Delegation ⌄
Prefix Length	56
Static DNS 1	2606:4700:4700::1001
Static DNS 2	2606:4700:4700::1111
MTU	1452 ⌄

DHCPv6 Client Daemon

No Release on Reconnect	⦿ Enable ○ Disable
Custom Configuration	○ Enable ○ Disable ⦿ Dnsmasq IPv6 Settings

DHCPv6 Server Daemon

Enable Daemon	○ Enable ⦿ Disable

Router Advertisement Daemon (radvd)

Enable Daemon	○ Enable ⦿ Disable

STEP 2

RADVD can be used to advertise IPv6 settings (Router Advertisement) to your LAN clients but it is rather rudimentary, DNSMasq has much more possibilities and is the preferred way to do this.
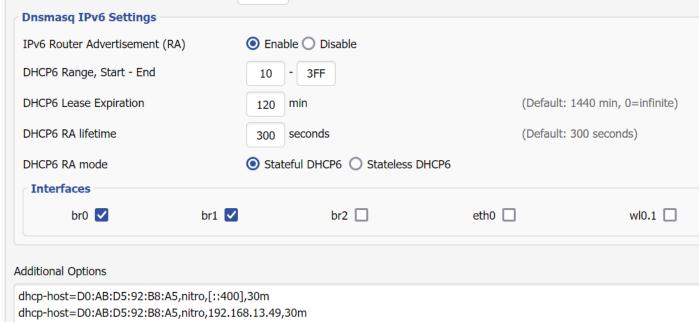So we are using DNSMasq to advertise IPv6 settings to your LAN clients.
Open the DDWRT GUI and go to Services > Services

1. Under DNSMasq IPv6 Settings, *Enable IPv6 Router Advertisement (RA)*
2. Set *Lease Expiration* to your desired value in minutes (minimum is 2, default is 1440 minutes, if you want infinite lease set 0)
3. Choose *DHCP6 RA mode*, *Stateful* or *Stateless*.
   Stateful means both SLAAC and DHCPv6 so that you can set a static IPv6 lease, not all clients support static leases e.g. Android so they will be SLAAC only (strangely enough it translates to DNSMasq option slaac), Stateless means SLAAC only (which translates to DNSMasq ra-stateless).
4. *Check* which *Interfaces* you want to handout IPv6 to your LAN clients.
   (These interfaces will also be used by wide-dhcp6 from step 1 and will automatically get a prefix with length of /64).
5. If desired check final settings with: *cat /tmp/dnsmasq.conf*
6. ==Make sure to reboot the router after you are done or press Apply on Basic Setup page==

Dnsmasq IPv6 Settings

IPv6 Router Advertisement (RA)	⦿ Enable ◯ Disable
DHCP6 Range, Start - End	10 - 3FF
DHCP6 Lease Expiration	120 min (Default: 1440 min, 0=infinite)
DHCP6 RA lifetime	300 seconds (Default: 300 seconds)
DHCP6 RA mode	⦿ Stateful DHCP6 ◯ Stateless DHCP6

Interfaces

br0 ☑	br1 ☑	br2 ☐	eth0 ☐	wl0.1 ☐

Additional Options

```
dhcp-host=D0:AB:D5:92:B8:A5,nitro,[::400],30m
dhcp-host=D0:AB:D5:92:B8:A5,nitro,192.168.13.49,30m
```

For an in depth explanation of DNSMasq options see : https://thekelleys.org.uk/dnsmasq/docs/dnsmasq-man.html)

Static IPv6 lease

Static IPv6 lease, add in DNSMasq additional options:
dhcp-host=D0:AB:F5:51:A1:33,nitro,[::400],30m
This sets an ::400 IPv6 address with a 30 minute lease time, note the brackets around the IPv6 address.

Note: This works only when Stateful DHCP6 is chosen and on OS's which support it so **no Android**

Thanks

Thanks to everyone who tested and made suggestions, especially thanks to @Mile-Lile for his valuable suggestions and test work.

Disclaimer

These are just my personal notes so not very well redacted, take it for what it is worth.

I am not in the business of writing guides and wikis so feel free to write a proper IPv6 wiki.
I am also not an expert on IPv6, so do not ask for my help on IPv6 but post your questions in the Advanced networking forum.

Multicast and IPv6
IPv6 relies on multicasting (ref: https://www.catchpoint.com/benefits-of-ipv6/ipv6-multicast-address)
For IPv6 Multicast should be enabled automatically

References:
https://forum.dd-wrt.com/phpBB2/viewtopic.php?t=337126
https://github.com/egc112/ddwrt/blob/main/IPv6%20DNSMasq%20IPv6%20RA.pdf
https://ipv6int.net/software/wide_dhcpv6.html
https://manpages.debian.org/testing/wide-dhcpv6-client/dhcp6c.conf.5.en.html
https://openwrt.org/docs/guide-user/network/ipv6/dhcp6c
https://sourceforge.net/projects/wide-dhcpv6/
https://thekelleys.org.uk/dnsmasq/docs/dnsmasq-man.html)
https://svn.dd-wrt.com/ticket/4032
RA modes: https://rakhesh.com/linux-bsd/brief-note-on-ipv6-flags-and-dnsmasq-modes/
Multicast and IPv6
IPv6 relies on multicasting (ref: https://www.catchpoint.com/benefits-of-ipv6/ipv6-multicast-address)
For IPv6 Multicast should be enabled automatically

To come
Possible things to come in a future upgrade:
DHCP6 RA mode: *ra-only*
Further down the road *sla-len* per interface

Addendum

DNSMasq static leases and option 6

dhcp-host=D0:AB:D5:92:B8:A5,nitro,[::400],30m   # static IPv6 lease of ::400, note the [ ]
dhcp-host=D0:AB:D5:92:B8:A5,nitro,192.168.13.49,30m

dhcp-option=option6:dns-server,[2606:4700:4700::1001]   # send this ipv6 DNS to LAN instead of routers address
dhcp-option=option:dns-server,1.0.0.1

resolv.conf

search home13
nameserver 192.168.13.1
nameserver ::1

dnsamsq.conf with dns enabled

interface=br0,wl0.1,br1,br2,tun2,br1
resolv-file=/tmp/resolv.dnsmasq
dhcp-range=::10,::3FF,constructor:br0,ra-names,slaac,120m
ra-param=br0,10,300
dhcp-range=::10,::3FF,constructor:br1,ra-names,slaac,120m
ra-param=br1,10,300
enable-ra
quiet-dhcp6
quiet-ra
domain=home13
dhcp-leasefile=/tmp/dnsmasq.leases
dhcp-lease-max=114
dhcp-option=br0,3,192.168.13.1
dhcp-option=br1,3,192.168.131.1
dhcp-authoritative
dhcp-range=br0,192.168.13.64,192.168.13.127,255.255.255.0,1440m
dhcp-range=br1,192.168.131.100,192.168.131.149,255.255.255.0,1440m
bogus-priv
conf-file=/etc/rfc6761.conf
clear-on-reload
dhcp-rapid-commit
stop-dns-rebind
dhcp-option=252,"\n"
cache-size=1500
dns-forward-max=150

dhcp6c.conf

With requested prefix of 60 the sla-len=4 for a 64 subnet mask.
If you want a lower subnet e.g. 62 for br0 in case you want to run a dhpc6 server to handout a prefix on downstream routers than lower sla-len for br0
interface vlan2 {
 send ia-pd 0;
 send rapid-commit;
 request domain-name-servers;
 script "/sbin/dhcp6c-state";
};
id-assoc pd 0 {
prefix ::/60 infinity;
 prefix-interface br0 {
  sla-id 0;
  sla-len 4;

```
 };
 prefix-interface br1 {
  sla-id 1;
  sla-len 4;
 };
};
id-assoc na 0 { };
```