


 PT. MNA SERANG	WORKING INSTRUCTION	WI/MNASRG-E&I-19-120	
		Dept.	ENGINEERING
	EMERSON TANK HUB CHECKING	Section	E&I
		Revision	0
		Effective Date	01-Sep-19
		Page	1 of 1


Memeriksa Tank Hub / Checking Tank hub

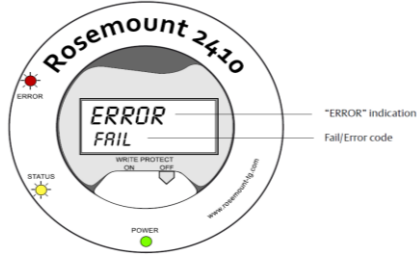

Code	Error
RAM	Ram failure
FPROM	FPROM
HREG	Holding register error
OMEM	Other memory error
SYS	System error
DPLY	Display error
AUX	AUX
FF ST	FF stack
TBUS	Tank Bus
HOST C	Host
D MNGR	Data manager
CFG	Invalid Configuration
SW	Software

Periksa indikasi error pada Display tank Hub (*Check the error indication on Tank hub Display*)

Sesuaikan dengan kode error yang adaPeriksa indikasi LED pada Display tank Hub (*Match it up with existing error code*)

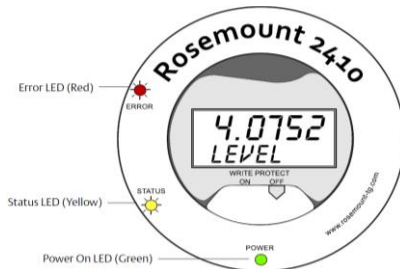


LED Type	Color	Description
Power On	Green	The green LED indicates that the 2410 is powered on.
Status	Yellow	The yellow Status LED blinks at a constant rate of one flash every other second in normal operation to indicate the 2410 software is running
Error	Red	The red Error LED is turned off in normal operation. If an error occurs, the Error LED flashes a sequence that corresponds to a certain error code, see "LED" on page 70.

Error type	Status LED	Error LED	Description
Hardware	Blinking	Blinking	Status and Error are blinking simultaneously
Checksum	Blinking	Blinking	Status and Error are toggling
Other	On	Blinking	Unknown error

Periksa indikasi error pada LED tank Hub (*Check the error indication on Tank hub LED*)

Sesuaikan dengan kode error yang adaPeriksa indikasi LED pada Display tank Hub (*Match it up with existing error code*)

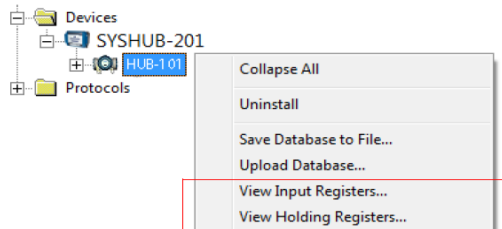

Name	Register	Value	Unit
TankbusDevDiagnosticsDev1_NoOfOpen...	1330	1	#
TankbusDevDiagnosticsDev1_NoOfOpenF...	1332	0	#
TankbusDevDiagnosticsDev1_NoOfReads	1334	1327902	#
TankbusDevDiagnosticsDev1_NoOfReadE...	1336	0	#
TankbusDevDiagnosticsDev1_NoOfReadFi...	1338	0	#
TankbusDevDiagnosticsDev1_AvgReadTim	1340	128	ms
TankbusDevDiagnosticsDev1_NoOfWrites	1342	1327873	#
TankbusDevDiagnosticsDev1_NoOfWriteE...	1344	0	#
TankbusDevDiagnosticsDev1_NoOfWriteT...	1346	0	#
TankbusDevDiagnosticsDev1_AvgWriteTim	1348	304	ms

klik kanan pada ikon system hub, pilih view holding register (*Right click on the tank hub Icon, choose view holding register*)

Pilih "all", lalu pilih "read". Cocokkan dengan database register yang dicatat (*Choose "all", then choose "read". Match it up with noted register*)