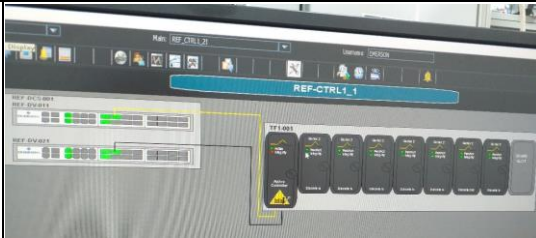


 PT. MNA SERANG	WORKING INSTRUCTION	WI/MNASRG-E&I-19-205	
	DELTA V DCS MEDIA CONVERTER RM	Dept.	ENGINEERING
		Section	E&I
		Revision	0
		Effective Date	01-Sep-19
		Page	1 of 2

Identifikasi / Identification	
	
Layar berwarna hitam kosong (The Screen Turns Pitch Black)	LED Error dari PSU menyala (Error LED from PSU Lit)
Reset Modul / Modul Reset	
	
Turunkan breaker AC (Lower the AC Breaker.)	Periksa Nominal Tegangan. Pastikan tidak ada tegangan mengalir (Check The Voltage Nominal, make sure no Voltage Induced)
	
Longgarkan baut yang mengunci power supply (Loosen the Bolt which connected to PSU.)	Tekan push button hitam pada bagian belakang, dan lepaskan power supply (Press the black push button on the back side and unplug the power supply)
	
Pasang power supply baru. Pastikan bagian belakang PSU yang menghubungkan PSU ke din-rail masih bekerja dengan baik (Install the new Power Supply. Make sure the Backside which connect the PSU to the din-rail is still working properly.)	Sambungkan kembali kabel power & kencangkan baut yang mengunci power supply (Re-connect the power cable & Tighten the Bolt which connected to PSU.)
	
Naikkan breaker AC (Push the AC Breaker.)	Pastikan sistem sudah kembali bekerja (Make sure that the System already back Online)