




Part Number : [473521001](#)
Product Description : 1.10mm Pitch microSD Card Connector, Push-Push Type, with VSS (Supply Voltage Ground) Detect Switch, Lead-Free
Series Number : 47352
Status : Active
Product Category : Memory / SIM Card Connectors

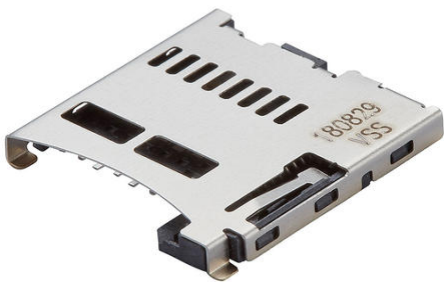

Documents & Resources

Drawings

[473521001_sd.pdf](#)
[PK-47352-101-001.pdf](#)

3D Models and Design Files

[STEP AP242](#)
[SOLIDWORKS](#)
[Creo](#)
[Symbol and Footprint \(Multi-Format\)](#)

Specifications

[PS-47334-001-001.pdf](#)
[TS-47334-001-008.pdf](#)

Product Environment Compliance

Compliance

GADSL/IMDS	Not Relevant
China RoHS	 per SJ/T 11365-2006
EU ELV	Not Relevant
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2025)4165-DC (25 June 2025)
EU RoHS	Compliant per EU 2015/863

[Compliance Statements](#)

- EU RoHS
- REACH SVHC
- Low-Halogen

Industry Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

Substances of Interest

- PFAS

EU RoHS Certificate of Compliance

Additional Product Compliance Information

Part Details

General

Status	Active
Category	Memory / SIM Card Connectors
Series	47352
Description	1.10mm Pitch microSD Card Connector, Push-Push Type, with VSS (Supply Voltage Ground) Detect Switch, Lead-Free
Comments	Push-Push Type; With VSS Detect Switch
Product Name	microSD Card
Style	Push-Push
UPC	822350373722

Agency

CSA	LR19980
UL	E29179

Electrical

Current - Maximum per Contact	0.5A
Shielded	Yes
Voltage - Maximum	100V DC

Physical

Card Detection Switch	Open
Card Entry Location	Front
Circuits (Loaded)	8
Circuits (maximum)	8
Color - Resin	Black
Durability (mating cycles max)	5000
Ejector Button Side	N/A
Flammability	94V-0
Material - Contact	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Material - Shell	Stainless Steel
Net Weight	0.516/g
Packaging Type	Embossed Tape on Reel
PCB Locator	No
PCB Retention	Yes
Pitch - Mating Interface	1.10mm
Pitch - Termination Interface	1.10mm
Temperature Range - Operating	-40° to +85°C
Termination Interface Style	Surface Mount

Solder Process Data

Max-Duration	10
Lead-Free Process Capability	REFLOW
Max-Cycle	2
Max-Temp	250

Mates With / Use With

Use with Part(s)

Description	Part Number
Use With	microSD Card