

SRI



南宁宇立仪器有限公司
SUNRISE INSTRUMENTS www.srisensor.com

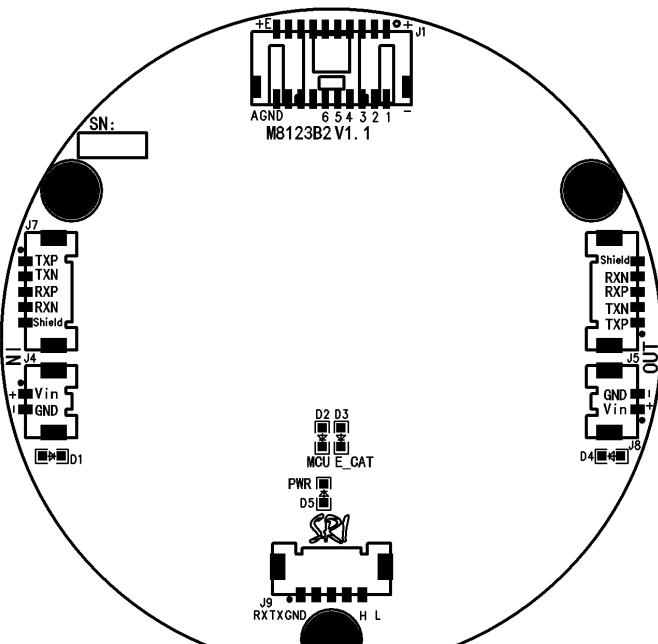
数采/DAQ Card

M8123B2

接头定义/ Connector Definition

版本/Rev. V1.0
日期/Date 2021-4-9

接头型号 Connector			线缆名称 Cable
Molex			20 芯线缆/1000002124 20 core cable 1000002124
插座	J1	501571-2007	
插头	J1	501189-2010	
触芯	J1	501193-3000	



引脚号 PIN #	功能定义 Definition	线的颜色 Line Color	备注 Note (Twisted Pair)
1	CH1+	白 (棕) / White (Brown)	白棕双绞/ White & Brown
2	CH1-	棕 (白) / Brown (White)	
3	CH2+	橙 (棕) / Orange (Brown)	橙棕双绞/ Orange & Brown
4	CH2-	棕 (橙) / Brown (Orange)	
5	CH3+	蓝 (棕) / Blue (Brown)	蓝棕双绞/ Blue & Brown
6	CH3-	棕 (蓝) / Brown (Blue)	
7	CH4+	黄 (棕) / Yellow (Brown)	黄棕双绞/ Yellow & Brown
8	CH4-	棕 (黄) / Brown (Yellow)	
9	CH5+	红 (棕) / Red (Brown)	红棕双绞/ Red & Brown
10	CH5-	棕 (红) / Brown (Red)	
11	CH6+	白 (黑) / White (Black)	白黑双绞/ White & Black
12	CH6-	黑 (白) / Black (White)	
13			
14			
15			
16			
17			
18			
19	+E	红 (黑) / Red (Black)	红黑双绞/ Red & Black
20	GND	黑 (红) / (Black) Red	
Shield		屏蔽线/ Shielded Line	

注: 触芯 501193-3000 的压接工具: 63819-1500