


RÉPARTITION DE CHARGE AVEC HAPROXY

configuration des server web	1
server Web1	2
server Web2	2
Configuration de HProxy	3
test du service	5

schema du service haproxy

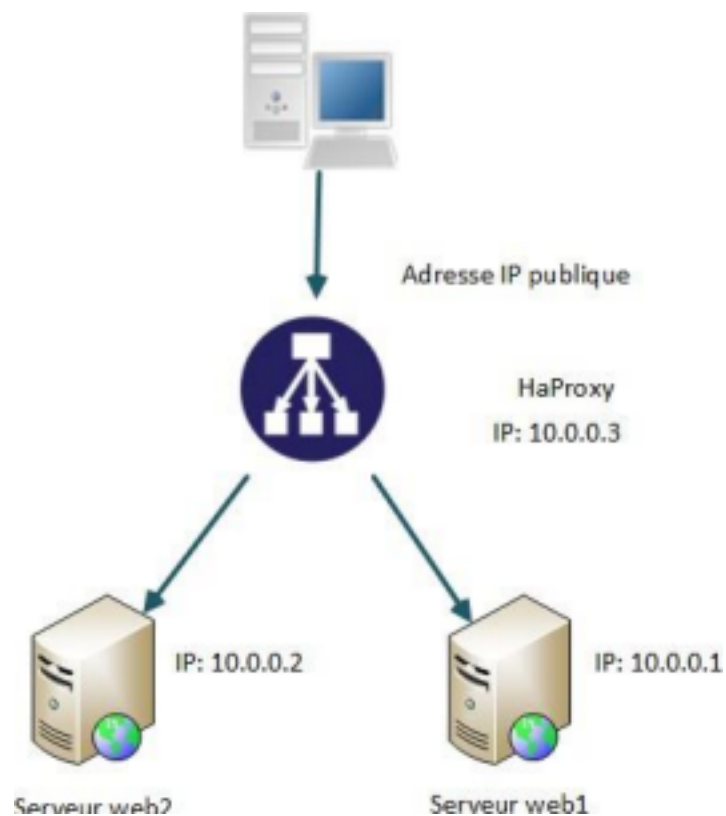

1

configuration des server web

service a installer apache2

server Web1


```
GNU nano 8.4 /etc/network/interfaces
# This file describes the network interfaces available on your system
# and how to activate them. For more information, see interfaces(5).

source /etc/network/interfaces.d/*

# The loopback network interface
auto lo
iface lo inet loopback

# The primary network interface
allow-hotplug enp0s3
auto enp0s3
iface enp0s3 inet static
    address 10.0.0.1/24
```

configurer la carte réseau en interne

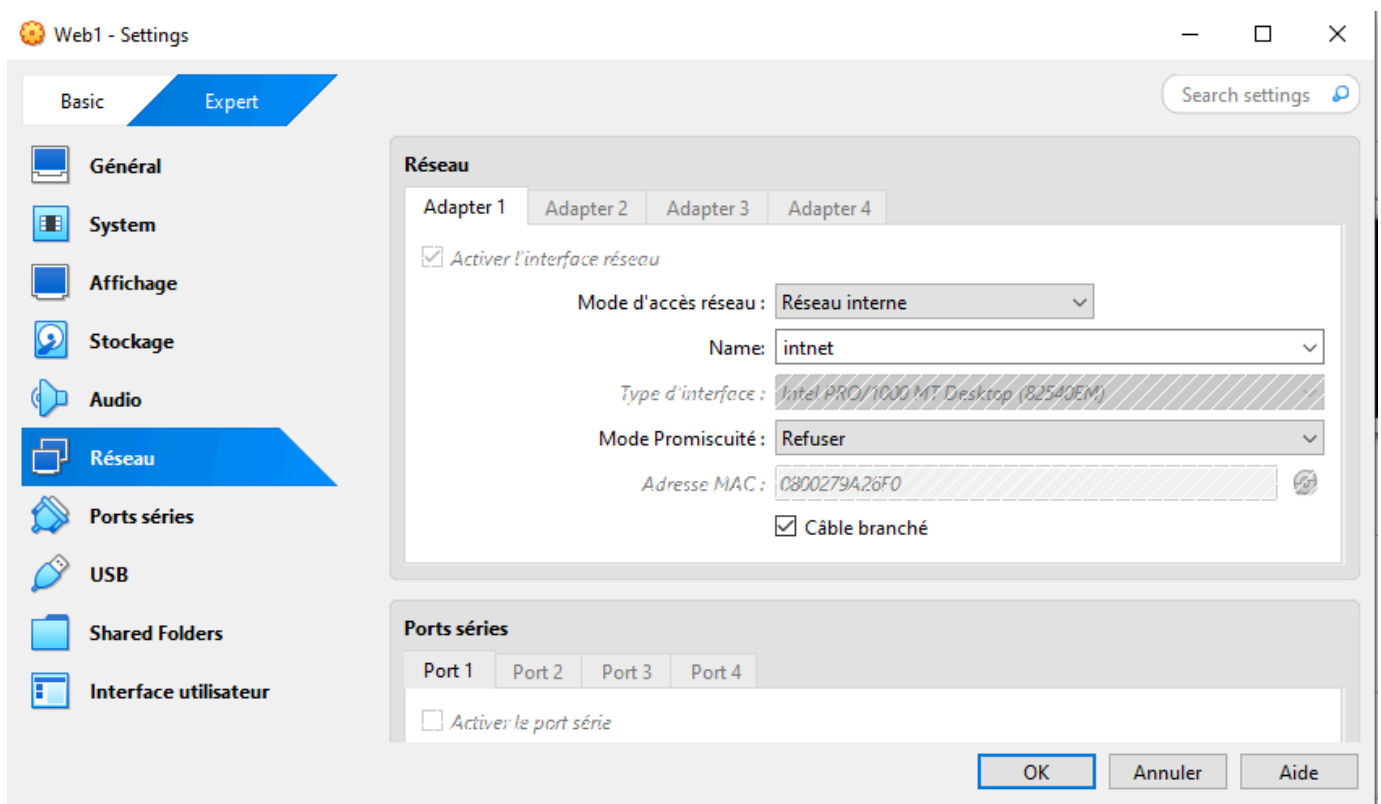

server Web2

service a installer apache2

```

GNU nano 8.4 /etc/network/interfaces
# This file describes the network interfaces available on your system
# and how to activate them. For more information, see interfaces(5).


source /etc/network/interfaces.d/*

# The loopback network interface
auto lo
iface lo inet loopback

# The primary network interface
allow-hotplug enp0s3
auto enp0s3
iface enp0s3 inet static
    address 10.0.0.2/24



```

configurer la carte réseau en interne

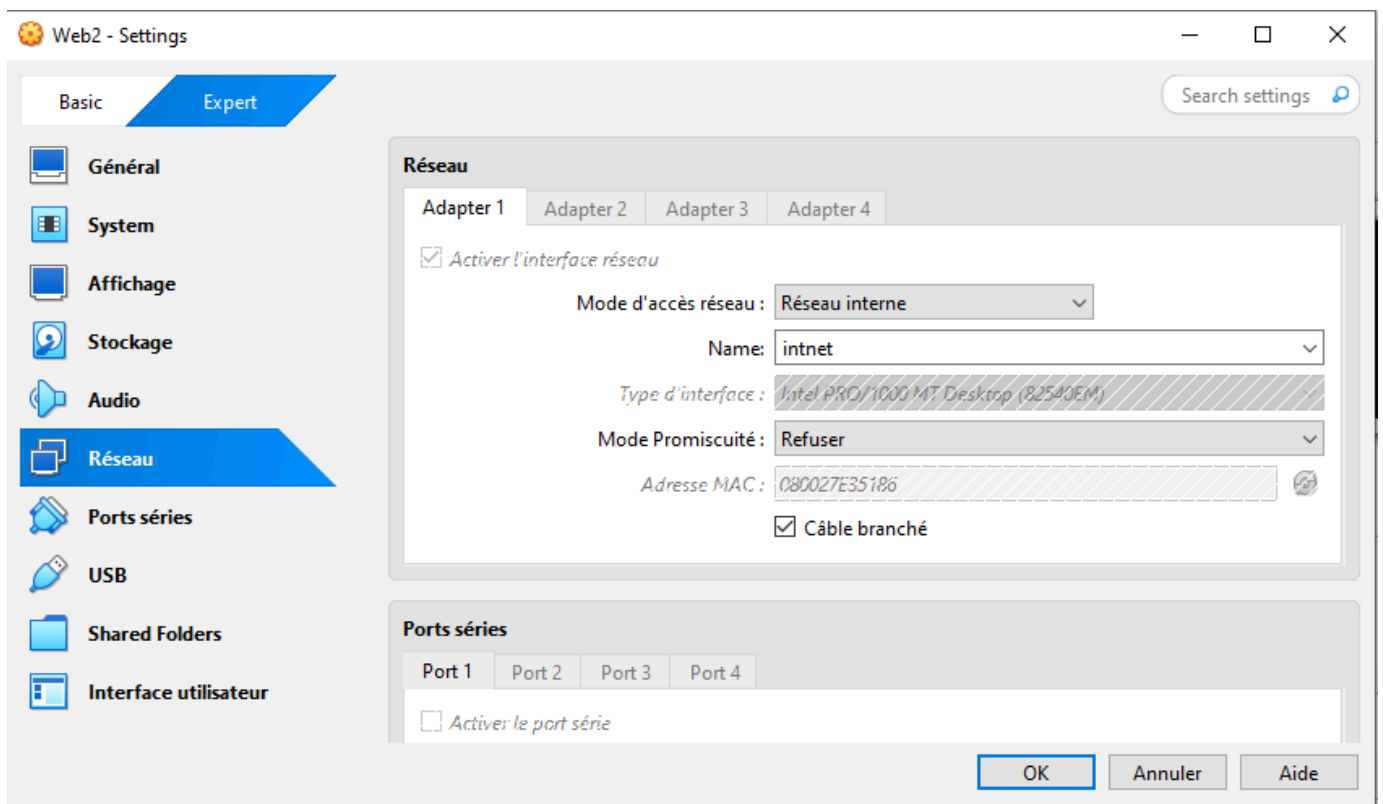

Configuration de HAproxy

service a installer HAproxy, apache2
 avant de configurer les fichier de conf du server HAproxy ne pas oublier d'ajouter une carte
 réseau en interne et une en accès par pont

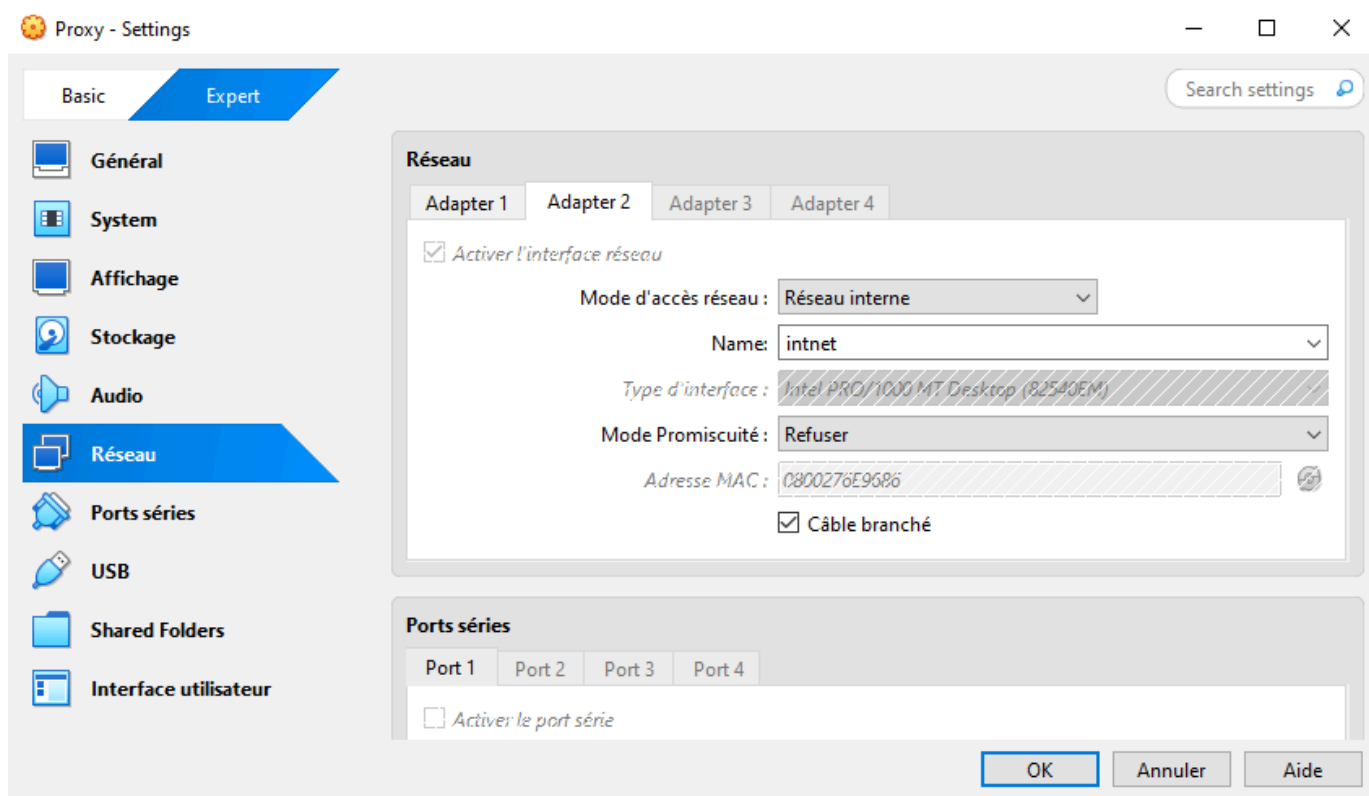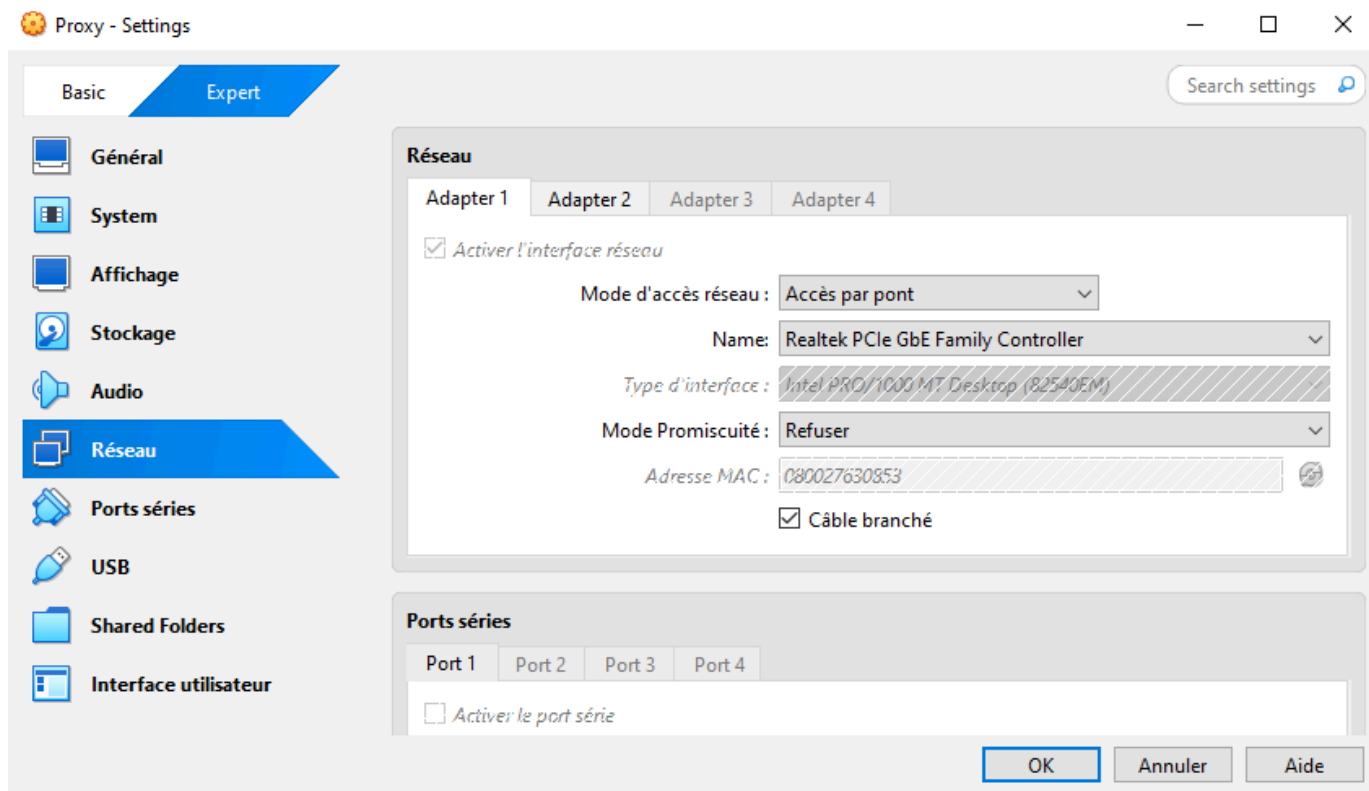

Sa configuration se fait par l'intermédiaire d'un fichier texte qui se situe dans **/etc/haproxy/haproxy.cfg** Voici un exemple de fichier de configuration :

```
frontend proxypublic
  bind 172.17.219.119:80
  default_backend fermeweb
backend fermeweb
  balance roundrobin
  option httpclose
  option httpchk HEAD / HTTP/1.0
  server web1 10.0.0.1:80 check weight 100
  server web2 10.0.0.2:80 check weight 50
  stats uri / statsHaproxy
  stats auth admin:admin
```

weight 100 et weight 50 permet de choisir la priorité de stockage des server

test du service

Tester sur internet avec l’IP

login: admin

password: admin

← → ↺

Non sécurisé 172.17.219.119

Tous les favoris

Applications | Google Drive | mail | EcoleDirecte | Google

HAProxy version 3.0.11-1, released 2025/06/03

Statistics Report for pid 1562

> General process information

pid = 1562 (process #1, nbproc = 1, nbthread = 1)

uptime = 0d 0h49m55s; warnings = 0

system limits: memmax = unlimited; ulimit-n = 524288

maxsock = 524288; maxconn = 262119; reached = 0; maxpipes = 0

current conns = 1; current pipes = 0/0; conn rate = 1/sec; bit rate = 0.271 kbps

Running tasks: 0/17 (0 nice'd); idle = 100 %

active UP

active UP, going down

active DOWN, going up

active or backup DOWN

active or backup DOWN for maintenance (MAINT)

active or backup SOFT STOPPED for maintenance

backup UP

backup UP, going down

backup DOWN, going up

not checked

Display option:

Scope:

Hide 'DOWN' servers

Disable refresh

Refresh now

CSV export

JSON export (schema)

External resources:

Primary site

Updates (v3.0)

Online manual

Note: "NOLB"/"DRAIN" = UP with load-balancing disabled.

proxypublic

	Queue			Session rate			Sessions					Bytes		Denied		Errors			Warnings		Server										
	Cur	Max	Limit	Cur	Max	Limit	Cur	Max	Limit	Total	LbTot	Last	In	Out	Req	Resp	Req	Conn	Resp	Retr	Redis	Status	LastChk	Wght	Act	Bok	Chk	Dwn	Dwntme	Thrtle	
Frontend				1	2	-	1	3		262 119	27		23 999	962 320	0	0	24					OPEN									

fermeweb

	Queue			Session rate			Sessions					Bytes		Denied		Errors			Warnings		Server									
	Cur	Max	Limit	Cur	Max	Limit	Cur	Max	Limit	Total	LbTot	Last	In	Out	Req	Resp	Req	Conn	Resp	Retr	Redis	Status	LastChk	Wght	Act	Bok	Chk	Dwn	Dwntme	Thrtle
☐	web1	0	0	-	0	0	0	0	0	-	0	0	?	0	0	0	0	0	0	0	0	49m55s UP	L7OK/200 in 1ms	100/100	Y	-	0	0	0s	
☐	web2	0	0	-	0	0	0	0	0	-	0	0	?	0	0	0	0	0	0	0	0	49m55s UP	L7OK/200 in 2ms	50/50	Y	-	1	0	0s	
Backend	0	0		1	1		1	1		26 212	49	0	0s	23 999	962 320	0	0	0	0	0	0	49m55s UP		150/150	2	0	0	0	0s	

Choose the action to perform on the checked servers :

Apply