
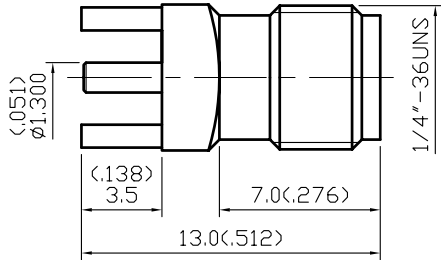
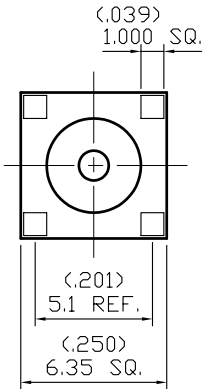
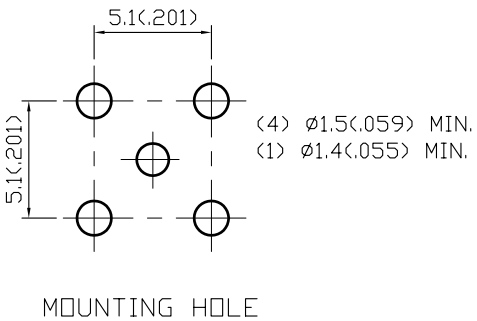


NO	DESCRIPTION	DATE
	BACKGROUND FORMAT UPDATED	06.25.02



NOTES: UNLESS OTHERWISE SPECIFIED

1. BODIES:BRASS PER JIS-C3604
2. CENTER CONTACT:BERYLLIUM COPPER PER ASTM B196 UNS C17300
3. INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710
4. CONNECTOR INTERFACE PER MIL-STD-348A
5. PART TO BE CLEAN AND FREE OF BURRS

3	INSULATION	TEFLON	1	NONE
2	BODY	BRASS	1	GOLD $3\mu$ " MIN.
1	CENTER CONTACT	BERYLLIUM COPPER	1	GOLD $50\mu$ " MIN.
NO	DESCRIPTION	MATERIAL	Q' TY	FINISH

APPROVED by \_\_\_\_\_ DATE: \_\_\_\_\_

DESCRIPTION				SMA STRAIGHT PCB MOUNT JACK RECEPTACLE												
製圖	DRAWN	TOLERANCE		品名	19-46-1/ROHS COMPLIANT (50Ω)			日期	DATE	版次	REV.					
	Elvis	.X	±0.2	TITLE					11.14.95		A-1					
檢圖	CHECK	.XX	±0.1	單位	UNIT	DWG.NO.	19-0145									
	Lewis	.XXX	±0.05		mm(in)											
認定	APPROV	.XXX	±0.05	比例	SCALE											
	Lewis	ANGLE	±5°		4:1											