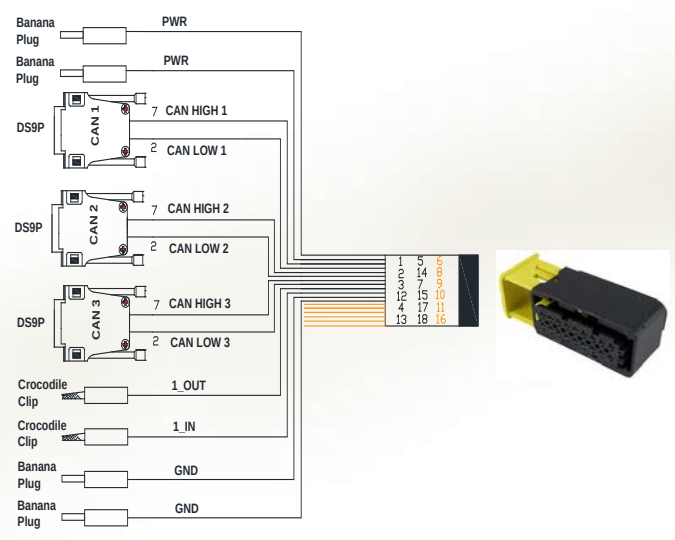


Signal	Colour	Pin Nr \ Connector Site A	Pin Nr \ Connector Site B
PWR	Black [Wire]	1 Tyco	Red Banana Plug
PWR	Black [Wire]	2 Tyco	Red Banana Plug
CAN HIGH 1	Green [Wire]	3 Tyco	7 DS9P
CAN LOW 1	Green [Wire]	12 Tyco	2 DS9P
CAN HIGH 2	Green [Wire]	4 Tyco	7 DS9P
CAN LOW 2	Green [Wire]	13 Tyco	2 DS9P
CAN HIGH 3	Green [Wire]	5 Tyco	7 DS9P
CAN LOW 3	Green [Wire]	14 Tyco	2 DS9P
1_OUT	Black [Wire]	7 Tyco	Red Crocodile Clip
1_IN	Black [Wire]	15 Tyco	Black Crocodile Clip
GND	Black [Wire]	17 Tyco	Black Banana Plug
GND	Black [Wire]	18 Tyco	Black Banana Plug
Flying Wires	Black [Wire]	6 Tyco	OPEN
Flying Wires	Black [Wire]	8 Tyco	OPEN
Flying Wires	Black [Wire]	9 Tyco	OPEN
Flying Wires	Black [Wire]	10 Tyco	OPEN
Flying Wires	Black [Wire]	11 Tyco	OPEN
Flying Wires	Black [Wire]	16 Tyco	OPEN
Materials			
Connector	TE Connectivity	Female	PN 1-1563759-1
Pins	TE Connectivity	Female	PN 1241380-1
Housing	Harting d - sub	Universal	PN 9670090343
Connector	Harting d - sub 9pole	Female	PN 9670094701
Pins	Harting AWG 18-22	Female	PN 09670003676
Banana Plug	SCHÜTZINGER	Red	PN FK15LNI/1/RT
Banana Plug	SCHÜTZINGER	Black	PN FK15LNI/1/SW
Crocodile Clip	SCHÜTZINGER	Red	PN CRCLRE-03
Crocodile Clip	SCHÜTZINGER	Black	PN CRCLBL-03
Wires	LappKabel	Length [m]	3.0 - 4.0
Graphic			
The diagram shows a wiring harness with three CAN bus modules (CAN 1, CAN 2, CAN 3) and various connectors. Each module has two pins for CAN HIGH and CAN LOW. Power (PWR) is connected to two pins, and ground (GND) to two pins. A 1_OUT and 1_IN signal is also shown. To the right, a photograph of a black 18-pin connector with a yellow housing is shown.			
Wire Harness_JLR	Karol Wiśniewski 795 738 507 engineer.wka@gmail.com		Example