
बहु-विषयक क्षेत्रीय रेल प्रशिक्षण संस्थान ,
धनबाद (भूली)

MULTI-DISCIPLINARY ZONAL RAILWAY TRAINING INSTITUTE, DHANBAD (Bhuli)

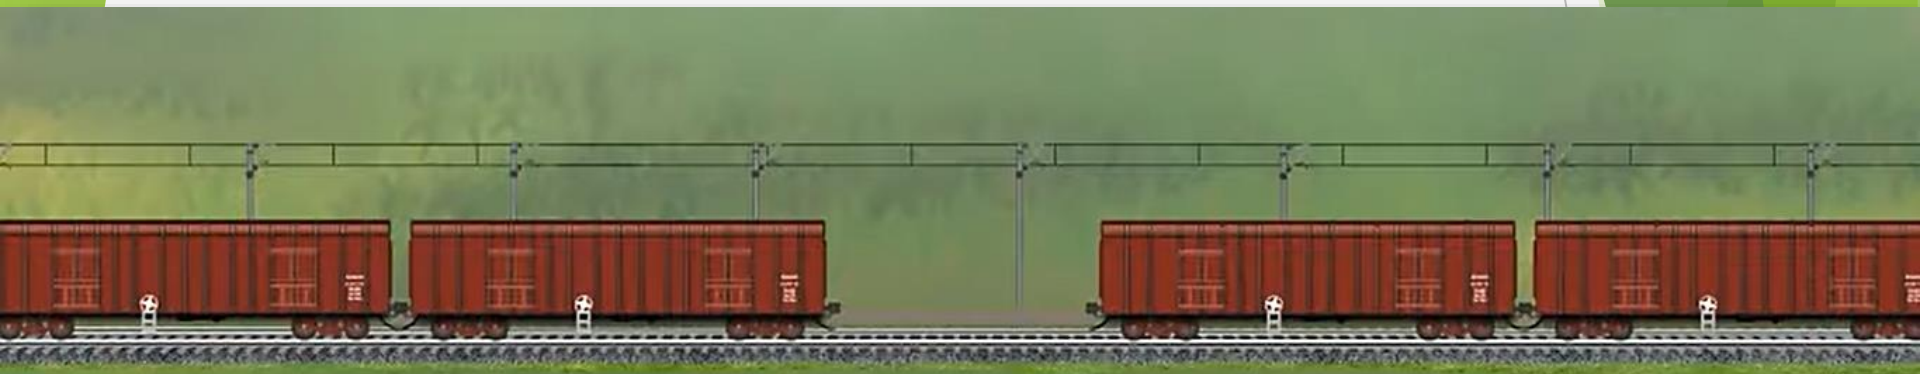

TRAIN PARTING

Dhananjay Kumar Singh
Transportation Instructor
MDZTI / Bhuli

TRAIN PARTING

If any portion of a train should, while in motion, become detached –

- **When any portion of a train in motion becomes detached, the Guard (and the Assistant Guard, if any) on realising the situation shall promptly apply his hand brake and then signal to the Loco Pilot by waving up and down a green signal by day and white light by night.**




TRAIN PARTING

- If the Loco Pilot comes to know that the train has parted, he should put on flasher light and give (—o—o) whistle repeatedly to attract attention of the Guard till acknowledged by Guard (by waving green signal up and down by day and white light by night). Loco Pilot should keep the front portion of the train moving until the rear portion has come to a stand.




TRAIN PARTING

- **the Guard or Guards in the rear portion shall –**
  - i. **do all they can to prevent a collision with the front portion, and**
  - ii. **promptly apply their hand-brakes, where provided and**

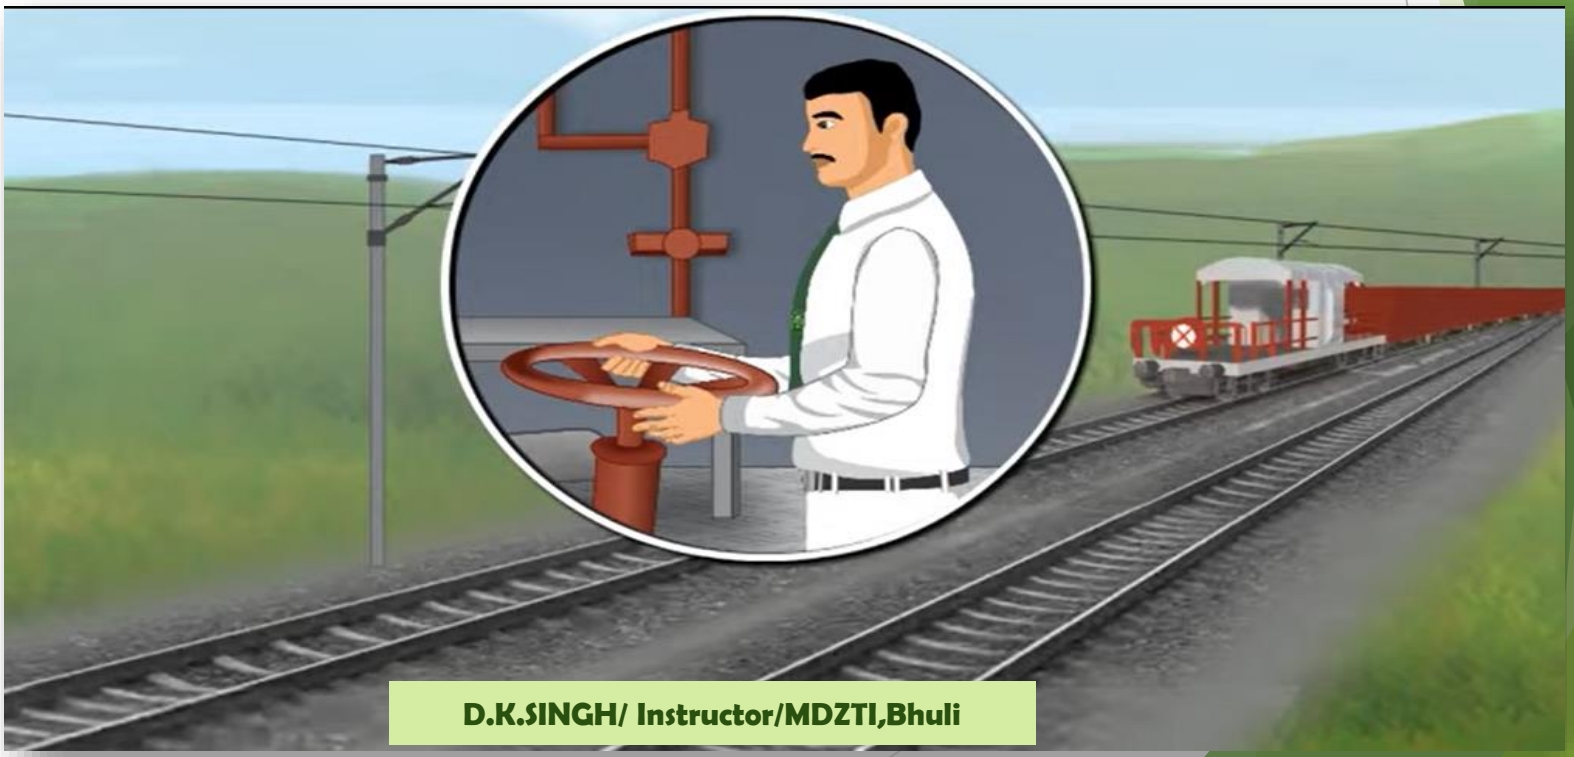

TRAIN PARTING


- If the Loco Pilot finds it necessary to proceed to the station ahead, he must, on approaching the station, give —o—o whistle repeatedly to warn the station staff. The station Master must promptly admit the train into the station on a vacant line, and immediately inform the station in rear that the train has parted and that the rear portion may roll back.

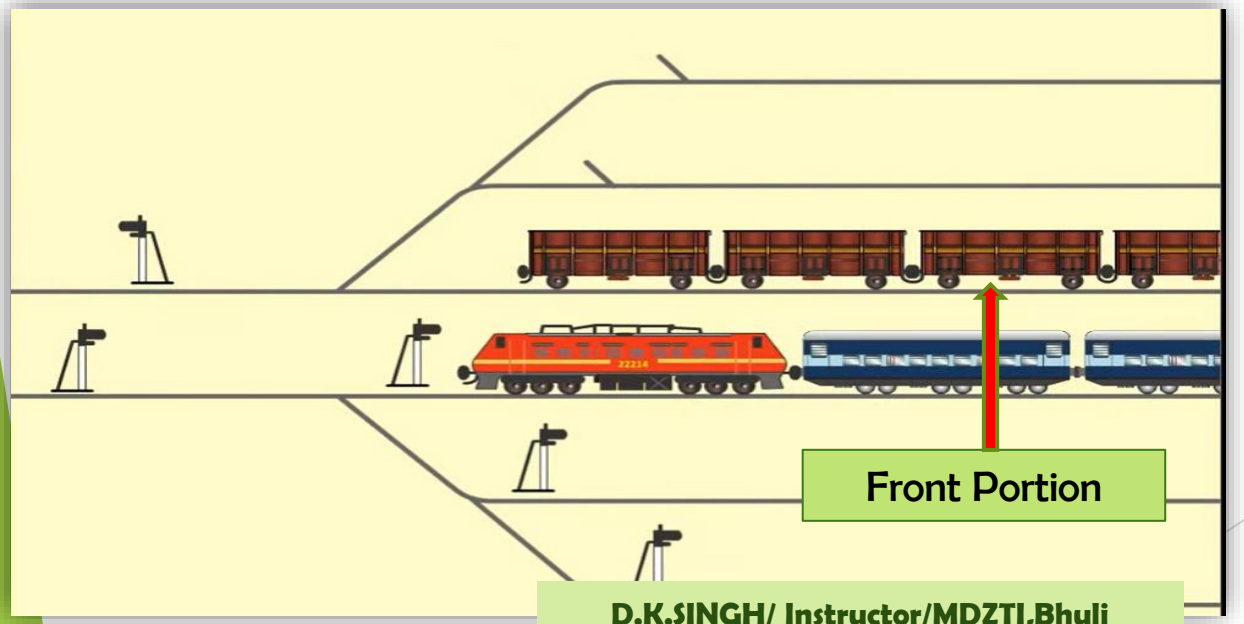




TRAIN PARTING

- **Station Master of both stations will set a clear line immediately when the parted train has arrived, clear line will be set by setting sand hump or derailing switch if available.**

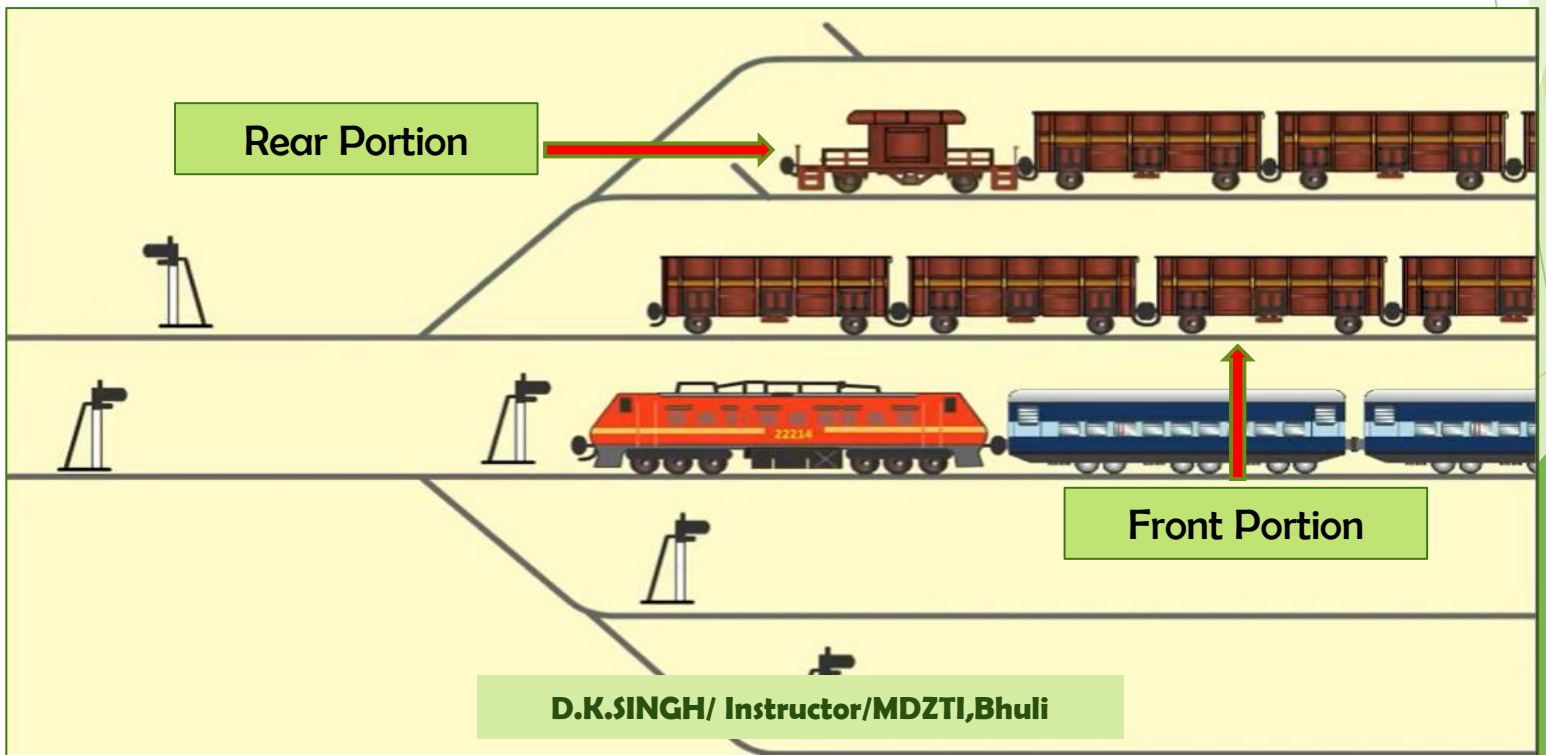

TRAIN PARTING

- **If the front portion already passed the LSS signal the SM will send (6 pause 3) beat to the SM of next station. If however, the rear portion is following the front portion, the Station Master must attract the Guard's attention and endeavour to bring it to a stand by the application of brakes by Guard.**

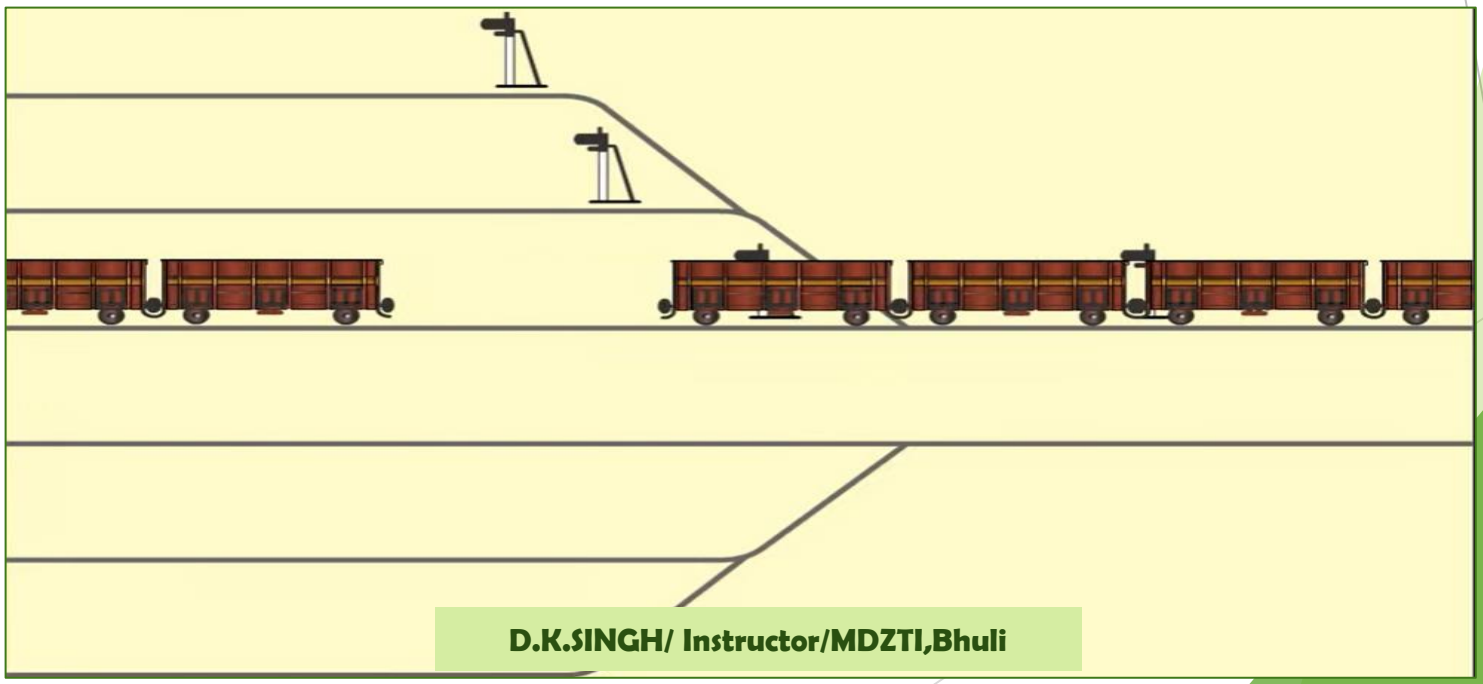


TRAIN PARTING

- **If the Station staff/Gateman notice a train running in two or more portions, they will endeavour to attract the attention of the Loco Pilot and the Guard by waving up and down a green signal by day and white light by night.**




TRAIN PARTING

- **the Loco Pilot of a banking engine, if any, shall bring the rear portion to a stand and sound the prescribed code of whistle (---o---o) to attract the attention of the Loco Pilot in the front portion.**

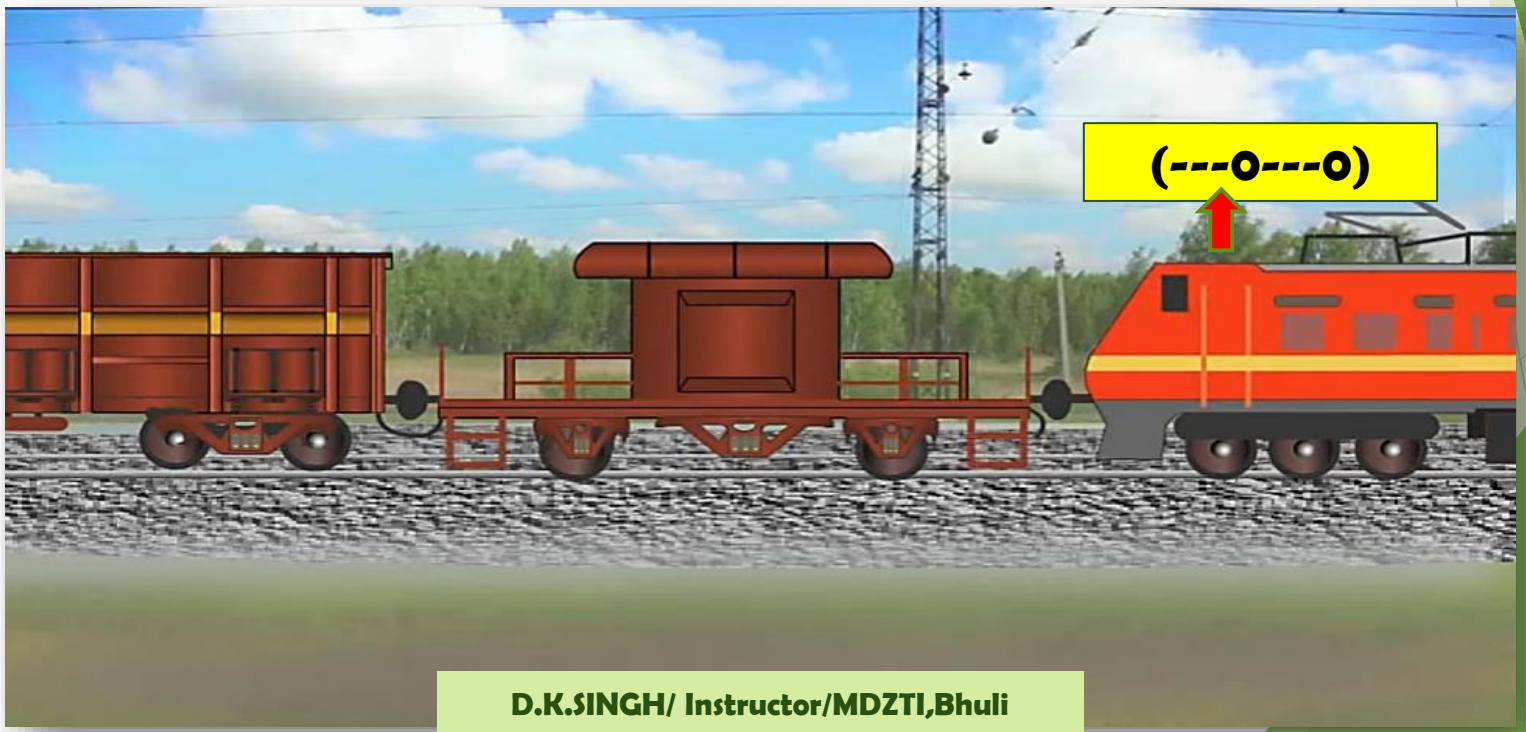

TRAIN PARTING

- As soon as the rear portion of a train has been brought to a stand, the Guard of the train shall protect that portion in accordance with Rule 6.03 both in the front and the rear, and take steps to secure the vehicles in stationary position by pinning down hand brakes and wherever necessary and prescribed by special instructions by use of sprags and chains also.

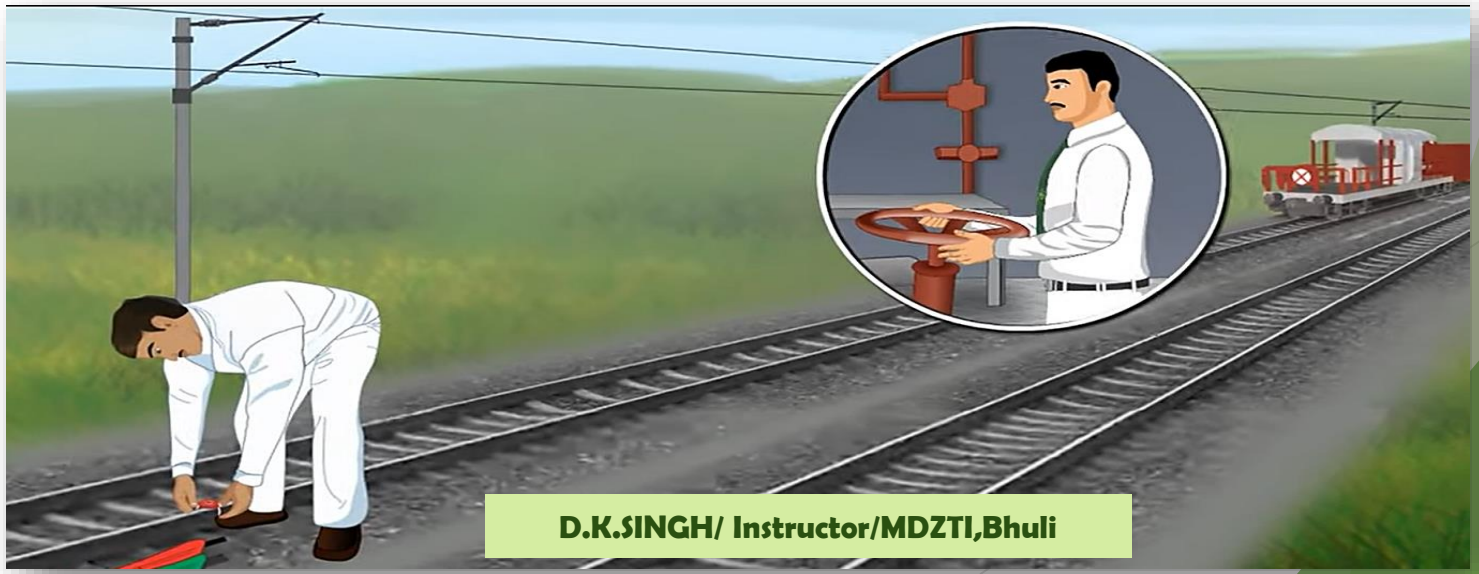

D.K.SINGH/ Instructor/MDZTI,Bhuli


TRAIN PARTING

NOTE:

If there is a banking engine, the Loco Pilot of the banking engine will protect the rear and the Guard will protect in front of the train. If both the portions have come to a stand on a single line section, the train Loco Pilot will depute Assistant Loco Pilot to protect in front and the Guard will protect the rear. On a double line, if the adjacent line is fouled, that line must also be protected in accordance with the rules.


TRAIN PARTING

- **The duties of the Guard specified in this rule shall devolve on the Loco Pilot in the absence of the Guard.**

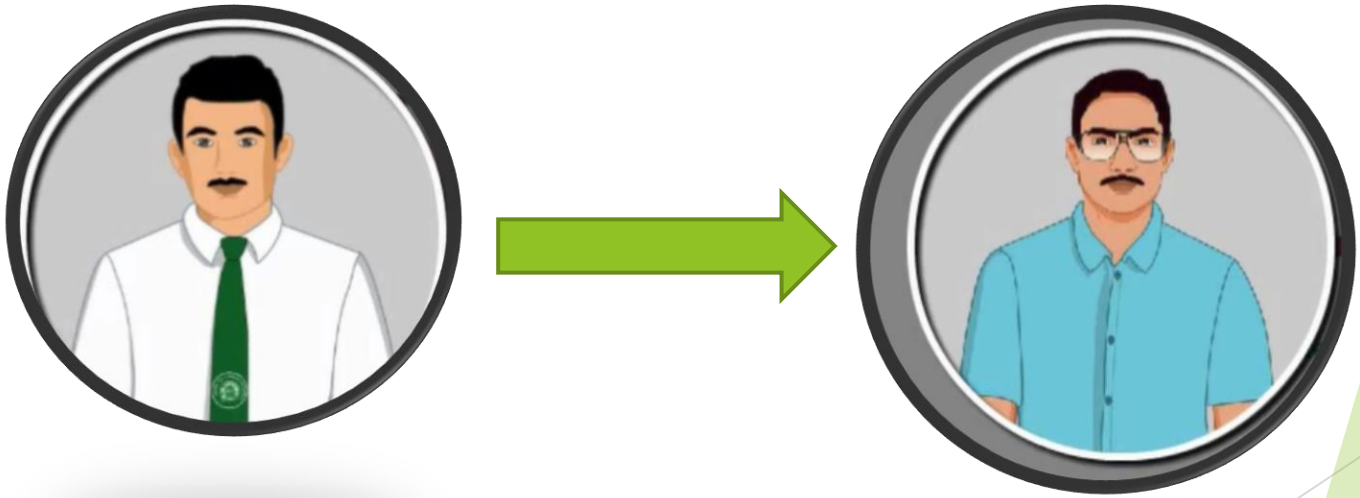

TRAIN PARTING

- **When both portions of a parted train are brought to a stand within sight of each other and it is possible and safe to couple them, the train shall be coupled with due caution under hand signals from the Guard provided necessary precautions have been taken to secure the rear portion.**

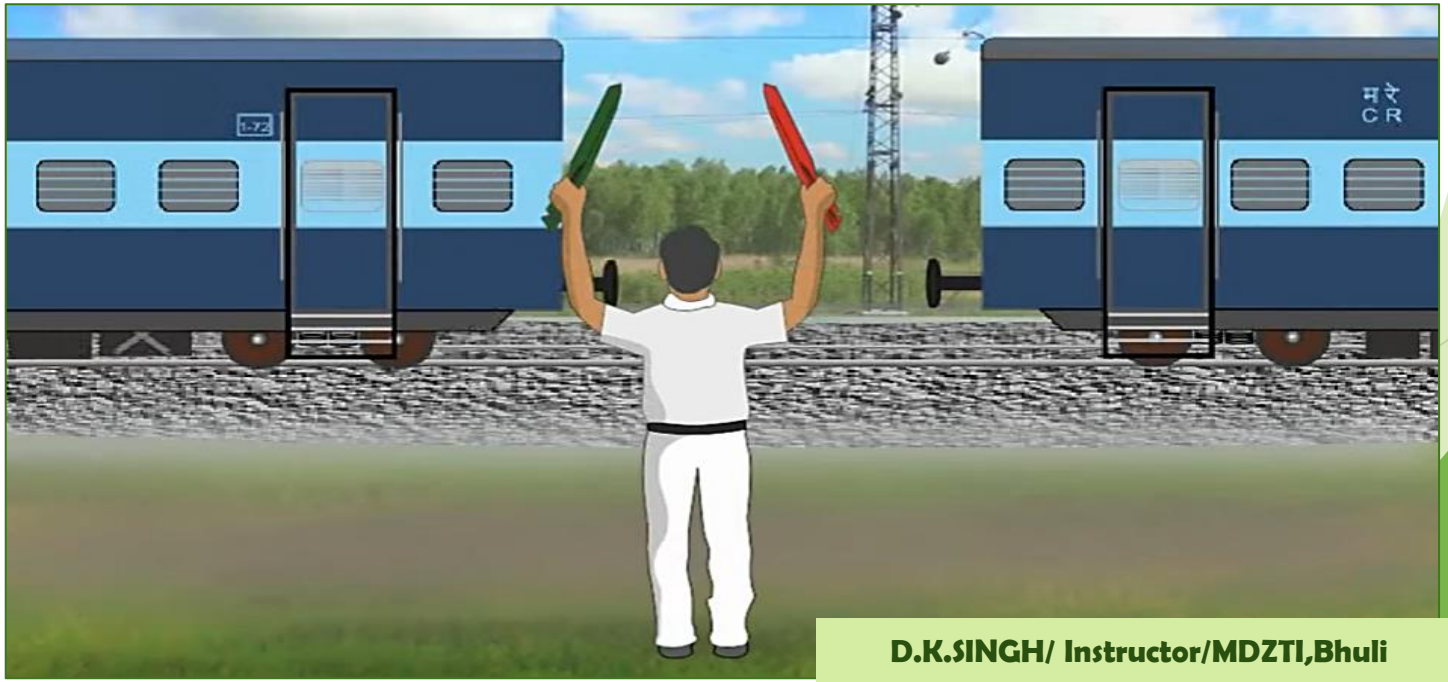

TRAIN PARTING

- **NOTE:**

  Signal by the Guard to the Loco Pilot for backing as mentioned above, should be given only after the rear hose pipe of the rearmost vehicle of the front portion is placed on the dummy and the Loco Pilot shall back only after requisite vacuum is exhibited in the vacuum gauge of the engine.

TRAIN PARTING

NOTE:

i. If it is not safe/possible to attach the two portion, Guard will act as per GR/SR 6.09 (i.e. case of train dividing).

ii. Normally after parting portions of a train not to be taken to two different stations.

TRAIN PARTING

- If the Loco Pilot of the parted train has already reached the block station in advance before he could bring the front portion to a stop, he shall instantly warn the Station Master of the parting as also the railway servant in charge of a cabin, if passed on the way, and shall not give up the tangible authority to proceed, if any, till the block section is cleared of all the vehicles of his train.



TRAIN PARTING

b) **If the two portions of a parted train have been separated to such an extent that they are out of sight of each other –**

i. **The Guard shall protect the rear portion and in front if alone, he shall first put down the necessary fog signals in rear, and then in front, and remain in front where the three fog signals are put down until the Loco Pilot returns with the engine. If another qualified man is available, the Guard shall protect the vehicles in front, and send the other man to protect in rear. If a banking engine is attached in rear of the train, the banking engine Loco Pilot shall protect the train in rear.**

TRAIN PARTING

b) **If the two portions of a parted train have been separated to such an extent that they are out of sight of each other –**




TRAIN PARTING

ii. The Loco Pilot shall proceed to the next station with the front portion and immediately advise the Station Master that a portion of a train has been left on the section if there is a cabin at the station, the Loco Pilot shall first advise the Cabin Assistant Station Master and then the Station Master.




TRAIN PARTING

iii. **The Station Master or Cabin Assistant Station Master, shall immediately advise the station in rear and keep the section blocked.**

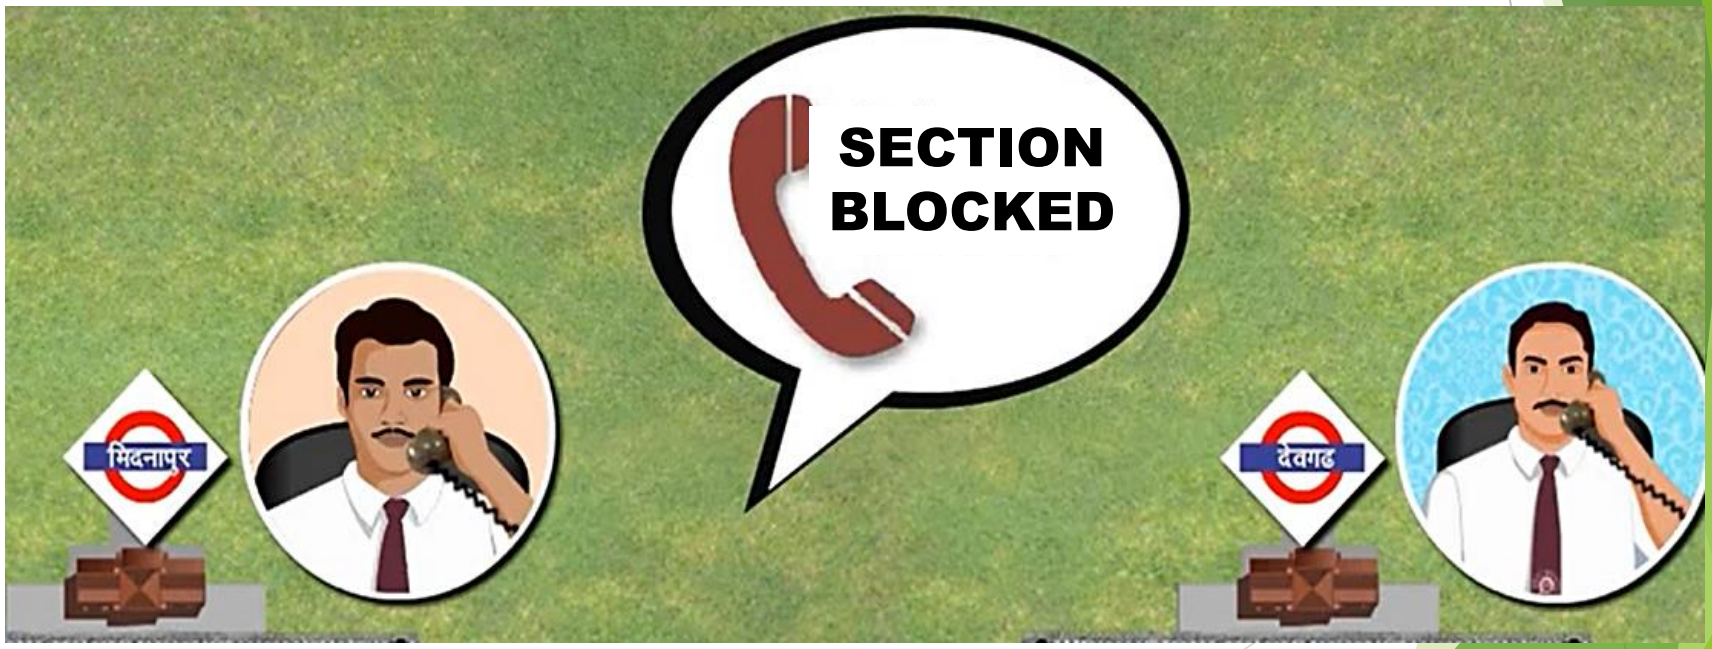

TRAIN PARTING

iv. **The Loco Pilot shall then return with the engine alone, on the authority of Form T/409 (ER) / T/A – 602 (ECR) to pick up the rear portion exercising all necessary caution and acting upon the signals of the Guard when approaching the vehicles.**

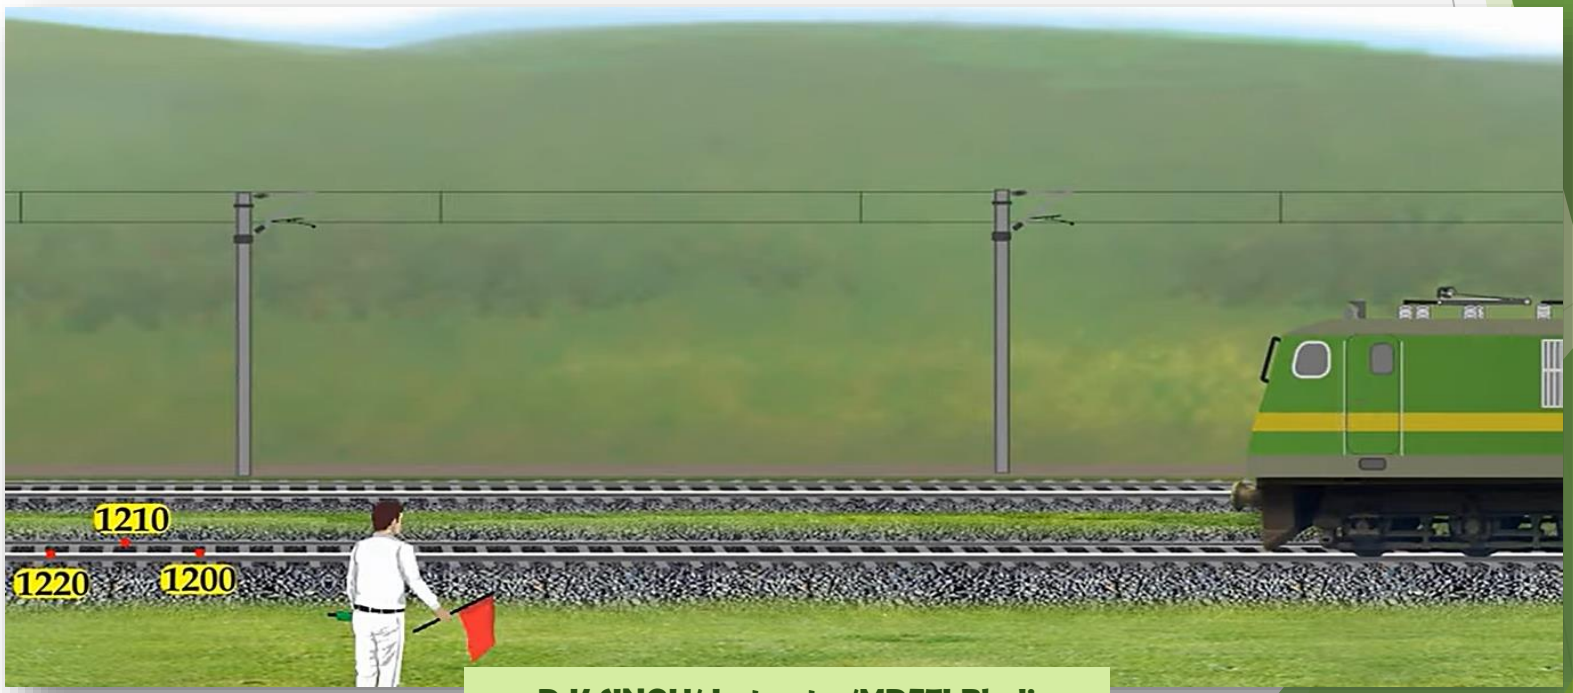

TRAIN PARTING

NOTE:

If the section is a single line section on which a token is the authority to proceed, the Loco Pilot shall retain possession of the token until the rear portion of the train has been brought in.



Dhananjay Kumar Singh
Transportation Instructor
MDZTI / Bhuli