
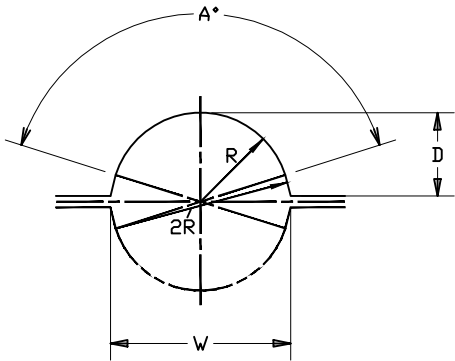


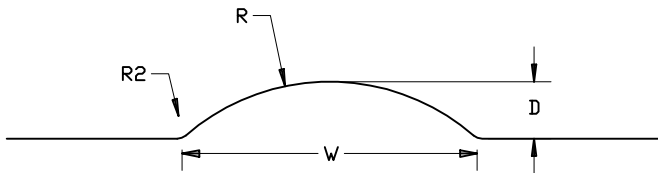

REDUCING MILL STANDS 26 & 27

PASS DIMENSIONS STAND 26					NEW ROLL Ø 228.34 MM DISC. ROLL Ø 205.00 MM	PASS DIMENSIONS STAND 27				
PASS	W (WIDTH ON FACE) (REFERENCE)	D (DEPTH)	R (GROOVE RADIUS)	R2 (RELIEF RADIUS)		PASS	W (WIDTH ON FACE) (REFERENCE)	D (DEPTH)	R (GROOVE RADIUS)	A°(ANGLE)
OV_9.0RM	16.72	2.90	13.5	1.5		9.0	9.61	4.06	4.56	113
OV_9.5RM	15.22	3.51	10.0	1.5		9.5	10.15	4.32	4.82	114
OV_10.0RM	19.14	3.06	16.5	1.5		10.0	10.67	4.47	5.07	112
OV_10.5RM	19.19	3.47	15.0	1.5		10.5	11.20	4.72	5.32	113
OV_11.0RM	19.68	3.68	15.0	1.5		11.0	11.74	4.98	5.58	114
OV_11.5RM	18.24	4.22	12.0	1.5		11.5	12.28	5.23	5.83	114
OV_12.0RM	18.91	4.61	12.0	1.5		12.0	12.80	5.48	6.08	115
OV_12.5RM	22.35	4.36	16.5	1.5		12.5	13.34	5.74	6.34	116
OV_13.0RM	23.11	4.72	16.5	1.5		13.0	13.88	5.99	6.59	116
OV_13.5RM	25.16	4.76	19.0	1.5		13.5	14.39	6.24	6.84	117
OV_14.0RM	24.16	5.26	16.5	1.5		14.0	14.95	6.50	7.10	117
OV_14.5RM	21.44	5.89	12.7	1.5		14.5	15.46	6.75	7.35	118
OV_15.0RM	28.22	5.28	21.5	1.5		15.0	15.90	6.91	7.61	120
OV_15.5RM	27.25	5.76	19.0	1.5		15.5	16.53	7.16	7.86	117
OV_16.0RM	29.31	5.77	21.5	1.5		16.0	17.07	7.41	8.11	117
OV_17.0RM	27.27	6.53	17.5	1.5		17.0	18.13	7.92	8.62	118
OV_18.0RM	27.46	7.35	16.5	1.5		18.0	19.23	8.43	9.13	118
OV_19.0RM	32.66	7.26	22.0	1.5		19.0	20.31	8.93	9.63	118
OV_20.0RM	33.26	7.60	22.0	1.5		20.0	21.41	9.44	10.14	118
OV_21.0RM	34.51	8.35	22.0	1.5		21.0	22.51	9.95	10.65	118
OV_22.0RM	37.96	8.73	25.0	1.5		22.0	23.58	10.45	11.15	118
OV_23.0RM	39.13	9.44	25.0	1.5		23.0	24.68	10.96	11.66	118
OV_24.0RM	39.25	9.51	25.0	1.5		24.0	25.78	11.47	12.17	118
OV_25.0RM	40.56	10.38	25.0	1.5		25.0	26.86	11.97	12.67	118
OV_26.0RM	41.49	11.05	25.0	1.5		26.0	27.95	12.48	13.18	118
OV_27.0RM	42.46	11.80	25.0	1.5		27.0	27.96	12.99	13.69	140

NOTE: REDUCING/SIZING MILL PASS TOLERANCES AS FOLLOWS:		
PASS	DEPTH	RADIUS
OVAL	± 0.013 $- 0.013$	± 0.050 $- 0.000$
ROUND	± 0.013 $- 0.013$	± 0.050 $- 0.000$

- NOTE:
- BREAK ALL SHARP CORNERS
 - THE ROUND PASSES FOR 9.0 TO 26.0MM ARE SAME AS EXISITNG.

REFERENCE DRAWINGS:

- 10289392 - ROLLING SCHEDULE STANDS AH - CV (BREAKDOWN MILL)
10289394 - ROLLING SCHEDULE FOR STANDS 1H TO 25
10289395 - DETAILS OF PASSES FOR STANDS 1H TO 25
10289396 - ROLLING SCHEDULE FOR THE RSM
10289396 - DETAILS OF PASSES FOR THE RSM

DIMENSIONING ACCORDING TO ASME Y14.5M:1994
UNLESS OTHERWISE SPECIFIED:
ENVELOPE PRINCIPLE APPLIES.
ALL DIMENSIONS ARE IN MILLIMETERS.
BREAK ALL SHARP EDGES
COUNTERSINK ALL TAPPED HOLES TO MAJOR Ø
MACHINED SURFACE FINISH $6.3\sqrt{\text{ASME Y14.36M}}$

REQUIREMENTS OF
THE ABOVE APPLY

01	ECN NO.	Date	Made by	Checked by
Revision	Modification Contents			
Condition		Sub Supplier	Similar to	
Description 1		Made by	Date	Name
ROLLING SCHEDULE & PASS DETAILS		05/05/2016	KP	
Description 2		Checked by	MHG	
SIZES: 9.0 TO 27.0MM		Approved by	KP	
Description 3		Material		
REDUCING MILL ONLY		Name		
Description 4		Security Level		
Description 5		Status		
AM - GIJON		Document Type		
Material No.		Version	Scale	NONE
Draw. No.		Sheet	02	No. of Sheets
10644111		Revision	02	