



ISO9001:2000

HOSE VALVE



FIRE PROTECTION PRODUCTS



MODEL SNG115

Thread:
21/2" FNPT x MNST
MBCT
MONT
MPHX
MQST
MCLV
MTEM
NYFD
11/2" FNPT x MNST
MNPSH




101(DWG.J281) ANGLE HOSE VALVE

300lb. RATED

Used with a Fire Hose Rack Assembly
Or as a Fire Dept. outlet connection
FEMALE x MALE

Standard equipment:
Female NPT inlet x male hose thread
Outlet cast brass valve
Red hand wheel.

Optional Finishes:
PB-Polished Brass
RC-Rough Chrome Plated
PC-Polished Chrome Plated

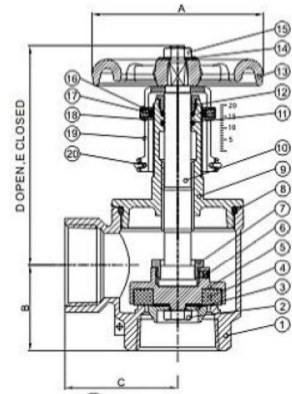

	A	B	C	D	E
1 1/2"x1 1/2"	100	50	66	127.5	153
2 1/2"x2 1/2"	125	68	83	162	206

NO	DESCRIPTION	MATERIALS	NO	DESCRIPTION	MATERIALS
1	BODY	ASTM B283 C37700	9	BONNET	ASTM B283 C37700
2	WHEEL NUT	ASTM B283 C37700	10	STEM	ASTM B283 C37700
3	WASHER	SS304	11	LOCK NUT	ASTM B283 C37700
4	SEAT SEAL	NBR	12	ORING	NBR
5	HOLDER	ASTM B283 C37700	13	HANDLE WHEEL	DUCTILE IRON
6	SET SCREW	SS304	14	WHEEL WASHER	SS304
7	LOCK NUT	ASTM B283 C37700	15	WHEEL NUT	ASTM B283 C37700
8	ORING	NBR			



MODEL SNG116

21/2" FNPT x FNPT
11/2" FNPT x FNPT




102(DWG.J281) ANGLE HOSE VALVE

300lb. RATED

Used with a Fire Hose Rack Assembly
Or as a Fire Dept. outlet connection
DOUBLE FEMALE

Standard equipment:
Female NPT inlet and outlet forge brass valve
Outlet cast brass valve
Red hand wheel.

Optional Finishes:
PB-Polished Brass
RC-Rough Chrome Plated
PC-Polished Chrome Plated

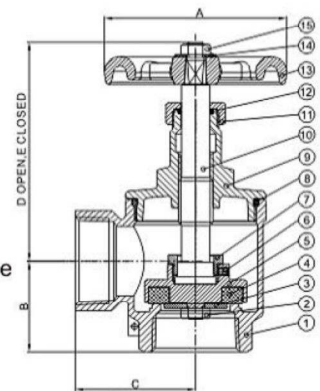

	A	B	C	D	E
1 1/2"x1 1/2"	100	50	66	119.5	145
2 1/2"x2 1/2"	125	68	83	157	200

NO	DESCRIPTION	MATERIALS	NO	DESCRIPTION	MATERIALS
1	BODY	ASTM B283 C37700	9	BONNET	ASTM B283 C37700
2	WHEEL NUT	ASTM B283 C37700	10	STEM	ASTM B283 C37700
3	WASHER	SS304	11	LOCK NUT	ASTM B283 C37700
4	SEAT SEAL	NBR	12	ORING	NBR
5	HOLDER	ASTM B283 C37700	13	HANDLE WHEEL	DUCTILE IRON
6	SET SCREW	SS304	14	WHEEL WASHER	SS304
7	LOCK NUT	ASTM B283 C37700	15	WHEEL NUT	ASTM B283 C37700
8	ORING	NBR			