




SHORT TEMPORARY STRAINER FT 15

SB-ATI-PV006

Page 1 of 1

- NOTES:**
- (1) All dimensions are in mm
 - (2) **Materials:** plate as per piping specification, wire inox 18/8, unless otherwise indicated on requisition
 - (3) Net wire 16 BWG, 5 MESH
 - (4) Mark-up with diameter, series and type of strainer

2

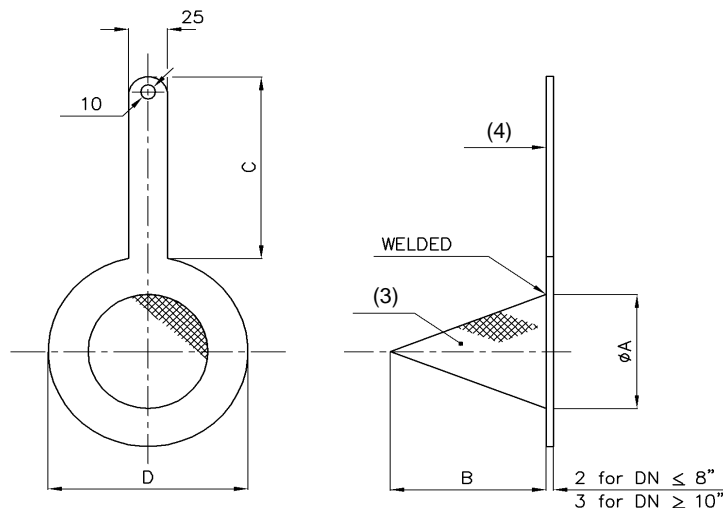

NOMINAL SIZE		ØA	B	C	D				Weight kg.
DN	INCH.				UNI PN 6	UNI PN 16	ASME 150#	ASME 300#	
25	1"	20	40	120	64	71	64	70	-
32	1¼"	25	60	120	76	82	73	79	-
40	1½"	30	60	120	86	92	82	92	-
50	2"	40	65	120	96	107	100	108	-
65	2½"	50	75	120	116	127	120	125	-
80	3"	70	90	120	132	142	133	145	-
100	4"	90	120	120	152	162	170	178	-
125	5"	115	140	130	182	192	193	213	-
150	6"	140	160	130	207	218	219	248	-
200	8"	180	220	130	262	273	275	305	-
250	10"	235	270	140	317	330	337	360	-
300	12"	280	320	140	373	385	406	420	-
350	14"	310	355	150	423	445	448	480	-
400	16"	355	400	150	473	495	510	535	-
450	18"	425	450	150	528	555	543	593	-
500	20"	476	500	150	578	617	600	650	-
600	24"	574	584	150	680	734	714	770	-

2	REVISED WHERE INDICATED	ATI	17/05/11	The master version of this document is stored as a digital file in a software archive - Approval process is digitally managed, details do not show on paper copies.
1	REVISED	ATI	11/12/06	
0	ISSUED	ATI	29/04/05	
Rev.	Description	Author	Date	

We reserve the ownership under the law of this document with prohibition of even partial reproduction and to make it known to third persons without our written authorization