




CHECK VALVE

SB-ATI-VR030

TYPE R 93

RATING	BODY150#			ASSEMBLING BODY BONNET	SCREWED BONNET <input type="checkbox"/>		INSIDE SCREW <input type="checkbox"/>	
	ASSEMBLINGASME B16.5 150# RF				BOLTED BONNET <input checked="" type="checkbox"/>		OUTSIDE SCREW <input type="checkbox"/>	
MATERIALS	BODYA 216 WCB				STEM /			
	SEATSA 182 F6				DISC A 182 F6			
OPERATING CONDITIONS	P	/	T	/	USE : /			

- NOTES:**
- (1) All gaskets have to be asbestos free
 - (2) All dimensions are in mm
 - (3) Face to Face dimensions in according to "ASME B16.10"

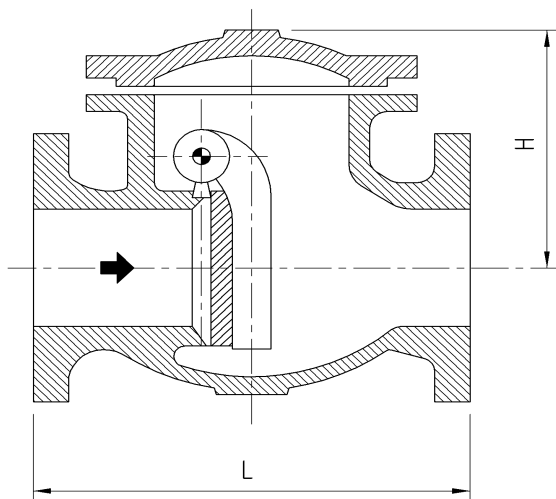

INCH.	1½"	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"
L (3)	165	203	216	241	292	330	356	495	622	699	787	864	978	978	1295
H	128	141	163	170	199	213	250	304	321	365	445	473	540	605	680
Weight Kg.	12,0	15,0	25,0	27,0	42,0	68,0	75,0	124,0	200,0	308,0	430,0	555,0	770,0	840,0	1315,0

1	REVISED	ATI	27/11/06	The master version of this document is stored as a digital file in a software archive - Approval process is digitally managed, details do not show on paper copies.
0	ISSUED	ATI	31/01/05	
Rev.	Description	Author	Date	

We reserve the ownership under the law of this document with prohibition of even partial reproduction and to make it known to third persons without our written authorization