




# GLOBE VALVE

**SB-ATI-VD012**

**TYPE D 72**

<b>RATING</b>	BODY	800#	<b>ASSEMBLING BODY BONNET</b>	SCREWED BONNET	<input type="checkbox"/>	INSIDE SCREW	<input type="checkbox"/>
	ASSEMBLING	SOCKET WELDED		BOLTED BONNET	<input checked="" type="checkbox"/>	OUTSIDE SCREW	<input checked="" type="checkbox"/>
<b>MATERIALS</b>	BODY	CARBON STEEL	STEM	CHROME STEEL			
	SEATS	CHROME STEEL + STELLITED	DISC	CHROME STEEL + STELLITED			
<b>OPERATING CONDITIONS</b>	P	/	T	/	USE :	/	

- NOTES:**
- (1) All gaskets have to be asbestos free
  - (2) All dimensions are in mm

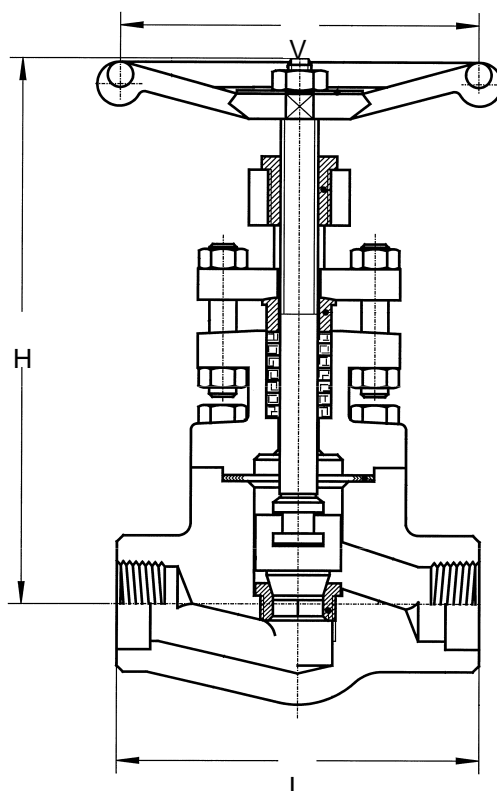

INCH.	1/4"	1/2"	3/4"	1"	1 1/2"	2"									
DN	8	15	20	25	40	50									
L	80	90	110	127	170	210									
H	152	155	181	238	290	330									
V	90	90	107	107	142	142									
Weight Kg.	1,7	2,0	3,3	5,4	10,8	14,2									

1	REVISED	ATI	21/11/06	The master version of this document is stored as a digital file in a software archive - Approval process is digitally managed, details do not show on paper copies.
0	ISSUED	ATI	31/01/05	
Rev.	Description	Author	Date	

We reserve the ownership under the law of this document with prohibition of even partial reproduction and to make it known to third persons without our written authorization