


## Data sheet

# SKYSAFE PRO FLEX

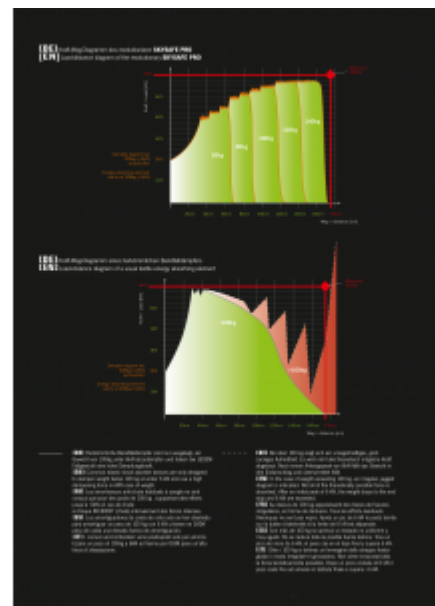

## GENERAL

|           |                                                                                                         |
|-----------|---------------------------------------------------------------------------------------------------------|
| Art. no.: | L-0566-1,8                                                                                              |
| EAN:      | 4030281180722                                                                                           |
| Standard: | EN 354:2010<br>EN 355:2002<br>EN 795:2012<br>RFU PPE-R/11.063<br>V1:2018<br>RFU PPE-R/11.074<br>V1:2018 |

|                 |             |
|-----------------|-------------|
| E-class number: | 40-02-01-04 |
| Customs no.:    | 56090000    |

## Data sheet

### SKYSAFE PRO FLEX

#### ONE4ALL - The SKYSAFE PRO

Revolutionary, new, patented energy absorber with the large weight range from 50 - 140kg (110 - 310 lbs.) that always withstands a maximum impact of less than 6 kN at a maximum absorber length of 1.75m (5.7 Feet).

The final impact resistance of 22 kN, also in the absorber, before AND after a fall is exceptional as well. SKYSAFE PRO furthermore meets the most relevant international standards in one SINGLE product.

UNIQUE: The built-in, adjustable RESCUE LOOPS! As a result, rescuers need not set up a rescue system and hereby save precious time in a rescue!

Available in four versions with different carabiner combinations:  
I-web, Y-web, I-web tie-back, Y-web tie-back.

#### FEATURES

|                         |                      |
|-------------------------|----------------------|
| Colour:                 | orange / black       |
| Fall indicator          |                      |
| Hand-washing:           | 40 °C                |
| Suitable for edges:     | yes                  |
| Max. service life:      | 10 Years             |
| Max. number of persons: | 1                    |
| Rated load:             | 140 KG               |
| Patent                  |                      |
| Rescue Loop:            | yes                  |
| Temperature:            | from 45 °C to -35 °C |
| Suspension element:     | BAND                 |

## DIMENSIONS

|         |         |
|---------|---------|
| Size:   | 1,8m    |
| Weight: | 1,18 kg |

## HARDWARE

Carabiner on anchoring point side:  
FS 90 ALU

|                         |          |
|-------------------------|----------|
| Carabiner on belt side: | STAK TRI |
|-------------------------|----------|

## MATERIAL

|                   |                      |
|-------------------|----------------------|
| Material:         | Polyester, Aluminium |
| Webbing material: | Polyester            |