

MY-SAVER Screwdriver Series




External Dimension




MY-SAVER 3 / 5 / 7 RA

MY-SAVER 12 / 18 RA


MY-SAVER 25 RA

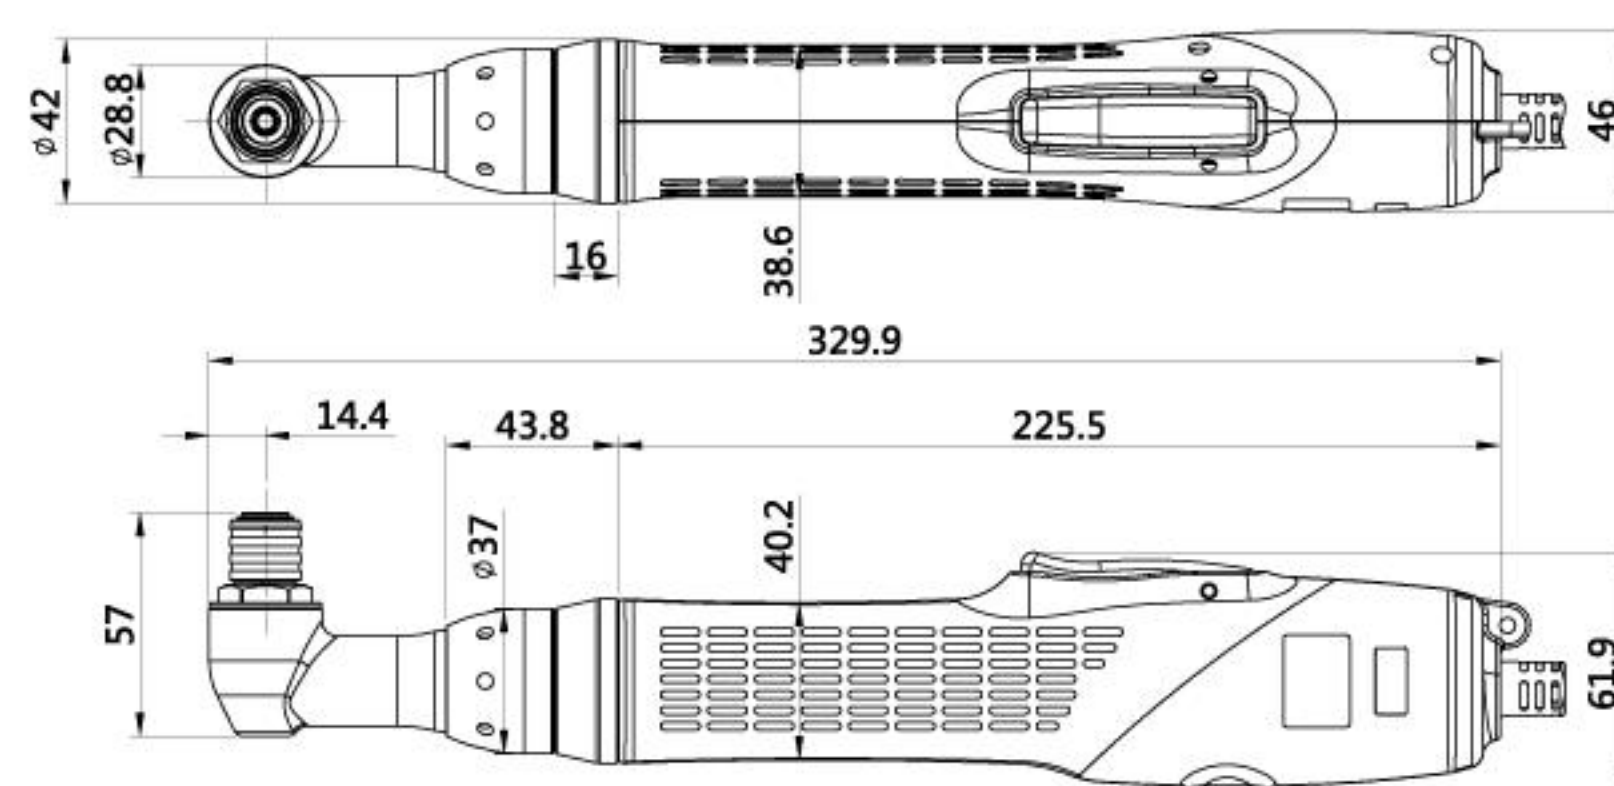

MY-SAVER 3 / 5 / 7 RA

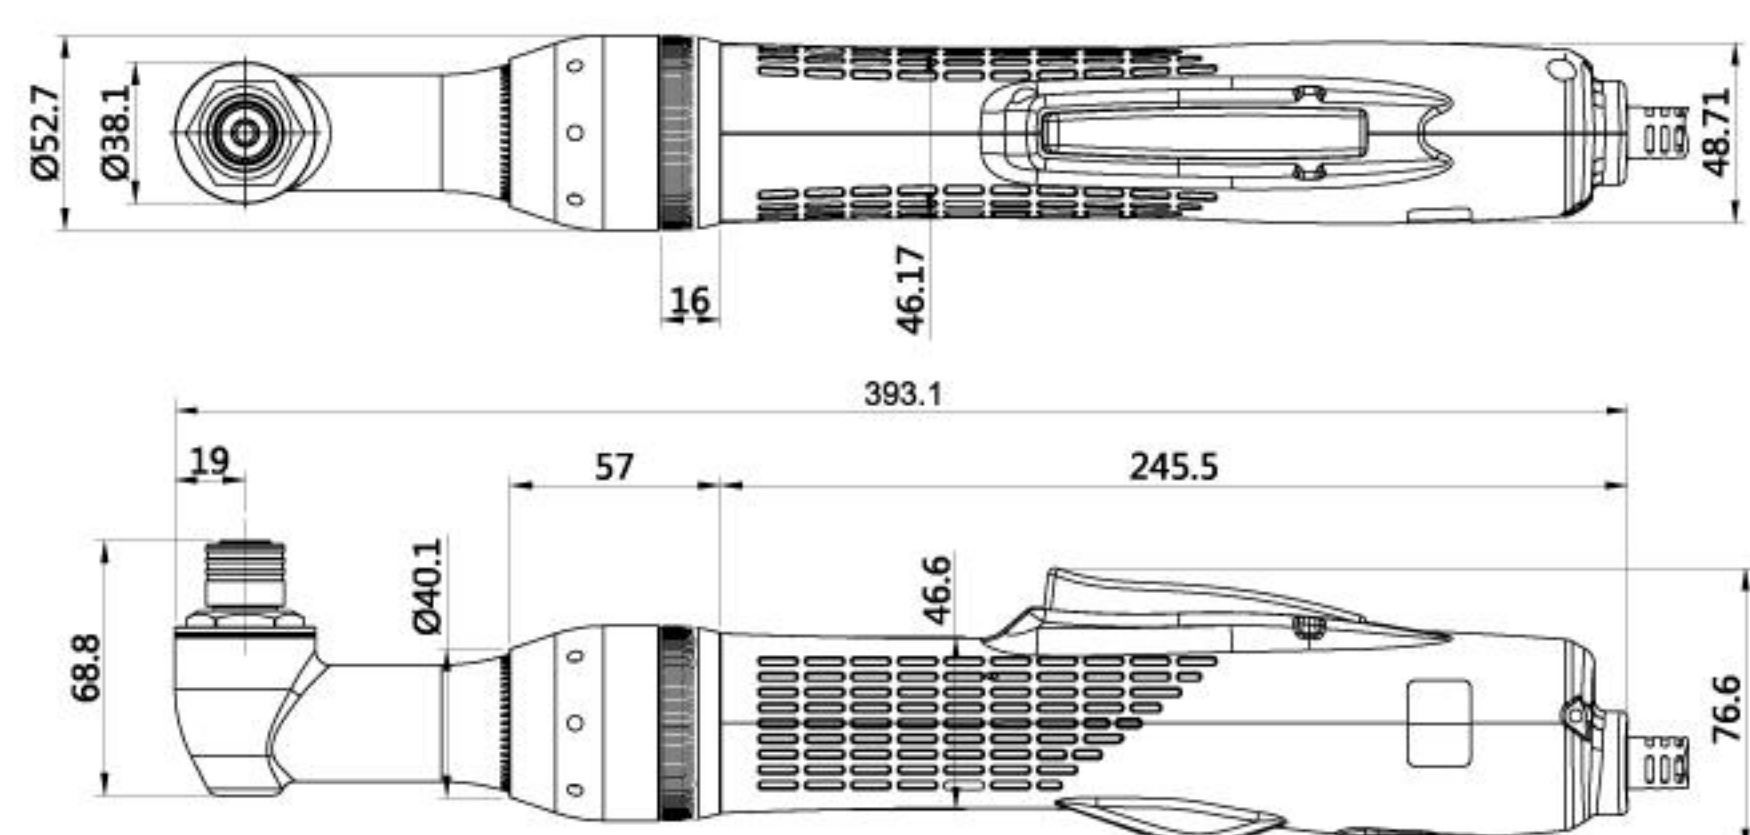

MY-SAVER 12 / 18 RA

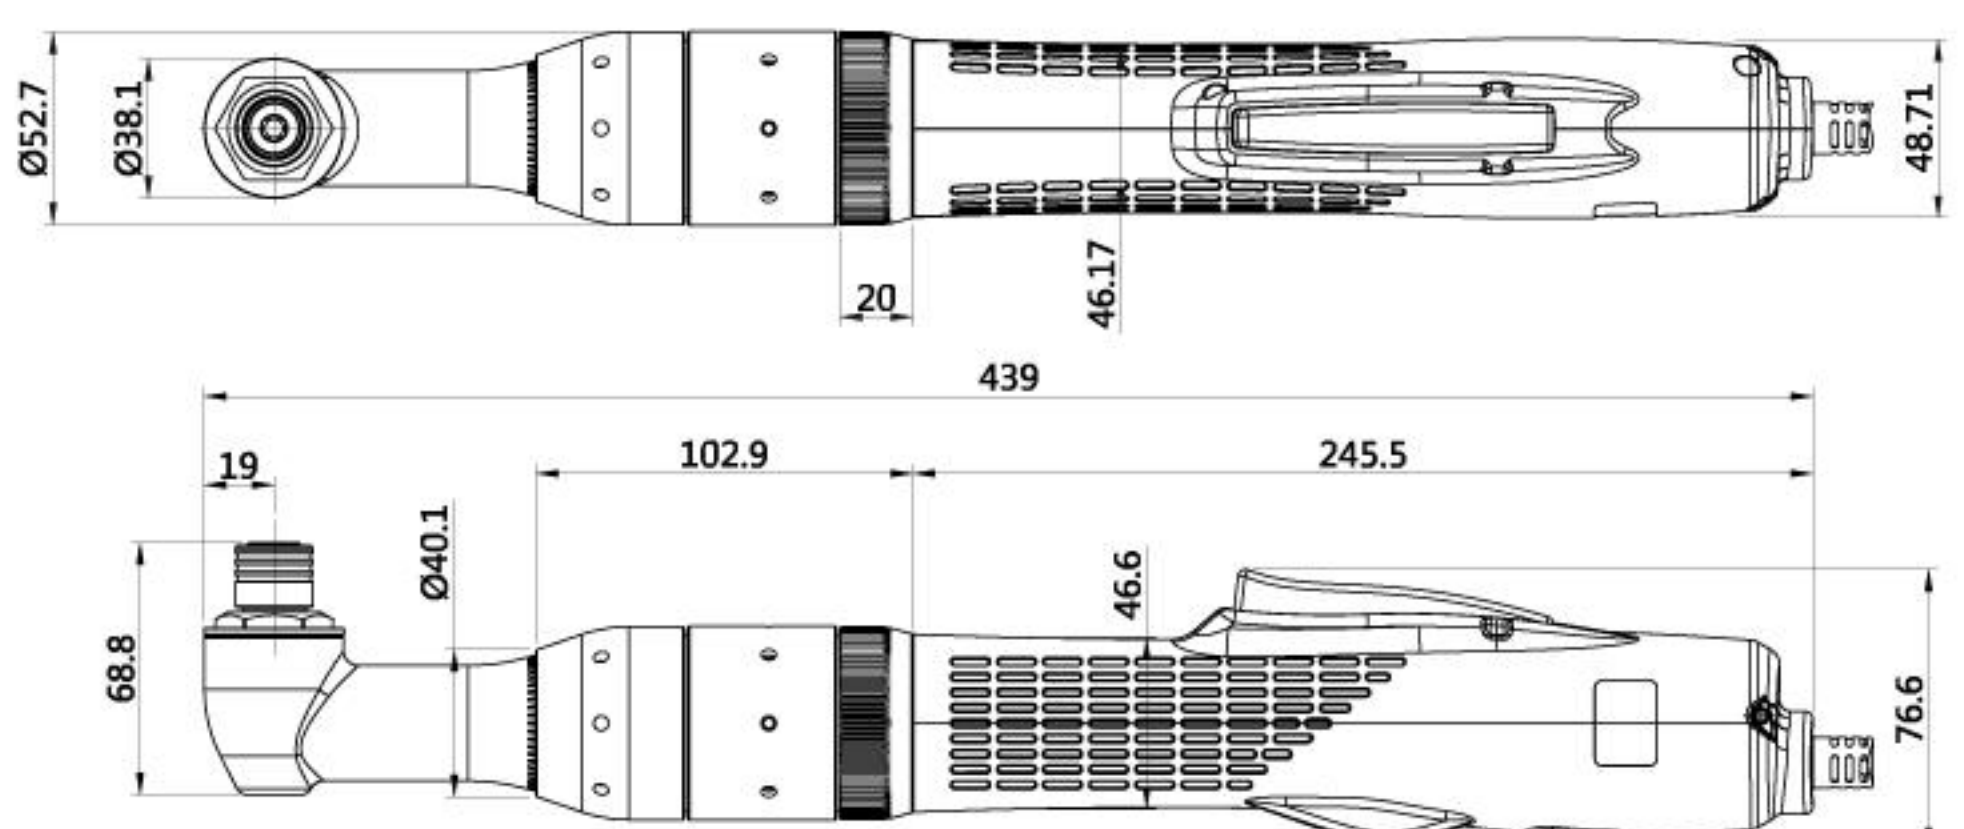

MY-SAVER 25 RA

Unit: mm

Specifications

Model	Input voltage	Torque			Free Speed (r.p.m)	Power Consumption	Weight (g)	Length (mm)	Power Controller	Bit Type
		(N.m)	(kgf.cm)	(Lbf.in)						
MY-SAVER 3 RA	DC40	0.6~3	6.11~30.59	5.31~26.55	1100~120	90W	1150	330	MY-SAVER	B 9.5 、 W 3/8"
MY-SAVER 5 RA	DC40	1~5	10.2~51.00	8.85~44.25	800~80	90W	1150	330	MY-SAVER	B 9.5 、 W 3/8"
MY-SAVER 7 RA	DC40	1.4~7	14.27~71.39	12.39~61.96	450~50	90W	1150	330	MY-SAVER	B 9.5 、 W 3/8"
MY-SAVER 12 RA	DC40	2.4~12	24.5~122.4	21.2~106.2	750~80	90W	2230	393	MY-SAVER mega	B 9.5 、 W 3/8"
MY-SAVER 18 RA	DC40	3.6~18	36.7~183.6	31.9~159.3	470~40	90W	2230	393	MY-SAVER mega	B 9.5 、 W 3/8"
MY-SAVER 25 RA	DC40	5~25	51~254.9	44.25~221.2	300~30	90W	2810	439	MY-SAVER mega	B 9.5 、 W 3/8"

※CE、RoHS

