

MYBT-IM Series



MYBT-IM100



MYBT-IM200

Features


MYBT-IM50 , MYBT-IM100

- Maintenance free brushless motor with 1 year warranty
- Long lasting contactless micro switch trigger
- Long lifespan heavy duty hammer
- High RPM for pre tightening
- 5 auto stop torque outputs for energy saving


MYBT-IM160 , MYBT-IM200

- Maintenance free brushless motor with 1 years warranty
- Long lasting contactless micro switch trigger
- Long lifespan heavy duty hammer
- High RPM for pre tightening
- 3 auto stop torque outputs for energy saving

External Dimension

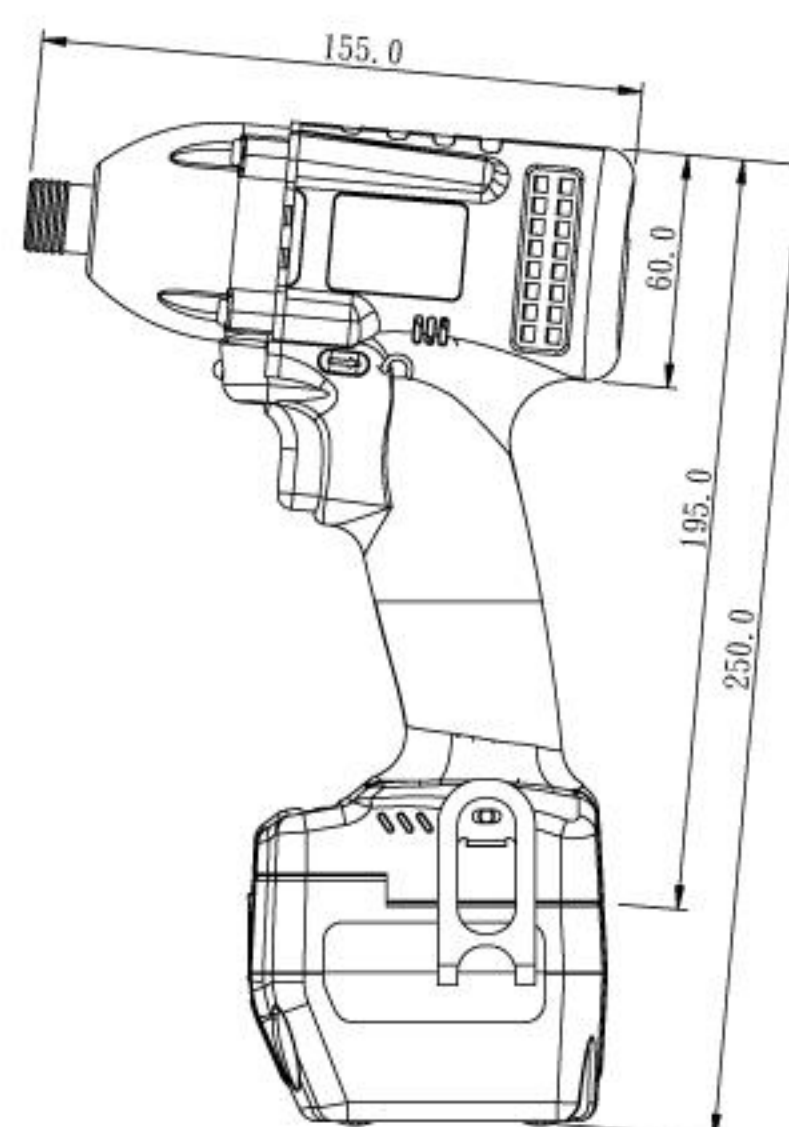

MYBT-IM100

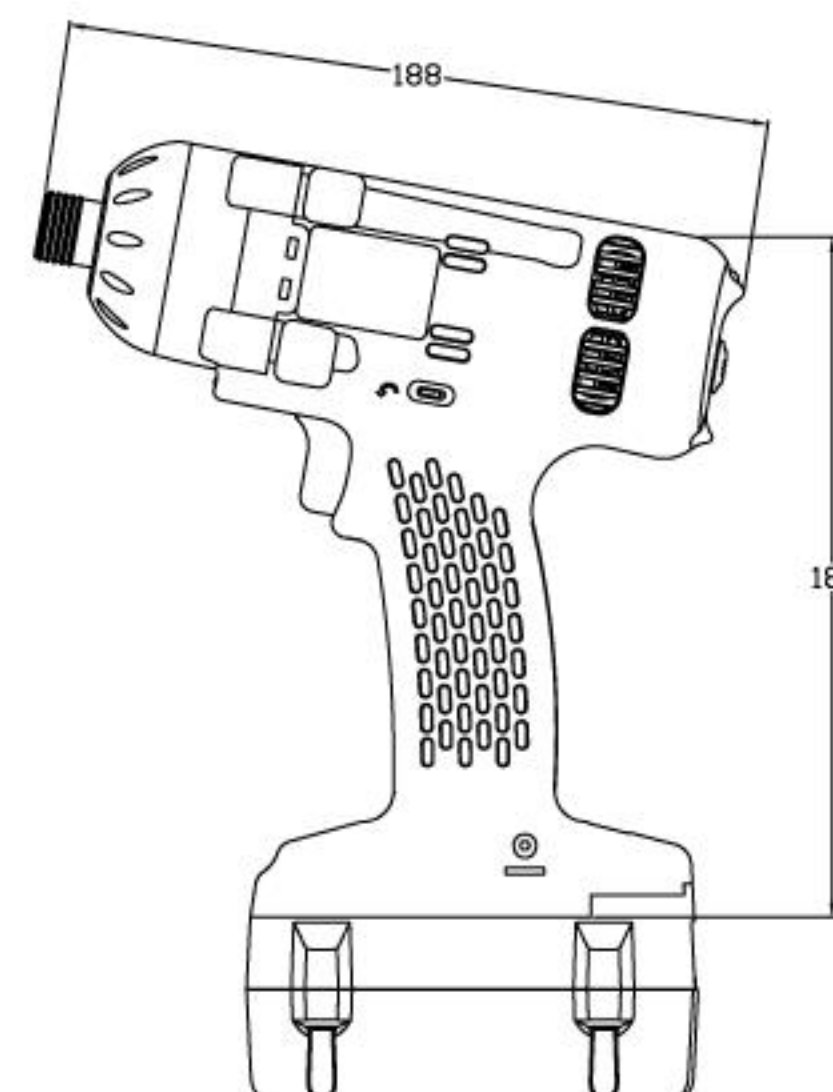


MYBT-IM200

Unit: mm

Specifications

Model	Input Voltage	Free Speed (r.p.m) $\pm 10\%$	B.P.M	Torque (N.m)	Impact modes					Weight (kg)	Size (mm)	Applicable Battery	Applicable Charger	Bit Type
MYBT-IM50	18V	0~2300	0~3000	0~50	1: 0~7	2: 0~15	3: 0~25	4: 0~35	5: 0~50	1.0	155X195	SKC-LB1830C	MYCS-ID80-D	B、B9.5
MYBT-IM100	18V	0~2300	0~3000	0~100	1: 0~20	2: 0~40	3: 0~60	4: 0~80	5: 0~100	1.0	155X195	SKC-LB1830C	MYCS-ID80-D	B、B9.5
MYBT-IM160	18V	0~2100	0~2800	0~160	HI: 0~160	MID: 0~120	LO: 0~80			1.1	188X181	SKC-LB1840 SKC-LB1820	MYCS-ID120 MYCS-ID80 MYCS-80	B、B9.5 W 1/2"
MYBT-IM200	18V	0~2100	0~3100	0~200	HI: 0~200	MID: 0~160	LO: 0~120			1.1	188X181	SKC-LB1840 SKC-LB1820	MYCS-ID120 MYCS-ID80 MYCS-80	W 1/2"

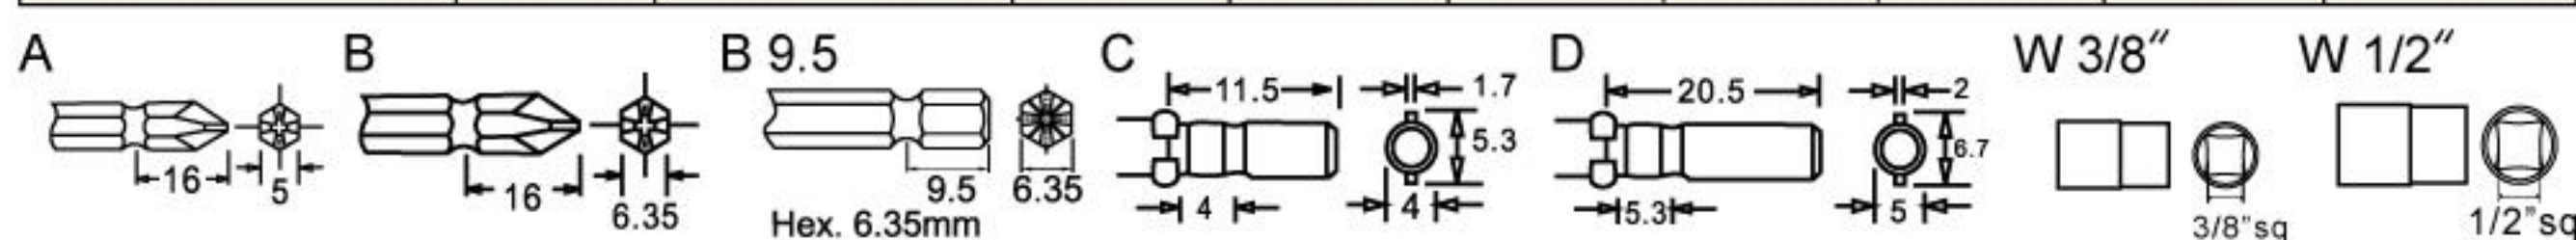

※ Tool Weight & Size indications without battery.